R113/B_snapshot | Locked full18 results

Unique VAL-selected checkpoint; native/FP64 ind; equal-problem ALL.

update 51840 | seed2 | parameters 1,659,453

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	70.8358	66.2037	11.417715	11.427978	11.371692	-0.1855	+0.4022	0.4128
TEST ALL	71.1889	66.1802	11.374399	11.385299	11.329932	-0.1932	+0.3900	0.3984

Dataset	n	NSS Top1 (%)	R113 Top1 (%)	NSS cost	R113 cost
TSP TEST	4500	45.888889	46.600000	7.970400719	7.971641970
CVRP TEST	4500	45.977778	47.488889	18.004802368	18.013341244
TSPLIB	49	20.408163	30.612245	8.217907074	8.191982005
CVRPLIB	100	70.000000	49.000000	67.101111717	67.547211847

NSS: saved R79 weights; no new training. Missing same-population/native references remain MISSING.

SBS: minimum mean cost on frozen81000 TRAIN; Oracle: per-instance legal-pool minimum.

ALL: equal problem weight; raw-cost average is descriptive, never a pooled optimization score.

TEST was development-exposed; only VAL chose this checkpoint. No per-problem assembly.

Distribution Top1 is instance accuracy, not the largest method frequency.

Same final recursive architecture; A scratch, B snapshots, C predicted transition pretraining.

Post-lock process diagnostics: COMPLETE; saved PDF/CSV/JSON included below.

R113/B_snapshot | VAL: ALL and18 tasks

Native/FP64 winners, frozen pools, TRAIN-fitted SBS.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	70.8358	66.2037	11.417715	11.427978	11.371692	-0.1855	+0.4022	0.4128	per-problem TRAIN SBS
TSP	46.2222	33.1111	8.025671	8.045354	7.990533	-0.2446	+0.4397	0.4289	T2T
CVRP	45.6222	18.7111	18.165689	18.269377	18.064087	-0.5676	+0.5625	0.7433	RELD_CVRP
ATSP	76.7556	47.4889	1.638772	1.676905	1.632471	-2.2740	+0.3860	0.3813	UNICO_MatPOENet
OVRP	40.2000	35.7556	7.463029	7.469579	7.415777	-0.0877	+0.6372	0.6551	MoSES_RF
VRPB	80.8889	80.8444	9.356540	9.354876	9.318750	+0.0178	+0.4055	0.4099	reld_mt
VRPL	37.7556	33.0889	12.431705	12.437959	12.383444	-0.0503	+0.3897	0.3973	MoSES_RF
VRPTW	79.9556	79.9556	18.819210	18.819431	18.766139	-0.0012	+0.2828	0.3001	reld_mt
OVRPTW	83.8000	83.7778	10.142991	10.143730	10.116859	-0.0073	+0.2583	0.2552	reld_mt
OVRPB	88.4889	88.5111	6.357287	6.357254	6.341078	+0.0005	+0.2556	0.2656	reld_mt
OVRPL	40.6222	35.9111	7.439188	7.445709	7.390416	-0.0876	+0.6599	0.6821	MoSES_RF
VRPBL	78.7111	78.5111	9.369141	9.371523	9.328366	-0.0254	+0.4371	0.4386	reld_mt
VRPBTW	78.4000	78.4222	19.950564	19.950430	19.851084	+0.0007	+0.5011	0.4787	reld_mt
VRPLTW	78.8444	78.7556	18.764366	18.765871	18.707843	-0.0080	+0.3021	0.3173	reld_mt
OVRPBL	89.2000	89.2000	6.369956	6.370093	6.352824	-0.0022	+0.2697	0.2814	reld_mt
OVRPBTW	83.5778	83.4444	10.660387	10.661098	10.623245	-0.0067	+0.3496	0.3233	reld_mt
OVRPLTW	83.4444	83.4889	10.157488	10.157423	10.129818	+0.0006	+0.2732	0.2761	reld_mt
VRPBLTW	79.4222	79.4000	19.795963	19.797044	19.706420	-0.0055	+0.4544	0.4418	reld_mt
OVRPBLTW	83.1333	83.2889	10.610916	10.609955	10.571302	+0.0091	+0.3747	0.3536	reld_mt

vs_SBS / vs_Oracle:100*(ratio of mean costs-1).

actual regret: mean_i[100*(selected_i-oracle_i)/oracle_i], not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per task; no label/cost in query forward.

R113/B_snapshot | TEST: ALL and18 tasks

Native/FP64 winners, frozen pools, TRAIN-fitted SBS.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.1889	66.1802	11.374399	11.385299	11.329932	-0.1932	+0.3900	0.3984	per-problem TRAIN SBS
TSP	46.6000	34.5333	7.971642	7.989621	7.937593	-0.2250	+0.4290	0.4204	T2T
CVRP	47.4889	17.9333	18.013341	18.124983	17.918509	-0.6160	+0.5292	0.6829	RELD_CVRP
ATSP	76.8889	47.2444	1.635298	1.674207	1.629441	-2.3240	+0.3594	0.3591	UNICO_MatPOENet
OVRP	40.6222	33.6444	7.446669	7.455750	7.400487	-0.1218	+0.6240	0.6382	MoSES_RF
VRPB	80.5333	80.4000	9.350770	9.351810	9.315298	-0.0111	+0.3808	0.3829	reld_mt
VRPL	37.2667	32.2667	12.350350	12.356138	12.300958	-0.0468	+0.4015	0.4110	MoSES_RF
VRPTW	80.9111	80.8444	18.689981	18.690545	18.637408	-0.0030	+0.2821	0.2942	reld_mt
OVRPTW	83.9111	83.9333	10.093165	10.093063	10.068135	+0.0010	+0.2486	0.2398	reld_mt
OVRPB	88.1111	88.1333	6.370831	6.370826	6.352225	+0.0001	+0.2929	0.3015	reld_mt
OVRPL	40.9556	34.6000	7.464290	7.472542	7.418033	-0.1104	+0.6236	0.6358	MoSES_RF
VRPBL	79.5778	79.4222	9.396131	9.396379	9.355967	-0.0026	+0.4293	0.4317	reld_mt
VRPBTW	78.7778	78.7556	19.665714	19.665725	19.577666	-0.0001	+0.4497	0.4472	reld_mt
VRPLTW	79.2889	79.2444	18.802721	18.803136	18.745143	-0.0022	+0.3072	0.3214	reld_mt
OVRPBL	89.2889	89.2889	6.375594	6.375741	6.359310	-0.0023	+0.2561	0.2673	reld_mt
OVRPBTW	84.8444	84.8222	10.659403	10.659591	10.624748	-0.0018	+0.3262	0.2983	reld_mt
OVRPLTW	82.9111	82.8667	10.085766	10.086112	10.059001	-0.0034	+0.2661	0.2667	reld_mt
VRPBLTW	79.8444	79.7333	19.705309	19.707068	19.613284	-0.0089	+0.4692	0.4501	reld_mt
OVRPBLTW	83.5778	83.5778	10.662202	10.662149	10.625574	+0.0005	+0.3447	0.3221	reld_mt

vs_SBS / vs_Oracle:100*(ratio of mean costs-1).

actual regret: mean_i[100*(selected_i-oracle_i)/oracle_i], not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per task; no label/cost in query forward.

R113/B_snapshot | LIB and provenance

Same checkpoint; no LIB selection or solver execution.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	30.6122	10.2041	8.191982	8.240435	8.142167	-0.5880	+0.6118	0.6819
CVRPLIB	49.0000	45.0000	67.547212	67.245364	66.945093	+0.4489	+0.8994	0.8178

Checkpoint SHA256: f3e09c85074311ccf0e3b376d14a2bac587aa4766bff94600853c51dd7114129

VAL rule: maximum macroTop1; exact ties minimum actual regret; then first.

Selector:512 x57600 successful updates; AdamW1e-4 to1e-6; warmup4320.

Pretraining B/C:512 x8640; AdamW3e-4 to1e-5; warmup432; same targets/order.

All deployment: self-initialized predicted-state feedback, transition mode.

Candidates read global/node trajectory and final directed edge-state tokens.

Raw two-layer stem enters processor context only; no old-score bypass.

Fresh state SHA256: 95791a650b09425f0c1cfc362d50565a38b4ae45752f004cfec100bdbc41db14

Process manifest: 975282dea4458cfb0009d042a6e369b2afe415988929dfd1b29418926dafbcce

Pretraining mode: snapshot; processor-only transfer; newly authorized TRAIN states.

Last TRAIN process losses are optimization evidence only, not generalization or selector gain.

R113/B_snapshot | Post-lock VAL process: overview

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Scalar NMSE	Binary acc	Pointer acc	Directed acc	Reached acc	Frontier acc
TSP	79.8732	N/A	0.2255	0.7874	0.4829	0.7333
CVRP	64.6481	0.9144	0.1752	0.5326	0.4880	0.7888
ATSP	14.0911	N/A	0.3389	1.0000	0.7210	0.3089
OVRP	31.0812	0.6120	0.2812	0.7799	0.5687	0.3585
VRPB	23.7359	0.7019	0.2737	0.7743	0.5084	0.4473
VRPL	31.9347	0.5014	0.3009	0.8081	0.5955	0.3132
VRPTW	24.5717	0.7851	0.2496	0.5909	0.4379	0.7128
OVRPTW	20.4936	0.7805	0.2530	0.6121	0.4461	0.7714
OVRPB	22.1404	0.7224	0.2860	0.8168	0.5126	0.2815
OVRPL	33.6793	0.5833	0.2674	0.7969	0.5890	0.4269
VRPBL	22.3247	0.6130	0.2941	0.8194	0.5206	0.3750
VRPBTW	18.9662	0.7370	0.2604	0.6364	0.4571	0.7352
VRPLTW	27.1651	0.6823	0.2293	0.6128	0.4589	0.6821
OVRPBL	27.7565	0.6647	0.2879	0.7402	0.5216	0.2425
OVRPBTW	17.4679	0.7506	0.2457	0.6185	0.3829	0.9100
OVRPLTW	24.7687	0.6898	0.2270	0.6090	0.4143	0.7359
VRPBLTW	21.5724	0.6747	0.2334	0.6351	0.4080	0.6404
OVRPBLTW	20.1991	0.6561	0.2263	0.6566	0.3969	0.8005

No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: f3e09c85074311ccf0e3b376d14a2bac587aa4766bff94600853c51dd7114129
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json

R113/B_snapshot | Post-lock VAL process: binary

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Active entries	Accuracy	Precision	Recall	All-zero acc	True positives
TSP	0	N/A	N/A	N/A	N/A	0
CVRP	1484	0.9144	0.9860	0.9254	0.0243	1448
ATSP	0	N/A	N/A	N/A	N/A	0
OVRP	1152	0.6120	0.9376	0.6212	0.0764	1064
VRPB	2905	0.7019	0.8774	0.6839	0.2757	2104
VRPL	1725	0.5014	0.9173	0.4837	0.1096	1536
VRPTW	1731	0.7851	0.8836	0.7726	0.3472	1130
OVRPTW	1731	0.7805	0.9264	0.7329	0.3252	1168
OVRPB	2885	0.7224	0.9346	0.6809	0.2430	2184
OVRPL	1728	0.5833	0.9491	0.5764	0.0833	1584
VRPBL	3468	0.6130	0.8871	0.5598	0.2434	2624
VRPBTW	3456	0.7370	0.7980	0.7755	0.3750	2160
VRPLTW	2320	0.6823	0.9005	0.5841	0.3388	1534
OVRPBL	3480	0.6647	0.8586	0.6486	0.2681	2547
OVRPBTW	3468	0.7506	0.8418	0.7254	0.3930	2105
OVRPLTW	2308	0.6898	0.9248	0.6039	0.3033	1608
VRPBLTW	4018	0.6747	0.8197	0.6397	0.3507	2609
OVRPBLTW	4053	0.6561	0.8314	0.5900	0.3506	2632

No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: f3e09c85074311ccf0e3b376d14a2bac587aa4766bff94600853c51dd7114129
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json

R113/B_snapshot | Post-lock VAL process: compatible

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Active entries	Accuracy	Precision	Recall	All-zero acc	True positives
TSP	90942	0.7874	1.0000	0.7874	0.0000	90942
CVRP	93000	0.5326	1.0000	0.5326	0.0000	93000
ATSP	25138	1.0000	1.0000	1.0000	0.0000	25138
OVRP	42616	0.7799	1.0000	0.7799	0.0000	42616
VRPB	87440	0.7743	0.9146	0.8322	0.0809	80370
VRPL	42312	0.8081	1.0000	0.8081	0.0000	42312
VRPTW	42764	0.5909	0.6570	0.2292	0.5406	19647
OVRPTW	42816	0.6121	0.5655	0.3063	0.5825	17877
OVRPB	85736	0.8168	0.9444	0.8522	0.0750	79306
OVRPL	42564	0.7969	1.0000	0.7969	0.0000	42564
VRPBL	86032	0.8194	0.9176	0.8835	0.0776	79358
VRPBTW	85128	0.6364	0.5576	0.4487	0.5993	34113
VRPLTW	43520	0.6128	0.6006	0.2786	0.5730	18584
OVRPBL	87144	0.7402	0.9305	0.7733	0.0867	79592
OVRPBTW	86136	0.6185	0.5372	0.1321	0.6114	33471
OVRPLTW	42816	0.6090	0.5393	0.3137	0.5903	17541
VRPBLTW	84328	0.6351	0.5531	0.4030	0.6045	33352
OVRPBLTW	86536	0.6566	0.5956	0.1945	0.6337	31699

No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: f3e09c85074311ccf0e3b376d14a2bac587aa4766bff94600853c51dd7114129
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json

R113/B_snapshot | Post-lock VAL process: reached

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Active entries	Accuracy	Precision	Recall	All-zero acc	True positives
TSP	8530	0.4829	0.4753	0.9798	0.5306	4004
CVRP	8662	0.4880	0.4864	1.0000	0.5151	4200
ATSP	3645	0.7210	0.8592	0.6892	0.3416	2400
OVRP	5228	0.5687	0.5599	0.9997	0.4514	2868
VRPB	10634	0.5084	0.4888	0.9954	0.5299	4999
VRPL	5207	0.5955	0.5847	0.9976	0.4312	2962
VRPTW	5243	0.4379	0.4306	1.0000	0.5749	2229
OVRPTW	5245	0.4461	0.4377	1.0000	0.5689	2261
OVRPB	10494	0.5126	0.5004	0.9776	0.5117	5124
OVRPL	5226	0.5890	0.5843	0.9773	0.4275	2992
VRPBL	10524	0.5206	0.5042	0.9846	0.5125	5130
VRPBTW	10452	0.4571	0.4287	0.9771	0.5902	4283
VRPLTW	5300	0.4589	0.4501	0.9996	0.5570	2348
OVRPBL	10604	0.5216	0.5010	0.9851	0.5197	5093
OVRPBTW	10528	0.3829	0.3603	0.9808	0.6494	3691
OVRPLTW	5245	0.4143	0.4023	0.9995	0.6057	2068
VRPBLTW	10384	0.4080	0.3880	0.9962	0.6242	3902
OVRPBLTW	10562	0.3969	0.3783	0.9900	0.6315	3892

No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: f3e09c85074311ccf0e3b376d14a2bac587aa4766bff94600853c51dd7114129
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json

R113/B_snapshot | Post-lock VAL process: frontier

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Active entries	Accuracy	Precision	Recall	All-zero acc	True positives
TSP	8530	0.7333	0.0468	0.3176	0.9627	318
CVRP	8662	0.7888	0.0542	0.2741	0.9617	332
ATSP	3645	0.3089	0.0814	0.7870	0.9240	277
OVRP	5228	0.3585	0.0622	0.7676	0.9457	284
VRPB	10634	0.4473	0.0481	0.6180	0.9562	466
VRPL	5207	0.3132	0.0610	0.7782	0.9437	293
VRPTW	5243	0.7128	0.0463	0.3454	0.9630	194
OVRPTW	5245	0.7714	0.0463	0.2550	0.9619	200
OVRPB	10494	0.2815	0.0512	0.8413	0.9544	479
OVRPL	5226	0.4269	0.0702	0.7333	0.9426	300
VRPBL	10524	0.3750	0.0543	0.7665	0.9540	484
VRPBTW	10452	0.7352	0.0442	0.3110	0.9643	373
VRPLTW	5300	0.6821	0.0472	0.3738	0.9611	206
OVRPBL	10604	0.2425	0.0482	0.8413	0.9548	479
OVRPBTW	10528	0.9100	0.0392	0.0966	0.9725	290
OVRPLTW	5245	0.7359	0.0506	0.3864	0.9664	176
VRPBLTW	10384	0.6404	0.0424	0.4877	0.9688	324
OVRPBLTW	10562	0.8005	0.0425	0.2586	0.9696	321


No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: f3e09c85074311ccf0e3b376d14a2bac587aa4766bff94600853c51dd7114129
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json


R113/B_snapshot | TSP | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

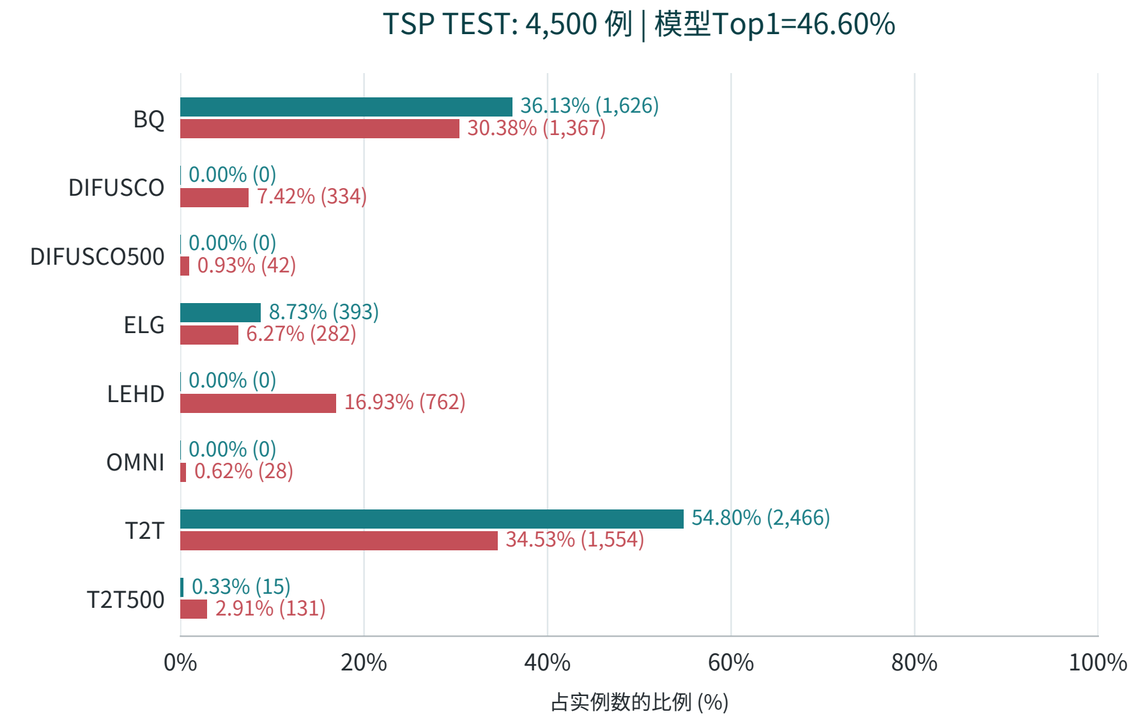

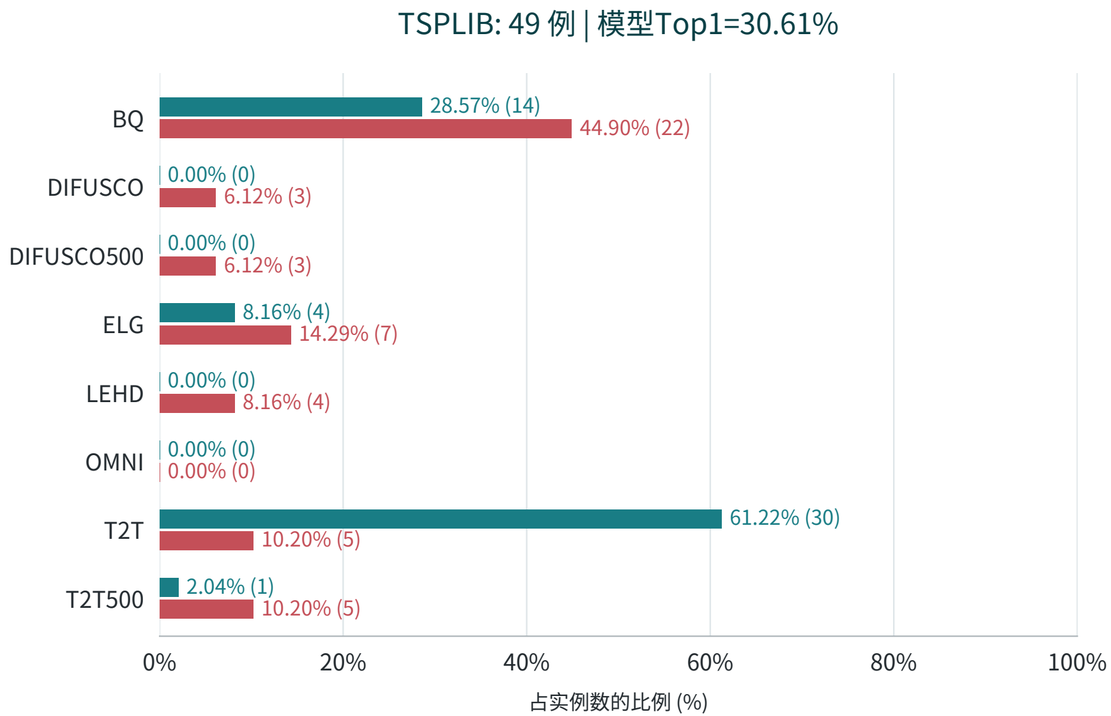

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | CVRP | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

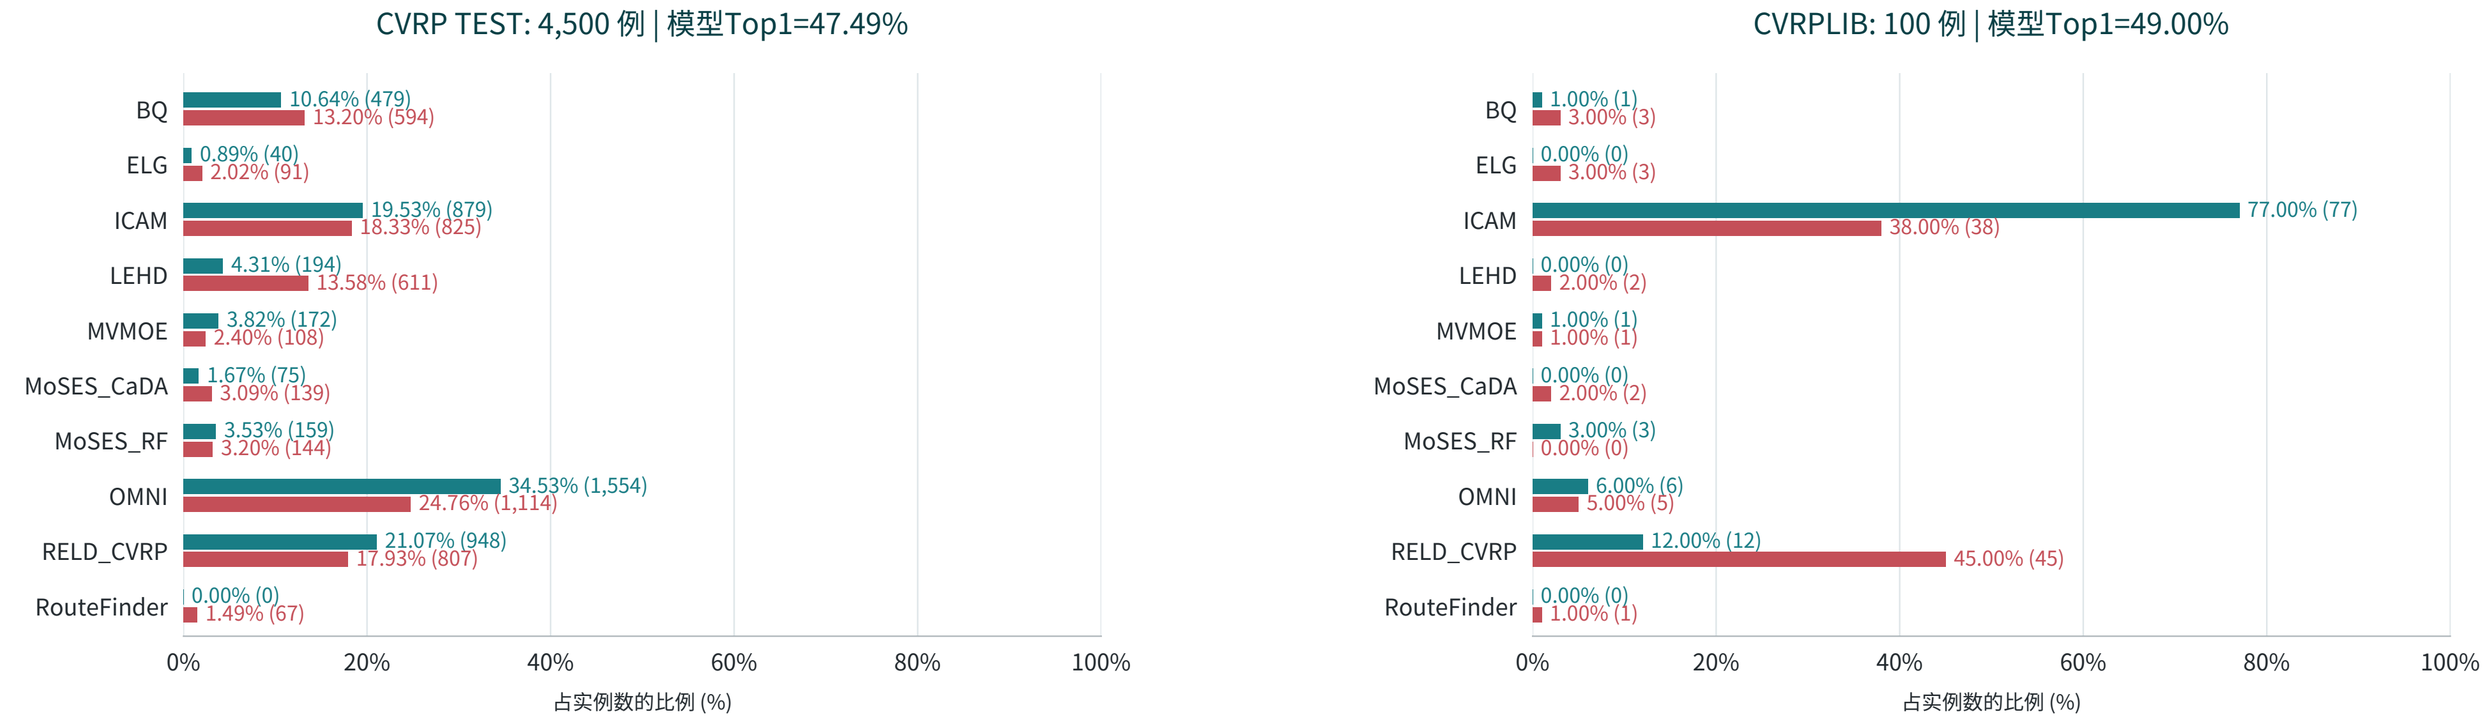

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | ATSP | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

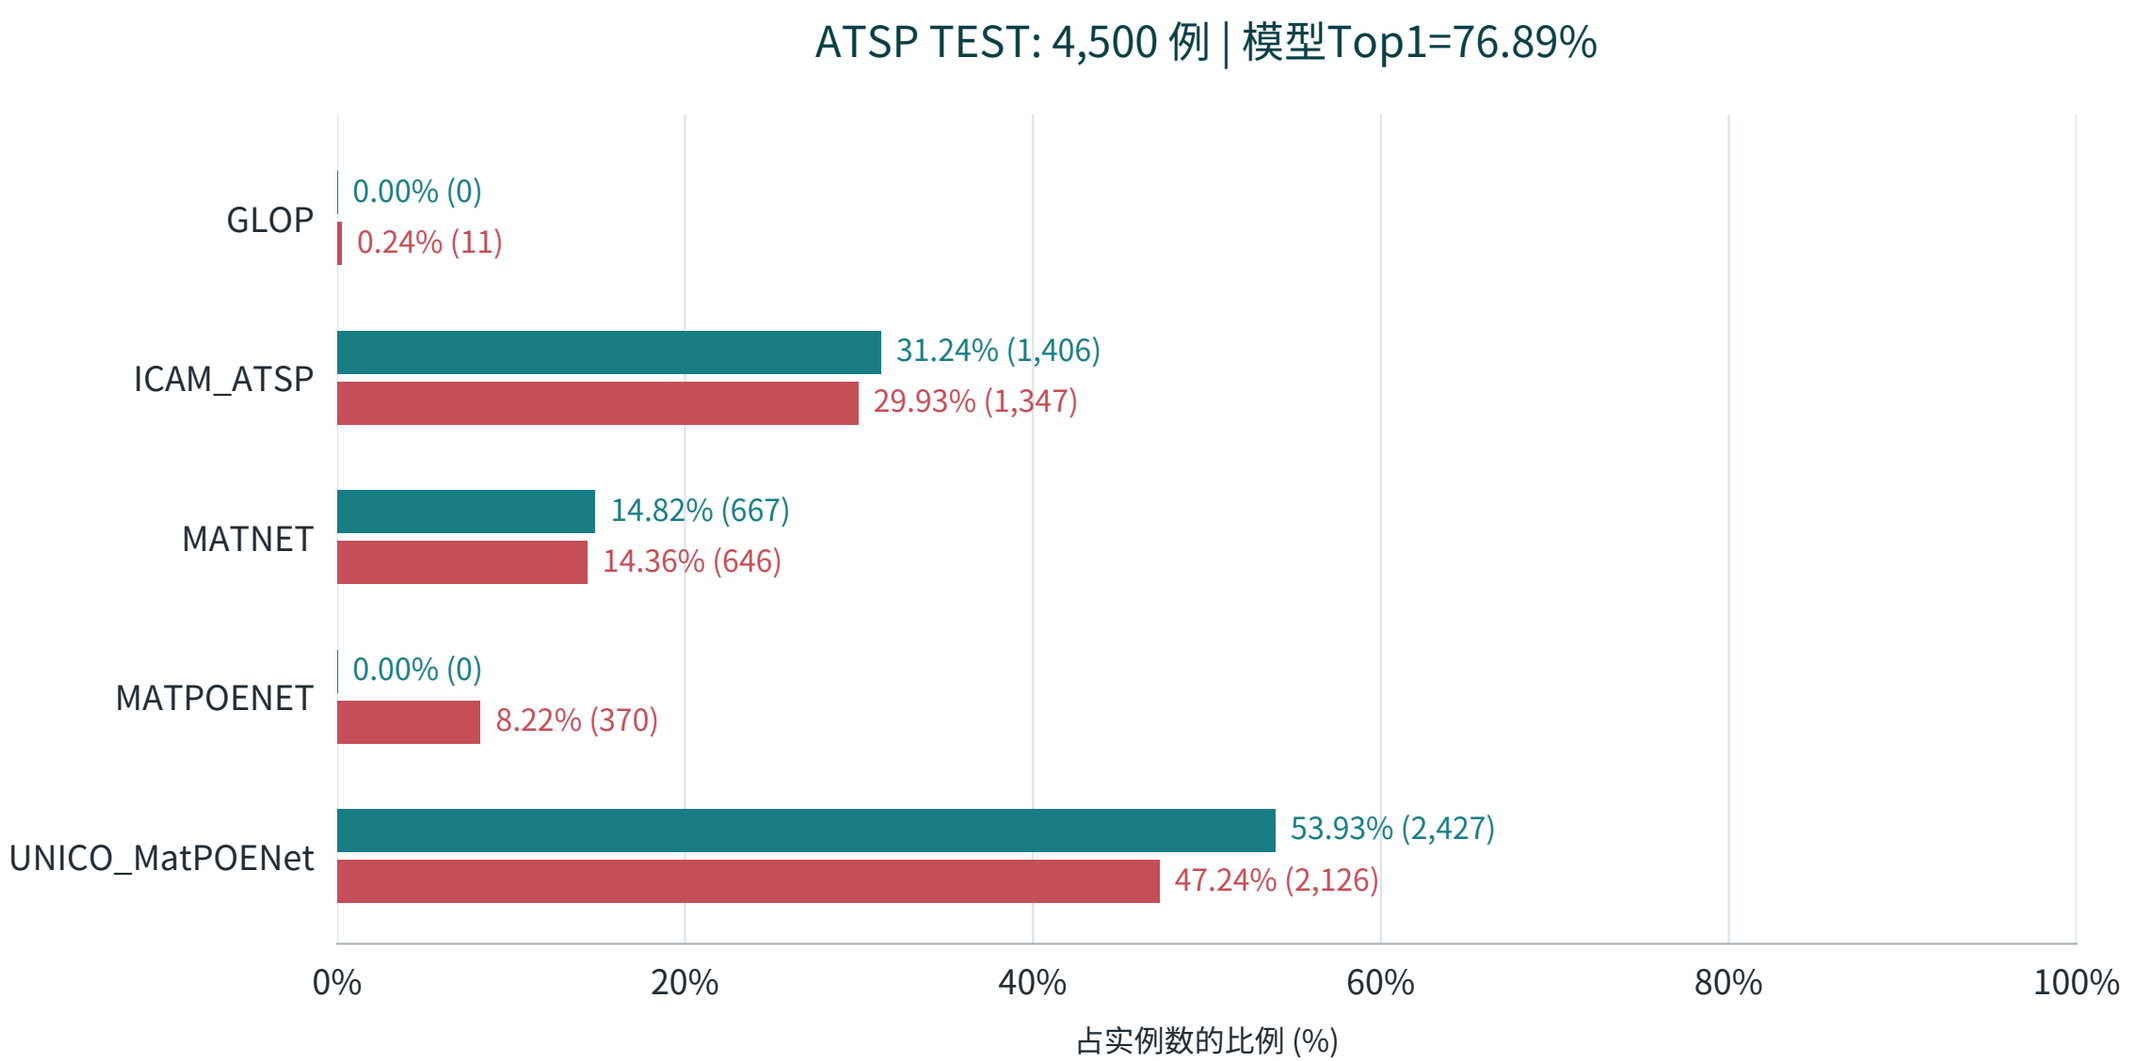

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | OVRP | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

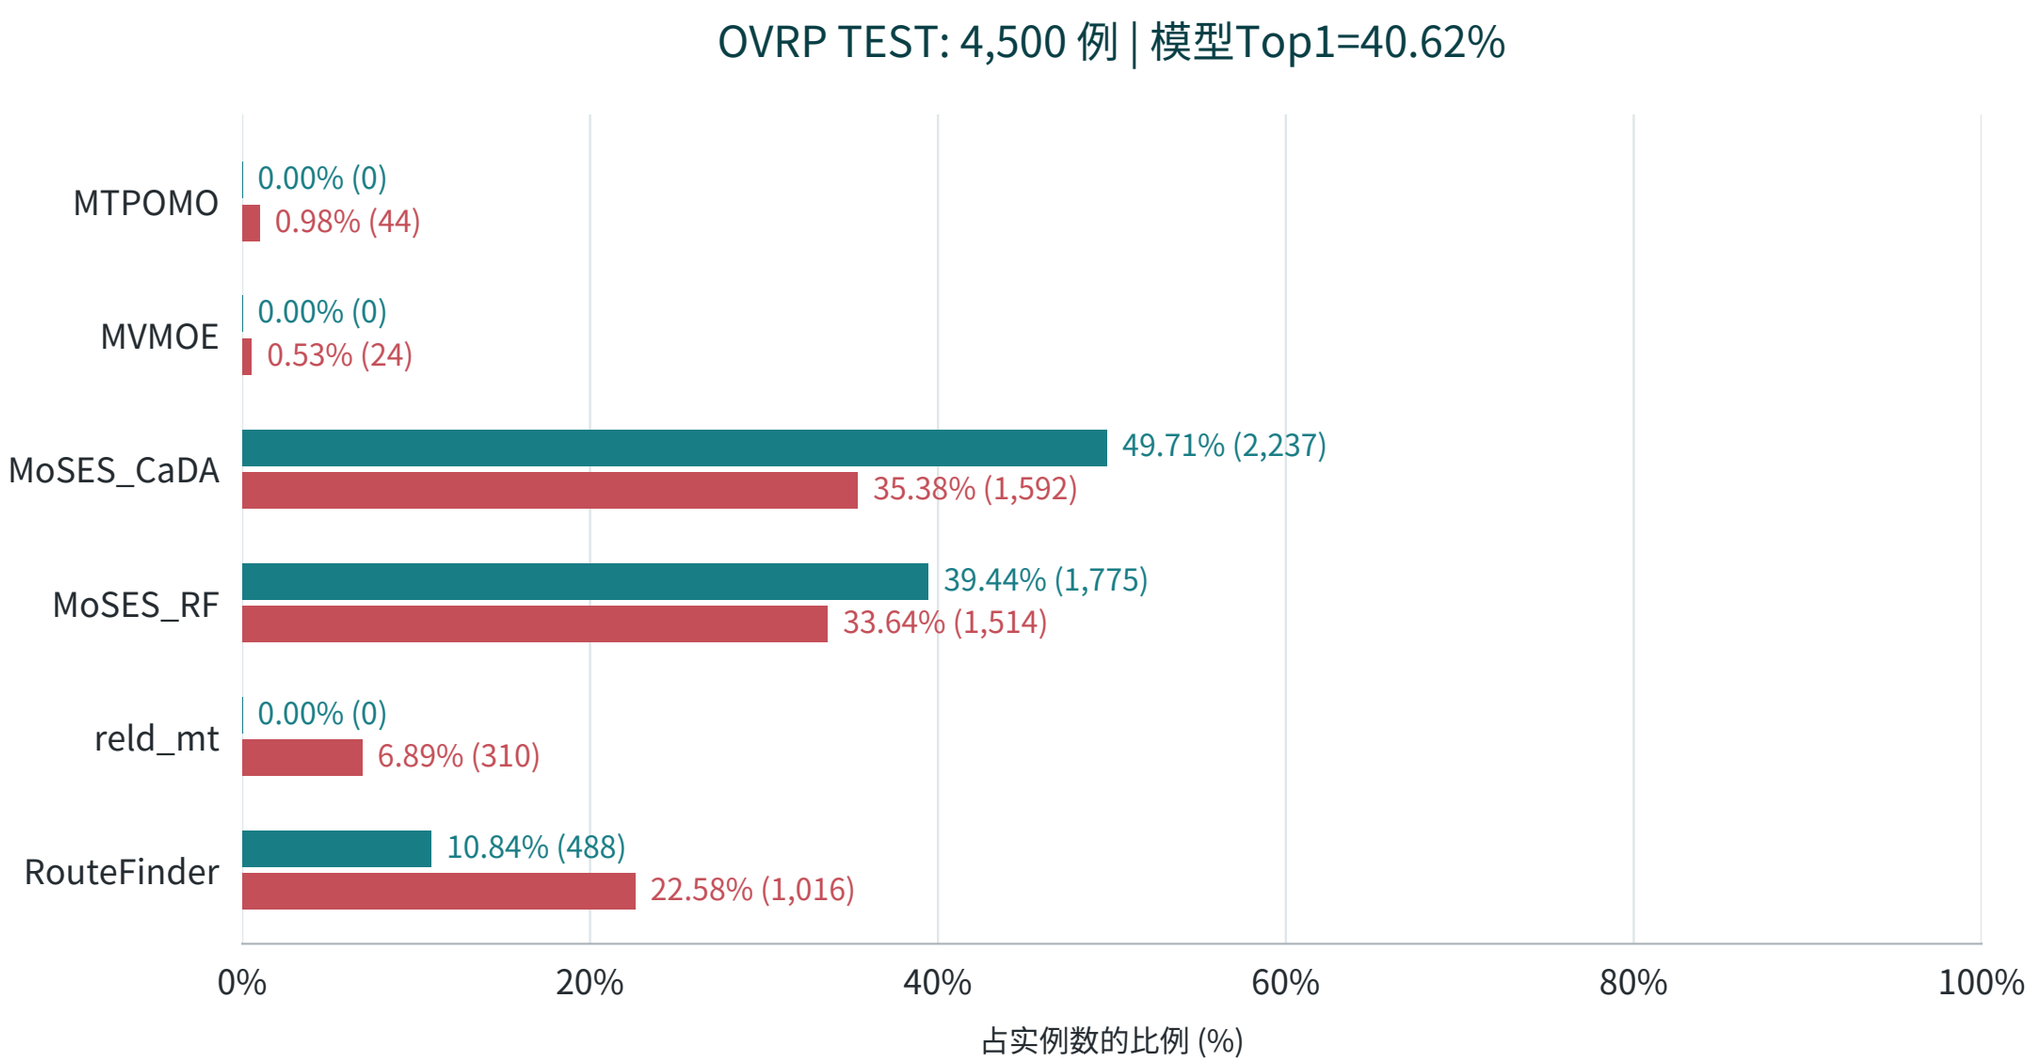

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | VRPB | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

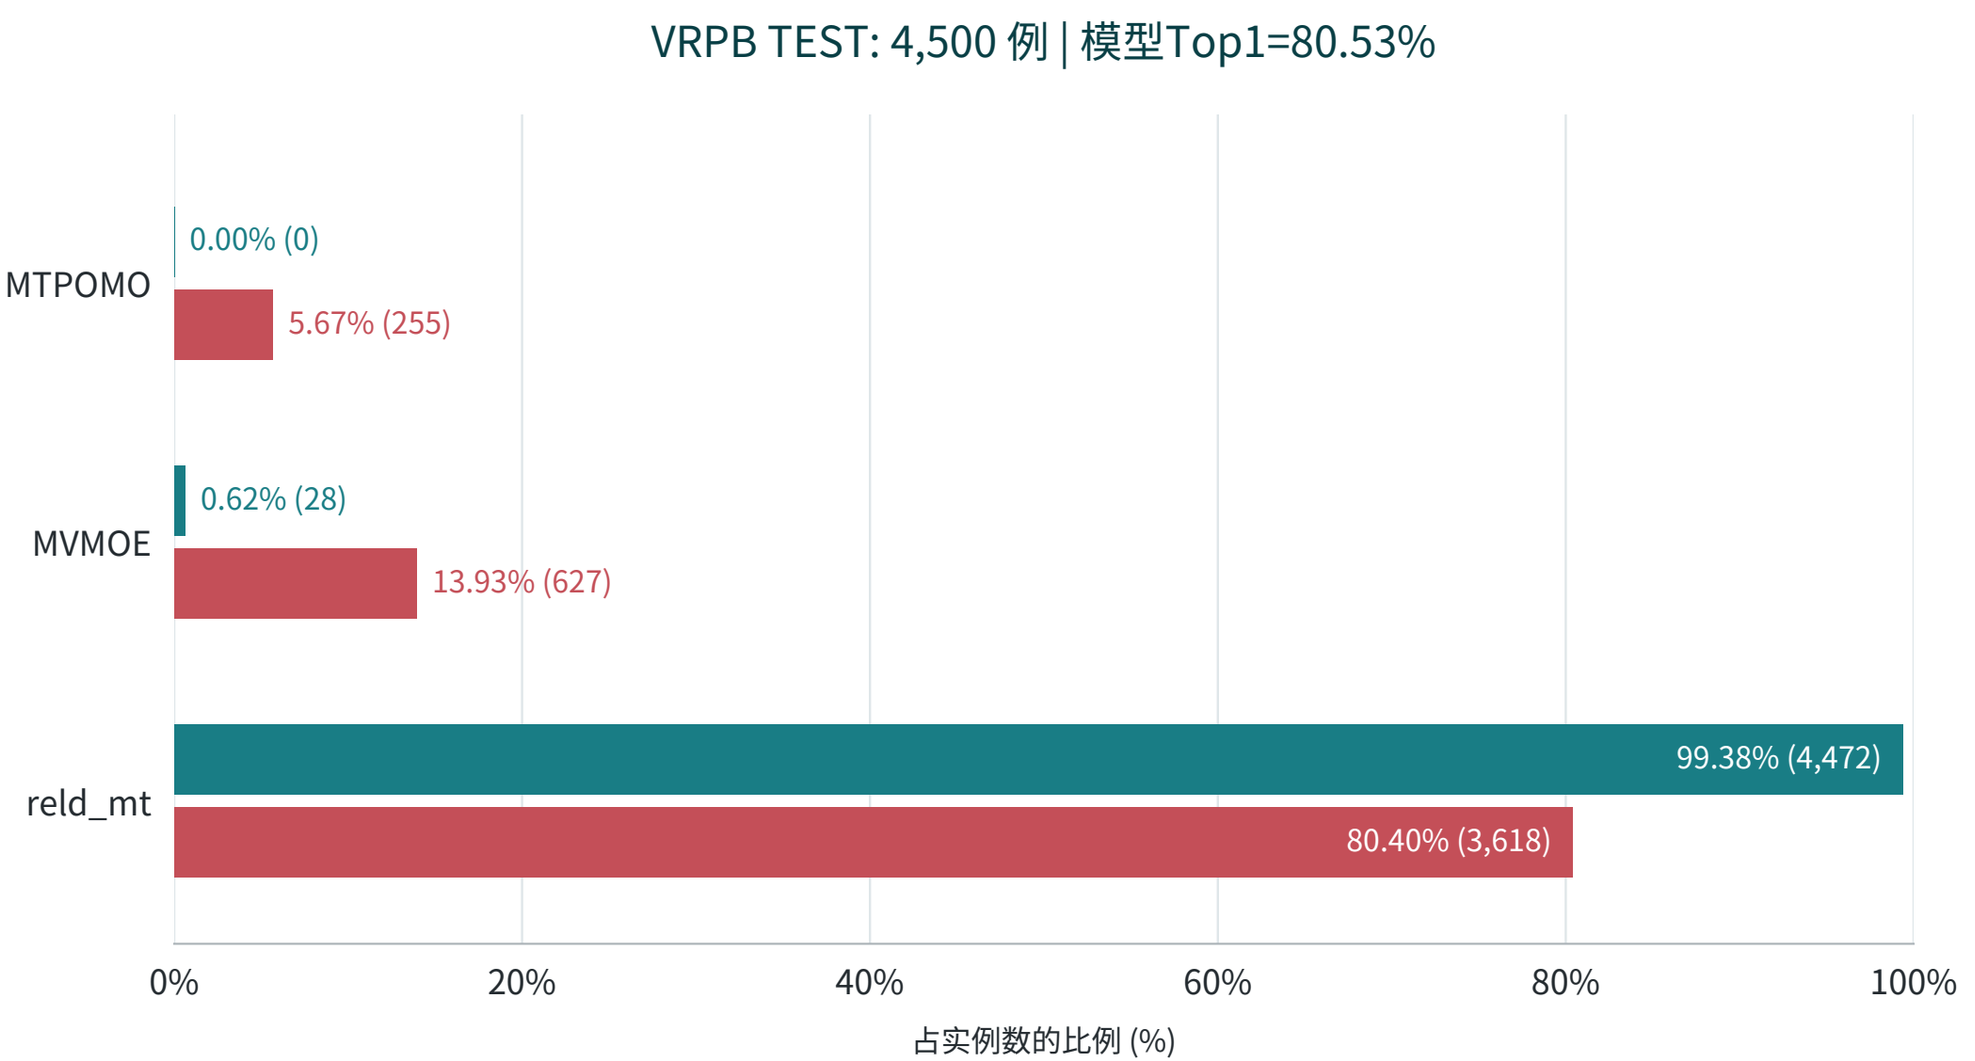

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | VRPL | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

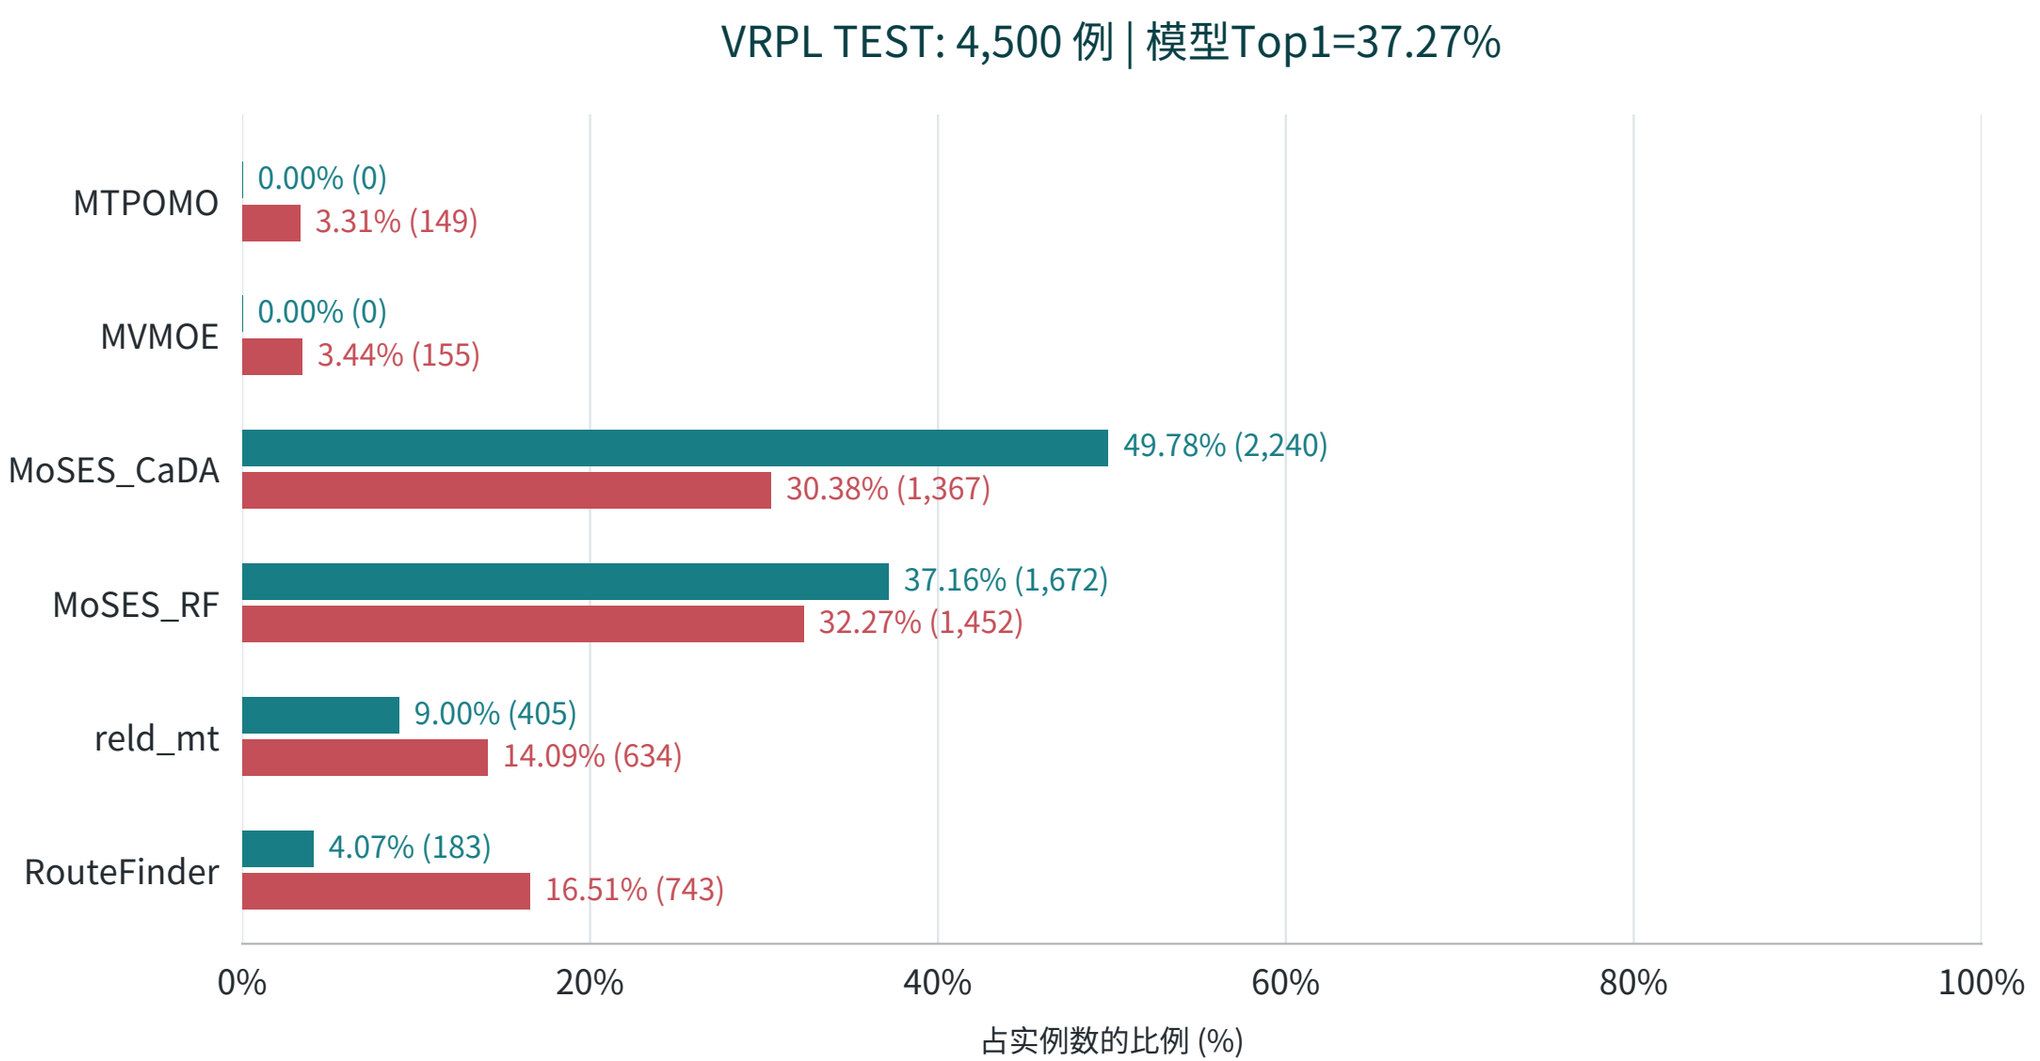

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | VRPTW | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

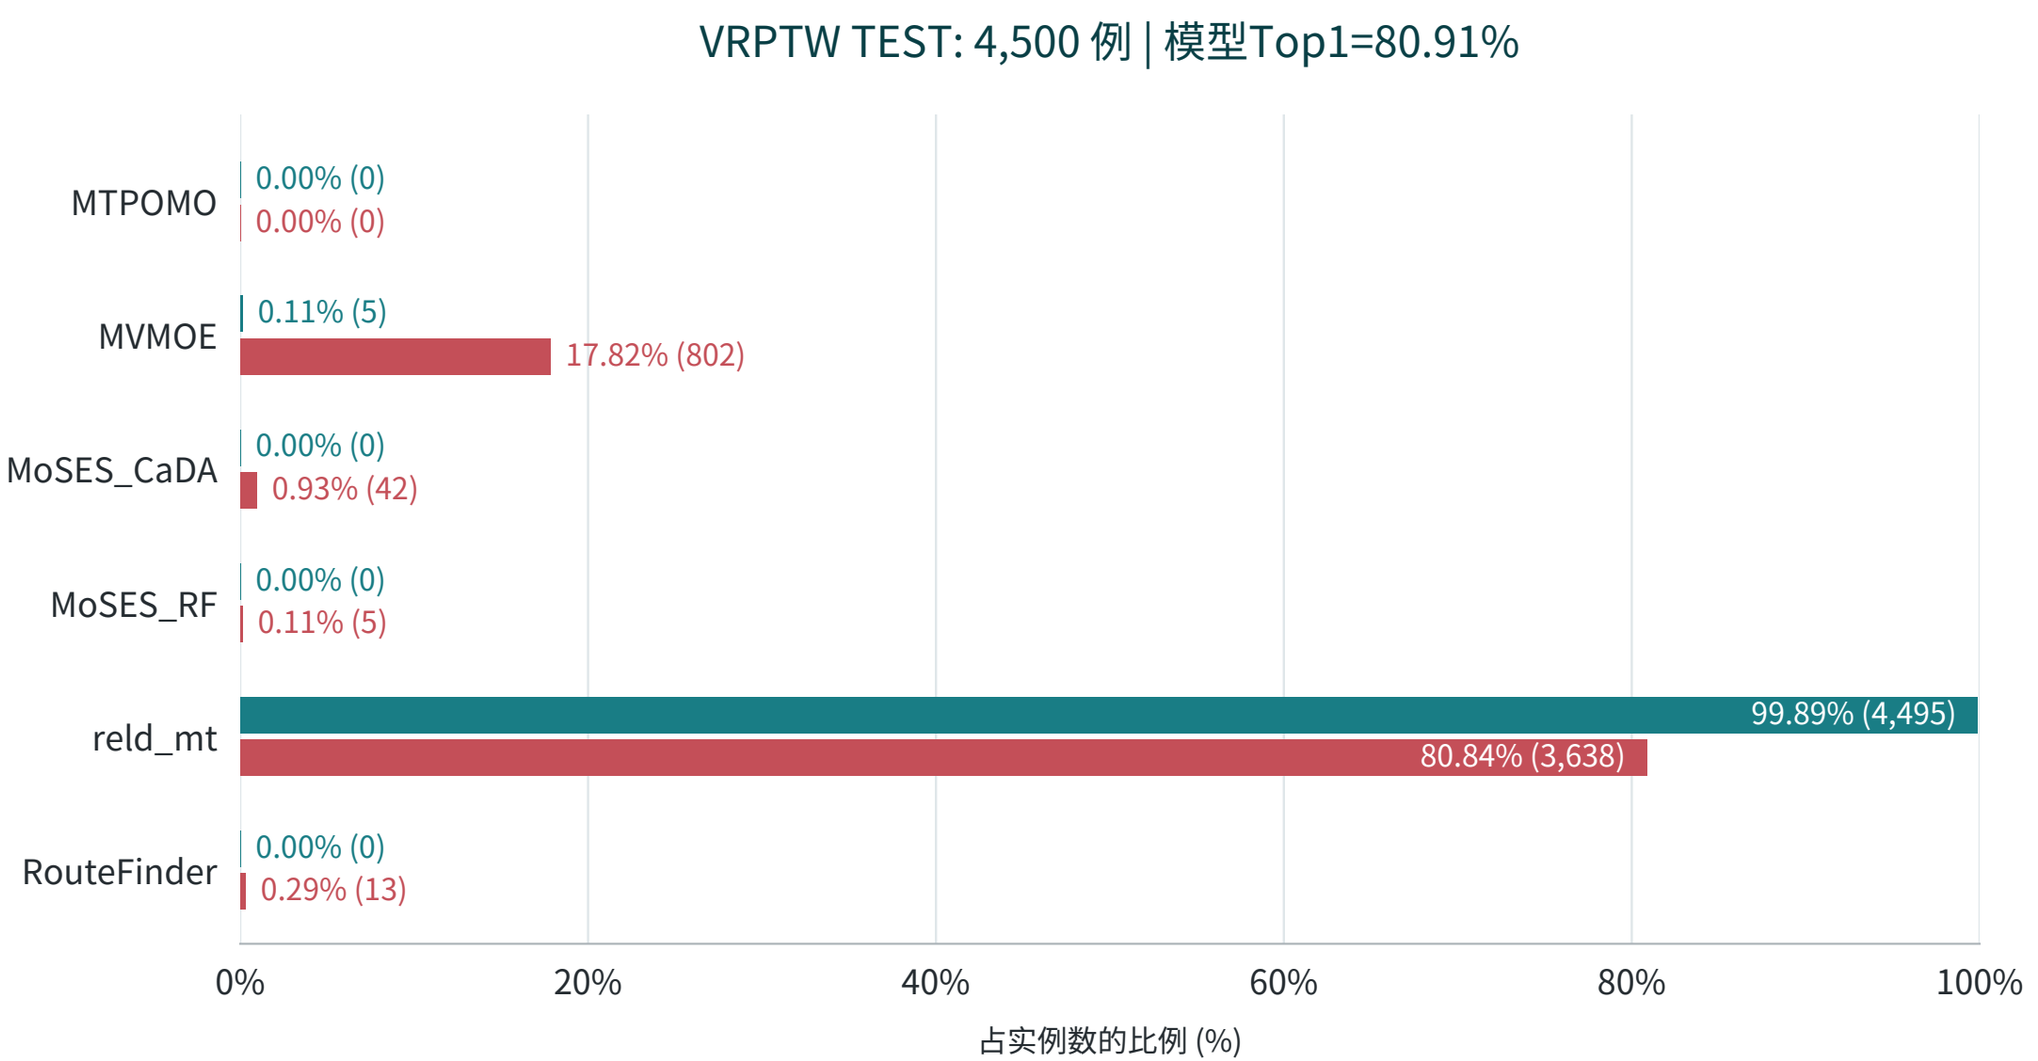

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | OVRPTW | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

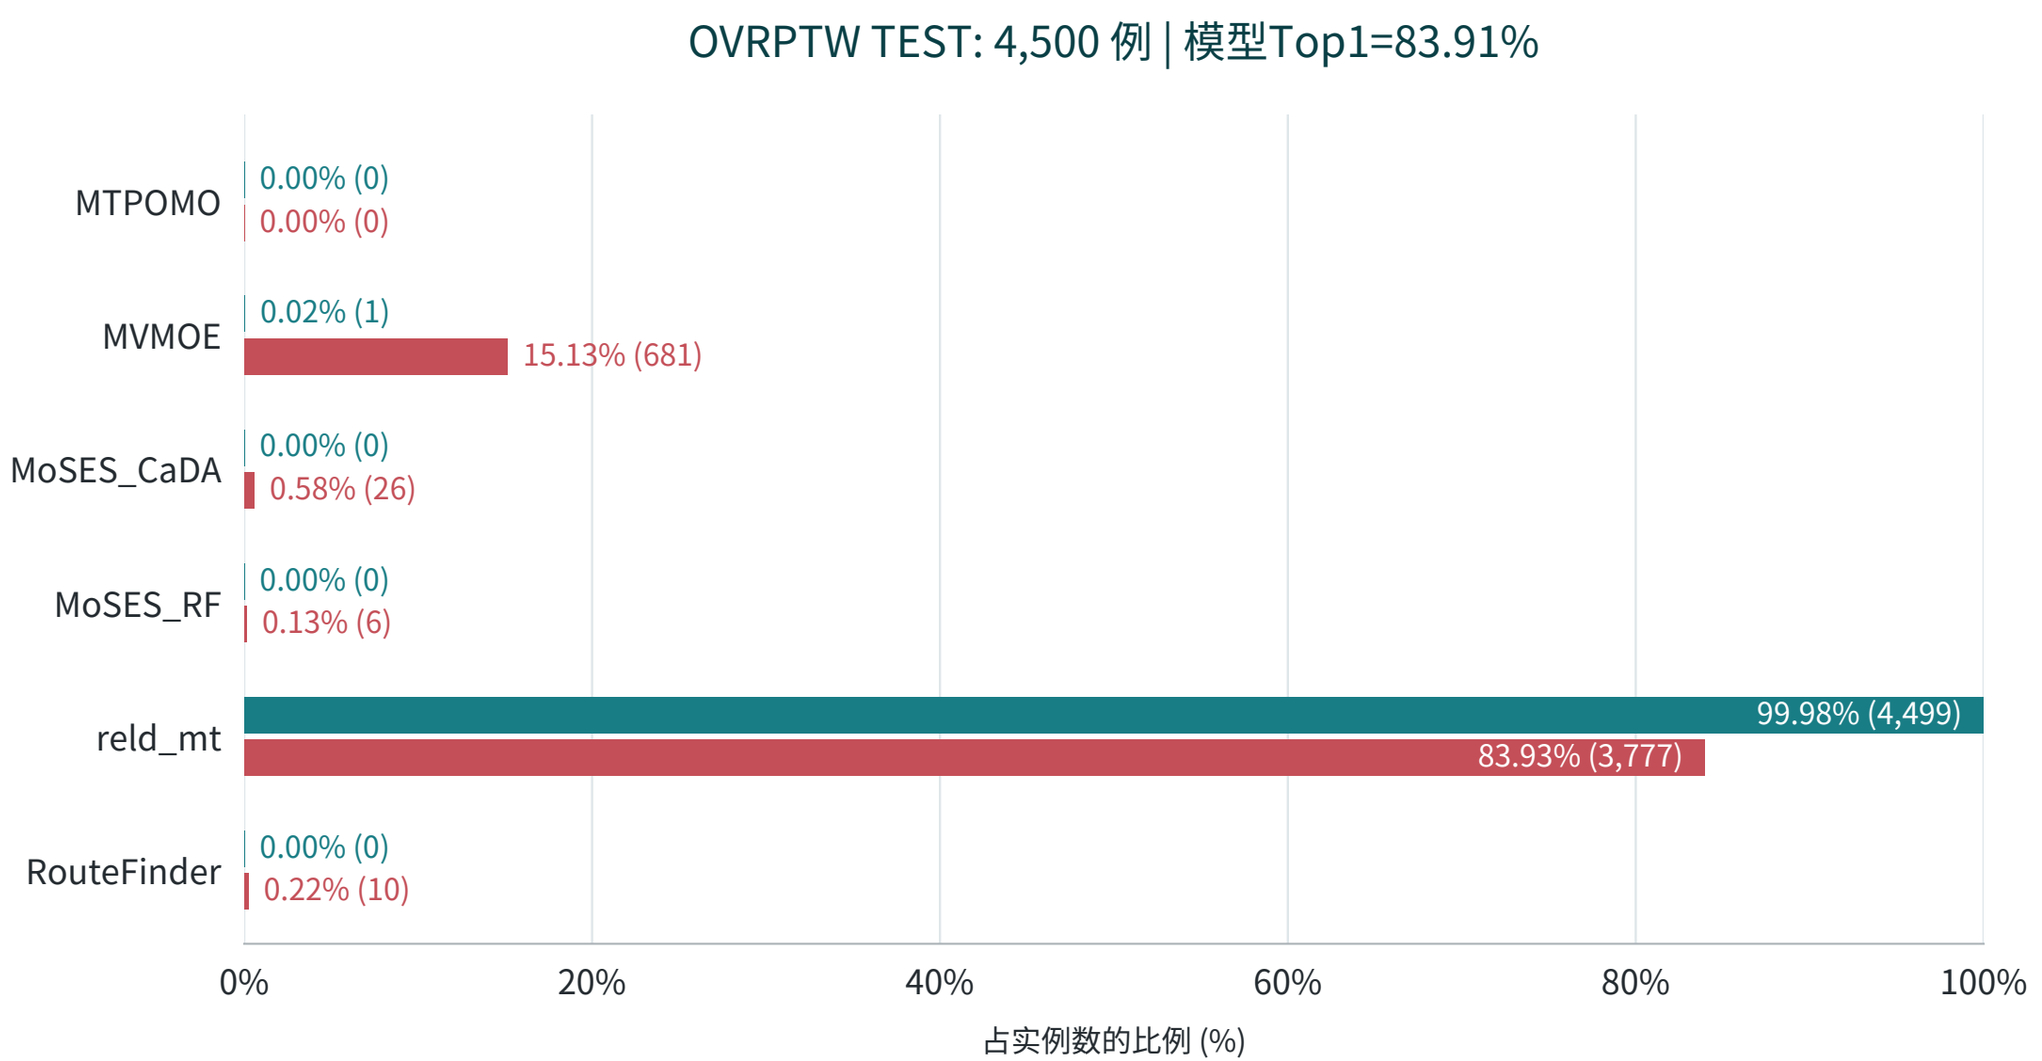

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | OVRPB | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

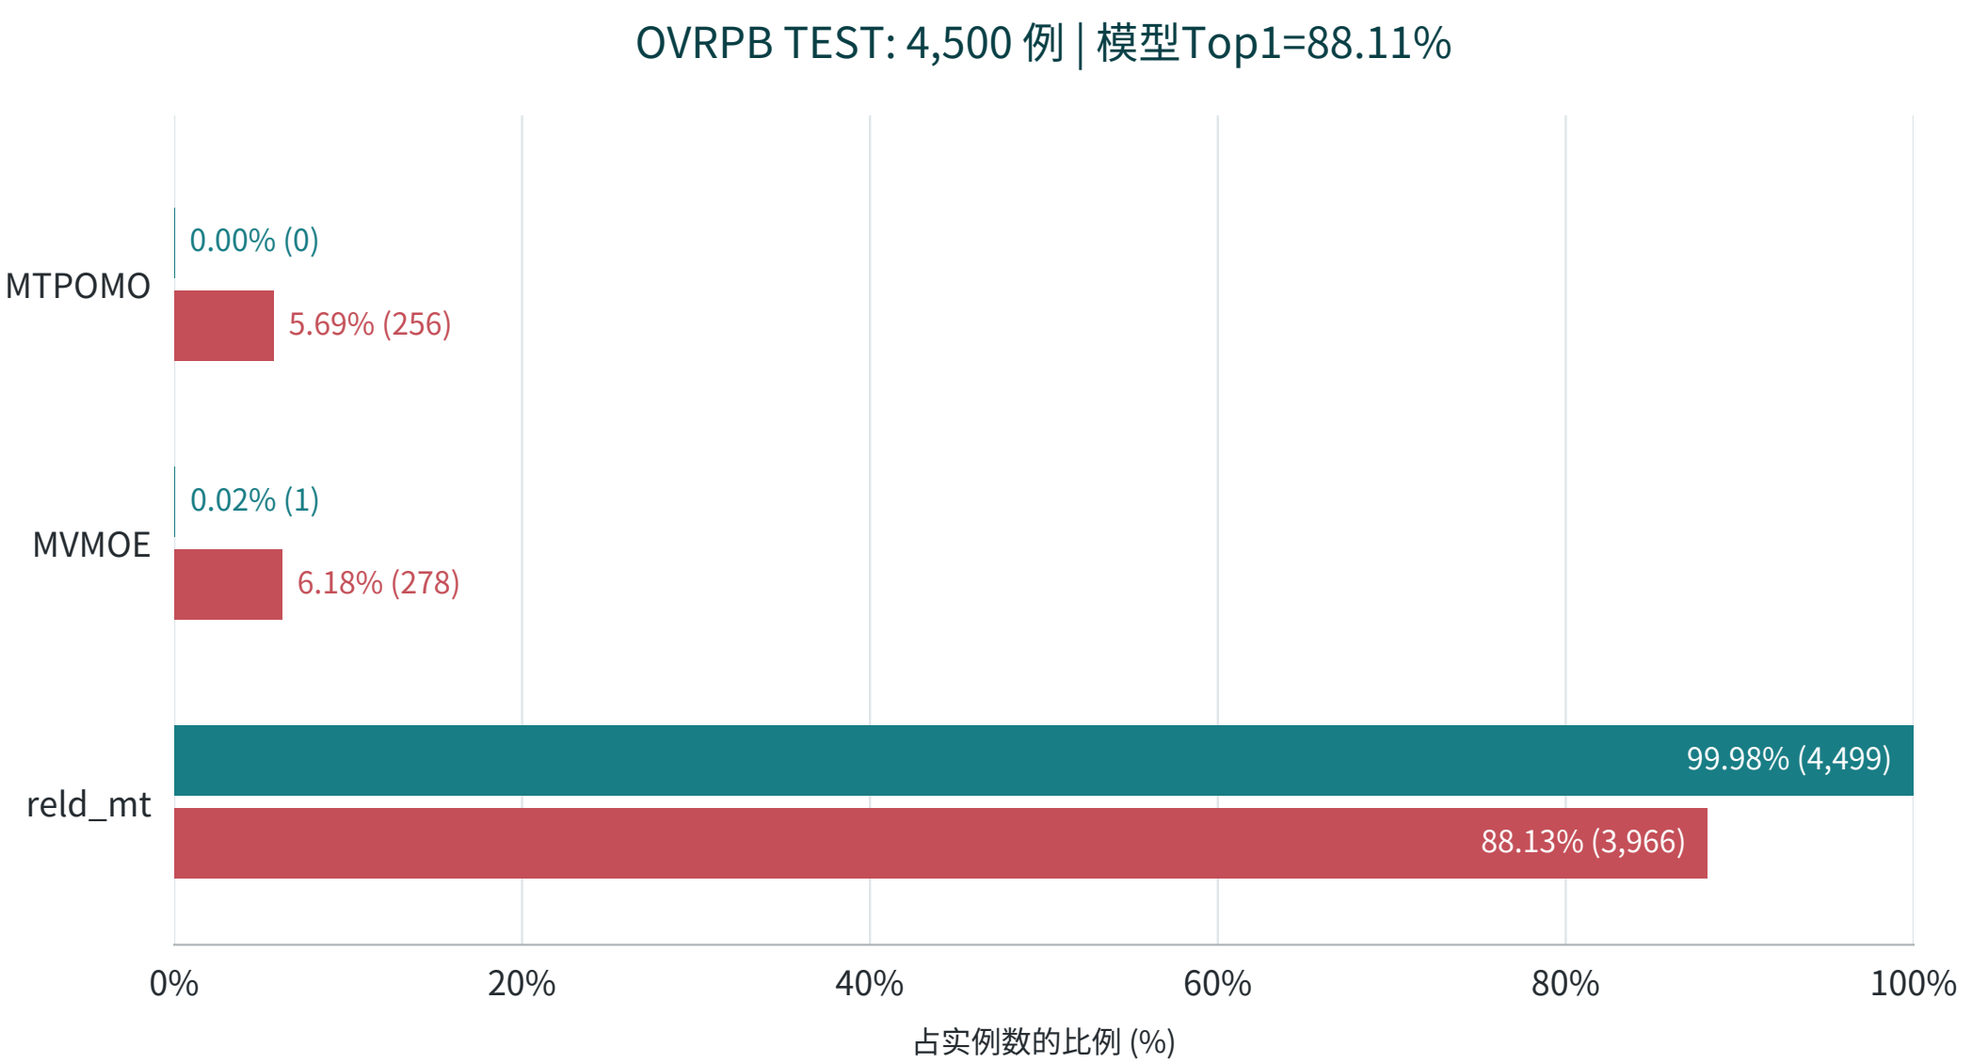

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | OVRPL | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

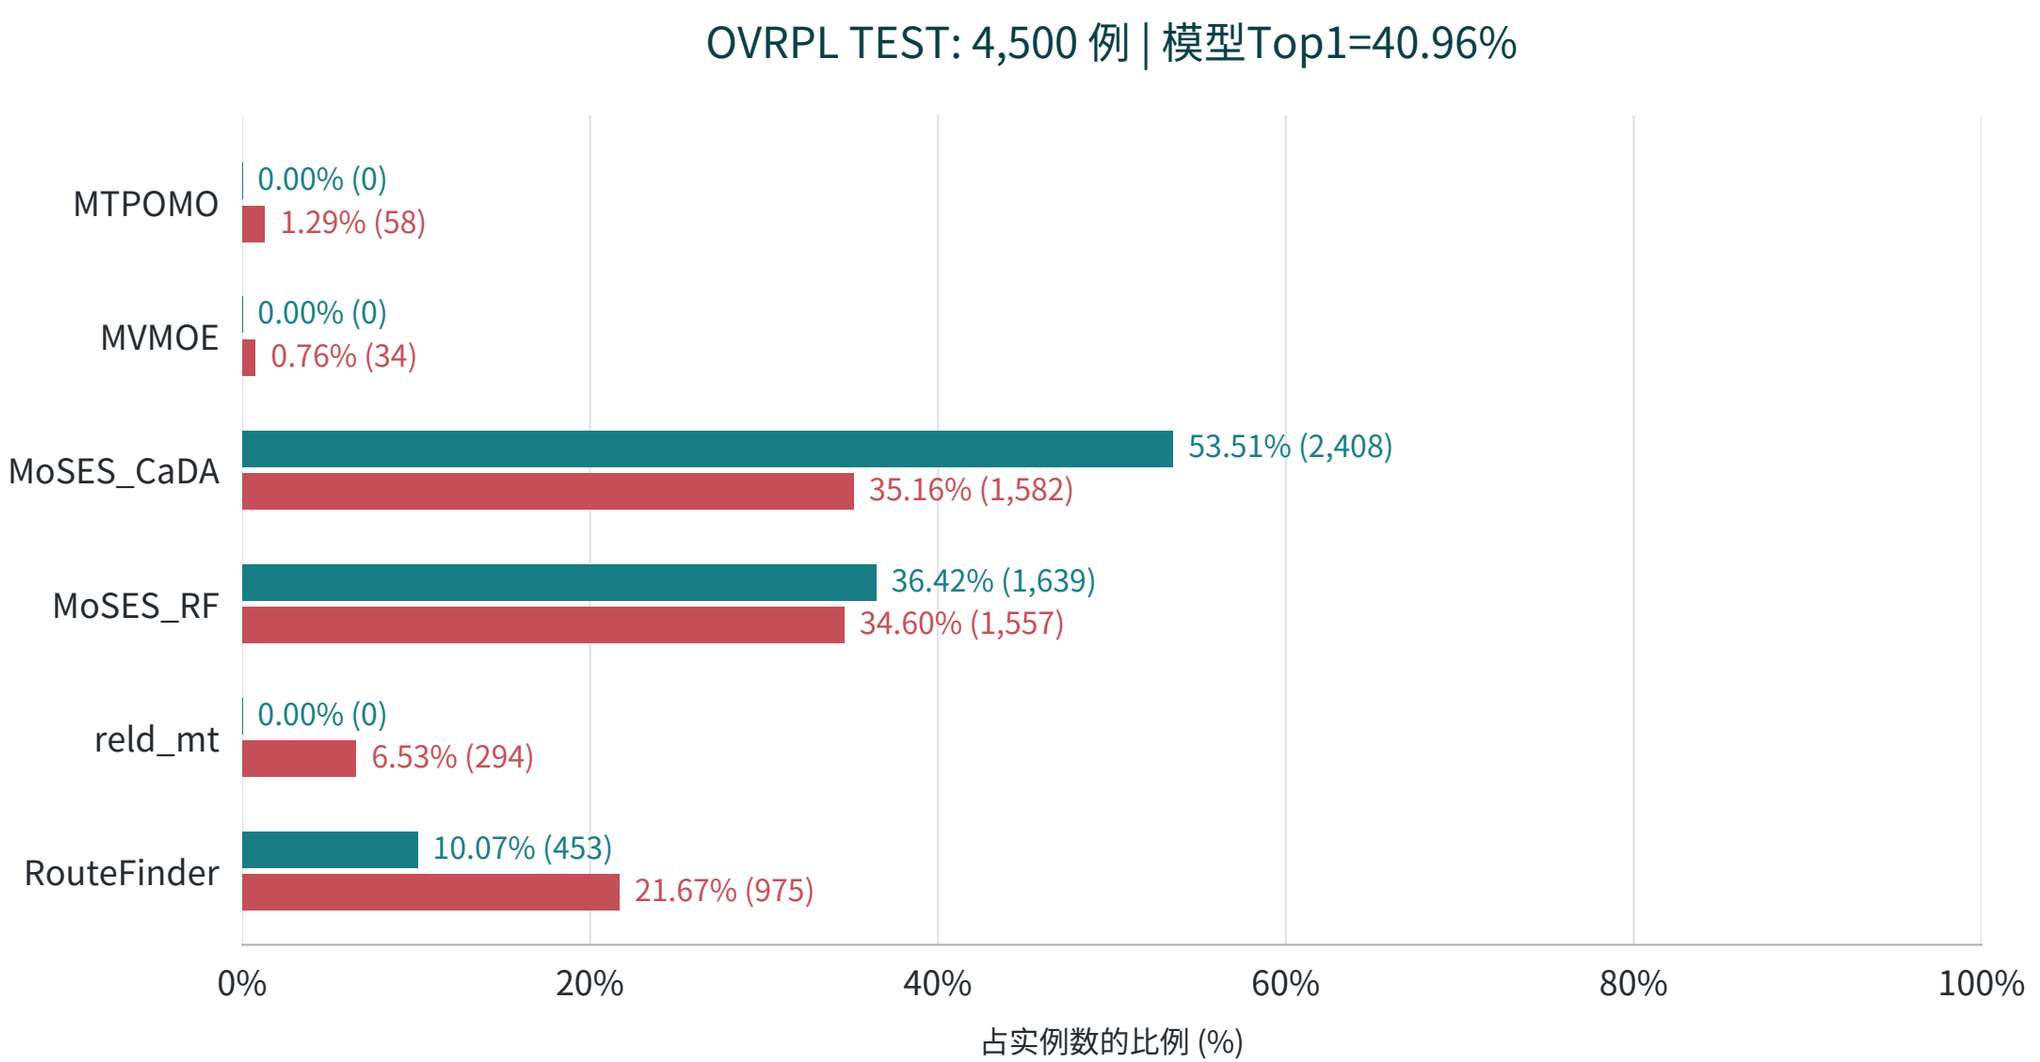

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | VRPBL | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

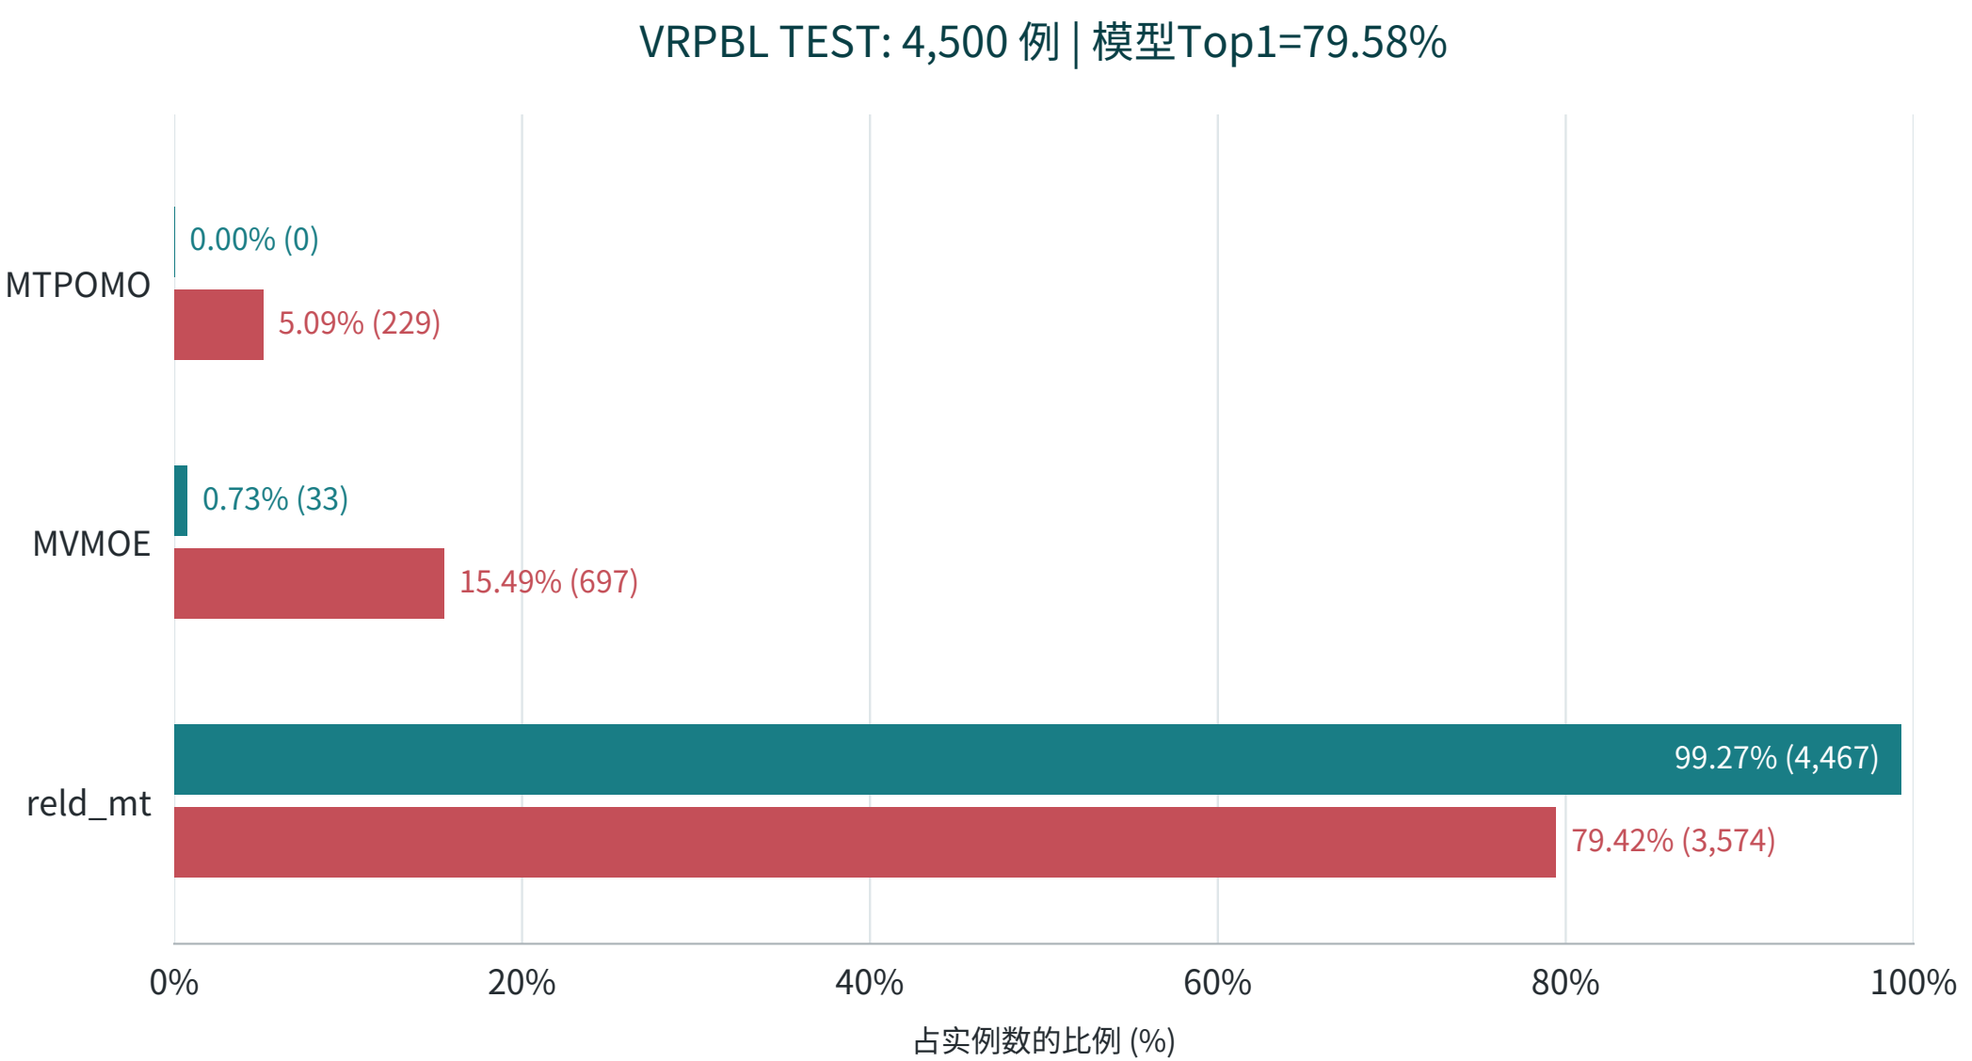

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | VRPBTW | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

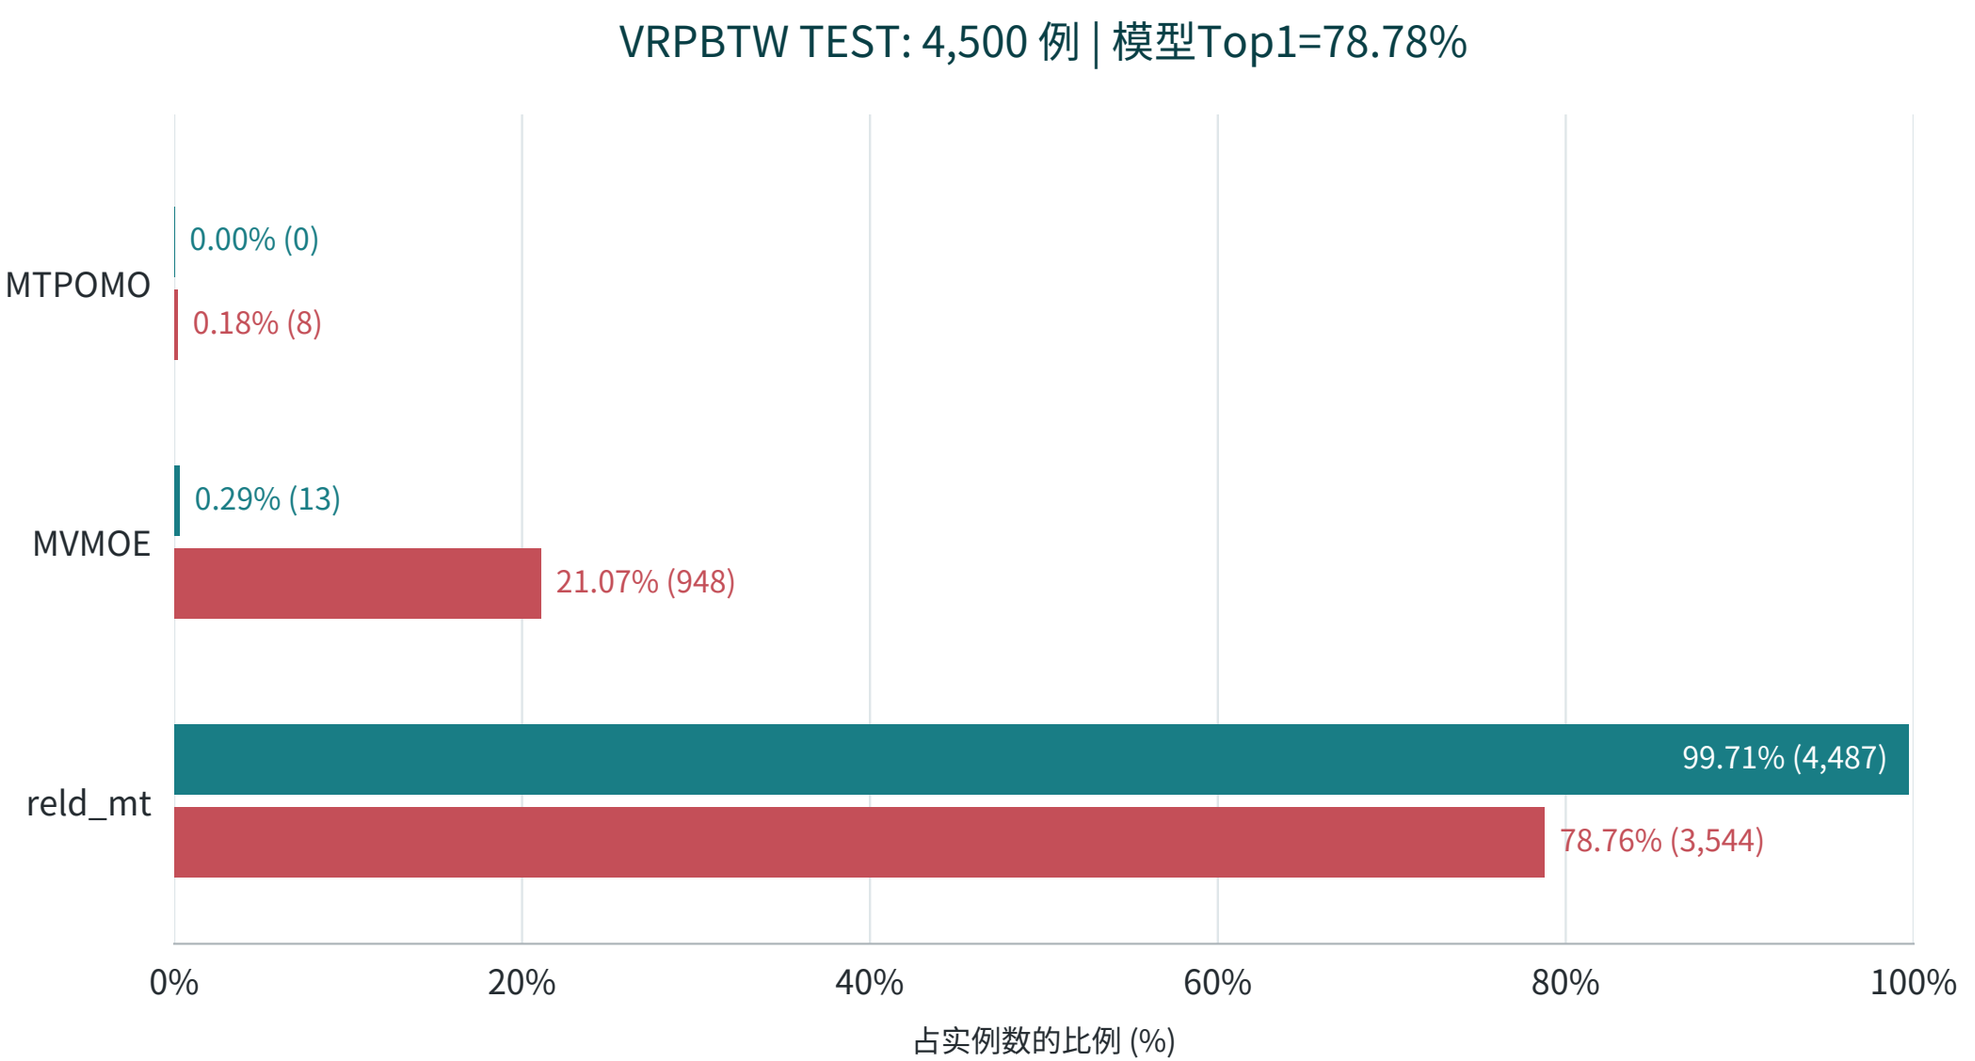

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | VRPLTW | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

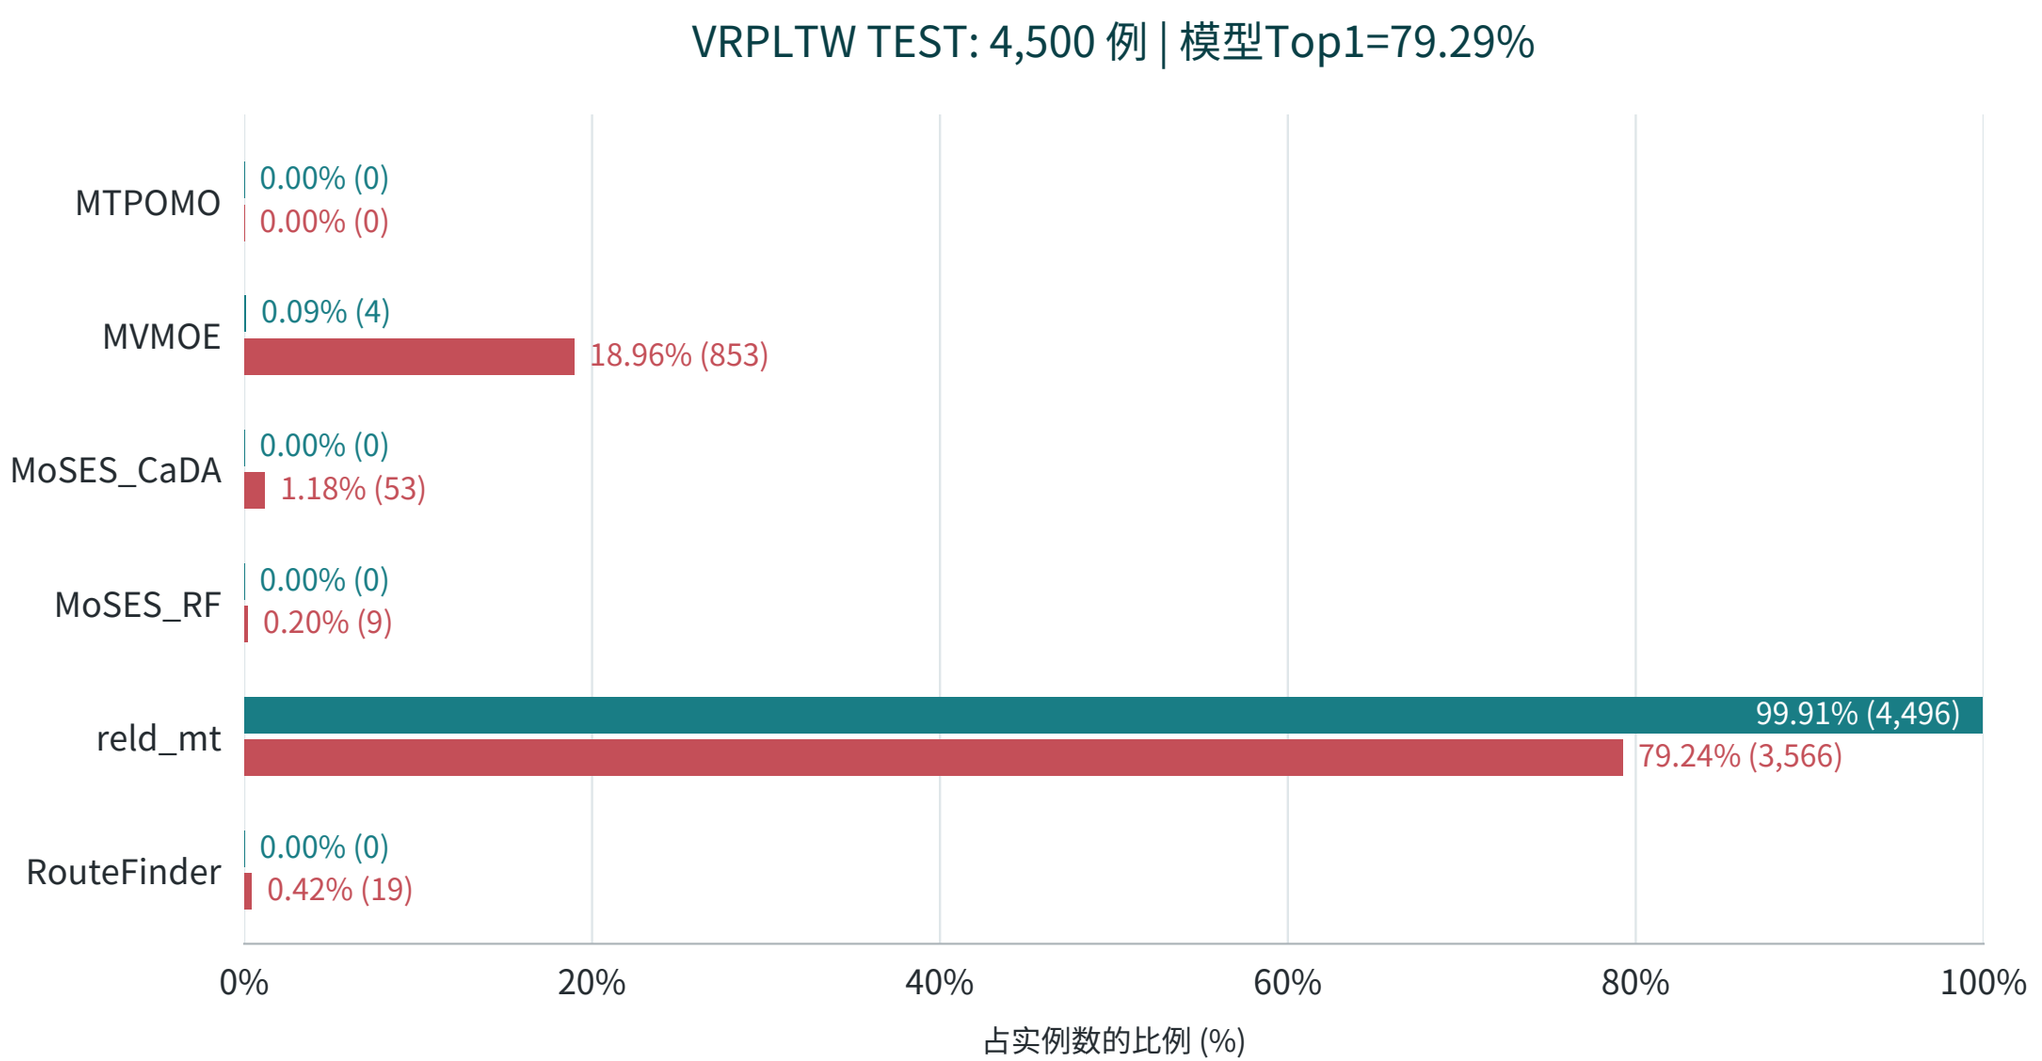

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | OVRPBL | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

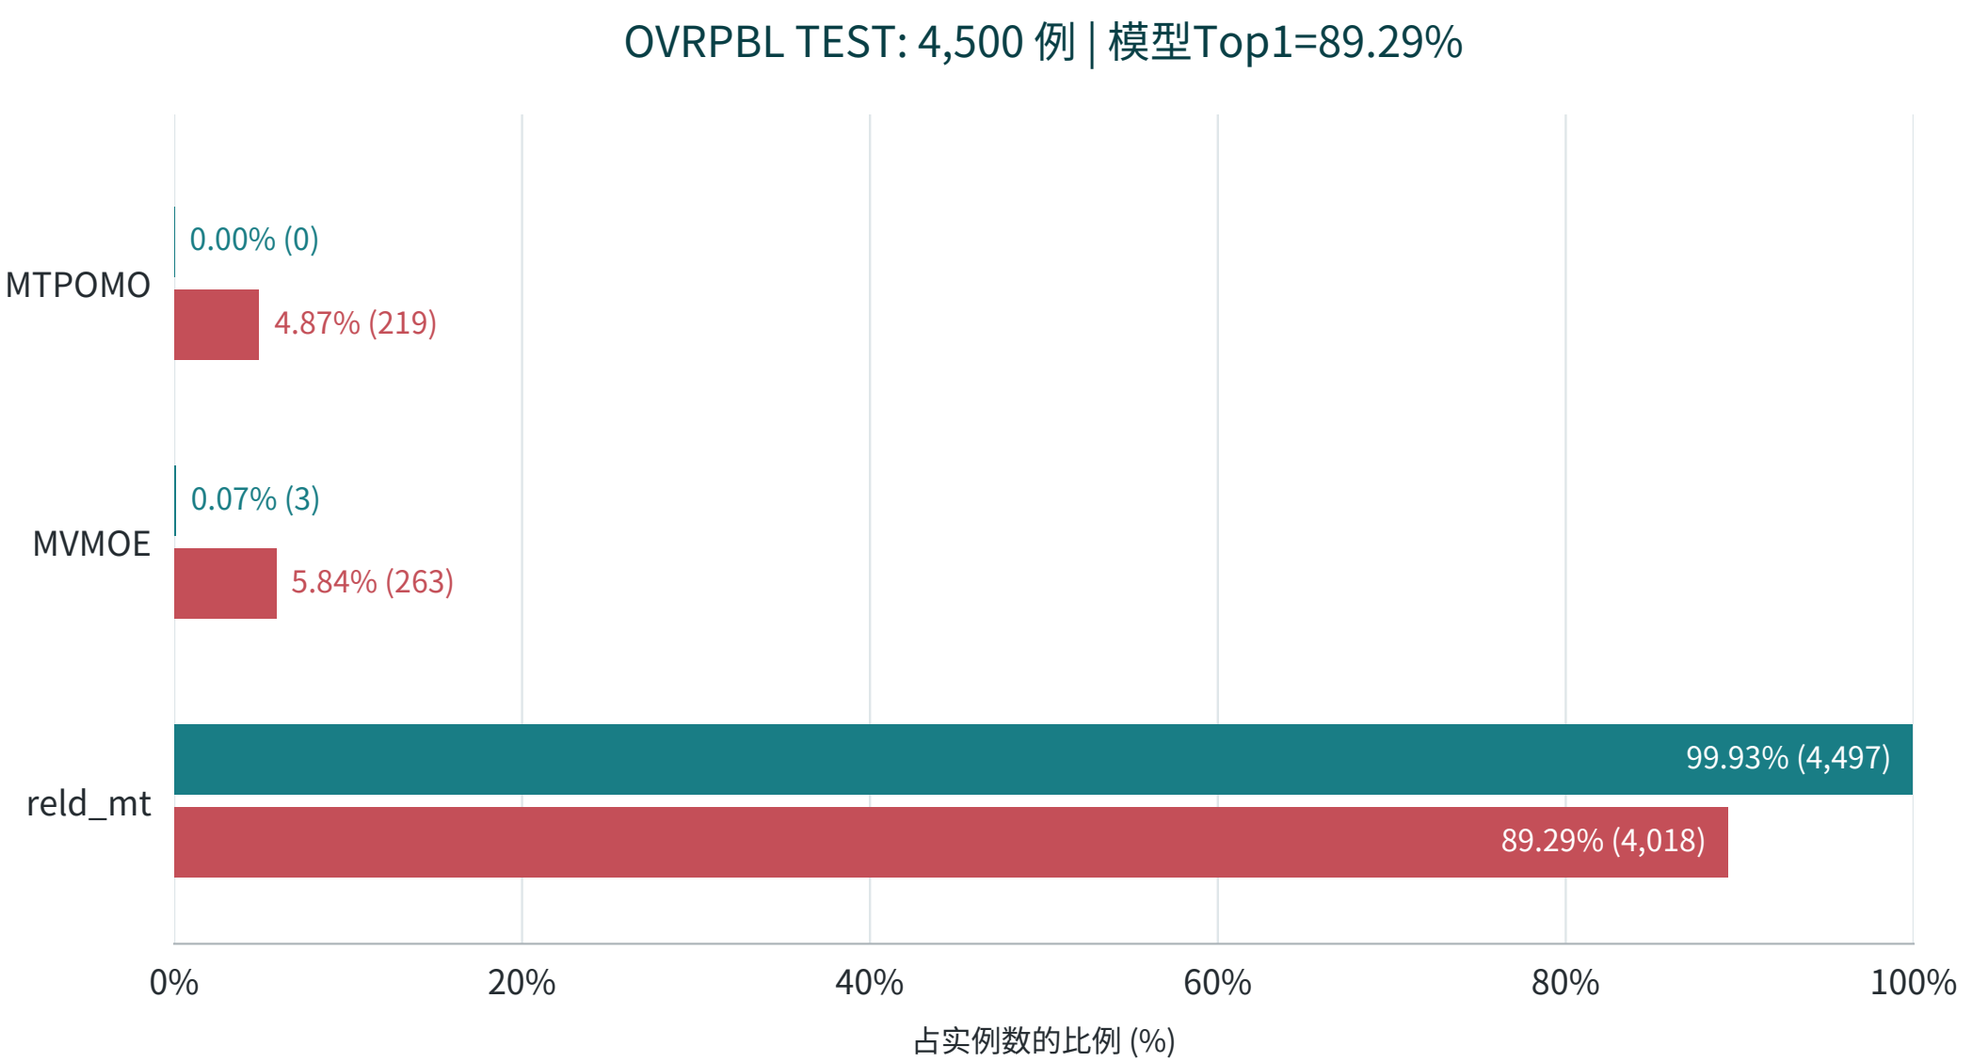

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | OVRPBTW | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

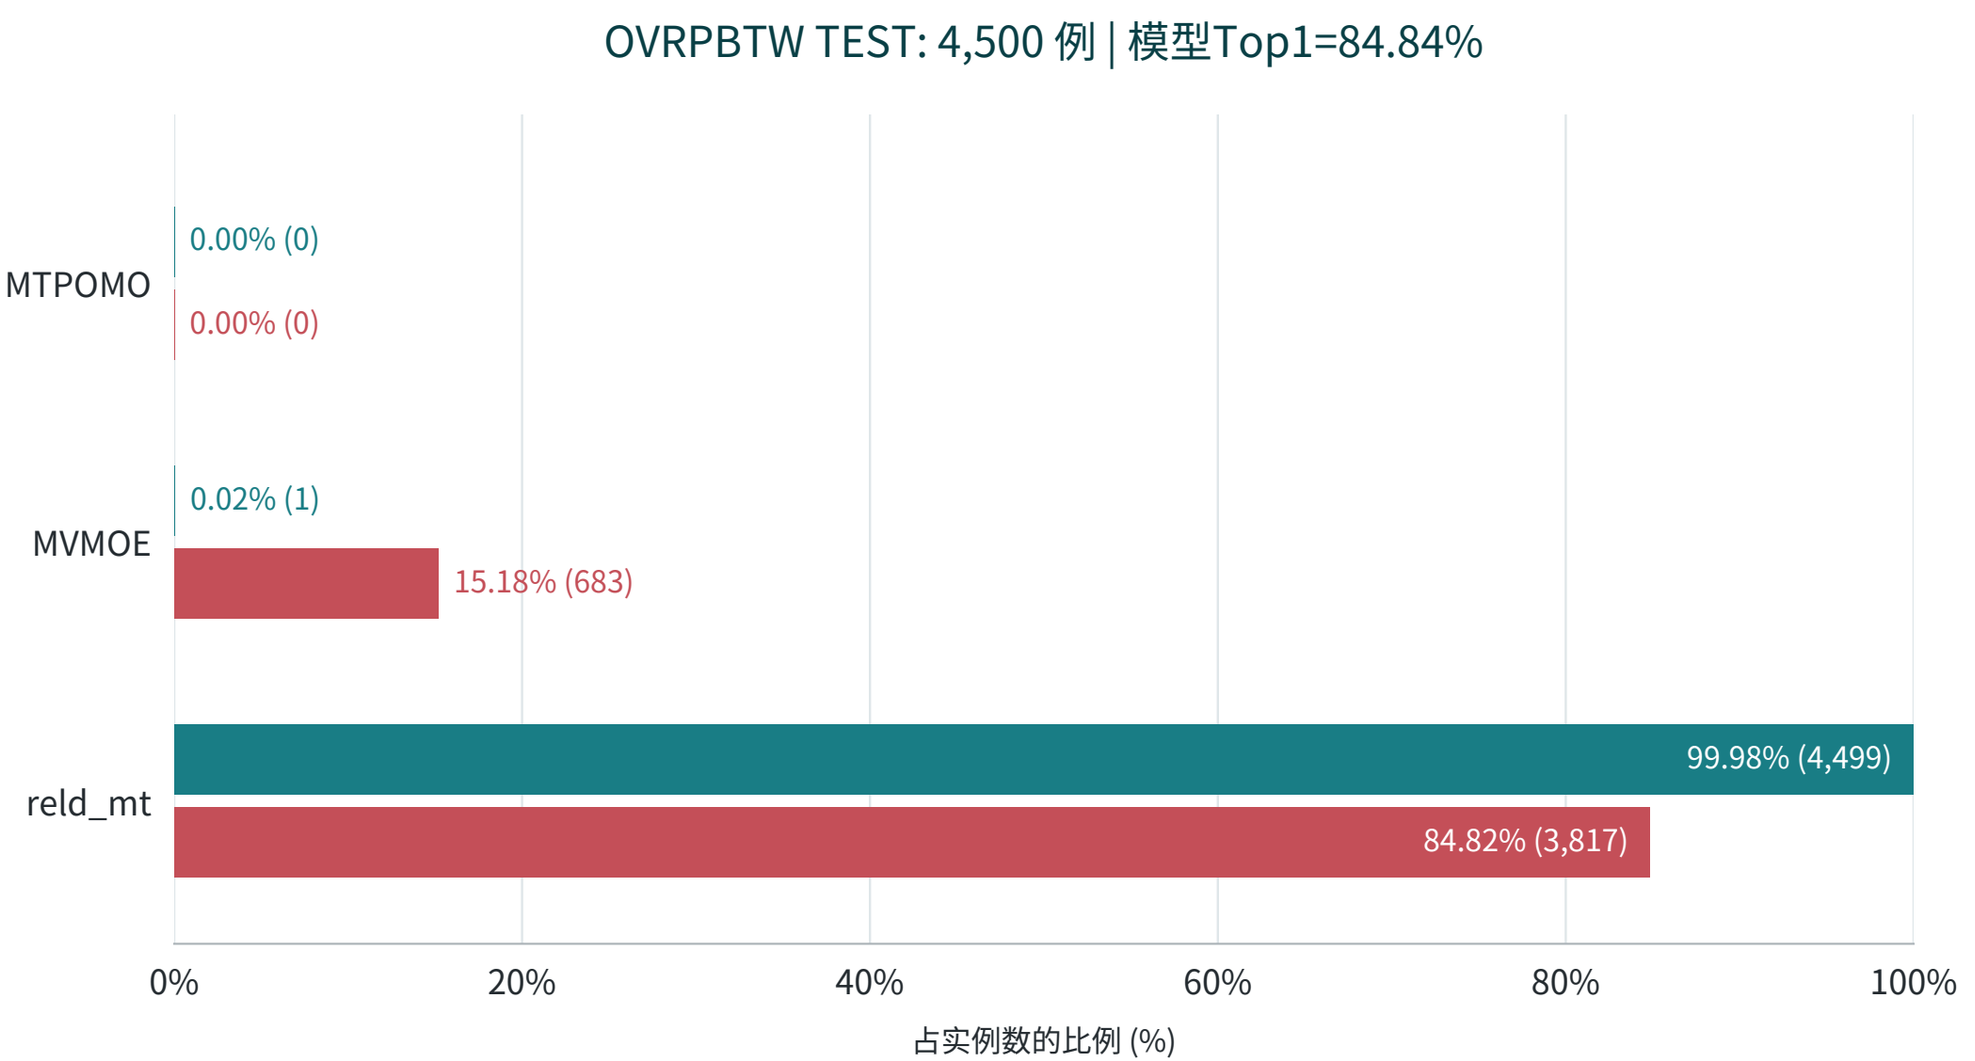

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | OVRPLTW | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

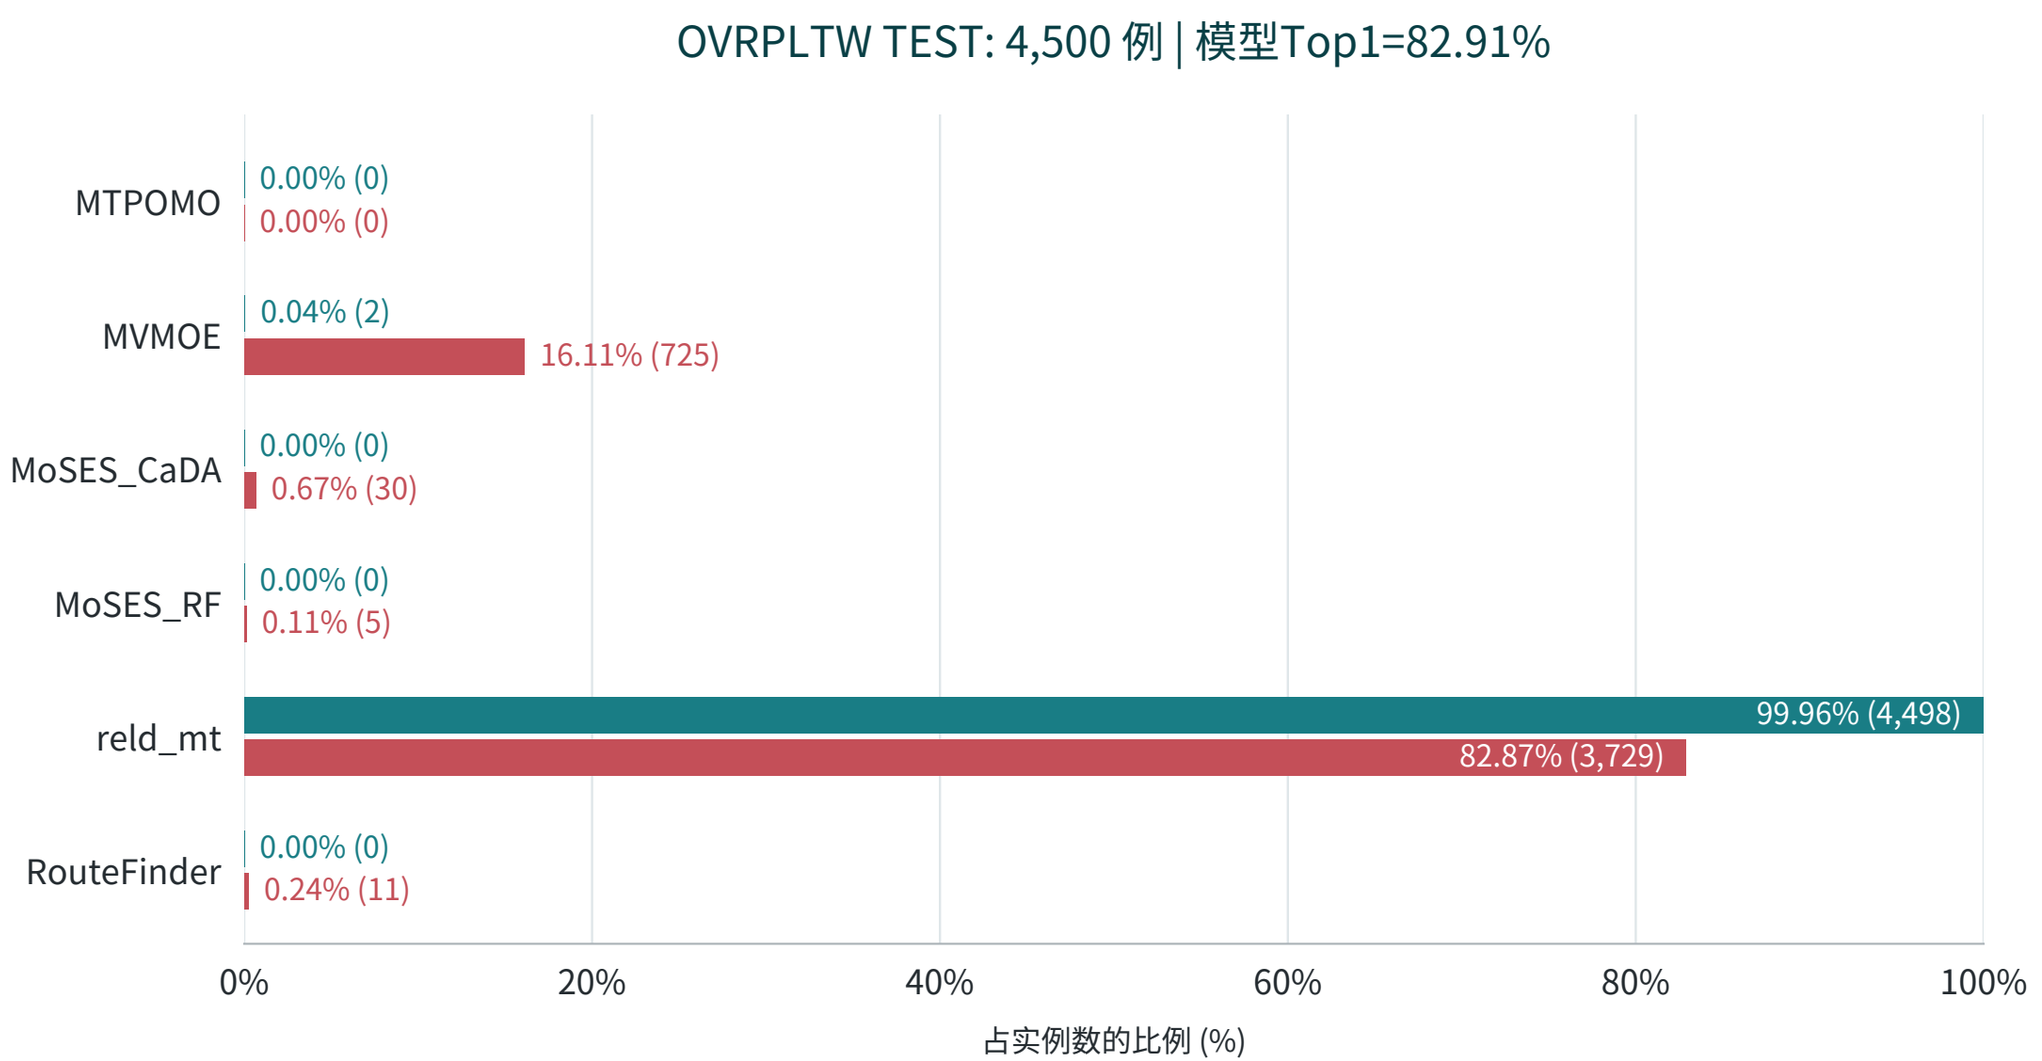

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | VRPBLTW | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

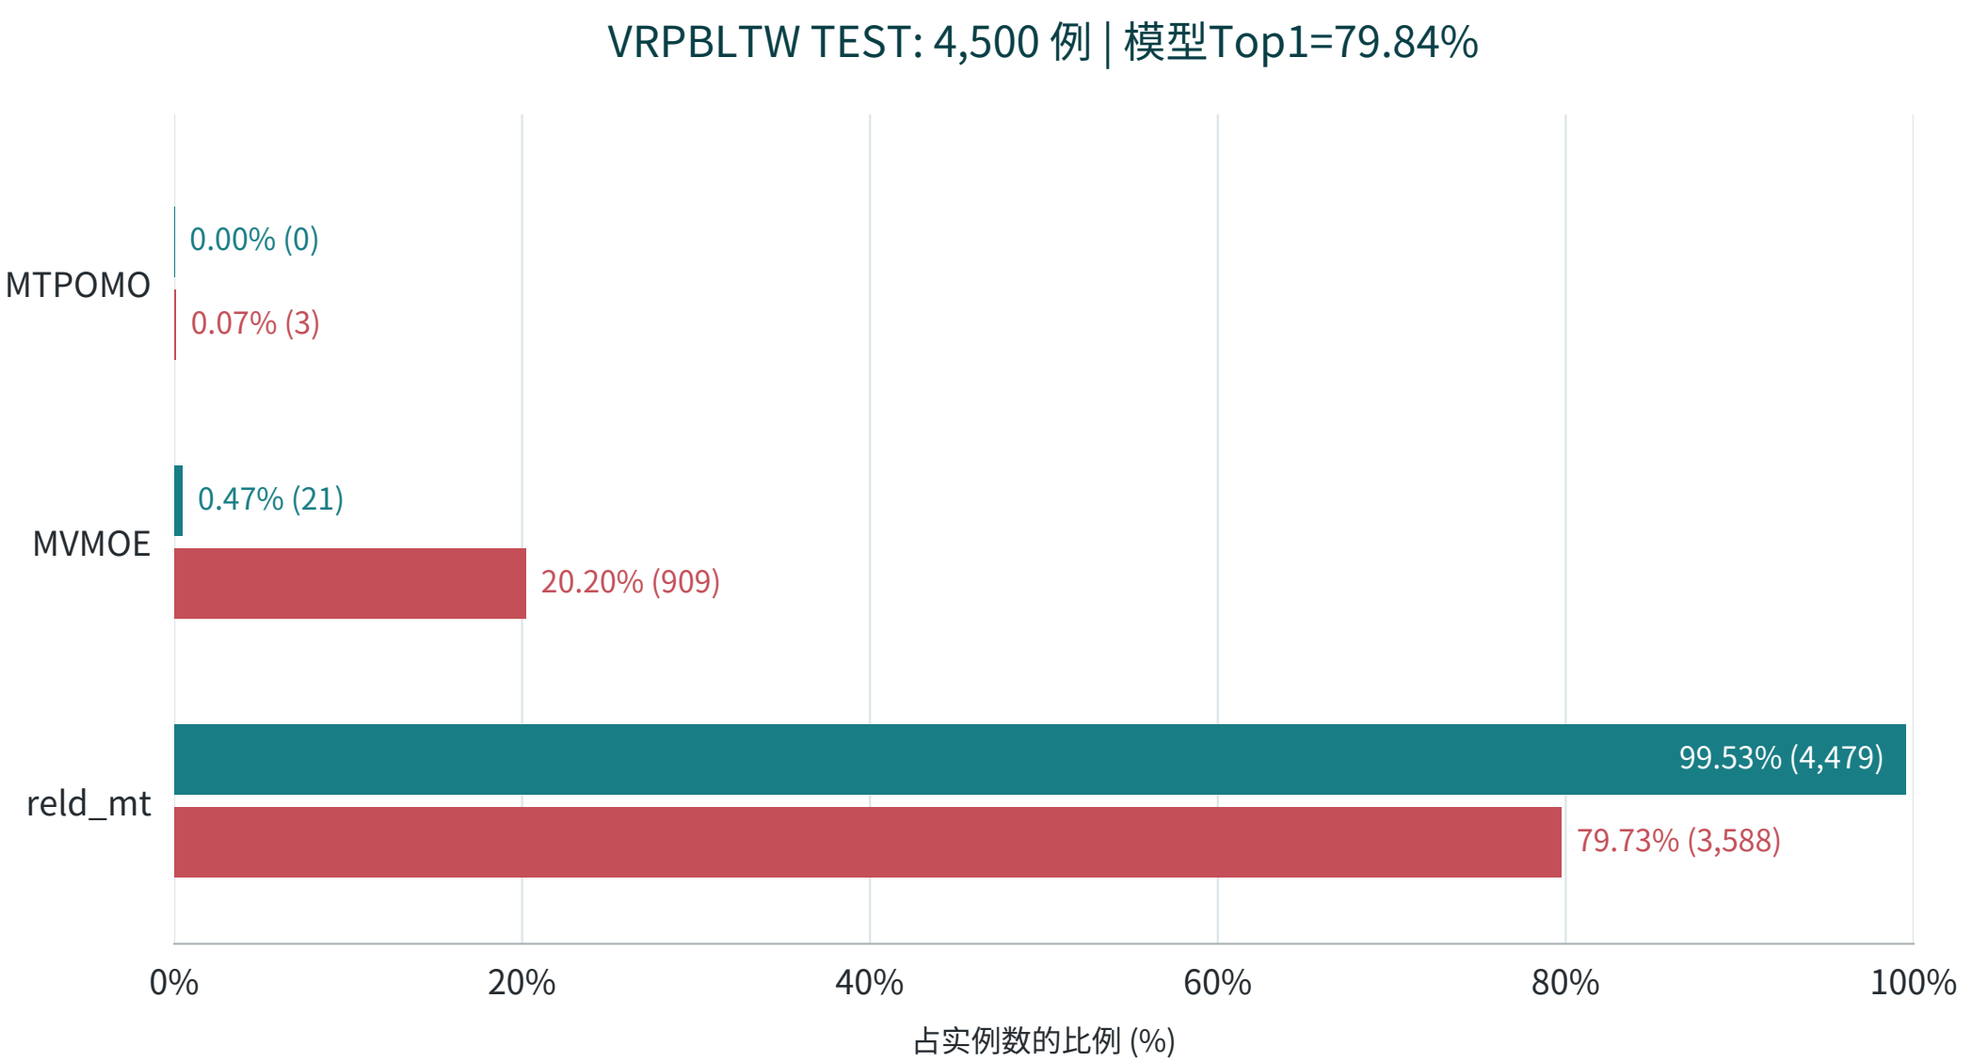

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/B_snapshot | OVRPBLTW | 方法分布

同一锁定模型: epoch 18 / update 51840 / SHA256 f3e09c85074311cc

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

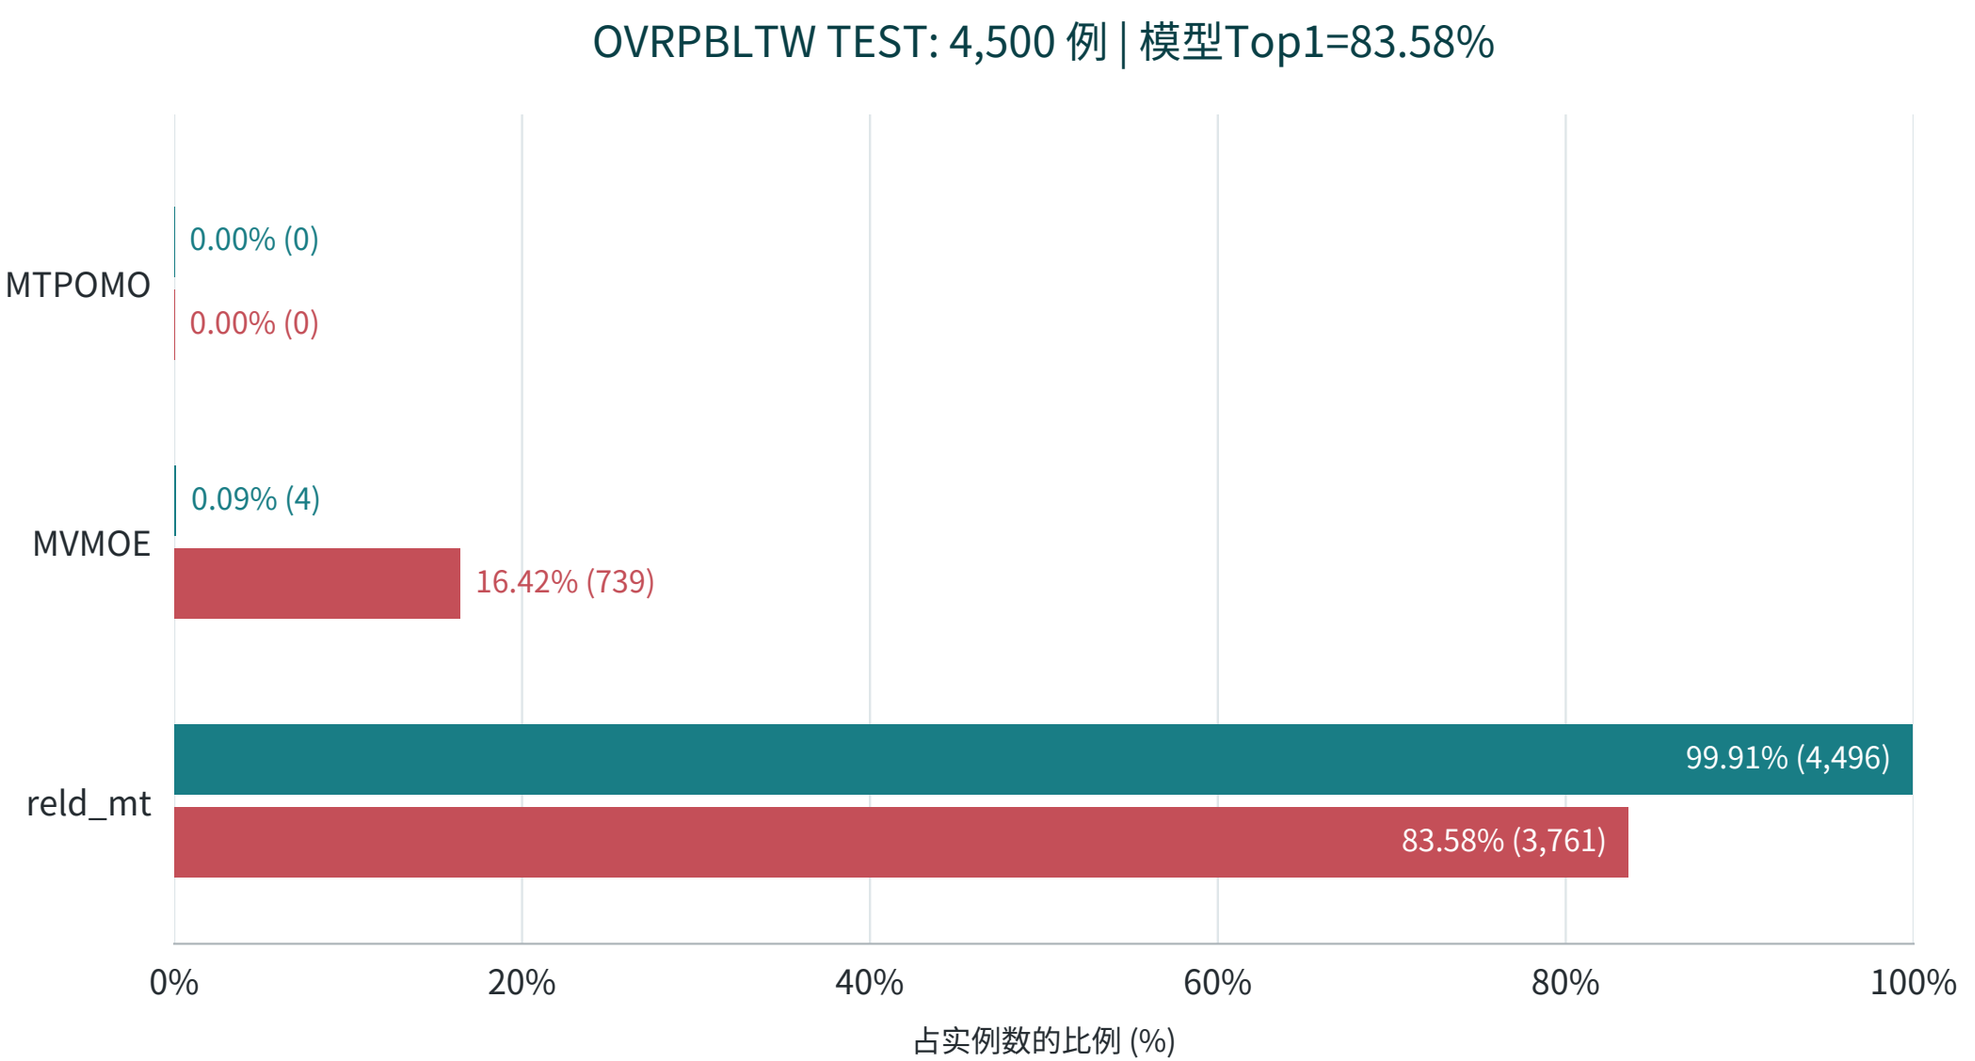

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R113/B_snapshot: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.