R113/C_transition | Locked full18 results

Unique VAL-selected checkpoint; native/FP64 ind; equal-problem ALL.

update 40320 | seed2 | parameters 1,659,453

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	70.8099	66.2037	11.417839	11.427978	11.371692	-0.1844	+0.4033	0.4142
TEST ALL	71.0593	66.1802	11.374651	11.385299	11.329932	-0.1901	+0.3932	0.4016

Dataset	n	NSS Top1 (%)	R113 Top1 (%)	NSS cost	R113 cost
TSP TEST	4500	45.888889	46.444444	7.970400719	7.972611655
CVRP TEST	4500	45.977778	46.933333	18.004802368	18.014831333
TSPLIB	49	20.408163	28.571429	8.217907074	8.195919152
CVRPLIB	100	70.000000	60.000000	67.101111717	67.295074530

NSS: saved R79 weights; no new training. Missing same-population/native references remain MISSING.

SBS: minimum mean cost on frozen81000 TRAIN; Oracle: per-instance legal-pool minimum.

ALL: equal problem weight; raw-cost average is descriptive, never a pooled optimization score.

TEST was development-exposed; only VAL chose this checkpoint. No per-problem assembly.

Distribution Top1 is instance accuracy, not the largest method frequency.

Same final recursive architecture; A scratch, B snapshots, C predicted transition pretraining.

Post-lock process diagnostics: COMPLETE; saved PDF/CSV/JSON included below.

R113/C_transition | VAL: ALL and18 tasks

Native/FP64 winners, frozen pools, TRAIN-fitted SBS.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	70.8099	66.2037	11.417839	11.427978	11.371692	-0.1844	+0.4033	0.4142	per-problem TRAIN SBS
TSP	46.3778	33.1111	8.025277	8.045354	7.990533	-0.2495	+0.4348	0.4249	T2T
CVRP	45.3778	18.7111	18.166357	18.269377	18.064087	-0.5639	+0.5661	0.7541	RELD_CVRP
ATSP	76.5333	47.4889	1.638824	1.676905	1.632471	-2.2709	+0.3892	0.3833	UNICO_MatPOENet
OVRP	40.4889	35.7556	7.462934	7.469579	7.415777	-0.0890	+0.6359	0.6524	MoSES_RF
VRPB	80.7556	80.8444	9.357355	9.354876	9.318750	+0.0265	+0.4143	0.4203	reld_mt
VRPL	37.4889	33.0889	12.432677	12.437959	12.383444	-0.0425	+0.3976	0.4041	MoSES_RF
VRPTW	79.9333	79.9556	18.819044	18.819431	18.766139	-0.0021	+0.2819	0.2993	reld_mt
OVRPTW	83.7778	83.7778	10.143681	10.143730	10.116859	-0.0005	+0.2651	0.2620	reld_mt
OVRPB	88.5111	88.5111	6.357254	6.357254	6.341078	+0.0000	+0.2551	0.2650	reld_mt
OVRPL	40.5111	35.9111	7.439488	7.445709	7.390416	-0.0836	+0.6640	0.6837	MoSES_RF
VRPBL	78.6444	78.5111	9.368975	9.371523	9.328366	-0.0272	+0.4353	0.4380	reld_mt
VRPBTW	78.5333	78.4222	19.950080	19.950430	19.851084	-0.0018	+0.4987	0.4768	reld_mt
VRPLTW	78.8000	78.7556	18.765198	18.765871	18.707843	-0.0036	+0.3066	0.3218	reld_mt
OVRPBL	89.2222	89.2000	6.369919	6.370093	6.352824	-0.0027	+0.2691	0.2808	reld_mt
OVRPBTW	83.4889	83.4444	10.660758	10.661098	10.623245	-0.0032	+0.3531	0.3271	reld_mt
OVRPLTW	83.4667	83.4889	10.157456	10.157423	10.129818	+0.0003	+0.2728	0.2757	reld_mt
VRPBLTW	79.4222	79.4000	19.795785	19.797044	19.706420	-0.0064	+0.4535	0.4419	reld_mt
OVRPBLTW	83.2444	83.2889	10.610037	10.609955	10.571302	+0.0008	+0.3664	0.3442	reld_mt

vs_SBS / vs_Oracle:100*(ratio of mean costs-1).

actual regret: mean_i[100*(selected_i-oracle_i)/oracle_i], not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per task; no label/cost in query forward.

R113/C_transition | TEST: ALL and18 tasks

Native/FP64 winners, frozen pools, TRAIN-fitted SBS.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.0593	66.1802	11.374651	11.385299	11.329932	-0.1901	+0.3932	0.4016	per-problem TRAIN SBS
TSP	46.4444	34.5333	7.972612	7.989621	7.937593	-0.2129	+0.4412	0.4319	T2T
CVRP	46.9333	17.9333	18.014831	18.124983	17.918509	-0.6077	+0.5376	0.6970	RELD_CVRP
ATSP	76.2444	47.2444	1.635618	1.674207	1.629441	-2.3049	+0.3791	0.3777	UNICO_MatPOENet
OVRP	40.0222	33.6444	7.446964	7.455750	7.400487	-0.1178	+0.6280	0.6437	MoSES_RF
VRPB	80.5778	80.4000	9.350723	9.351810	9.315298	-0.0116	+0.3803	0.3833	reld_mt
VRPL	37.0000	32.2667	12.351206	12.356138	12.300958	-0.0399	+0.4085	0.4174	MoSES_RF
VRPTW	80.9111	80.8444	18.689960	18.690545	18.637408	-0.0031	+0.2820	0.2936	reld_mt
OVRPTW	83.9333	83.9333	10.093063	10.093063	10.068135	+0.0000	+0.2476	0.2385	reld_mt
OVRPB	88.1111	88.1333	6.370831	6.370826	6.352225	+0.0001	+0.2929	0.3015	reld_mt
OVRPL	40.8000	34.6000	7.465215	7.472542	7.418033	-0.0980	+0.6360	0.6466	MoSES_RF
VRPBL	79.5778	79.4222	9.395129	9.396379	9.355967	-0.0133	+0.4186	0.4213	reld_mt
VRPBTW	78.7778	78.7556	19.665390	19.665725	19.577666	-0.0017	+0.4481	0.4436	reld_mt
VRPLTW	79.2667	79.2444	18.802741	18.803136	18.745143	-0.0021	+0.3073	0.3219	reld_mt
OVRPBL	89.3111	89.2889	6.375696	6.375741	6.359310	-0.0007	+0.2577	0.2690	reld_mt
OVRPBTW	84.8444	84.8222	10.659346	10.659591	10.624748	-0.0023	+0.3256	0.2977	reld_mt
OVRPLTW	82.8667	82.8667	10.086112	10.086112	10.059001	+0.0000	+0.2695	0.2701	reld_mt
VRPBLTW	79.8444	79.7333	19.706160	19.707068	19.613284	-0.0046	+0.4735	0.4524	reld_mt
OVRPBLTW	83.6000	83.5778	10.662116	10.662149	10.625574	-0.0003	+0.3439	0.3213	reld_mt

vs_SBS / vs_Oracle:100*(ratio of mean costs-1).

actual regret: mean_i[100*(selected_i-oracle_i)/oracle_i], not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per task; no label/cost in query forward.

R113/C_transition | LIB and provenance

Same checkpoint; no LIB selection or solver execution.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	28.5714	10.2041	8.195919	8.240435	8.142167	-0.5402	+0.6602	0.7591
CVRPLIB	60.0000	45.0000	67.295075	67.245364	66.945093	+0.0739	+0.5228	0.6529

Checkpoint SHA256: de0523bd1f7beadf51456ff50767a03d76cc96756278f3578c523310b2abd286

VAL rule: maximum macroTop1; exact ties minimum actual regret; then first.

Selector:512 x57600 successful updates; AdamW1e-4 to1e-6; warmup4320.

Pretraining B/C:512 x8640; AdamW3e-4 to1e-5; warmup432; same targets/order.

All deployment: self-initialized predicted-state feedback, transition mode.

Candidates read global/node trajectory and final directed edge-state tokens.

Raw two-layer stem enters processor context only; no old-score bypass.

Fresh state SHA256: 95791a650b09425f0c1cfc362d50565a38b4ae45752f004cfec100bdbc41db14

Process manifest: 975282dea4458cfb0009d042a6e369b2afe415988929dfd1b29418926dafbcce

Pretraining mode: transition; processor-only transfer; newly authorized TRAIN states.

Last TRAIN process losses are optimization evidence only, not generalization or selector gain.

R113/C_transition | Post-lock VAL process: overview

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Scalar NMSE	Binary acc	Pointer acc	Directed acc	Reached acc	Frontier acc
TSP	9.2009	N/A	0.1793	0.8911	0.5368	0.8170
CVRP	19.1109	0.9414	0.2695	0.7054	0.5843	0.8426
ATSP	7.2178	N/A	0.3221	1.0000	0.6818	0.4008
OVRP	3.8466	0.6042	0.3490	0.8792	0.5507	0.3638
VRPB	2.5456	0.7367	0.3442	0.8238	0.4708	0.4021
VRPL	3.6882	0.4742	0.3843	0.8260	0.5702	0.3760
VRPTW	3.9761	0.7868	0.4090	0.6297	0.5857	0.8631
OVRPTW	3.2840	0.8001	0.3674	0.6741	0.5211	0.7670
OVRPB	2.7918	0.6957	0.3432	0.8944	0.4888	0.2952
OVRPL	4.2078	0.5312	0.3542	0.9131	0.5752	0.4483
VRPBL	2.8251	0.6367	0.3616	0.8572	0.4938	0.3503
VRPBTW	3.1084	0.7975	0.4132	0.5391	0.5471	0.7876
VRPLTW	3.6216	0.7194	0.4672	0.6464	0.5862	0.8279
OVRPBL	3.2081	0.6417	0.3810	0.8224	0.4806	0.2470
OVRPBTW	3.1777	0.7938	0.3529	0.6364	0.5351	0.9125
OVRPLTW	3.7252	0.6854	0.4021	0.6552	0.5253	0.7529
VRPBLTW	2.9385	0.7337	0.4425	0.5690	0.4773	0.7896
OVRPBLTW	3.1704	0.7377	0.3834	0.6596	0.5025	0.8442

No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: de0523bd1f7beadf51456ff50767a03d76cc96756278f3578c523310b2abd286
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json

R113/C_transition | Post-lock VAL process: binary

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Active entries	Accuracy	Precision	Recall	All-zero acc	True positives
TSP	0	N/A	N/A	N/A	N/A	0
CVRP	1484	0.9414	0.9809	0.9586	0.0243	1448
ATSP	0	N/A	N/A	N/A	N/A	0
OVRP	1152	0.6042	0.9419	0.6090	0.0764	1064
VRPB	2905	0.7367	0.9460	0.6749	0.2757	2104
VRPL	1725	0.4742	0.9155	0.4512	0.1096	1536
VRPTW	1731	0.7868	0.9035	0.7540	0.3472	1130
OVRPTW	1731	0.8001	0.9326	0.7586	0.3252	1168
OVRPB	2885	0.6957	0.9759	0.6131	0.2430	2184
OVRPL	1728	0.5312	0.9398	0.5221	0.0833	1584
VRPBL	3468	0.6367	0.9231	0.5671	0.2434	2624
VRPBTW	3456	0.7975	0.9056	0.7546	0.3750	2160
VRPLTW	2320	0.7194	0.8546	0.6936	0.3388	1534
OVRPBL	3480	0.6417	0.9333	0.5497	0.2681	2547
OVRPBTW	3468	0.7938	0.9366	0.7083	0.3930	2105
OVRPLTW	2308	0.6854	0.9160	0.6039	0.3033	1608
VRPBLTW	4018	0.7337	0.8932	0.6700	0.3507	2609
OVRPBLTW	4053	0.7377	0.9238	0.6497	0.3506	2632

No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: de0523bd1f7beadf51456ff50767a03d76cc96756278f3578c523310b2abd286
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json

R113/C_transition | Post-lock VAL process: compatible

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Active entries	Accuracy	Precision	Recall	All-zero acc	True positives
TSP	90942	0.8911	1.0000	0.8911	0.0000	90942
CVRP	93000	0.7054	1.0000	0.7054	0.0000	93000
ATSP	25138	1.0000	1.0000	1.0000	0.0000	25138
OVRP	42616	0.8792	1.0000	0.8792	0.0000	42616
VRPB	87440	0.8238	0.9120	0.8947	0.0809	80370
VRPL	42312	0.8260	1.0000	0.8260	0.0000	42312
VRPTW	42764	0.6297	0.7978	0.2598	0.5406	19647
OVRPTW	42816	0.6741	0.7137	0.3664	0.5825	17877
OVRPB	85736	0.8944	0.9289	0.9593	0.0750	79306
OVRPL	42564	0.9131	1.0000	0.9131	0.0000	42564
VRPBL	86032	0.8572	0.9171	0.9292	0.0776	79358
VRPBTW	85128	0.5391	0.4480	0.6476	0.5993	34113
VRPLTW	43520	0.6464	0.7794	0.2398	0.5730	18584
OVRPBL	87144	0.8224	0.9146	0.8885	0.0867	79592
OVRPBTW	86136	0.6364	0.5771	0.2404	0.6114	33471
OVRPLTW	42816	0.6552	0.6370	0.3685	0.5903	17541
VRPBLTW	84328	0.5690	0.4635	0.5698	0.6045	33352
OVRPBLTW	86536	0.6596	0.5527	0.3717	0.6337	31699

No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: de0523bd1f7beadf51456ff50767a03d76cc96756278f3578c523310b2abd286
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json

R113/C_transition | Post-lock VAL process: reached

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Active entries	Accuracy	Precision	Recall	All-zero acc	True positives
TSP	8530	0.5368	0.5052	0.6384	0.5306	4004
CVRP	8662	0.5843	0.5703	0.5786	0.5151	4200
ATSP	3645	0.6818	0.6747	0.9975	0.3416	2400
OVRP	5228	0.5507	0.5497	1.0000	0.4514	2868
VRPB	10634	0.4708	0.4704	1.0000	0.5299	4999
VRPL	5207	0.5702	0.5696	1.0000	0.4312	2962
VRPTW	5243	0.5857	0.5098	0.6626	0.5749	2229
OVRPTW	5245	0.5211	0.4685	0.8266	0.5689	2261
OVRPB	10494	0.4888	0.4885	1.0000	0.5117	5124
OVRPL	5226	0.5752	0.5741	1.0000	0.4275	2992
VRPBL	10524	0.4938	0.4905	0.9885	0.5125	5130
VRPBTW	10452	0.5471	0.4703	0.8352	0.5902	4283
VRPLTW	5300	0.5862	0.5244	0.7104	0.5570	2348
OVRPBL	10604	0.4806	0.4804	1.0000	0.5197	5093
OVRPBTW	10528	0.5351	0.4103	0.7453	0.6494	3691
OVRPLTW	5245	0.5253	0.4459	0.8414	0.6057	2068
VRPBLTW	10384	0.4773	0.4059	0.8437	0.6242	3902
OVRPBLTW	10562	0.5025	0.4139	0.8417	0.6315	3892

No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: de0523bd1f7beadf51456ff50767a03d76cc96756278f3578c523310b2abd286
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json

R113/C_transition | Post-lock VAL process: frontier

64 fixed inputs/task; seed2, size-only strata; eval-only CPU teacher after complete locked TEST.

Problem	Active entries	Accuracy	Precision	Recall	All-zero acc	True positives
TSP	8530	0.8170	0.0675	0.3050	0.9627	318
CVRP	8662	0.8426	0.0679	0.2440	0.9617	332
ATSP	3645	0.4008	0.0892	0.7473	0.9240	277
OVRP	5228	0.3638	0.0672	0.8310	0.9457	284
VRPB	10634	0.4021	0.0528	0.7468	0.9562	466
VRPL	5207	0.3760	0.0658	0.7645	0.9437	293
VRPTW	5243	0.8631	0.0761	0.2423	0.9630	194
OVRPTW	5245	0.7670	0.0662	0.3900	0.9619	200
OVRPB	10494	0.2952	0.0544	0.8810	0.9544	479
OVRPL	5226	0.4483	0.0775	0.7900	0.9426	300
VRPBL	10524	0.3503	0.0575	0.8533	0.9540	484
VRPBTW	10452	0.7876	0.0674	0.3861	0.9643	373
VRPLTW	5300	0.8279	0.0609	0.2379	0.9611	206
OVRPBL	10604	0.2470	0.0514	0.8977	0.9548	479
OVRPBTW	10528	0.9125	0.0525	0.1276	0.9725	290
OVRPLTW	5245	0.7529	0.0645	0.4716	0.9664	176
VRPBLTW	10384	0.7896	0.0629	0.4136	0.9688	324
OVRPBLTW	10562	0.8442	0.0621	0.2928	0.9696	321


No t0, padded nodes, inactive types or diagonal pairs; directed source/target axes preserved.
Scalar NMSE: per-field MSE/max(1, mean(target^2)), then mean active fields. Acc/P/R are fractions.
Threshold=.5; undefined precision/recall=N/A. Sparse all-zero accuracy is not learned execution.
Teacher never enters model inputs, training, checkpoint selection or deployment; no solver calls.
Checkpoint SHA256: de0523bd1f7beadf51456ff50767a03d76cc96756278f3578c523310b2abd286
Shared input subset SHA256: 50cb1e5b4206c4356ba84e8eafb2309be093097a2488e28a3805a3e66b9147b4
Saved detail: process_diagnostics.pdf / process_diagnostics.csv / process_diagnostics.json

R113/C_transition | TSP | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

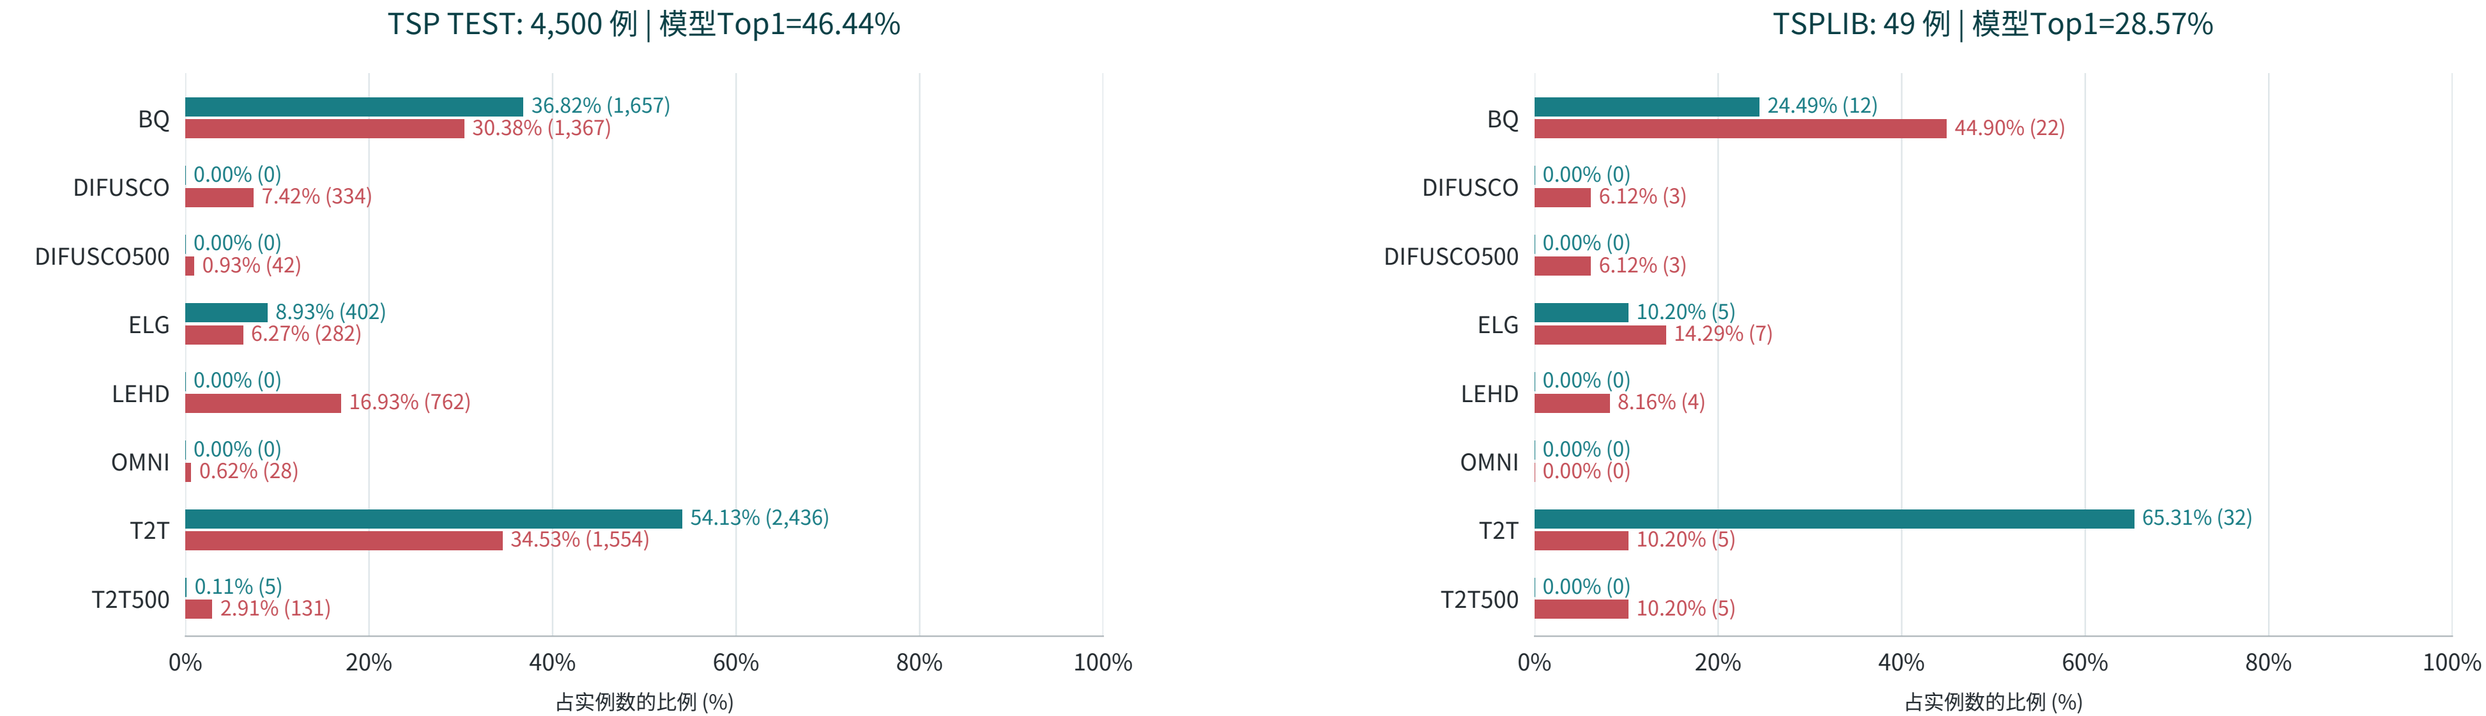

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | CVRP | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

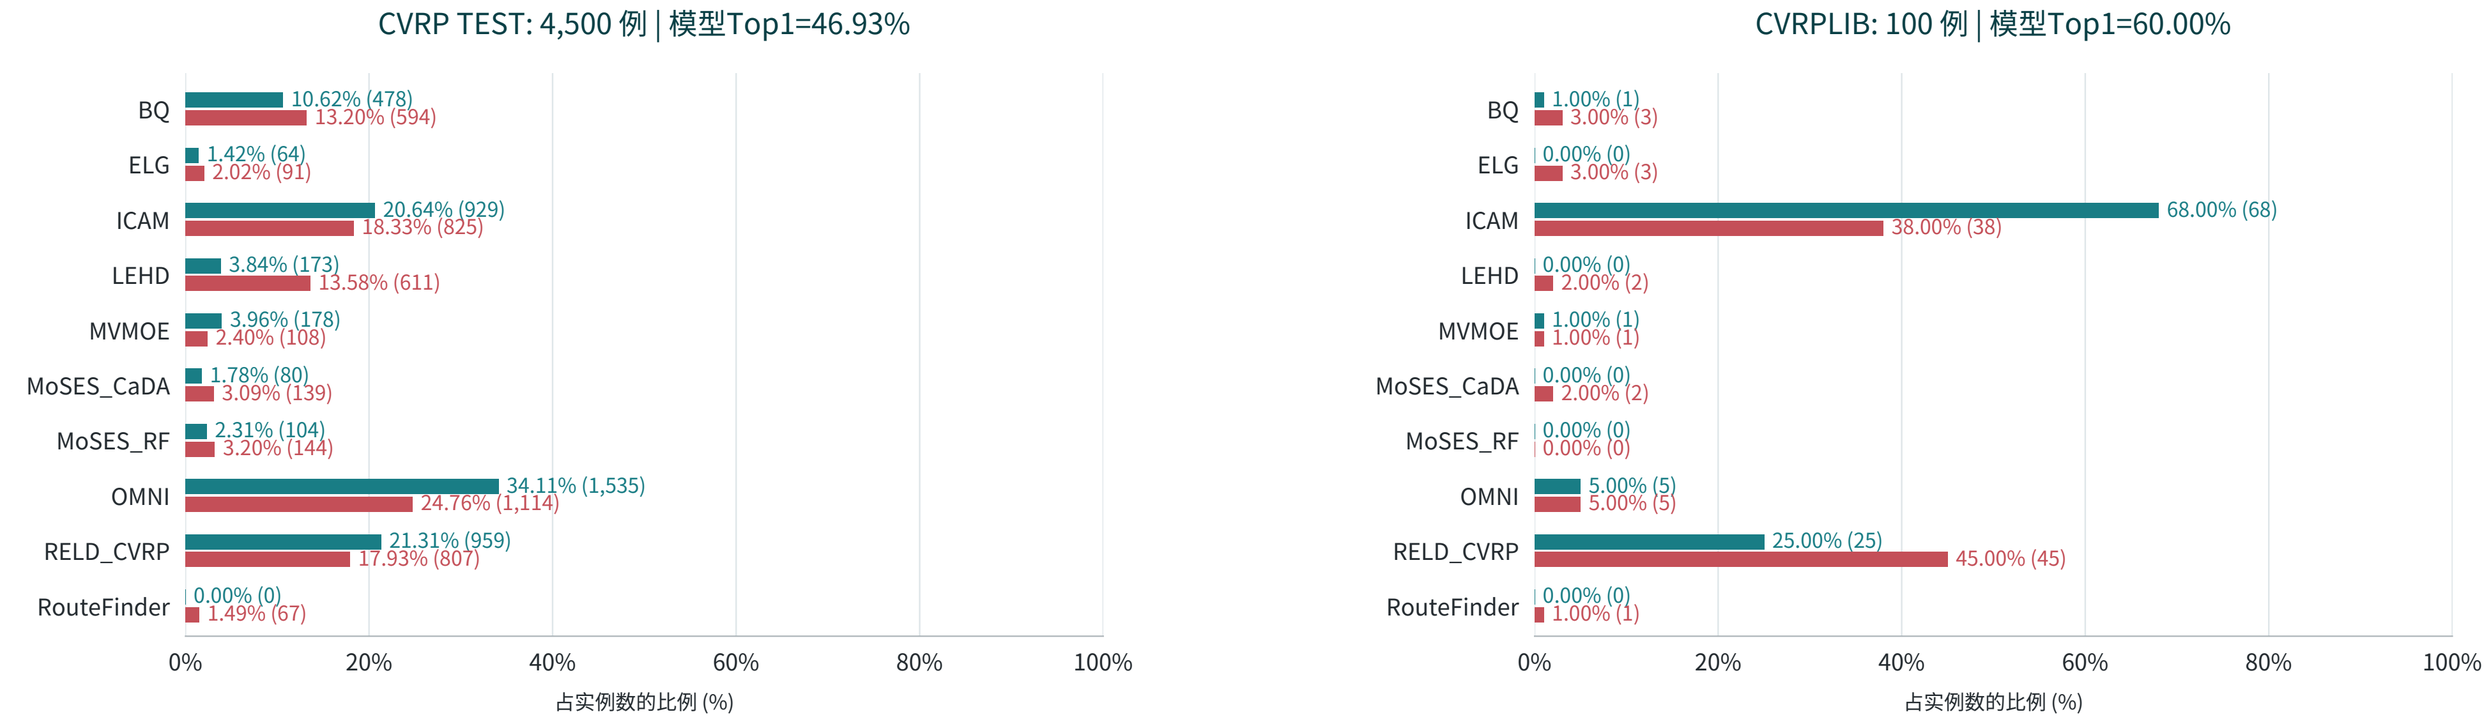

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | ATSP | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

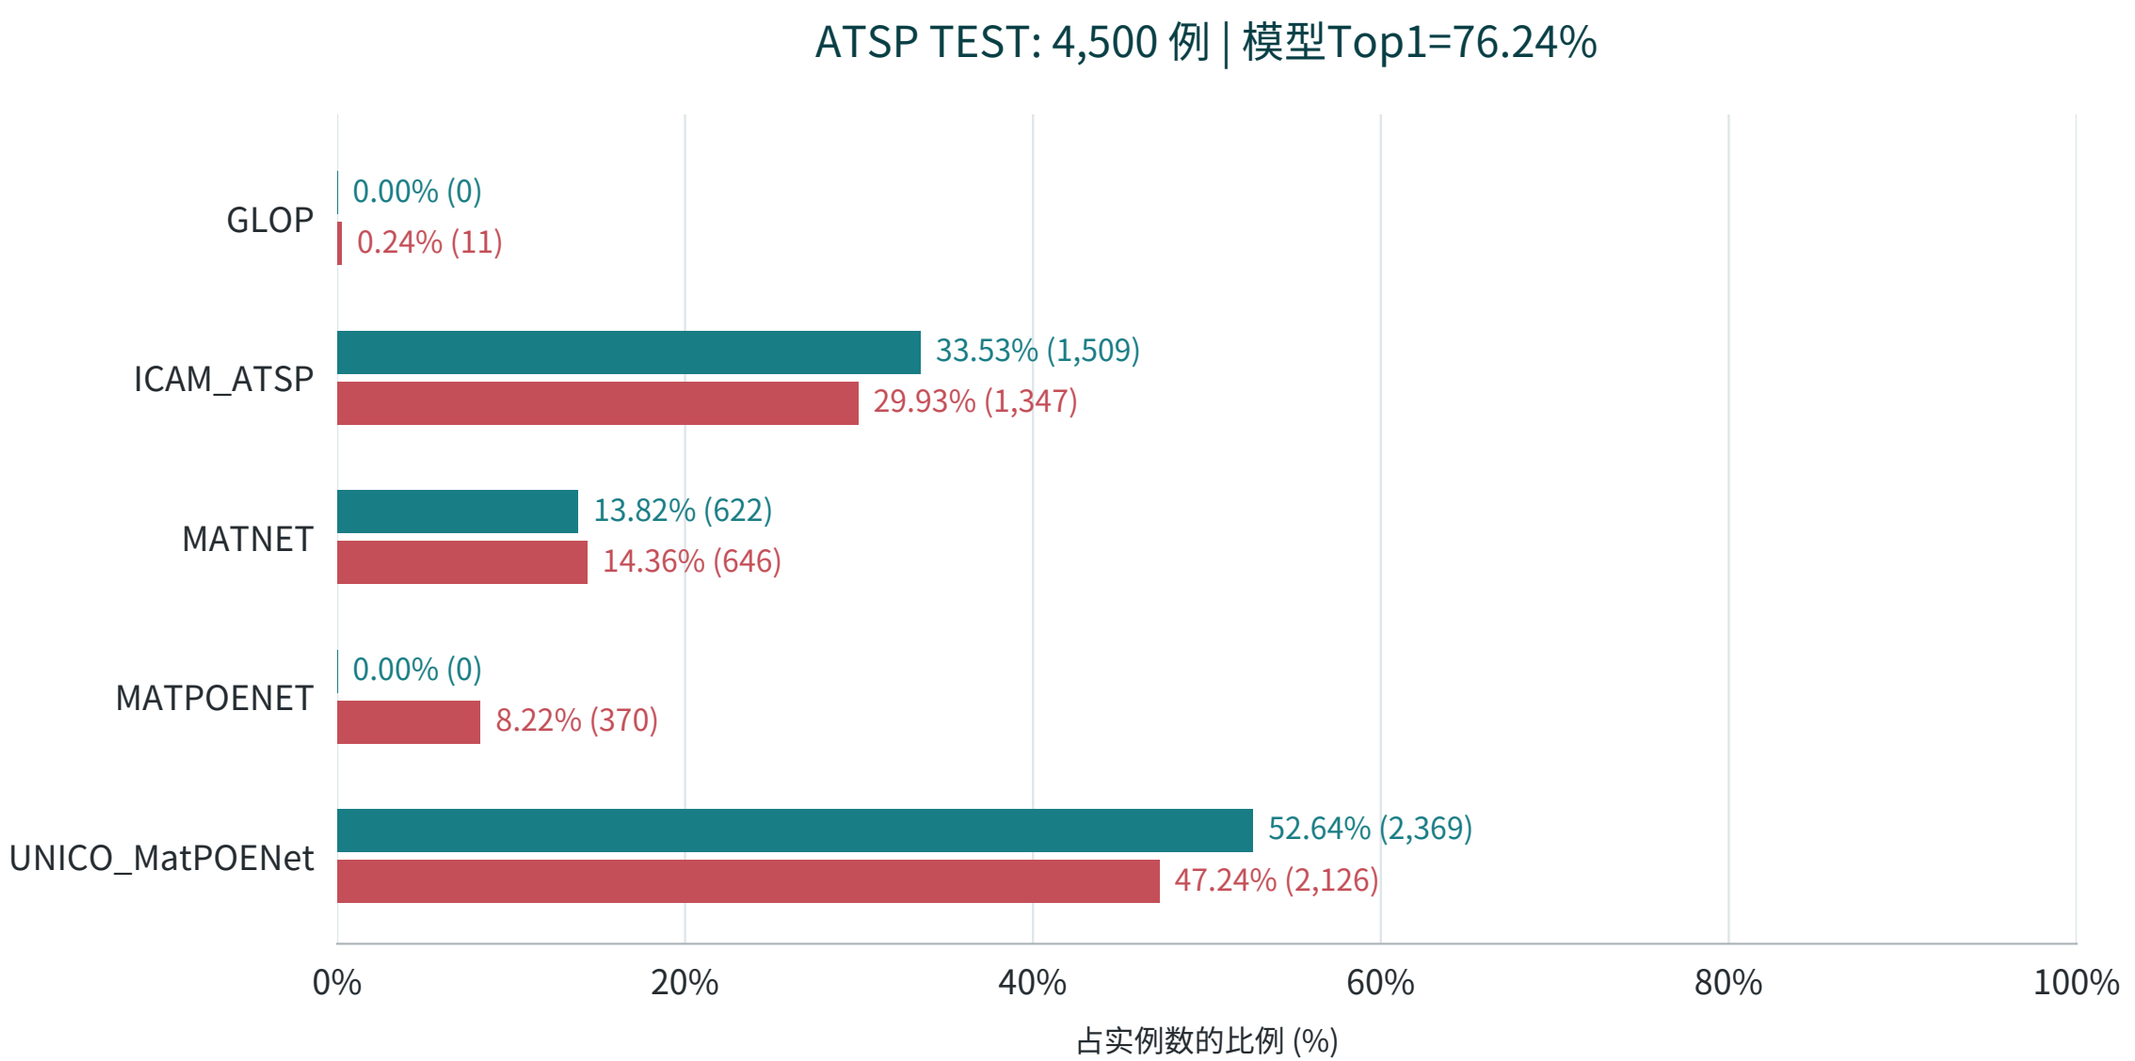

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | OVRP | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

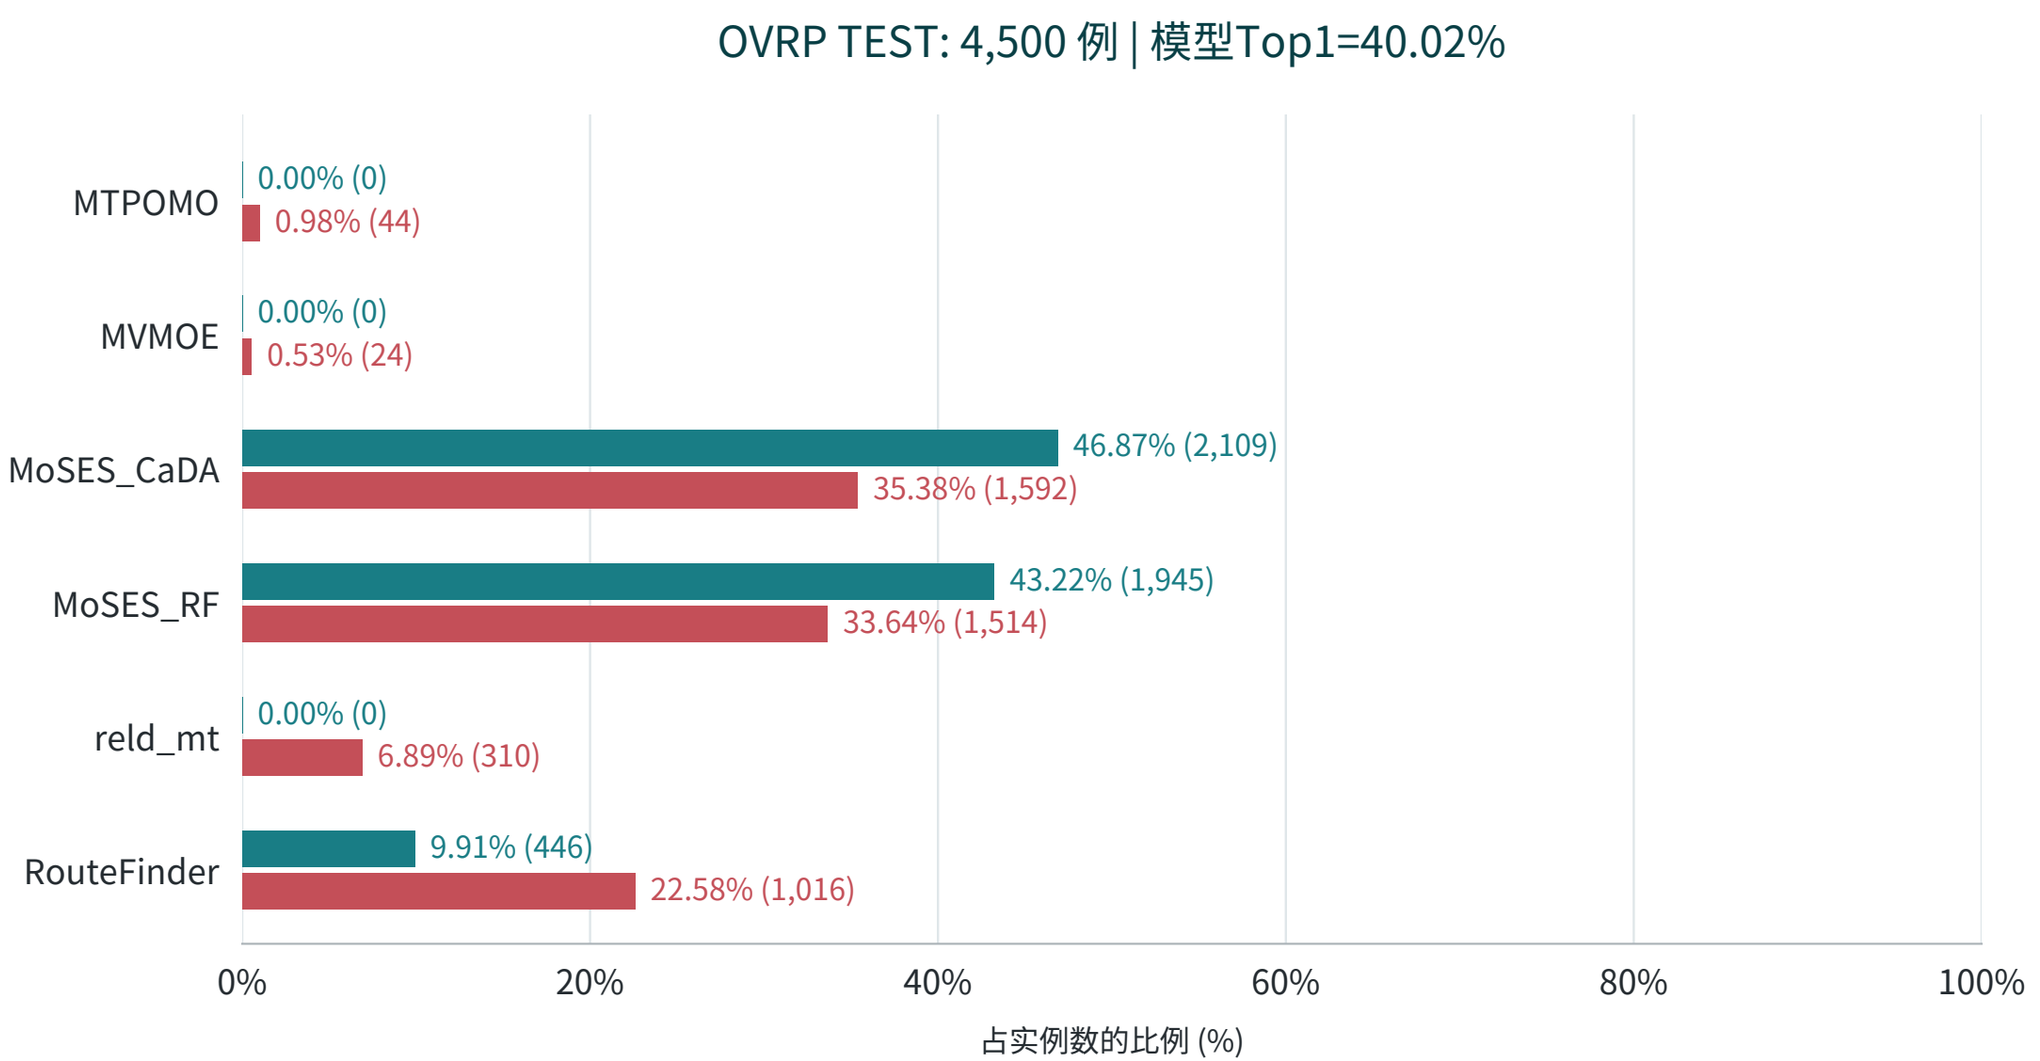

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | VRPB | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

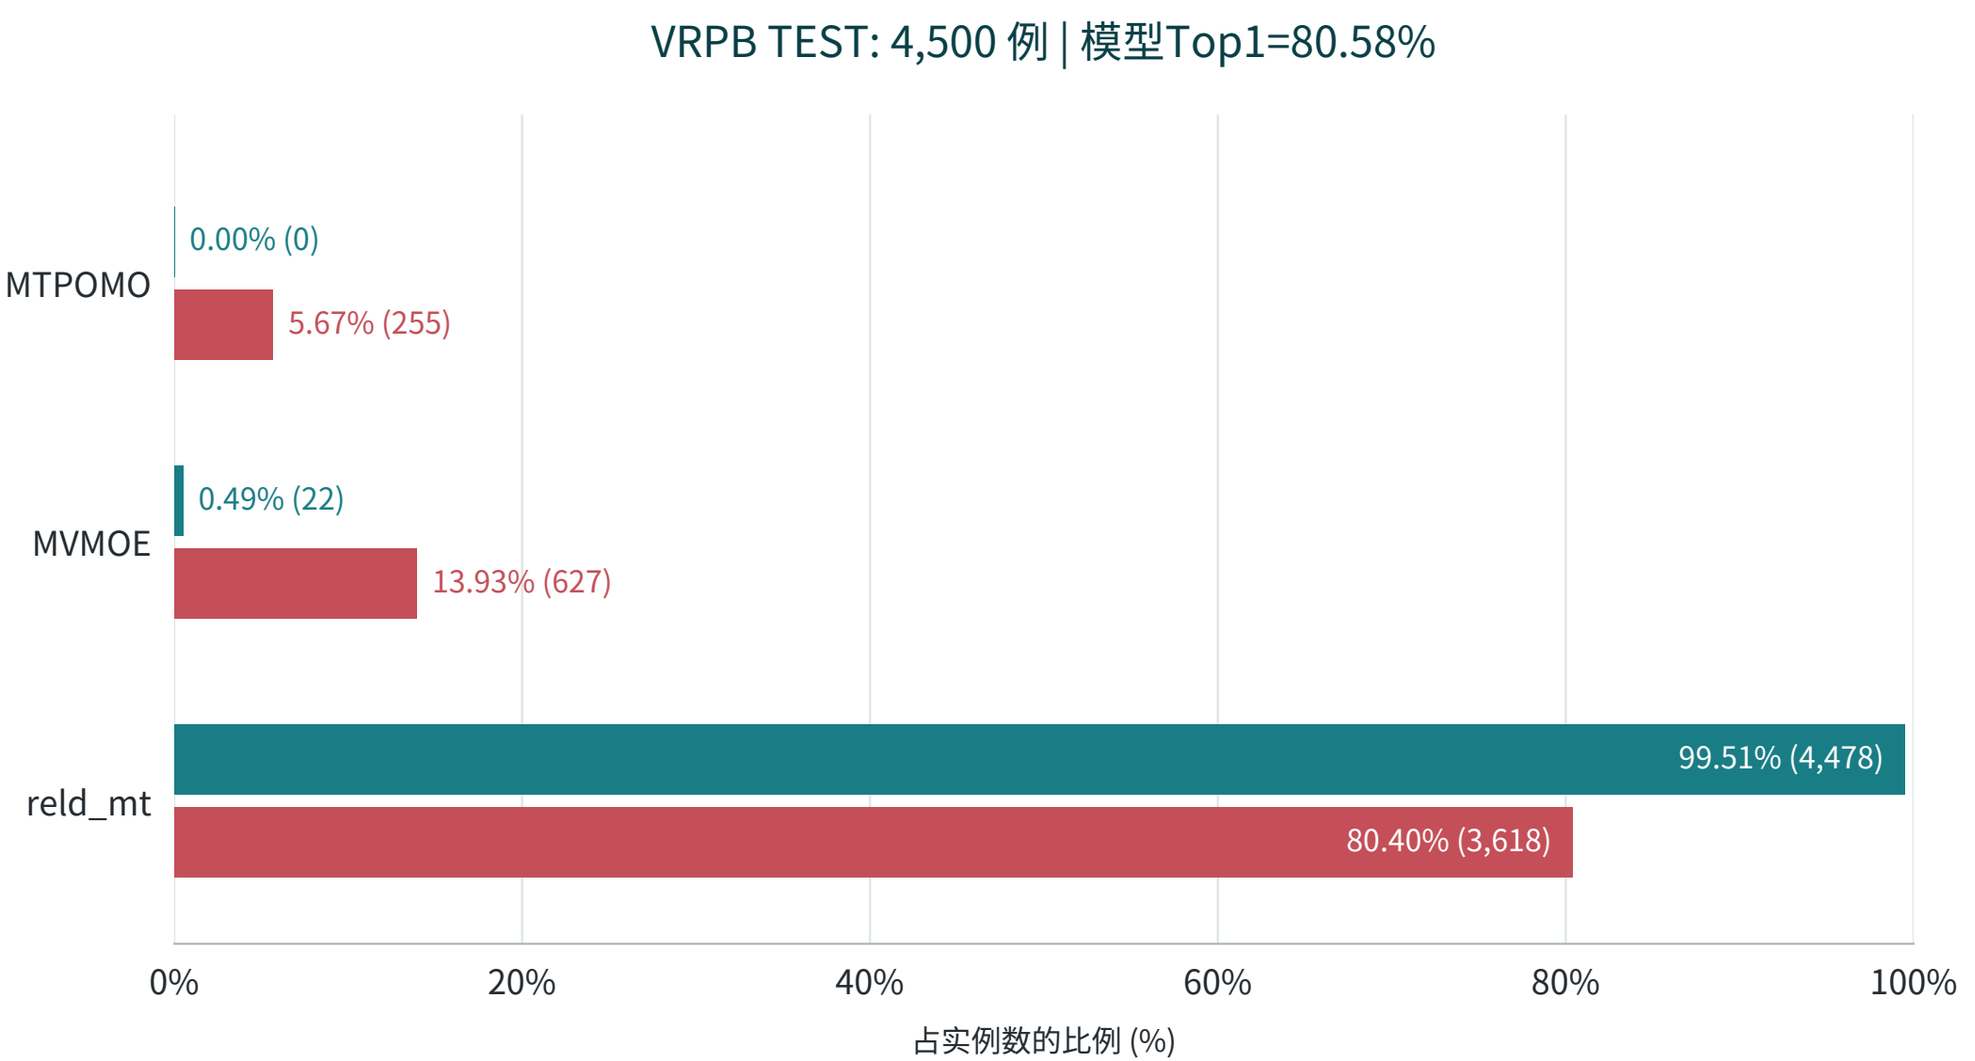

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | VRPL | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

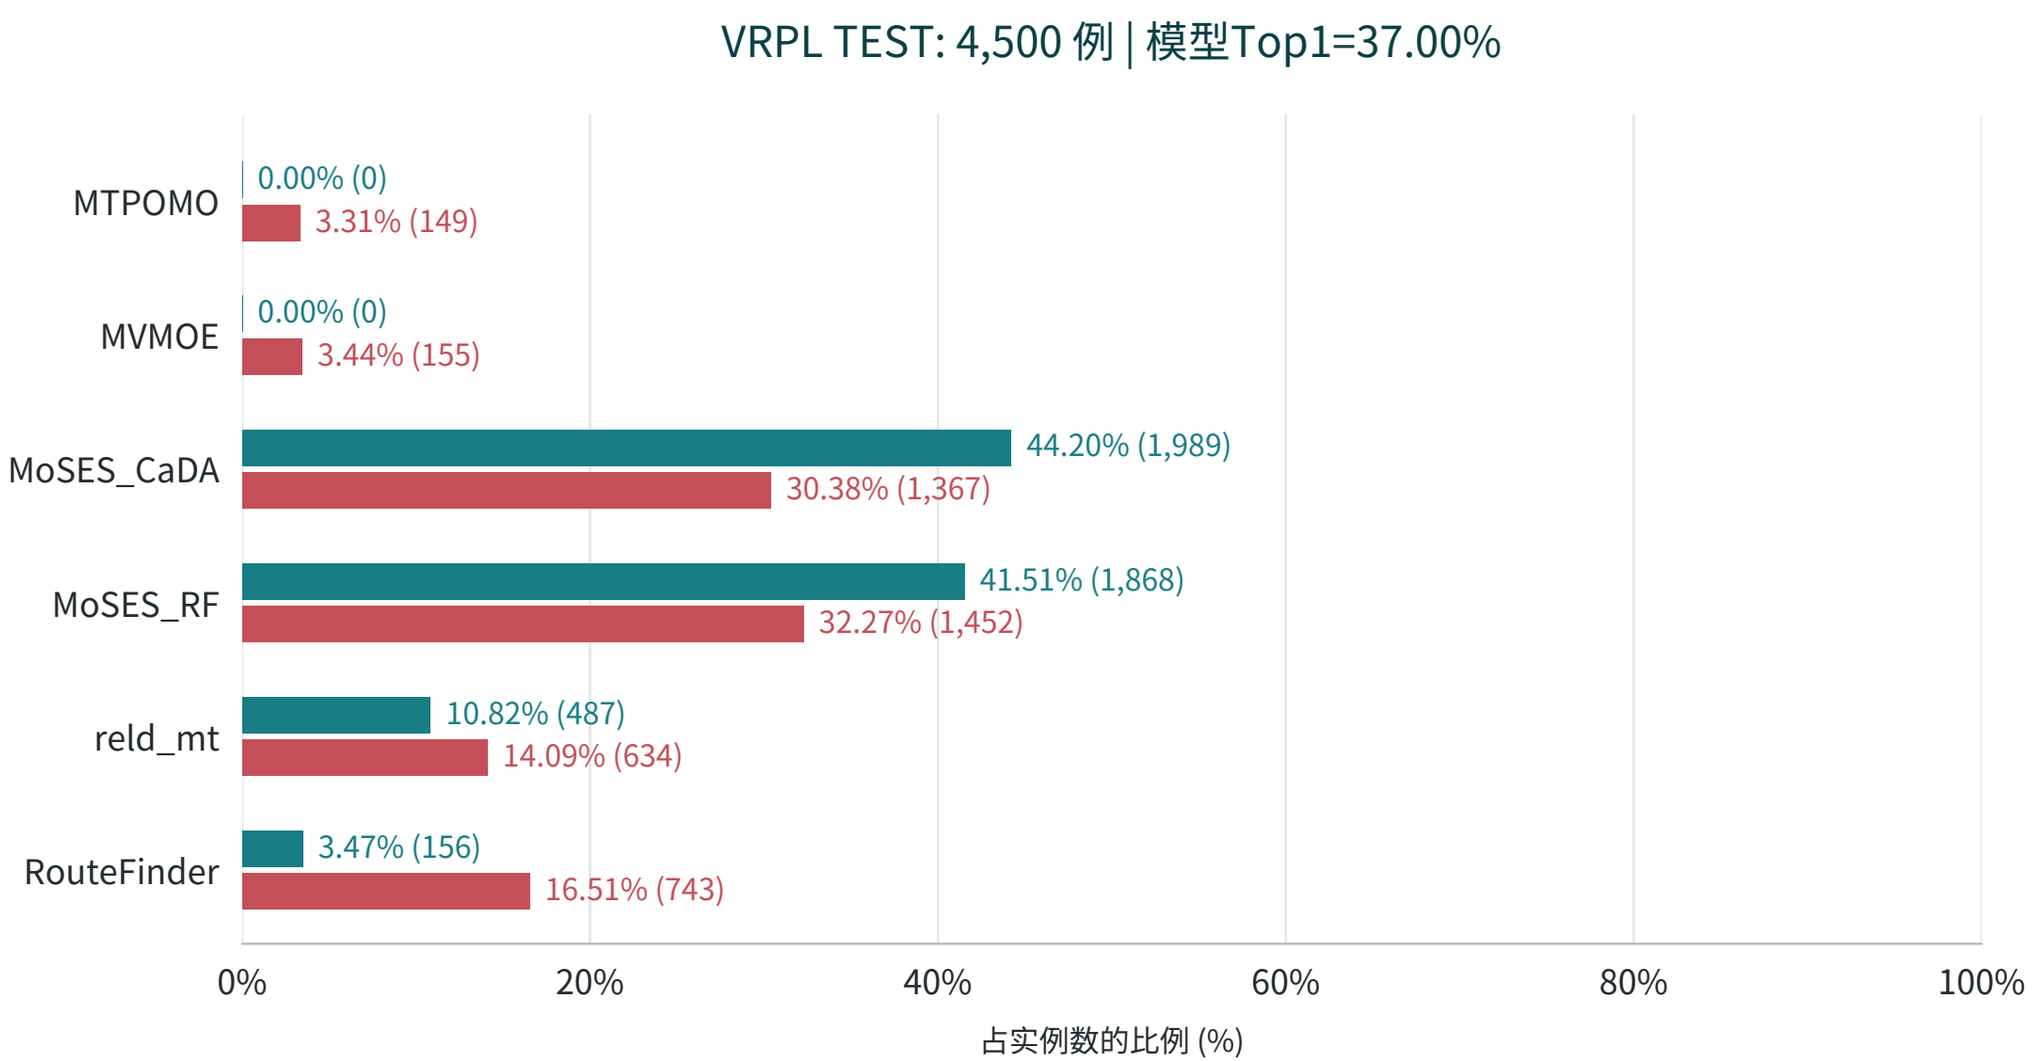

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | VRPTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

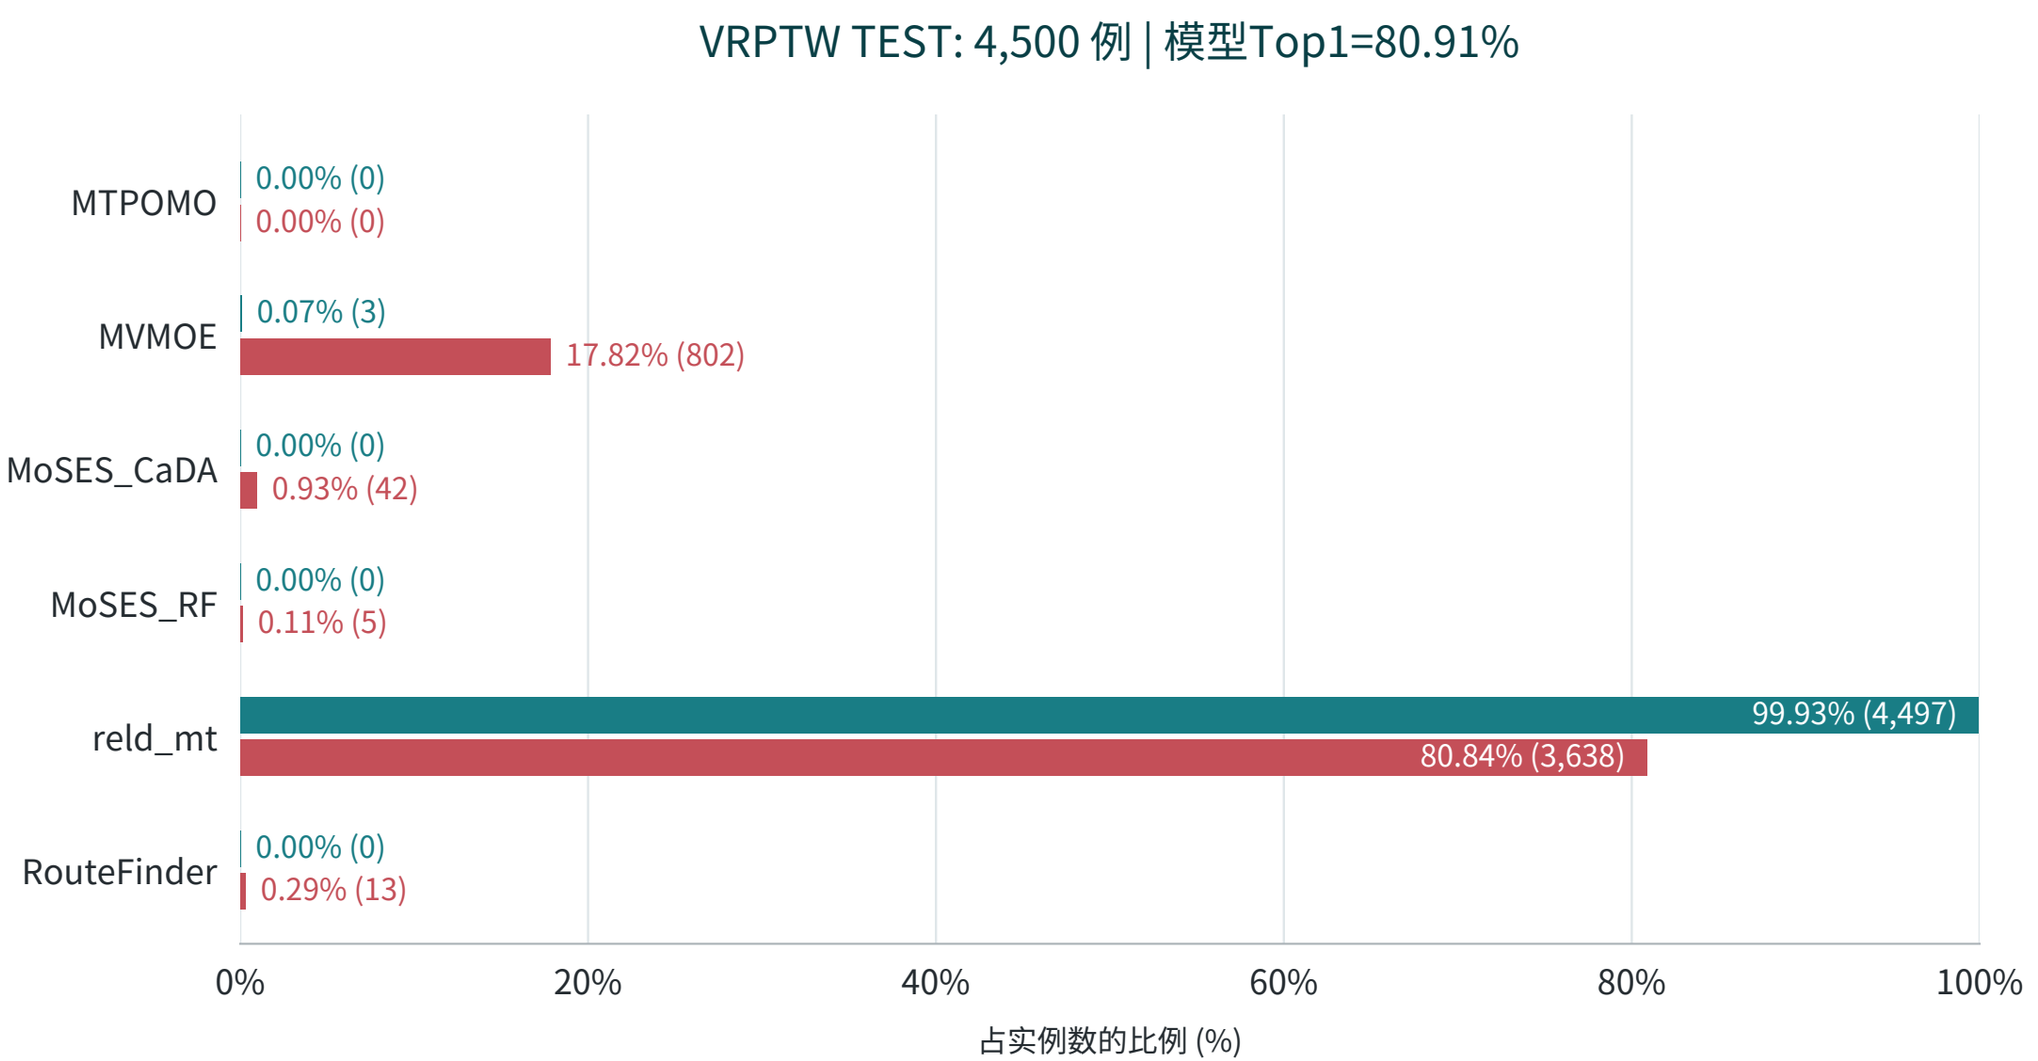

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | OVRPTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

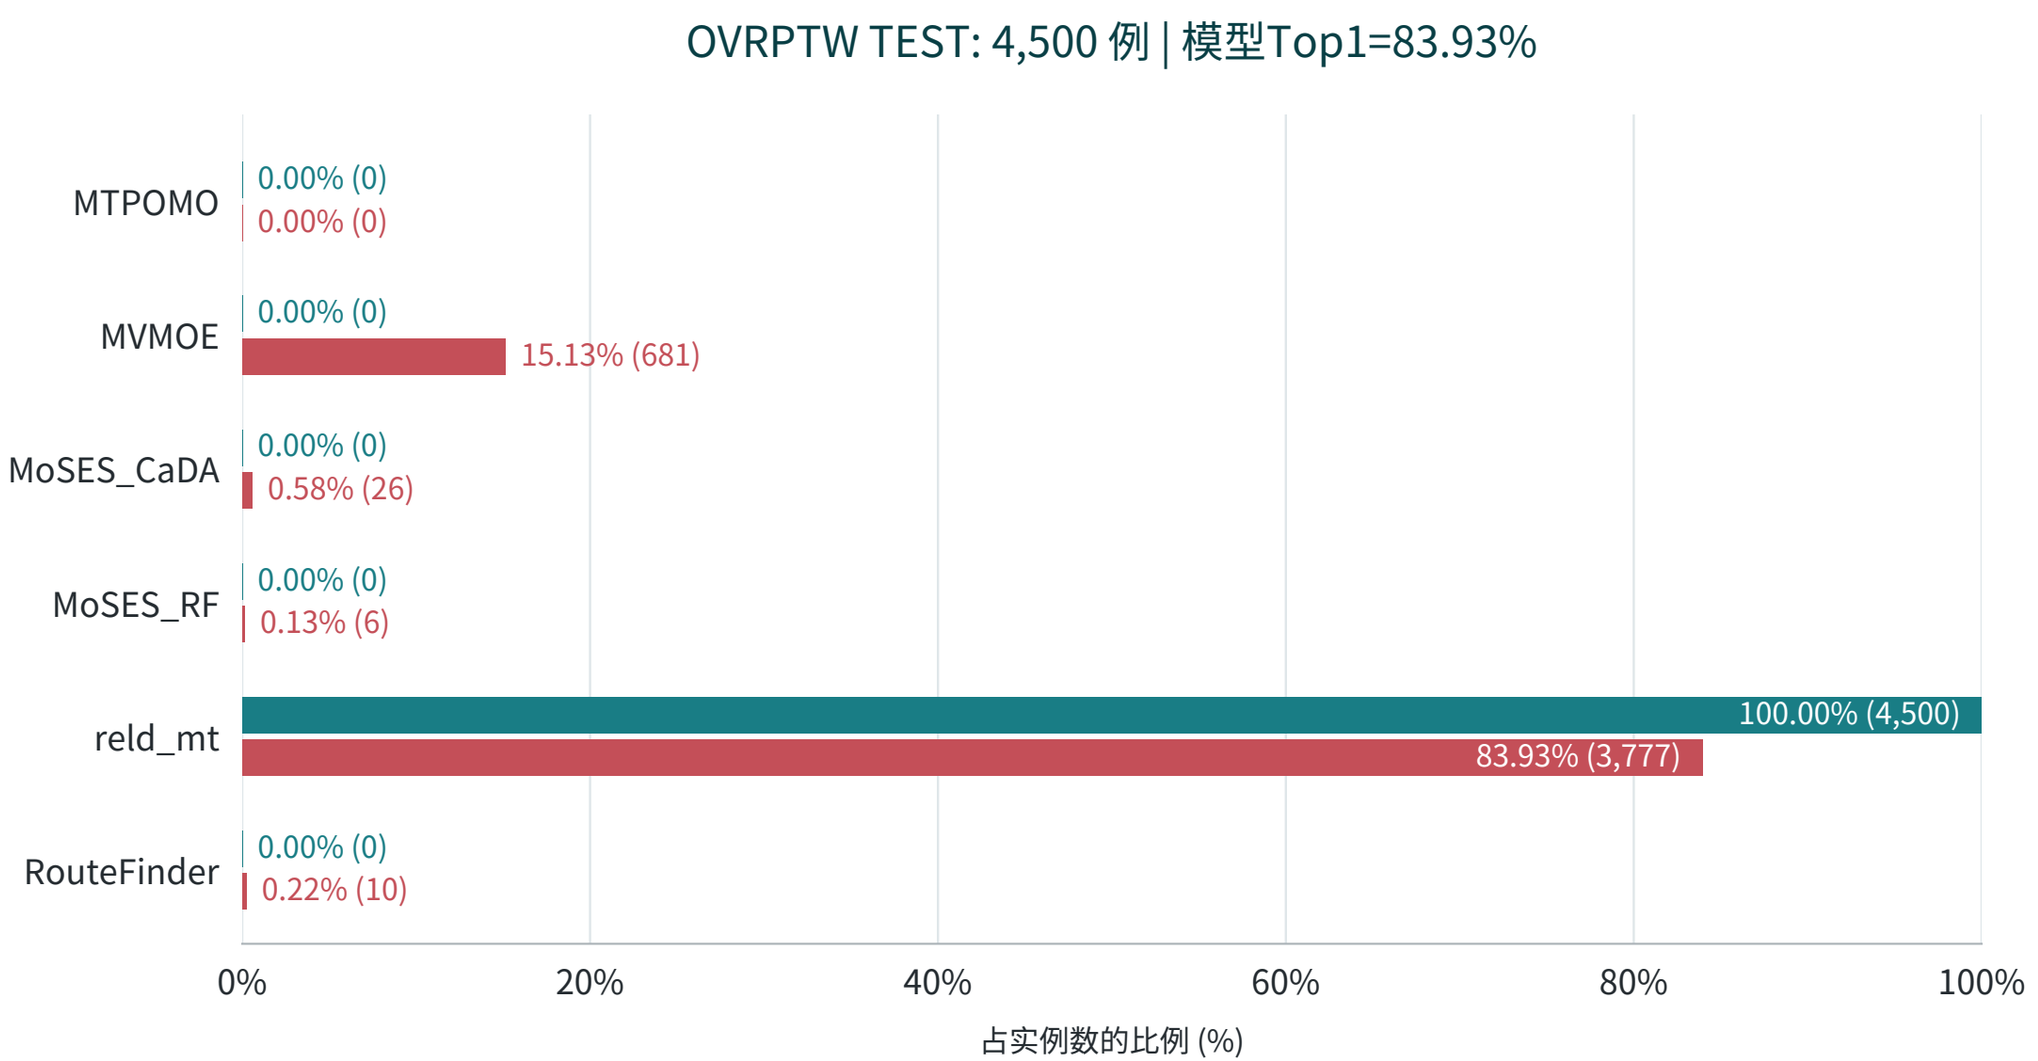

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | OVRPB | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

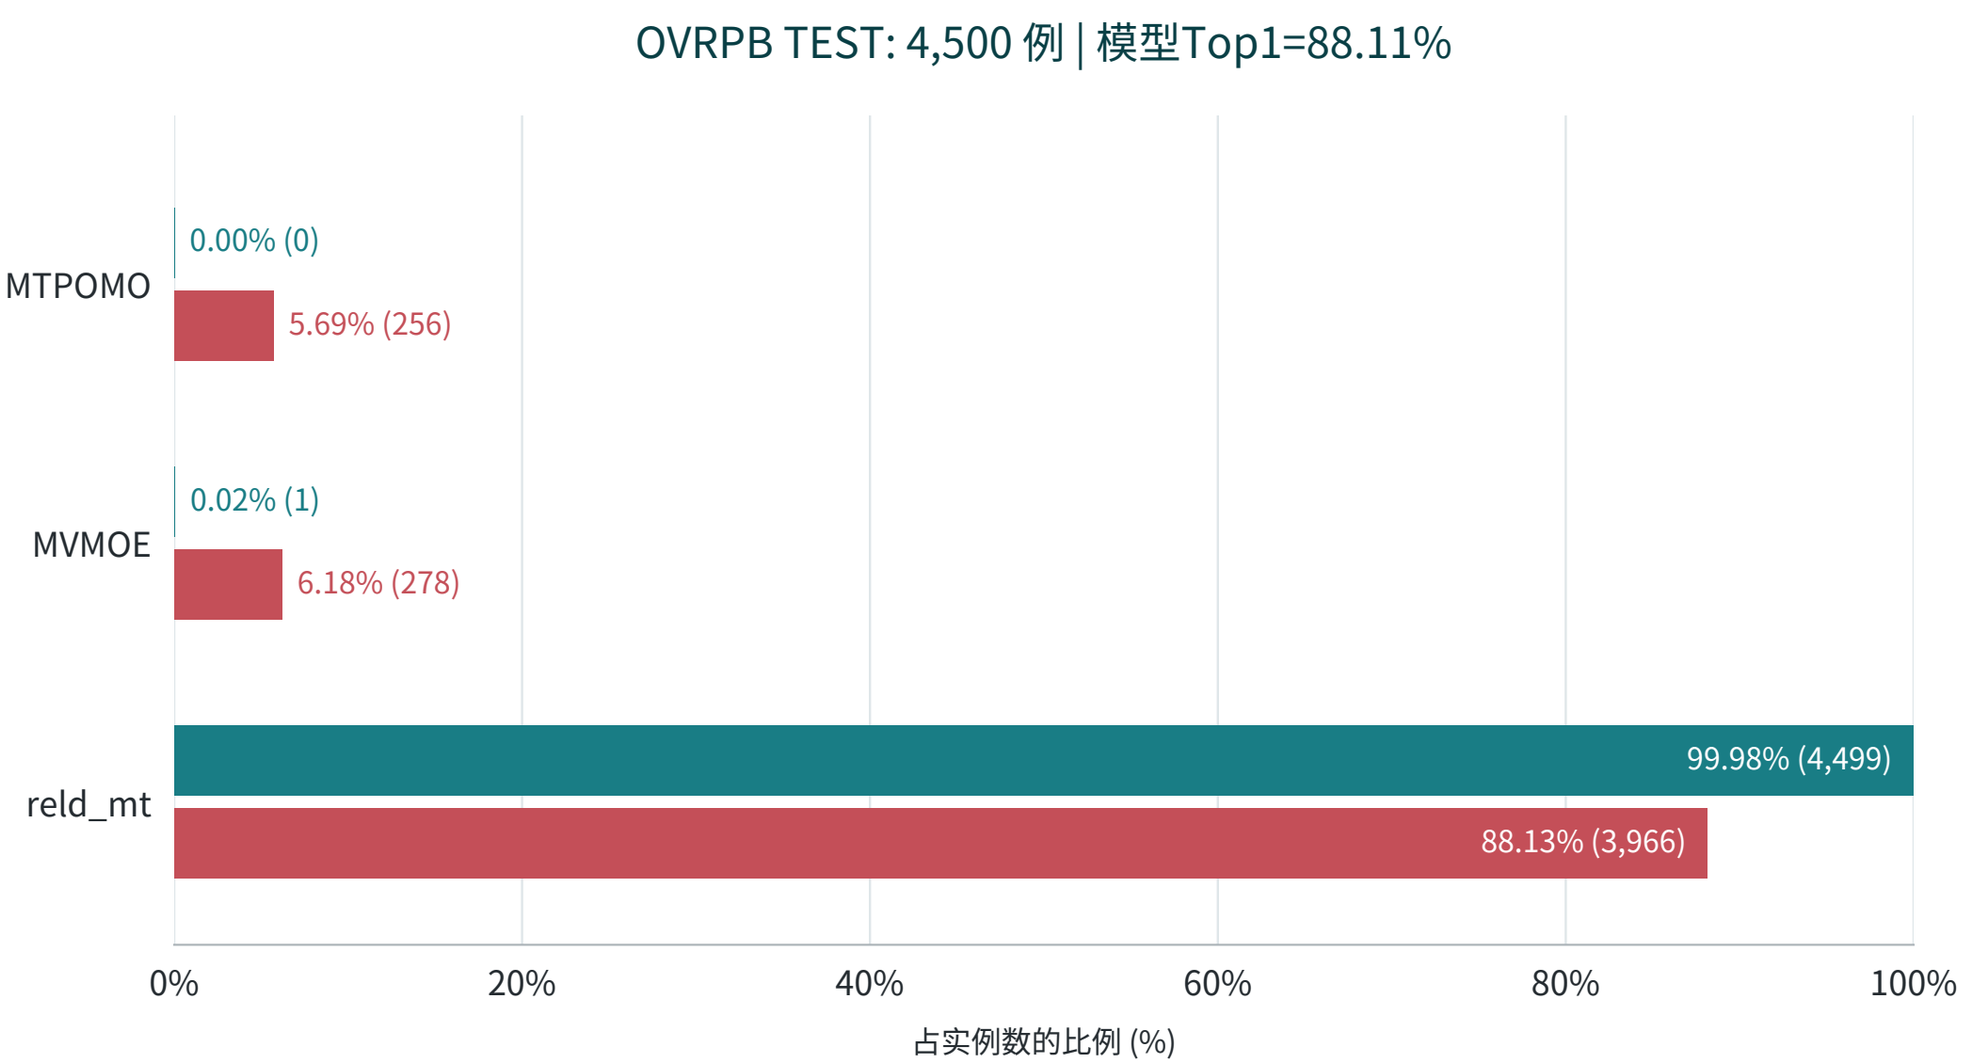

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | OVRPL | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

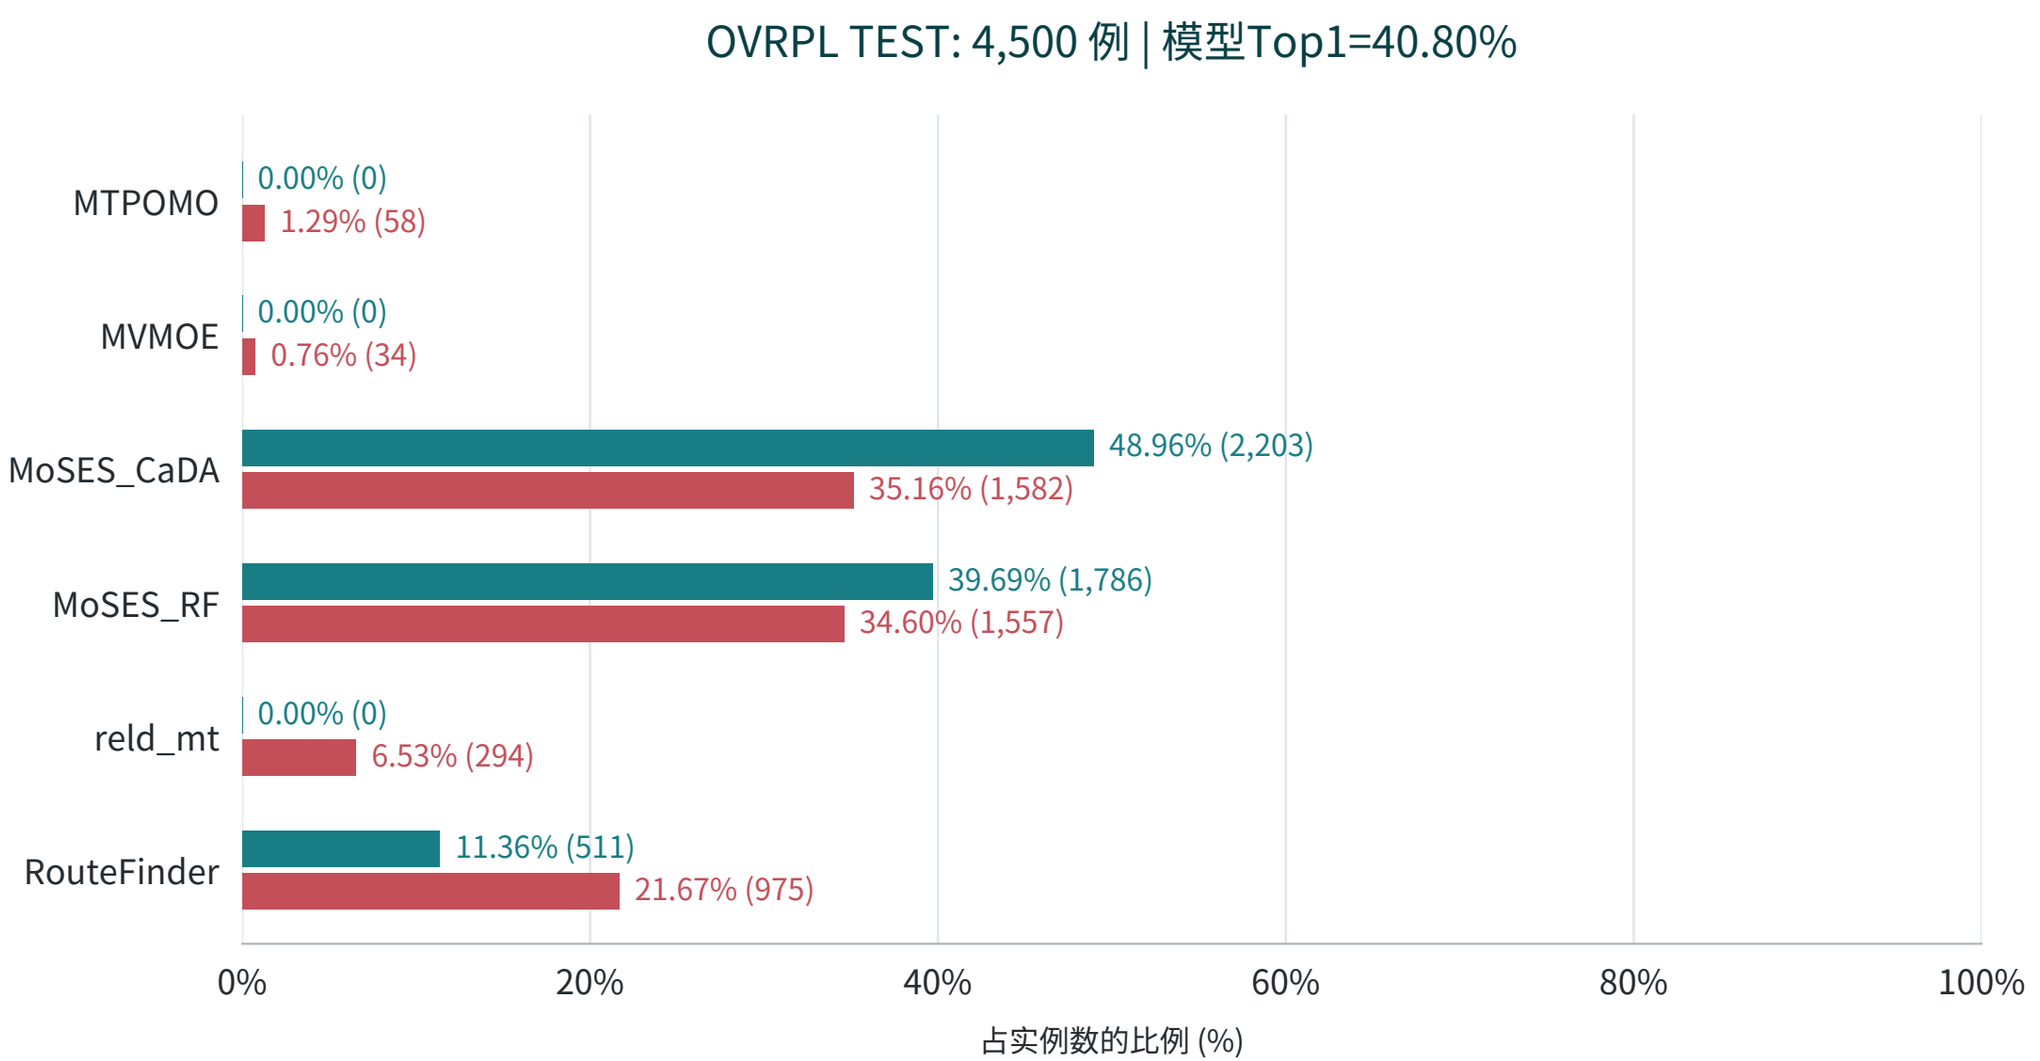

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | VRPBL | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

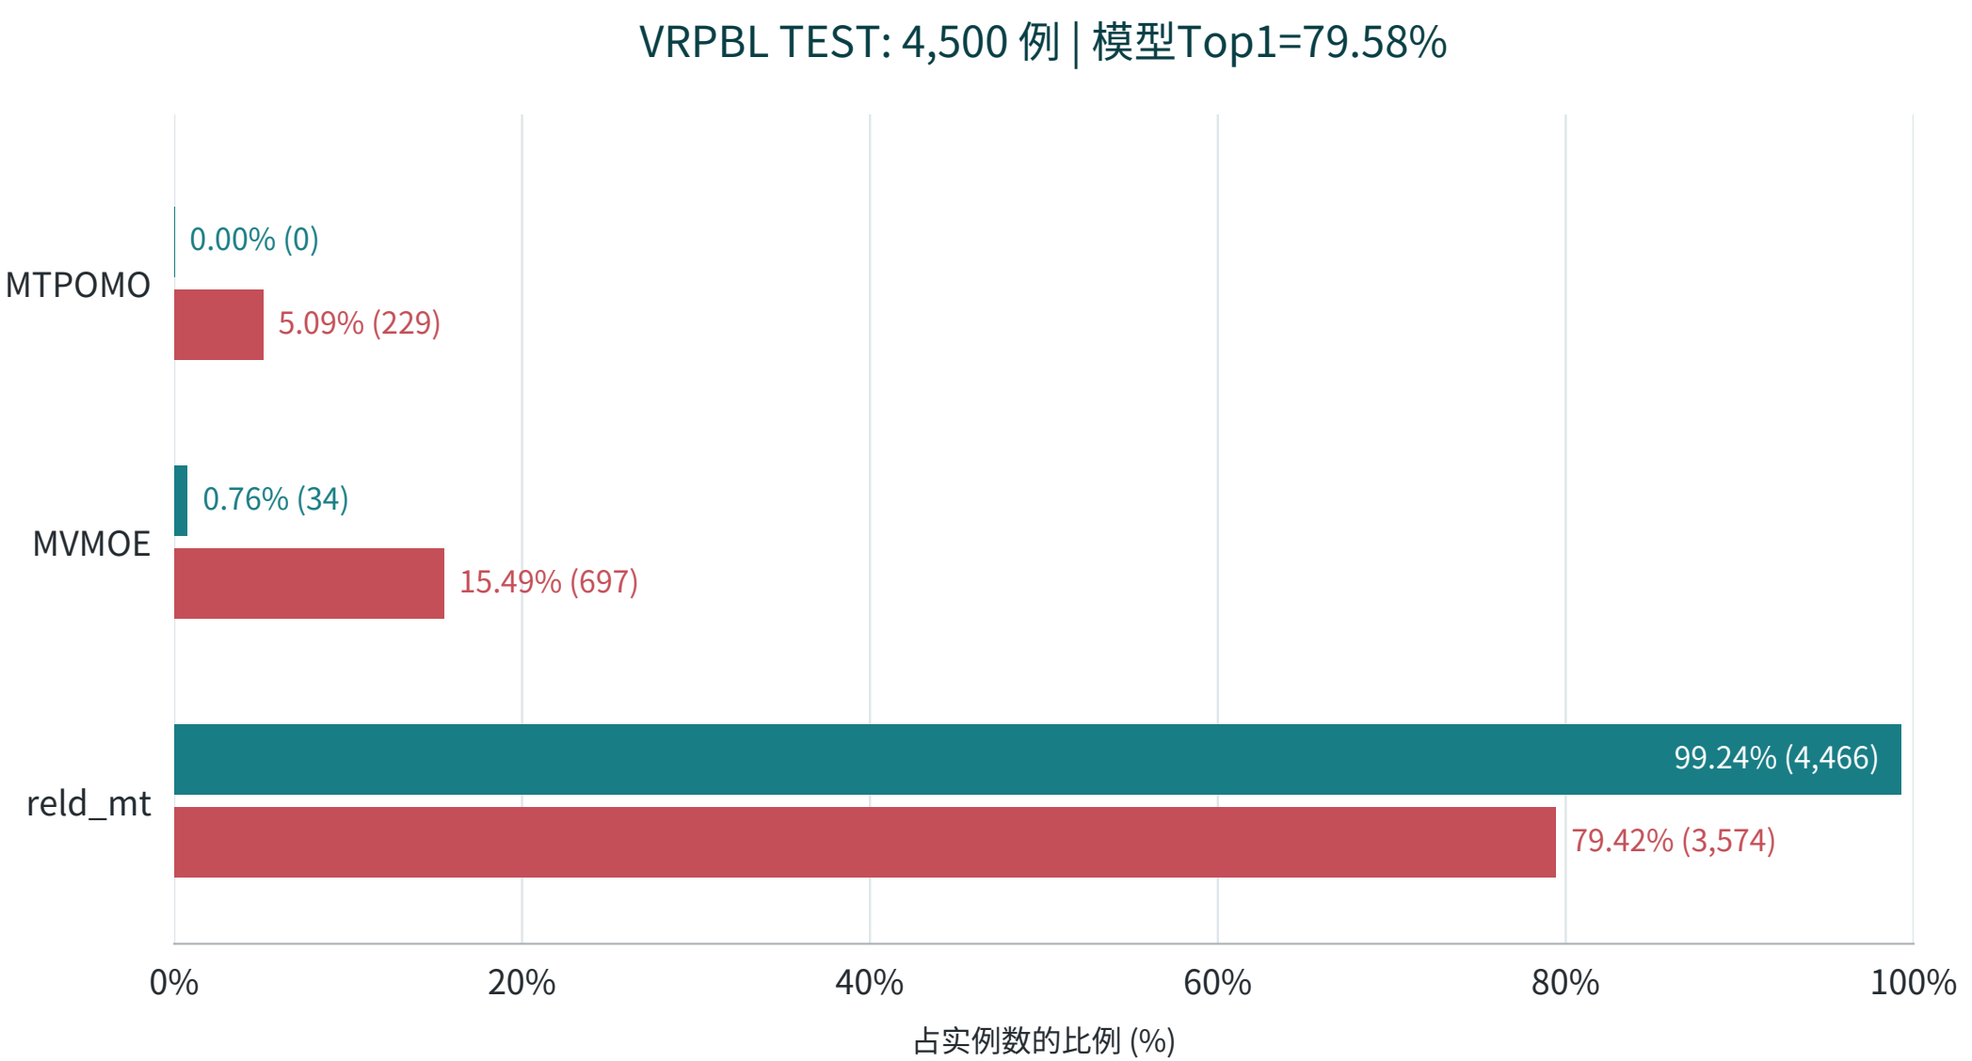

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | VRPBTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

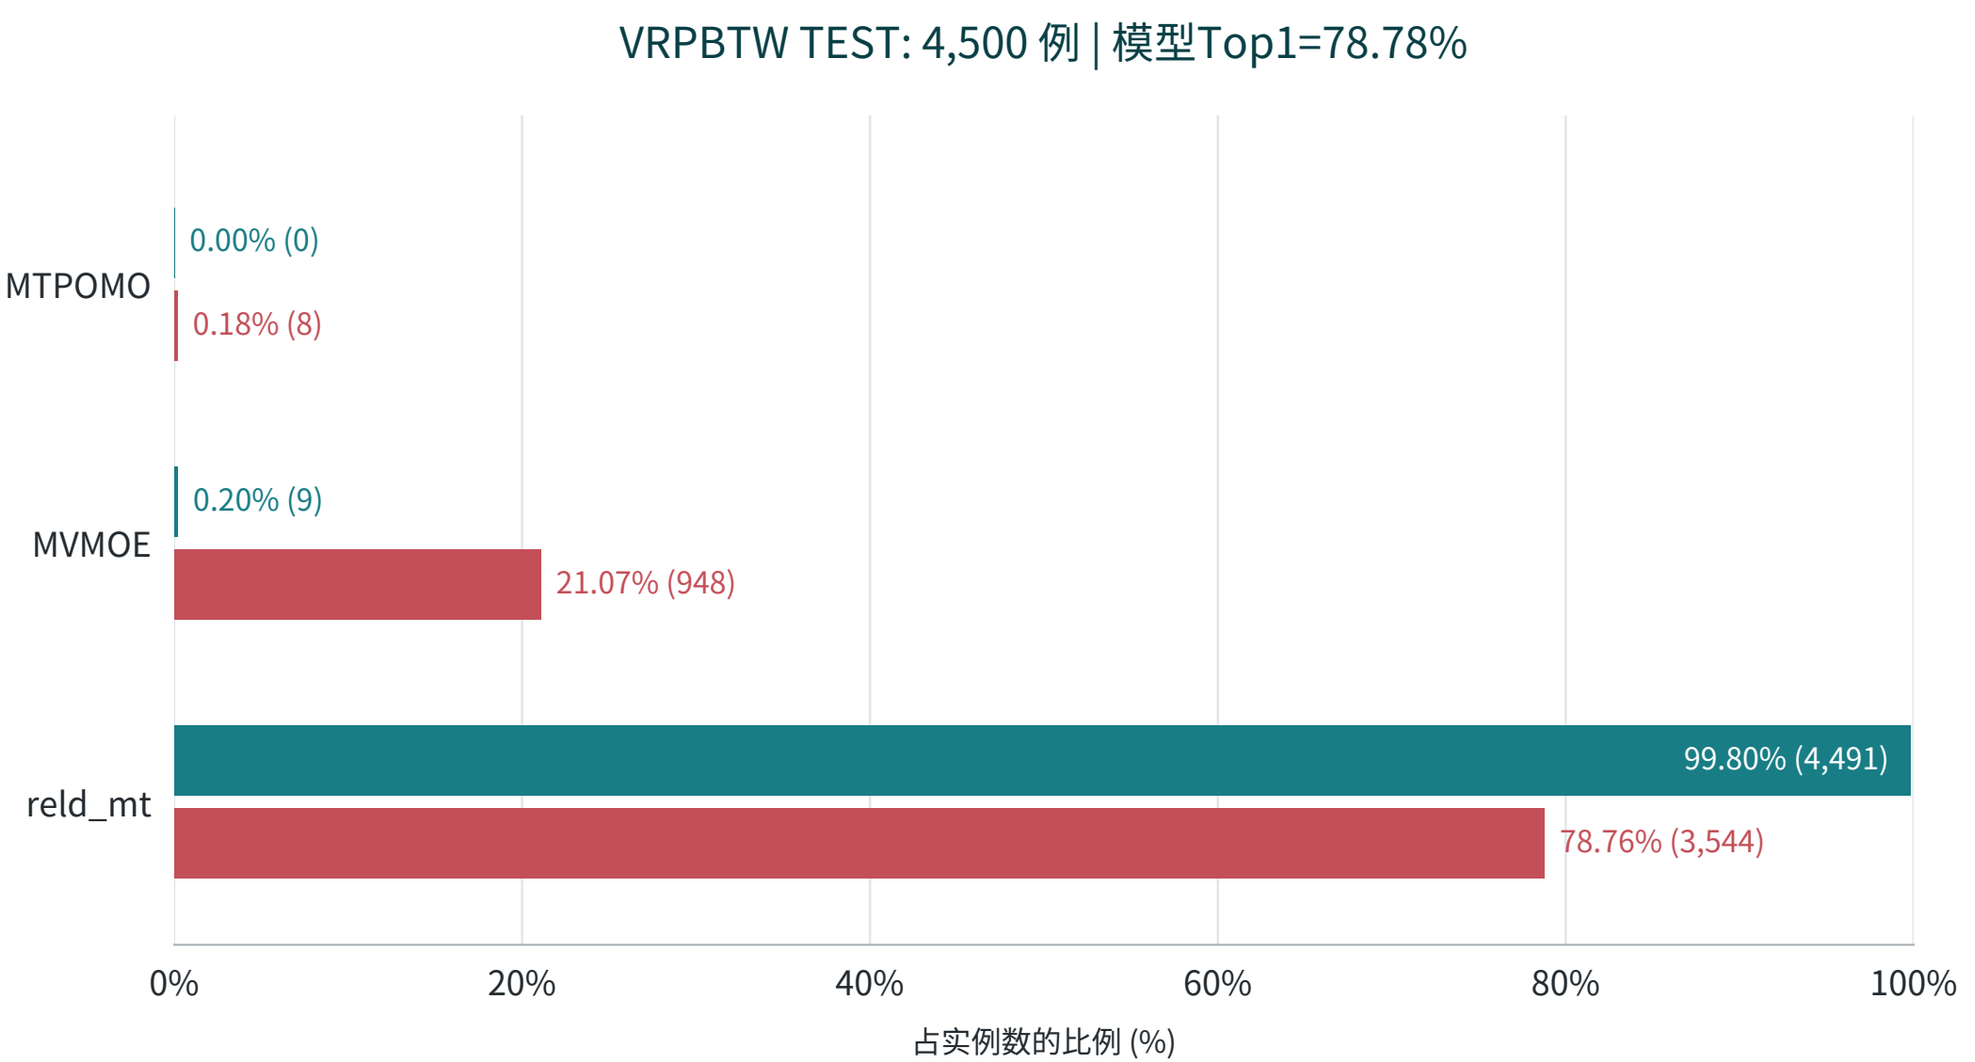

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | VRPLTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

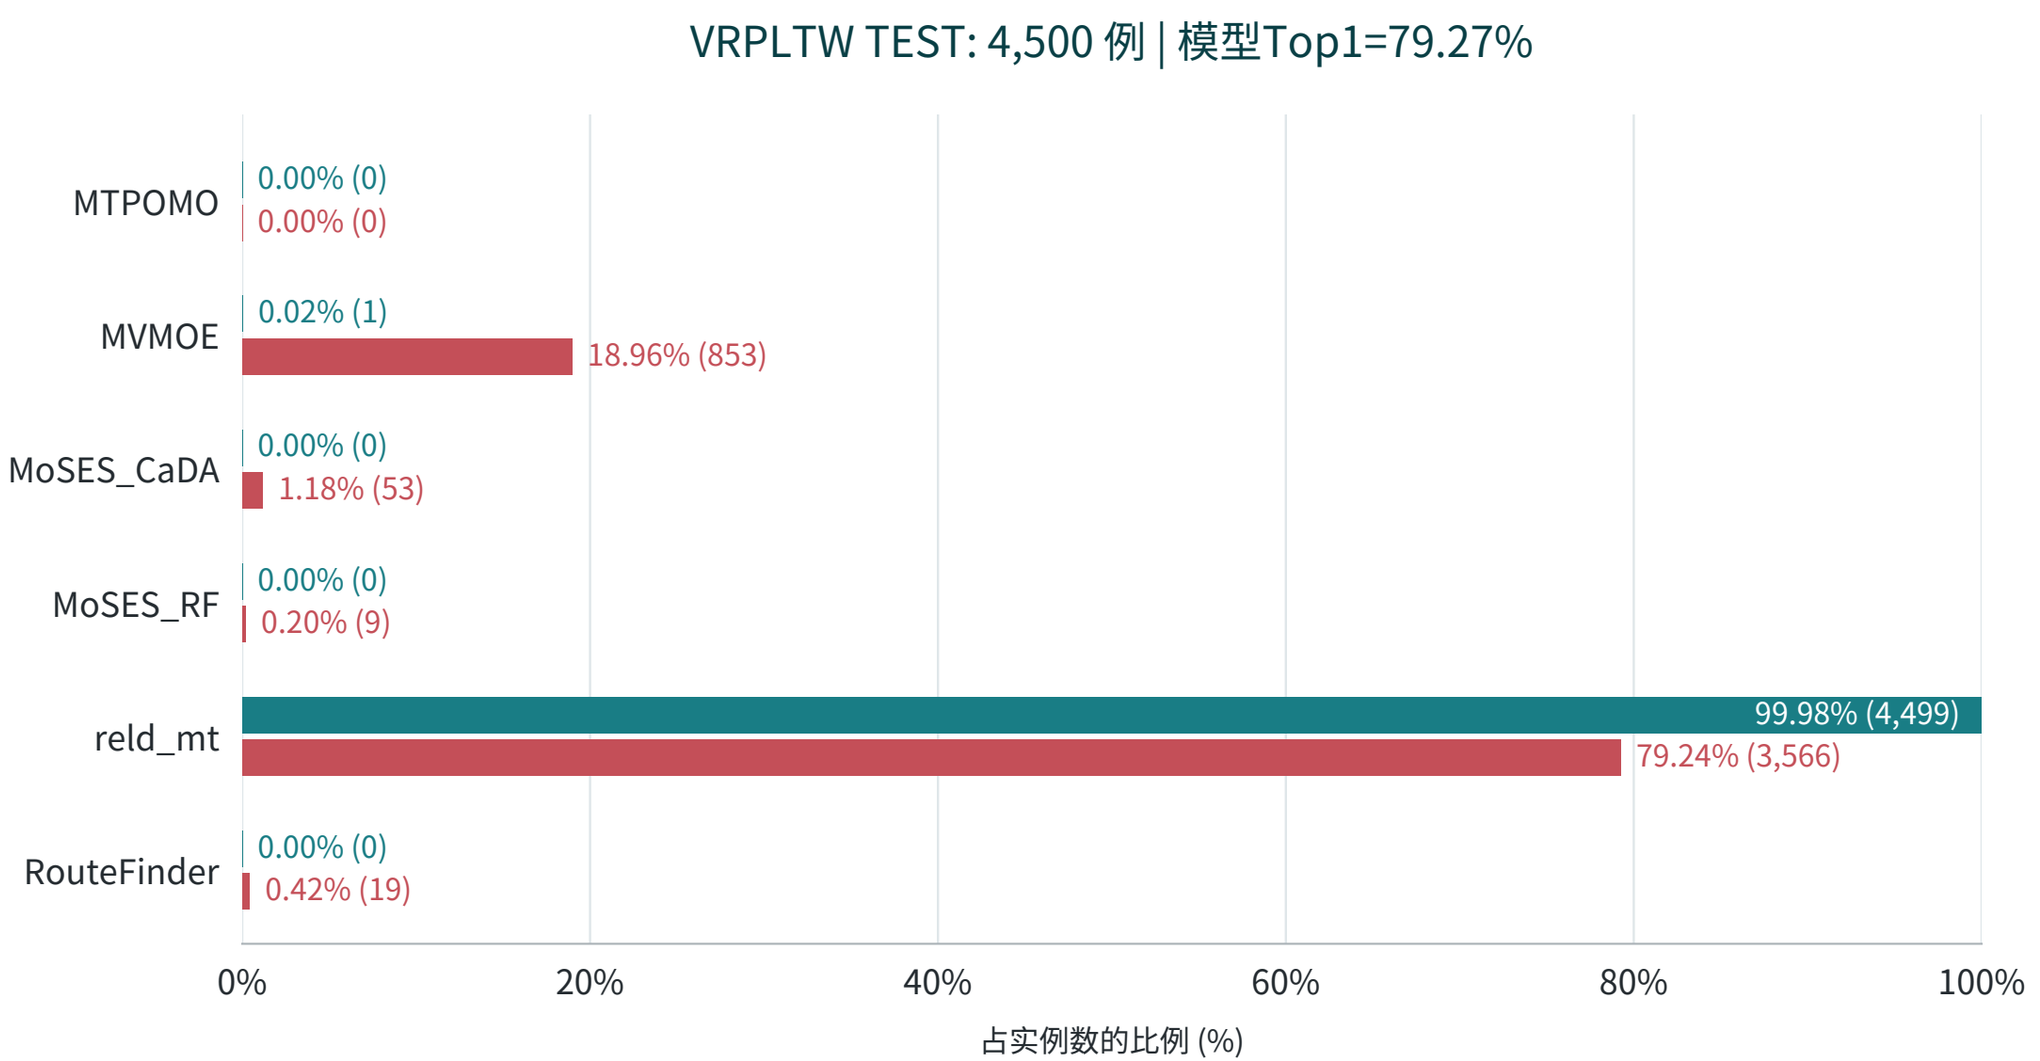

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | OVRPBL | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

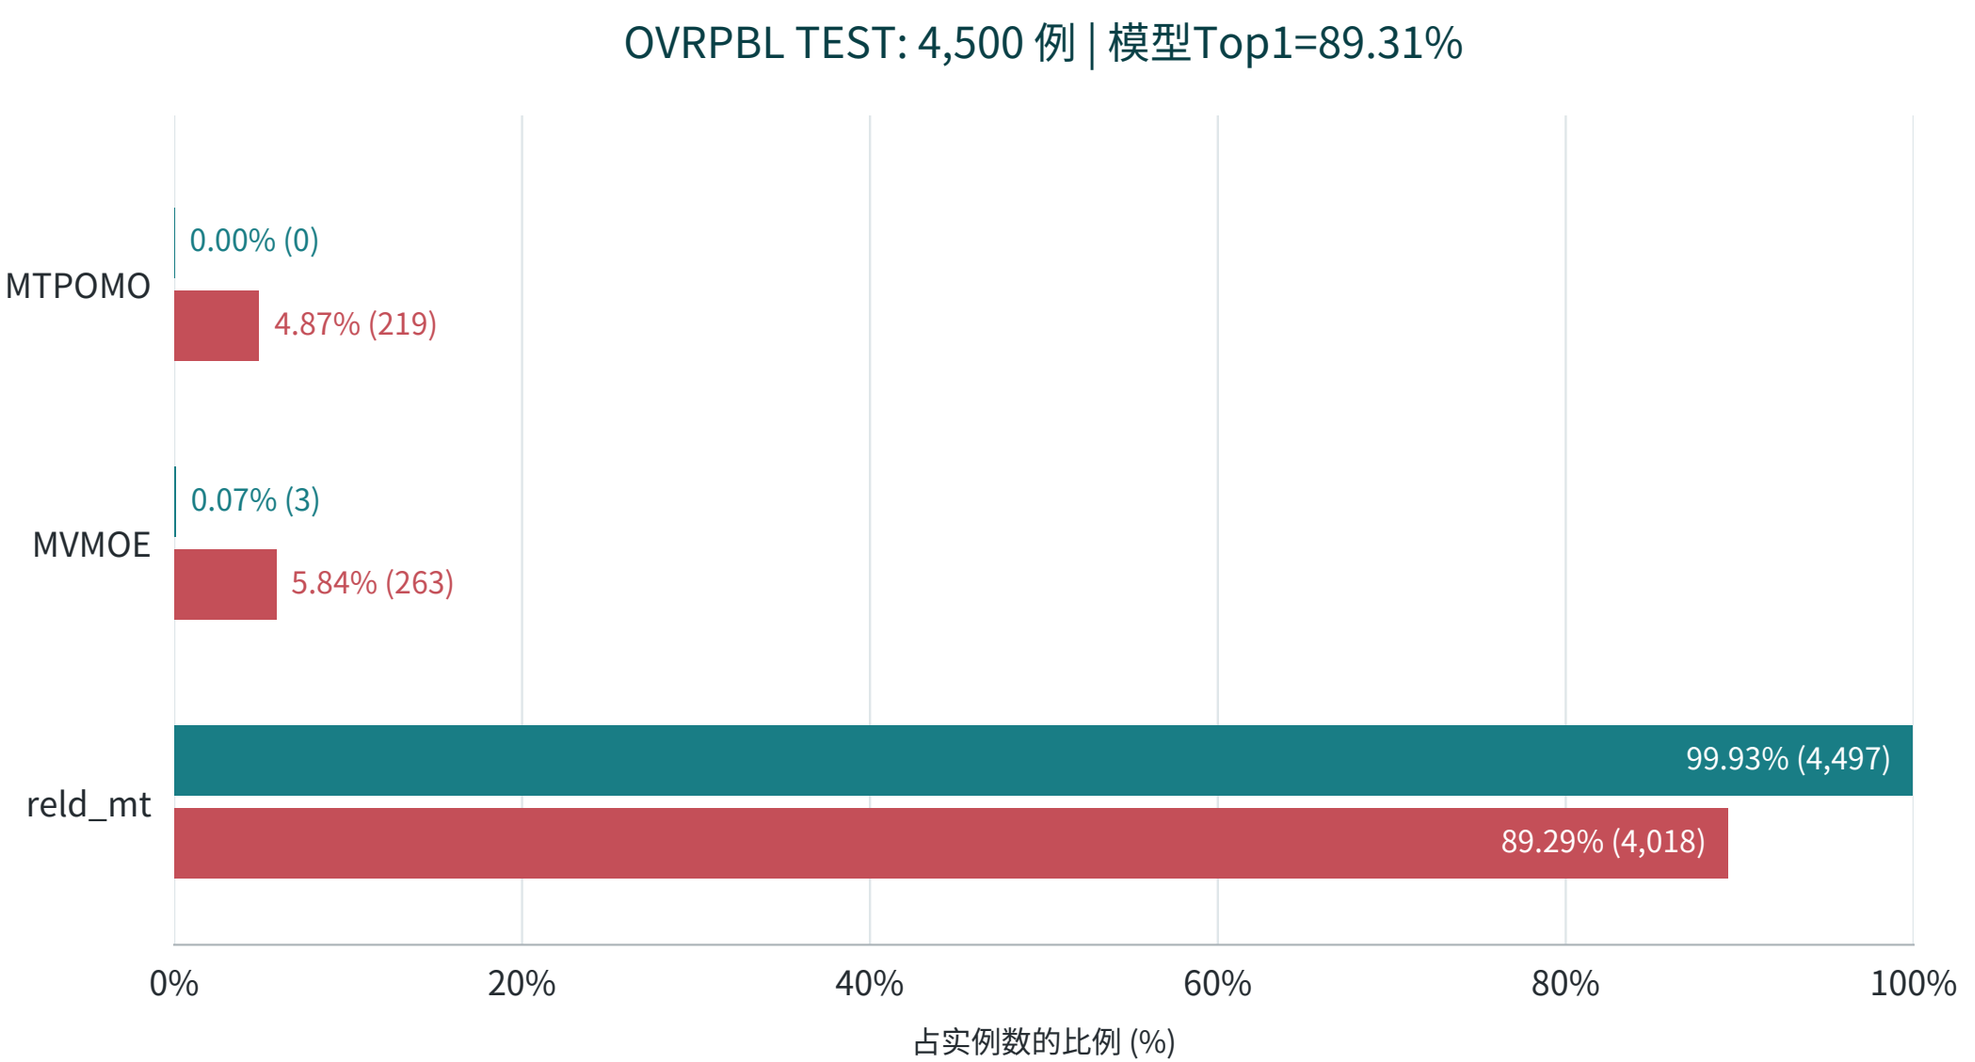

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | OVRPBTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

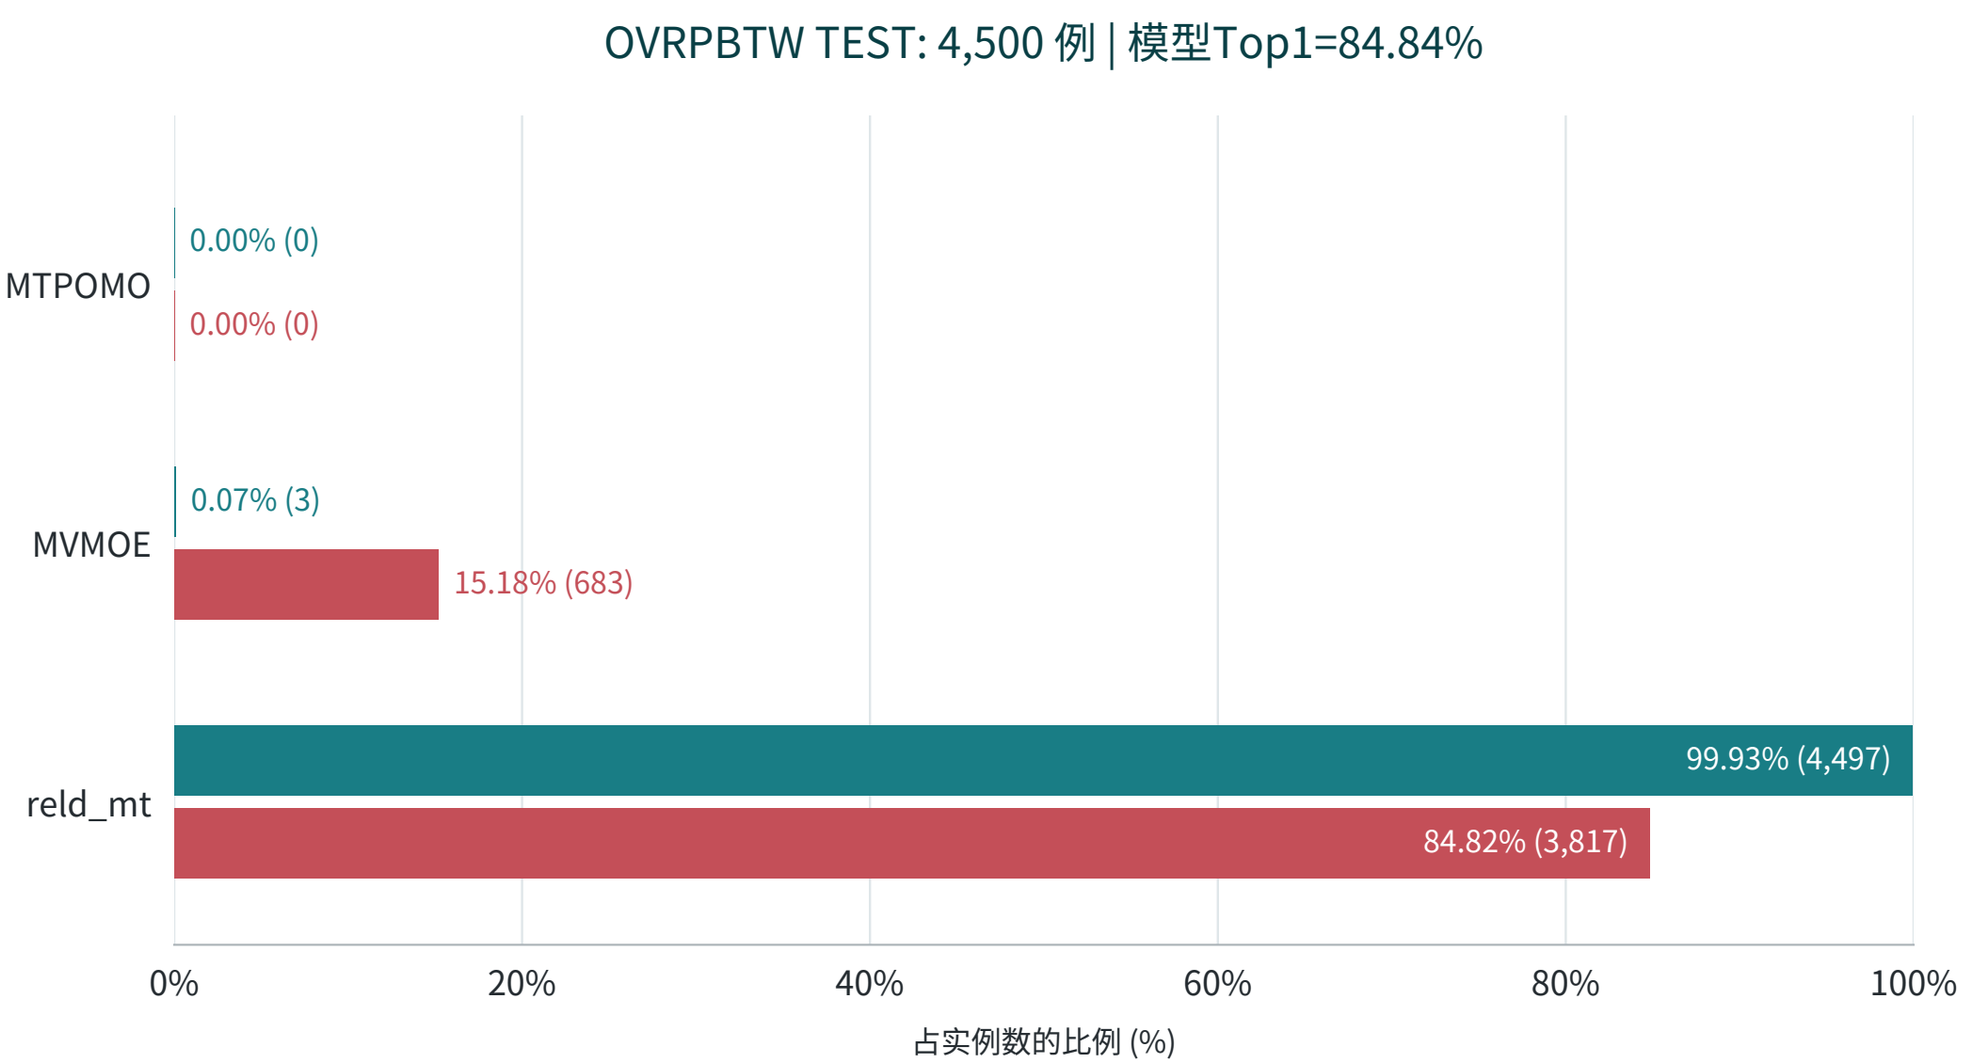

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | OVRPLTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

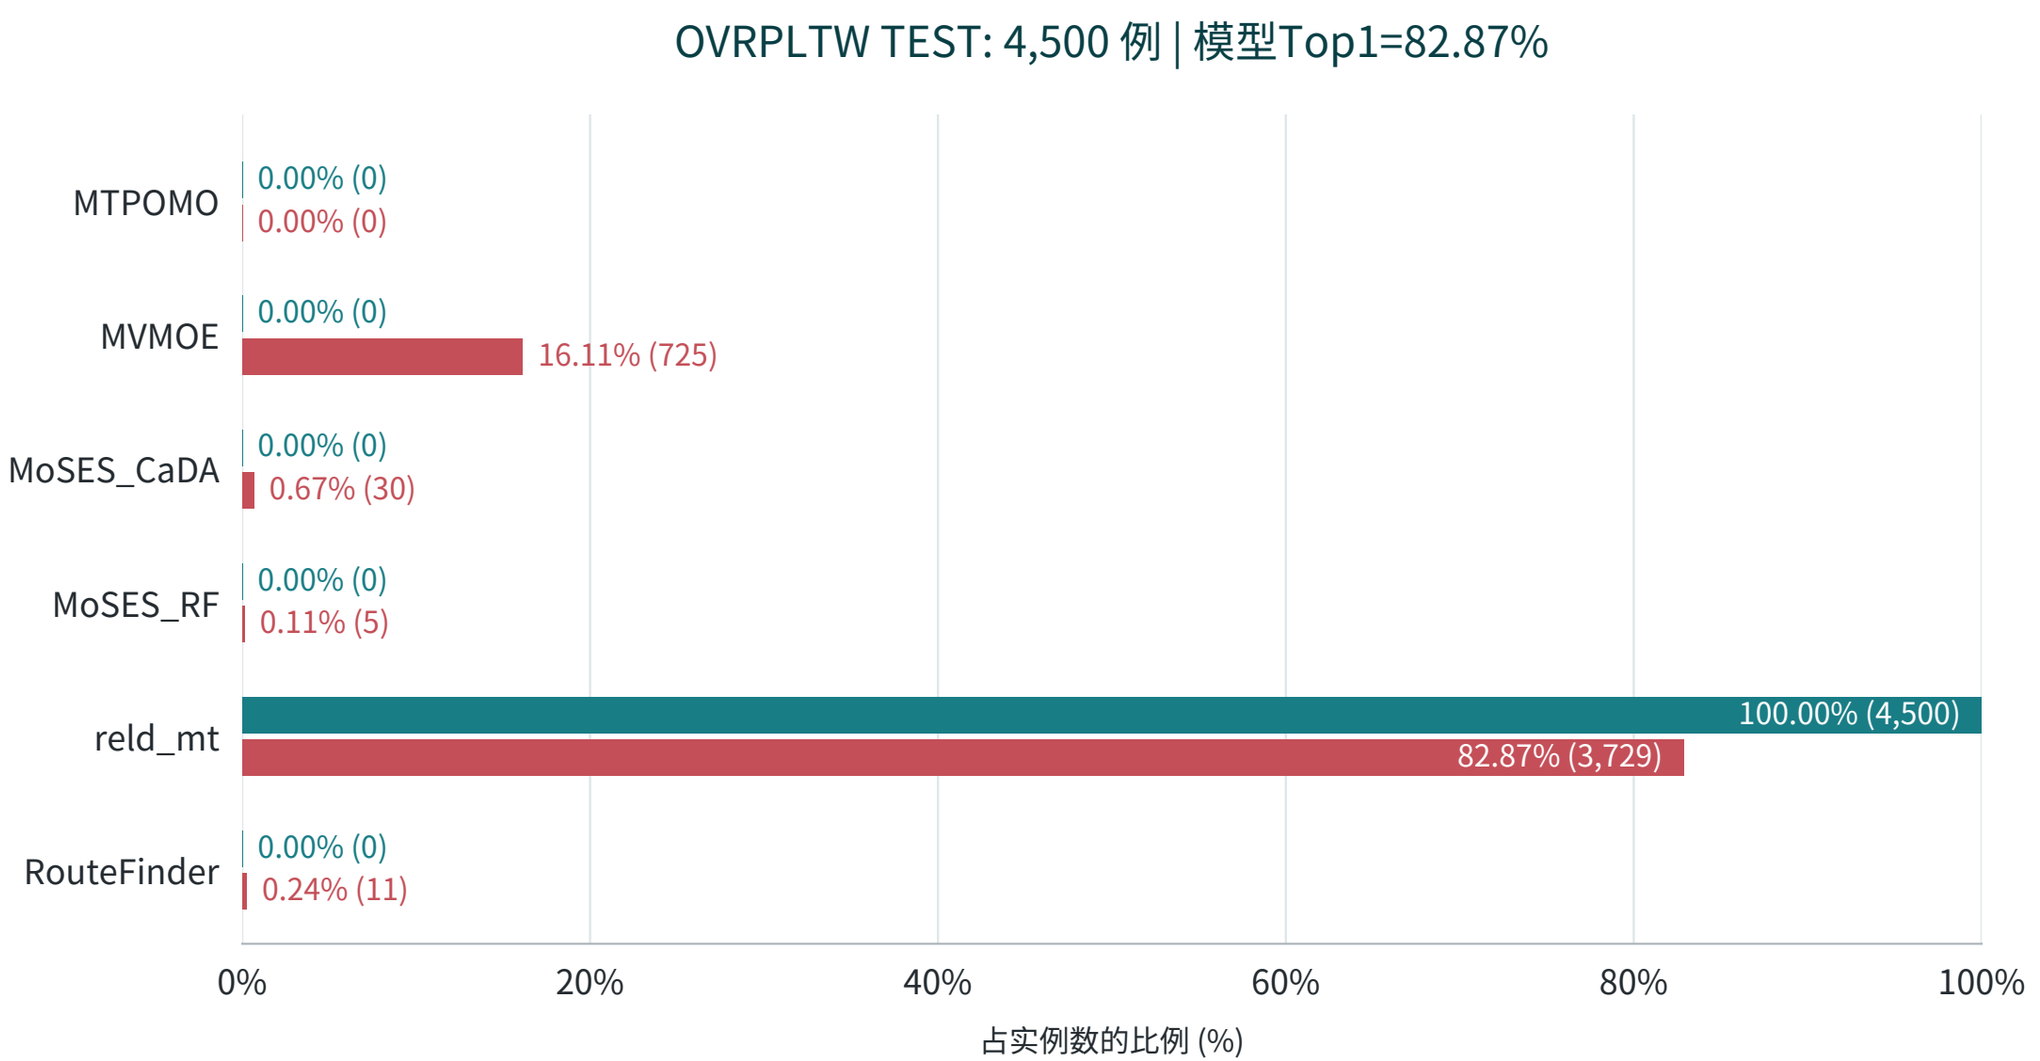

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | VRPBLTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

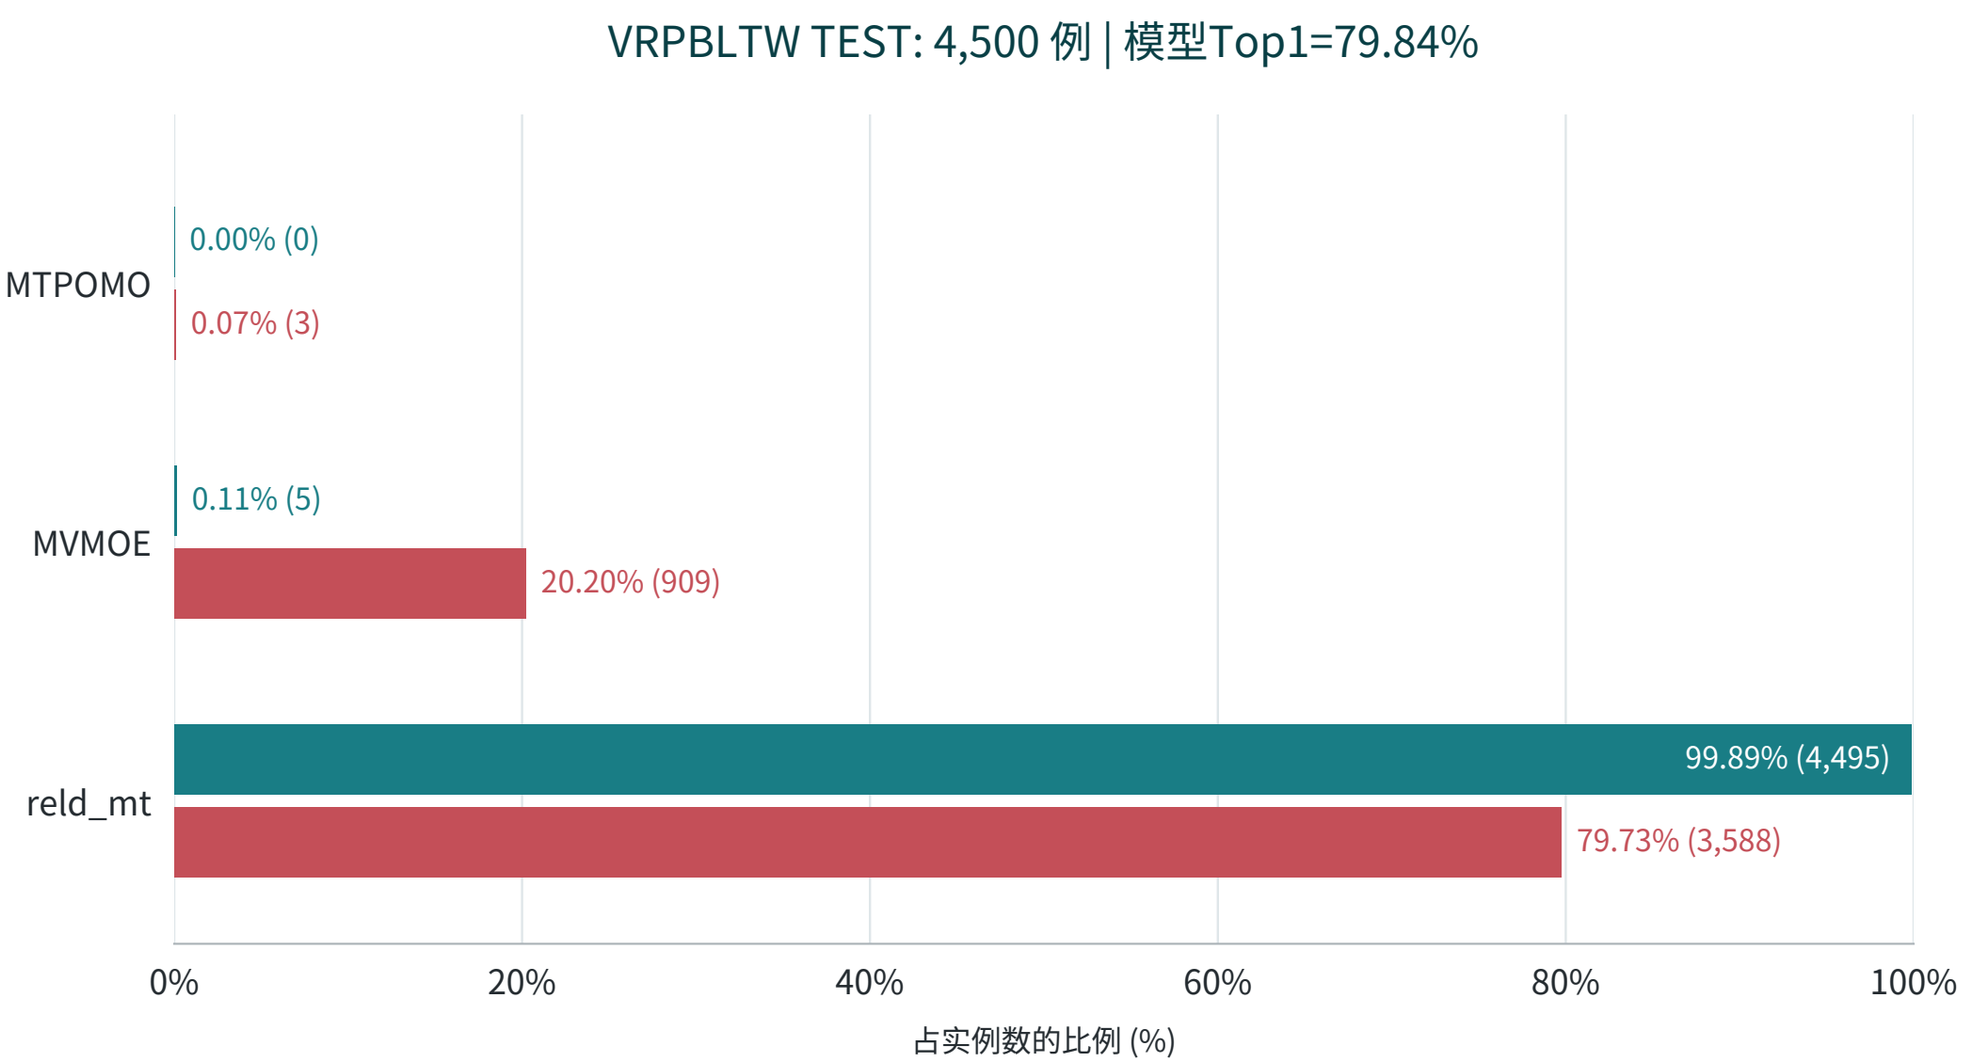

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.

R113/C_transition | OVRPBLTW | 方法分布

同一锁定模型: epoch 14 / update 40320 / SHA256 de0523bd1f7beadf

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

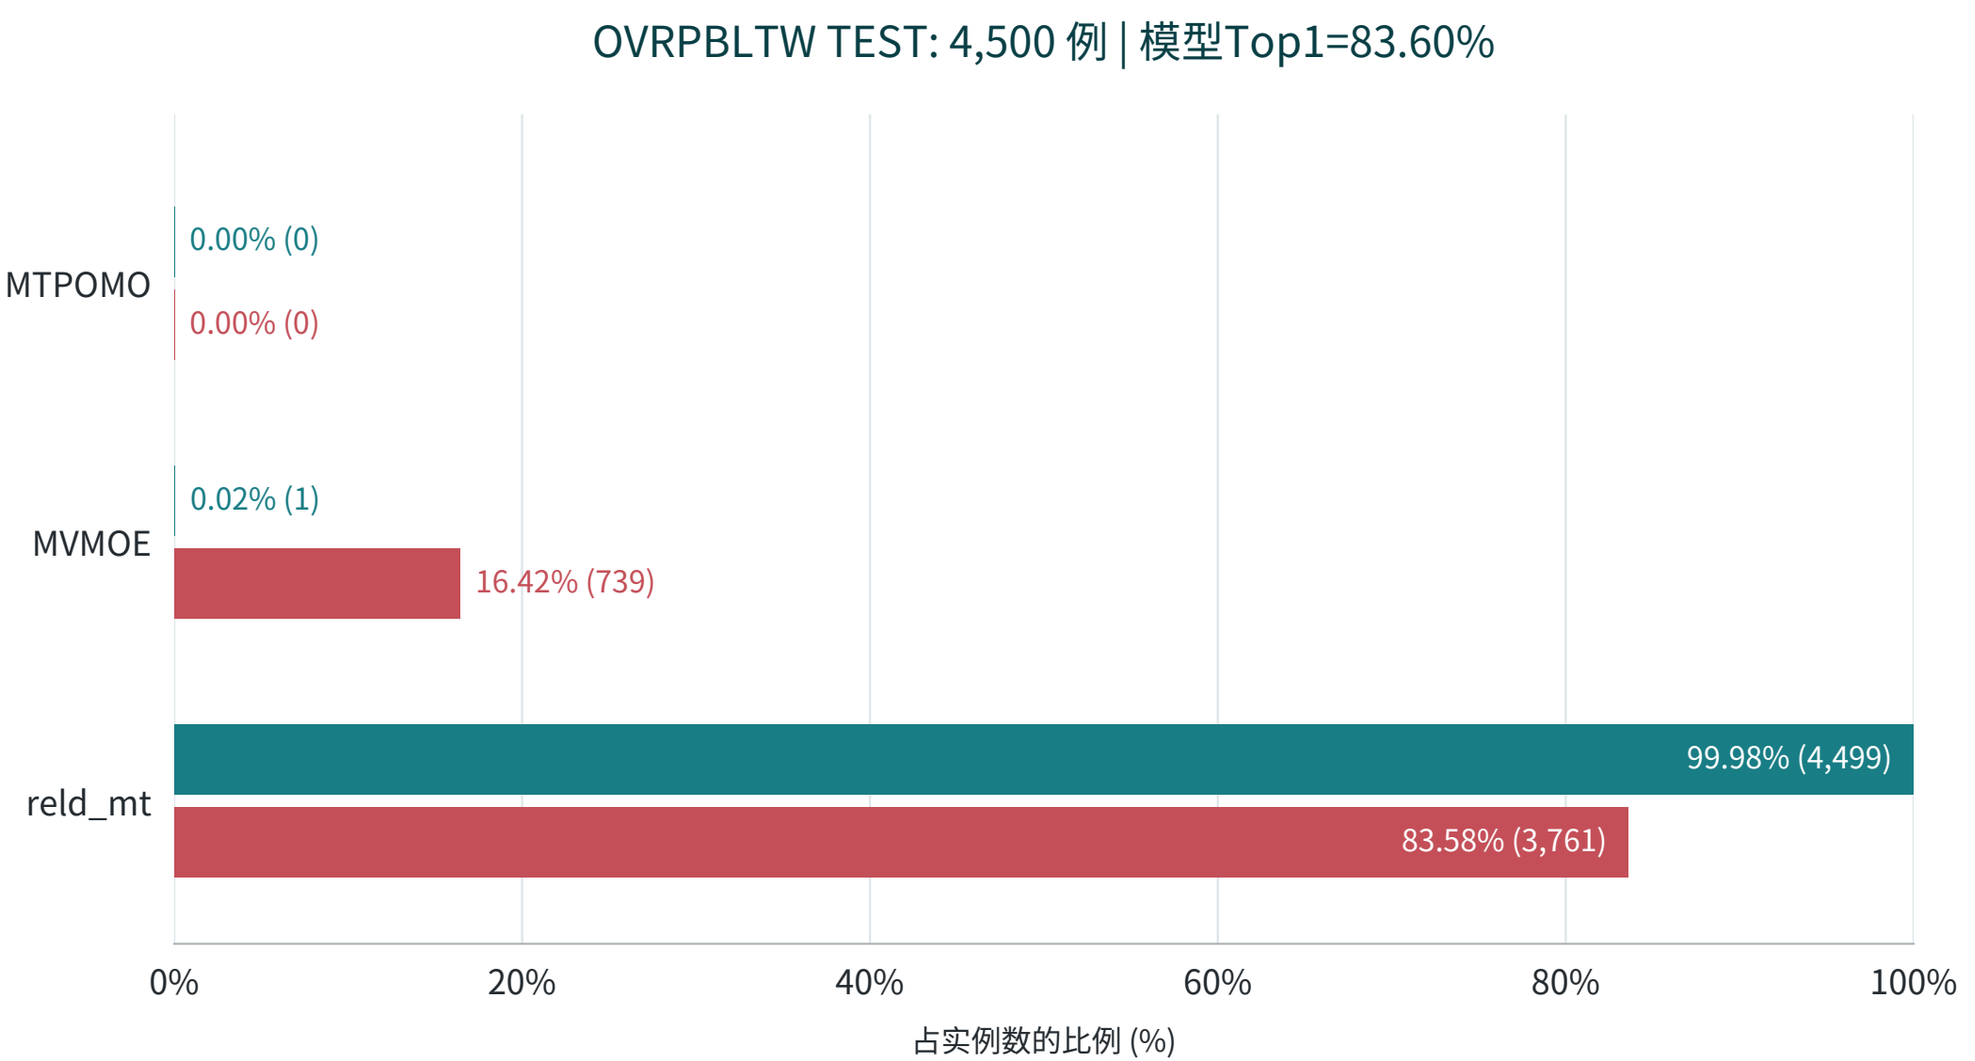

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R113/C_transition: stable global solver-ID score ties. Same R113 lock; LIB inference only; no training/reselection/Rxx mixing.