R111/A_family_conditional | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 29 | update 41760 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	71.1136	66.2037	11.417043	11.427978	11.371692	-0.1910	+0.3967	0.4080
TEST ALL	71.3309	66.1802	11.374659	11.385299	11.329932	-0.1895	+0.3937	0.4033

Dataset	n	NSS Top1 (%)	R111 Top1 (%)	NSS cost	R111 cost
TSP TEST	4500	45.888889	46.977778	7.970400719	7.972805443
CVRP TEST	4500	45.977778	47.911111	18.004802368	18.016056388
TSPLIB	49	20.408163	30.612245	8.217907074	8.202366645
CVRPLIB	100	70.000000	60.000000	67.101111717	67.282793598

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: normalized_family_times_conditional | objective: unweighted NLL on normalized joint logP

R111/A_family_conditional | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.1136	66.2037	11.417043	11.427978	11.371692	-0.1910	+0.3967	0.4080	per-problem TRAIN SBS
TSP	46.7111	33.1111	8.025996	8.045354	7.990533	-0.2406	+0.4438	0.4338	T2T
CVRP	46.9778	18.7111	18.165060	18.269377	18.064087	-0.5710	+0.5590	0.7540	RELD_CVRP
ATSP	77.0000	47.4889	1.638839	1.676905	1.632471	-2.2700	+0.3901	0.3874	UNICO_MatPOENet
OVRP	41.1111	35.7556	7.461925	7.469579	7.415777	-0.1025	+0.6223	0.6323	MoSES_RF
VRPB	80.9333	80.8444	9.354250	9.354876	9.318750	-0.0067	+0.3810	0.3880	reld_mt
VRPL	38.1556	33.0889	12.431118	12.437959	12.383444	-0.0550	+0.3850	0.3922	MoSES_RF
VRPTW	79.7778	79.9556	18.820406	18.819431	18.766139	+0.0052	+0.2892	0.3053	reld_mt
OVRPTW	83.8222	83.7778	10.142946	10.143730	10.116859	-0.0077	+0.2579	0.2557	reld_mt
OVRPB	88.4667	88.5111	6.358760	6.357254	6.341078	+0.0237	+0.2789	0.2911	reld_mt
OVRPL	41.8000	35.9111	7.436994	7.445709	7.390416	-0.1171	+0.6302	0.6464	MoSES_RF
VRPBL	78.8222	78.5111	9.368829	9.371523	9.328366	-0.0287	+0.4338	0.4373	reld_mt
VRPBTW	78.5333	78.4222	19.947313	19.950430	19.851084	-0.0156	+0.4848	0.4630	reld_mt
VRPLTW	78.8000	78.7556	18.764283	18.765871	18.707843	-0.0085	+0.3017	0.3179	reld_mt
OVRPBL	89.3778	89.2000	6.369007	6.370093	6.352824	-0.0171	+0.2547	0.2643	reld_mt
OVRPBTW	83.5778	83.4444	10.660550	10.661098	10.623245	-0.0051	+0.3512	0.3233	reld_mt
OVRPLTW	83.5778	83.4889	10.156842	10.157423	10.129818	-0.0057	+0.2668	0.2733	reld_mt
VRPBLTW	79.4000	79.4000	19.793267	19.797044	19.706420	-0.0191	+0.4407	0.4310	reld_mt
OVRPBLTW	83.2000	83.2889	10.610380	10.609955	10.571302	+0.0040	+0.3697	0.3470	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R111/A_family_conditional | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.3309	66.1802	11.374659	11.385299	11.329932	-0.1895	+0.3937	0.4033	per-problem TRAIN SBS
TSP	46.9778	34.5333	7.972805	7.989621	7.937593	-0.2105	+0.4436	0.4375	T2T
CVRP	47.9111	17.9333	18.016056	18.124983	17.918509	-0.6010	+0.5444	0.7226	RELD_CVRP
ATSP	76.5556	47.2444	1.635697	1.674207	1.629441	-2.3002	+0.3839	0.3833	UNICO_MatPOENet
OVRP	40.8889	33.6444	7.445987	7.455750	7.400487	-0.1309	+0.6148	0.6237	MoSES_RF
VRPB	80.6222	80.4000	9.355293	9.351810	9.315298	+0.0372	+0.4293	0.4330	reld_mt
VRPL	37.6444	32.2667	12.350027	12.356138	12.300958	-0.0495	+0.3989	0.4058	MoSES_RF
VRPTW	81.2000	80.8444	18.688566	18.690545	18.637408	-0.0106	+0.2745	0.2819	reld_mt
OVRPTW	83.8889	83.9333	10.092723	10.093063	10.068135	-0.0034	+0.2442	0.2351	reld_mt
OVRPB	88.1556	88.1333	6.370482	6.370826	6.352225	-0.0054	+0.2874	0.2950	reld_mt
OVRPL	42.1556	34.6000	7.463341	7.472542	7.418033	-0.1231	+0.6108	0.6231	MoSES_RF
VRPBL	79.4222	79.4222	9.396617	9.396379	9.355967	+0.0025	+0.4345	0.4394	reld_mt
VRPBTW	78.8667	78.7556	19.665316	19.665725	19.577666	-0.0021	+0.4477	0.4432	reld_mt
VRPLTW	79.2444	79.2444	18.803873	18.803136	18.745143	+0.0039	+0.3133	0.3297	reld_mt
OVRPBL	89.2667	89.2889	6.375656	6.375741	6.359310	-0.0013	+0.2570	0.2684	reld_mt
OVRPBTW	84.8889	84.8222	10.660659	10.659591	10.624748	+0.0100	+0.3380	0.3141	reld_mt
OVRPLTW	82.8222	82.8667	10.085279	10.086112	10.059001	-0.0083	+0.2612	0.2605	reld_mt
VRPBLTW	79.8444	79.7333	19.703291	19.707068	19.613284	-0.0192	+0.4589	0.4405	reld_mt
OVRPBLTW	83.6000	83.5778	10.662192	10.662149	10.625574	+0.0004	+0.3446	0.3229	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R111/A_family_conditional | LIB and locked provenance

Current R111 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	30.6122	10.2041	8.202367	8.240435	8.142167	-0.4620	+0.7394	0.7820
CVRPLIB	60.0000	45.0000	67.282794	67.245364	66.945093	+0.0557	+0.5044	0.6303

SHA256: 2c6011ea4cc80373810f1435c07d38d703665dcd1ca262ef99b72b89f6245d9f

Unique selection: strict minimum full VAL macro_vs_sbs_pct with common new81000 TRAIN-fitted SBS; first wins ties

Inference: eval, argmax normalized family-times-within-family probability; stable global-ID ties


Normalization: new81000 TRAIN only; no TEST/LIB refit.

R111/A_family_conditional | TSP | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

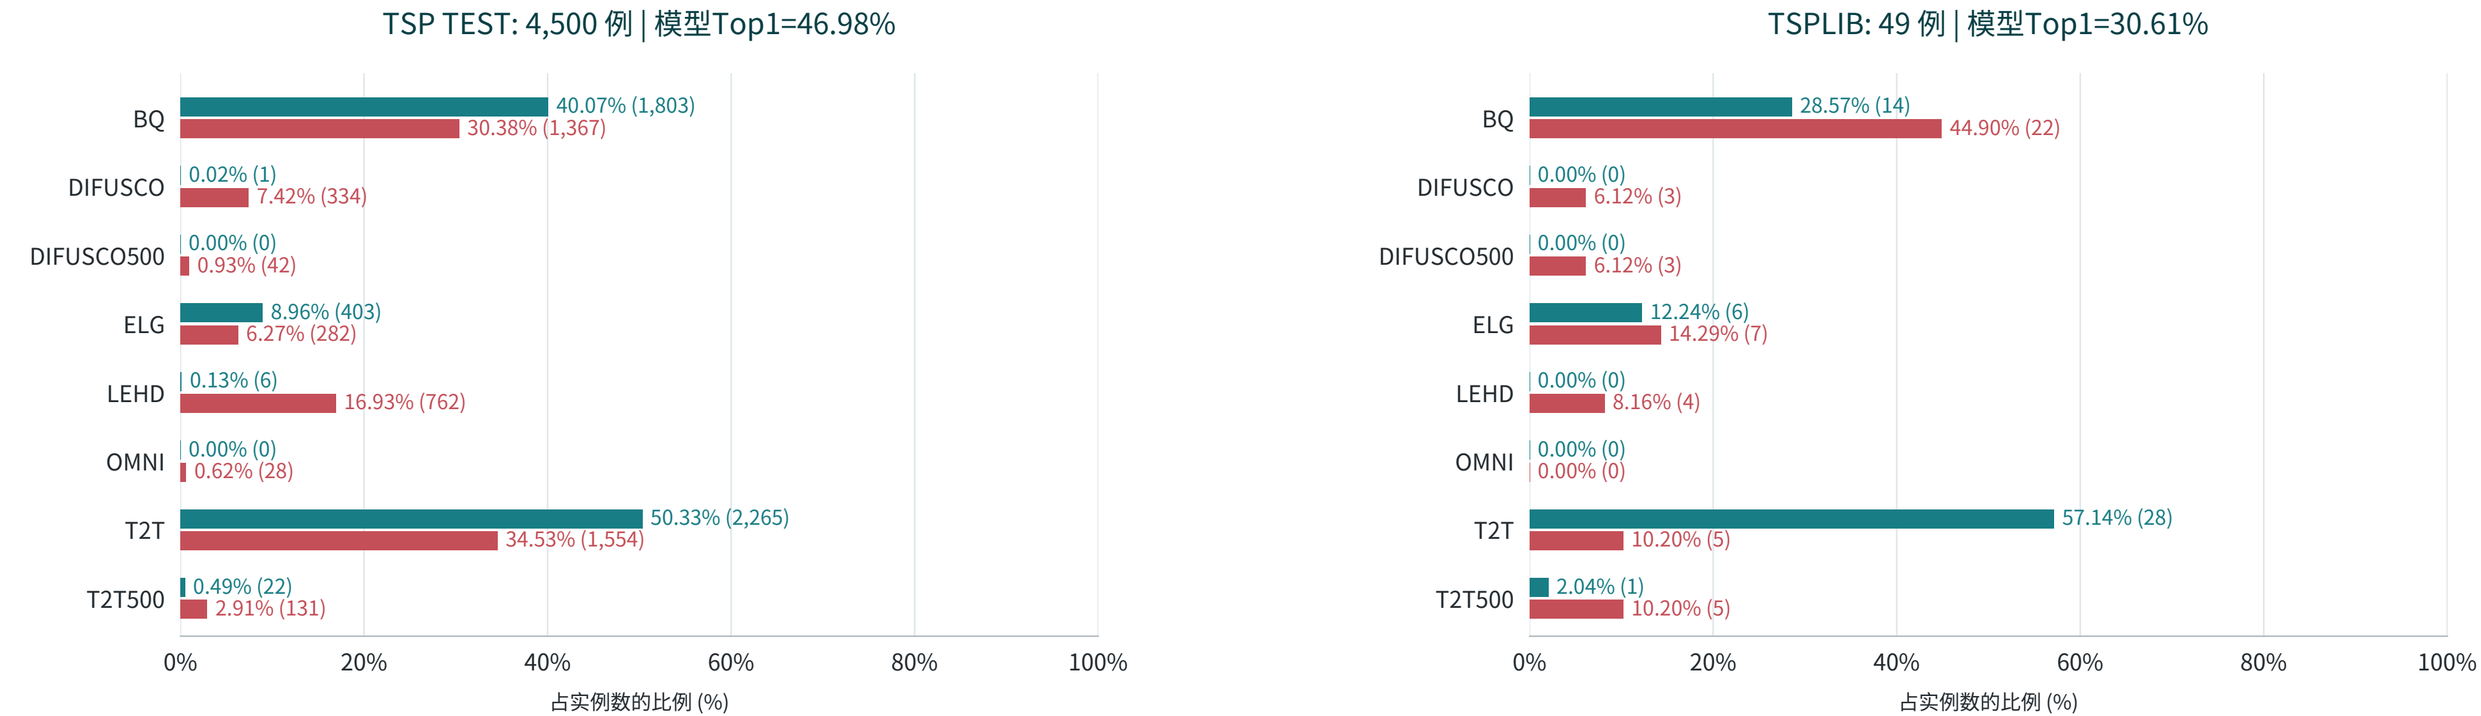

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | CVRP | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

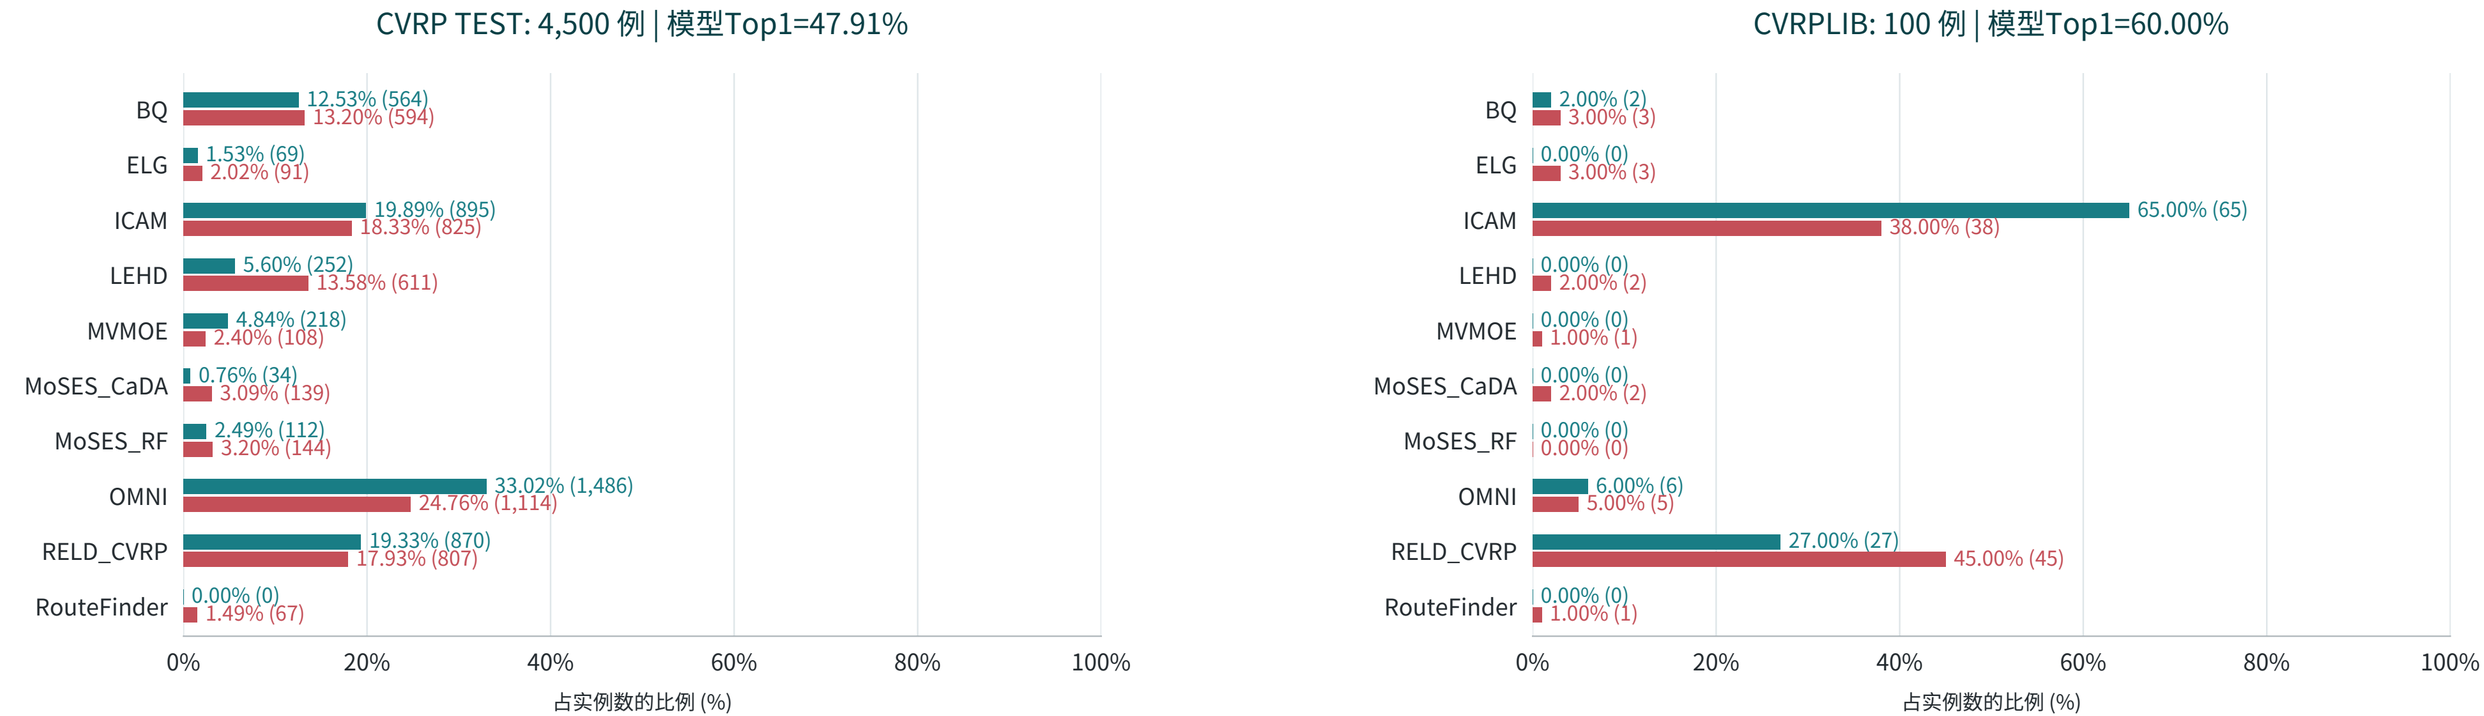

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | ATSP | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

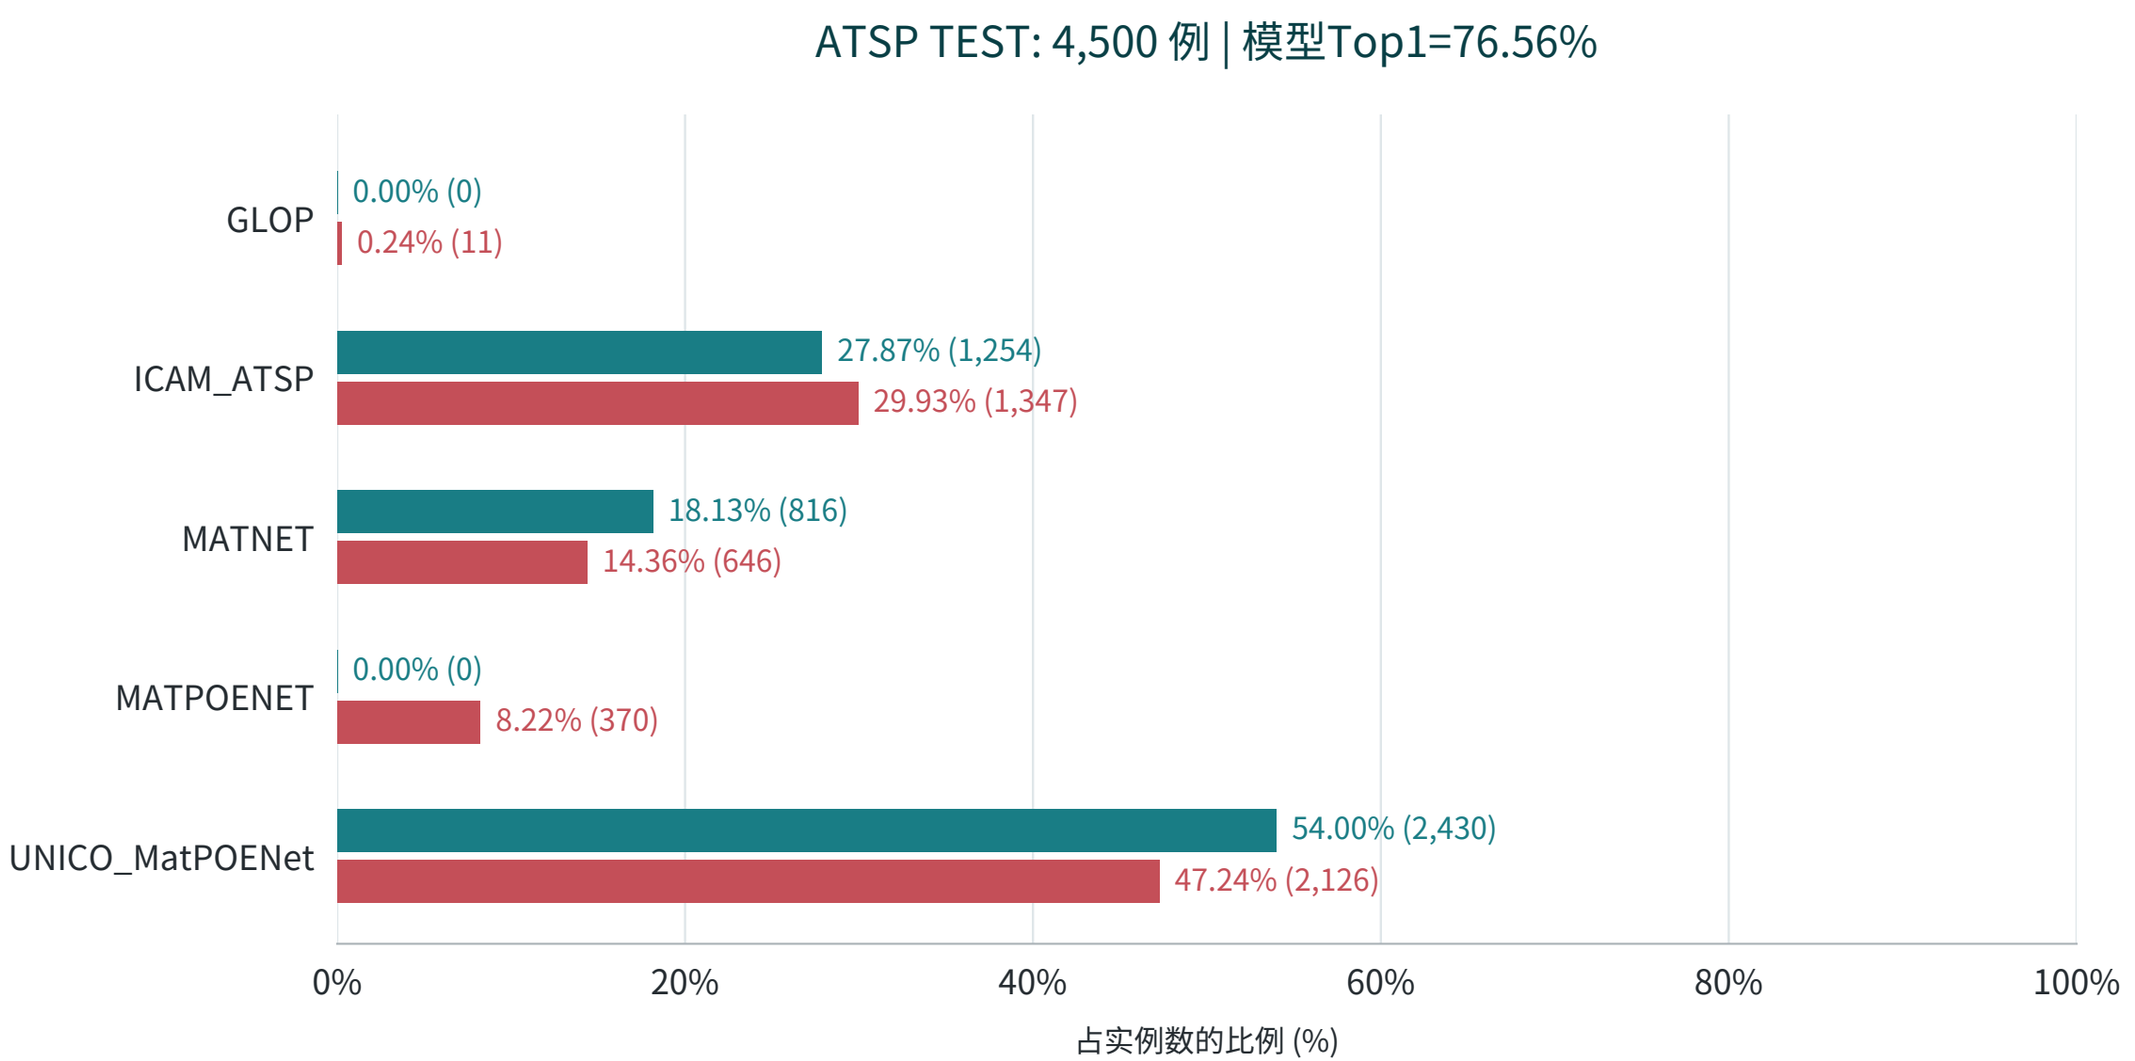

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | OVRP | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

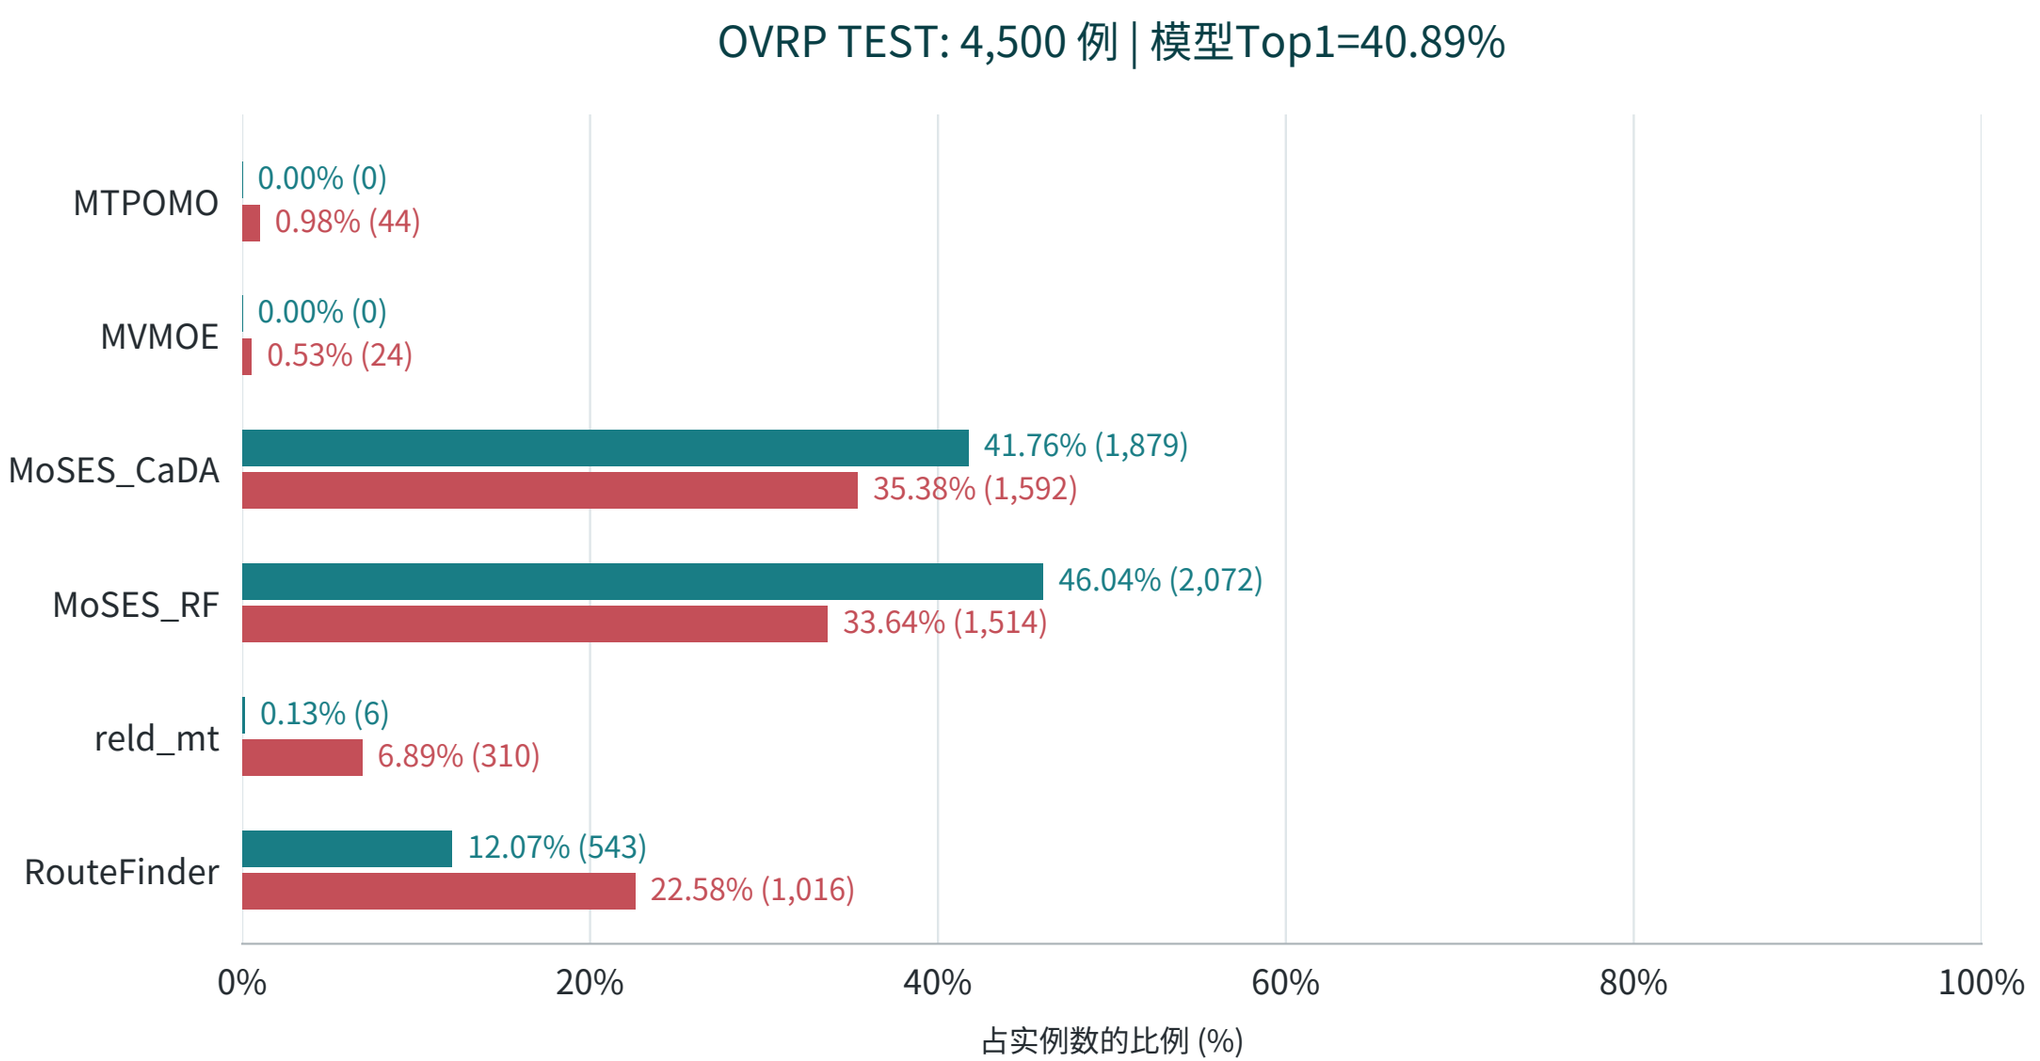

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | VRPB | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

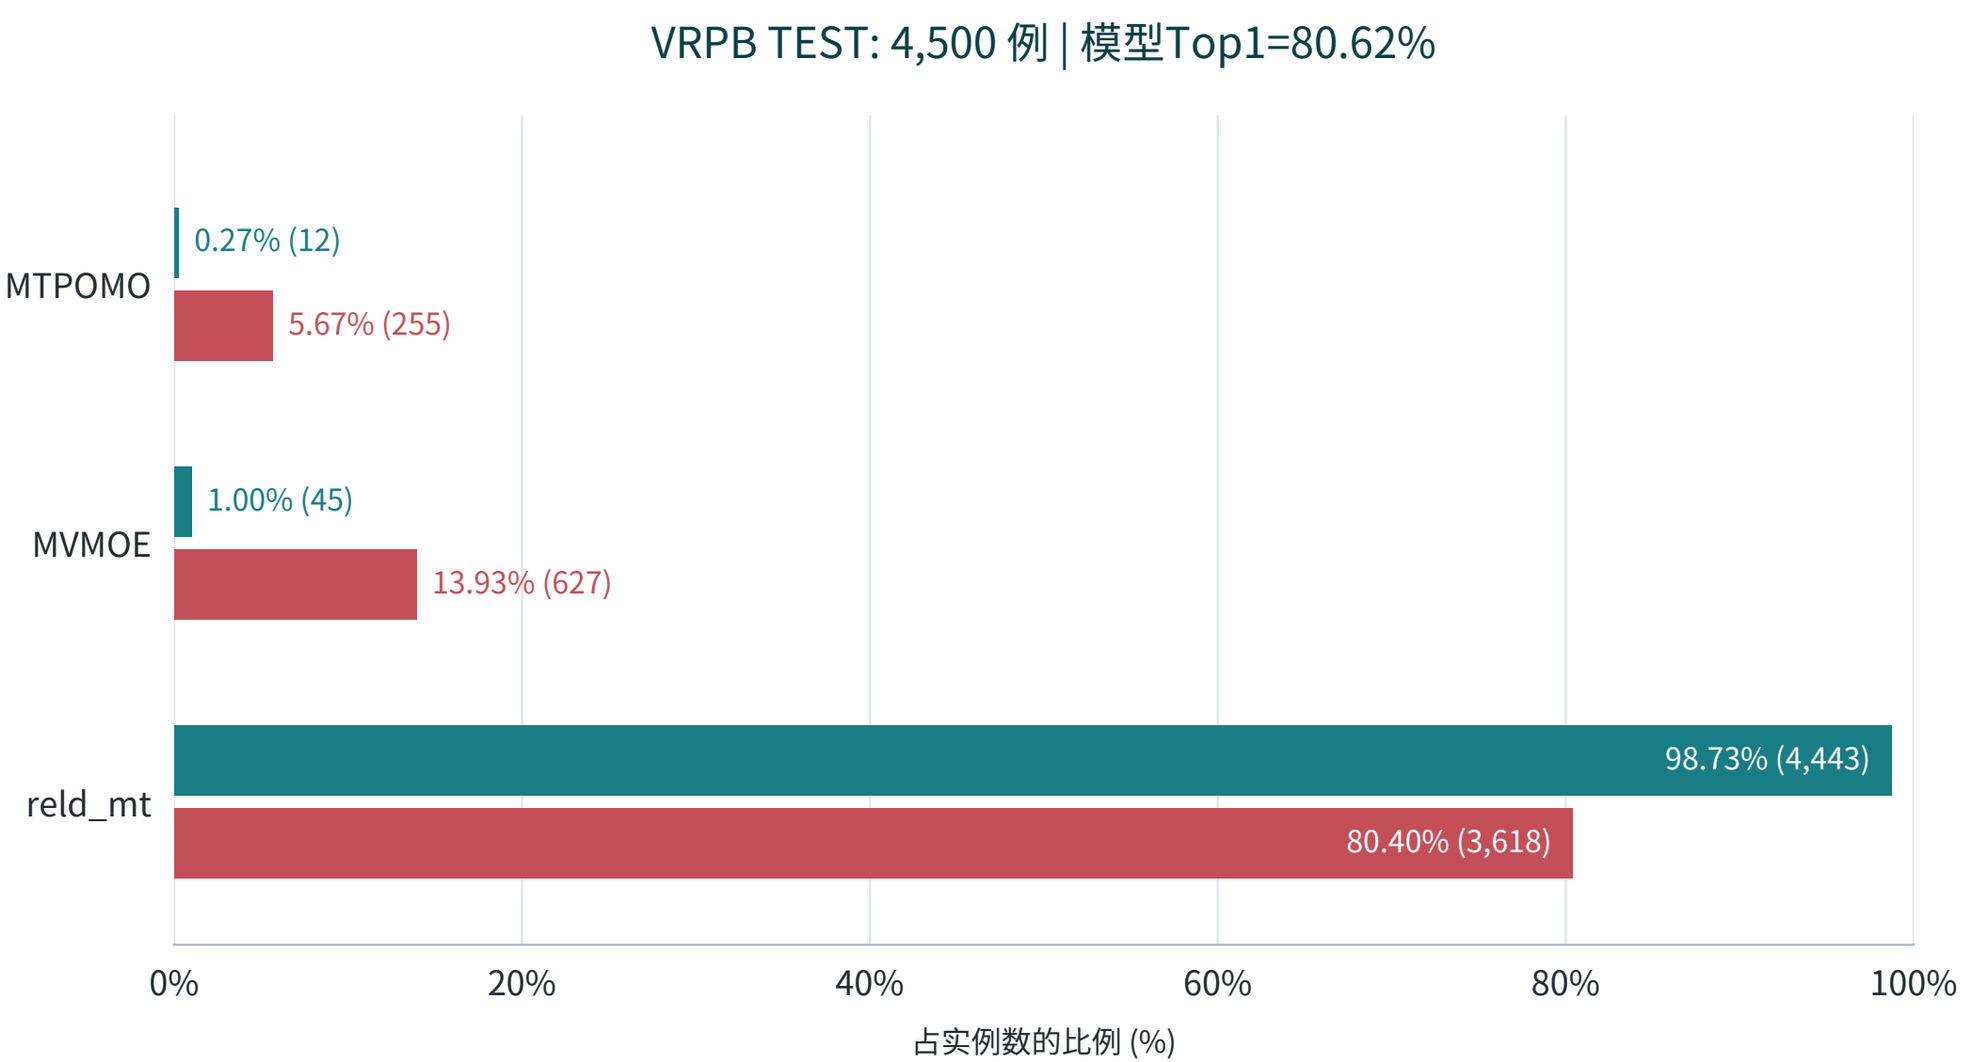

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | VRPL | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

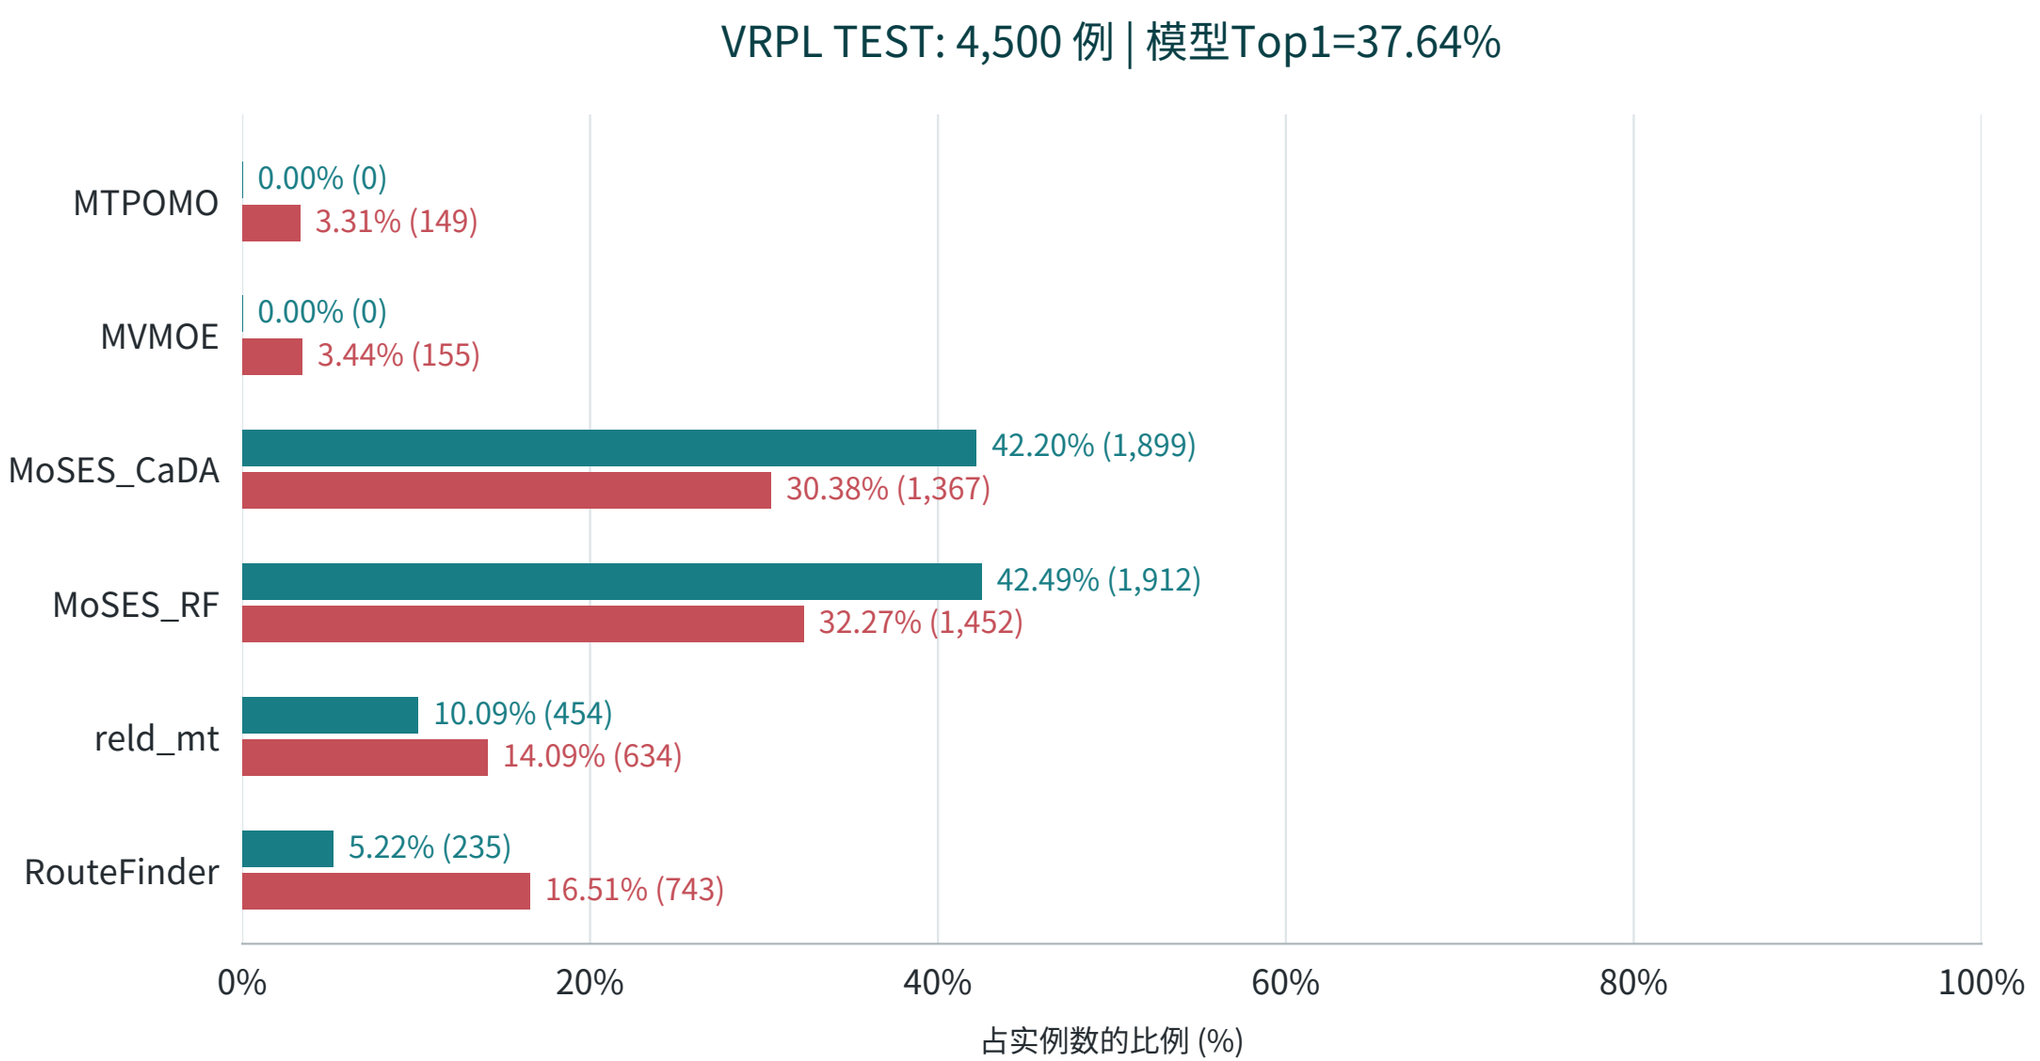

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | VRPTW | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

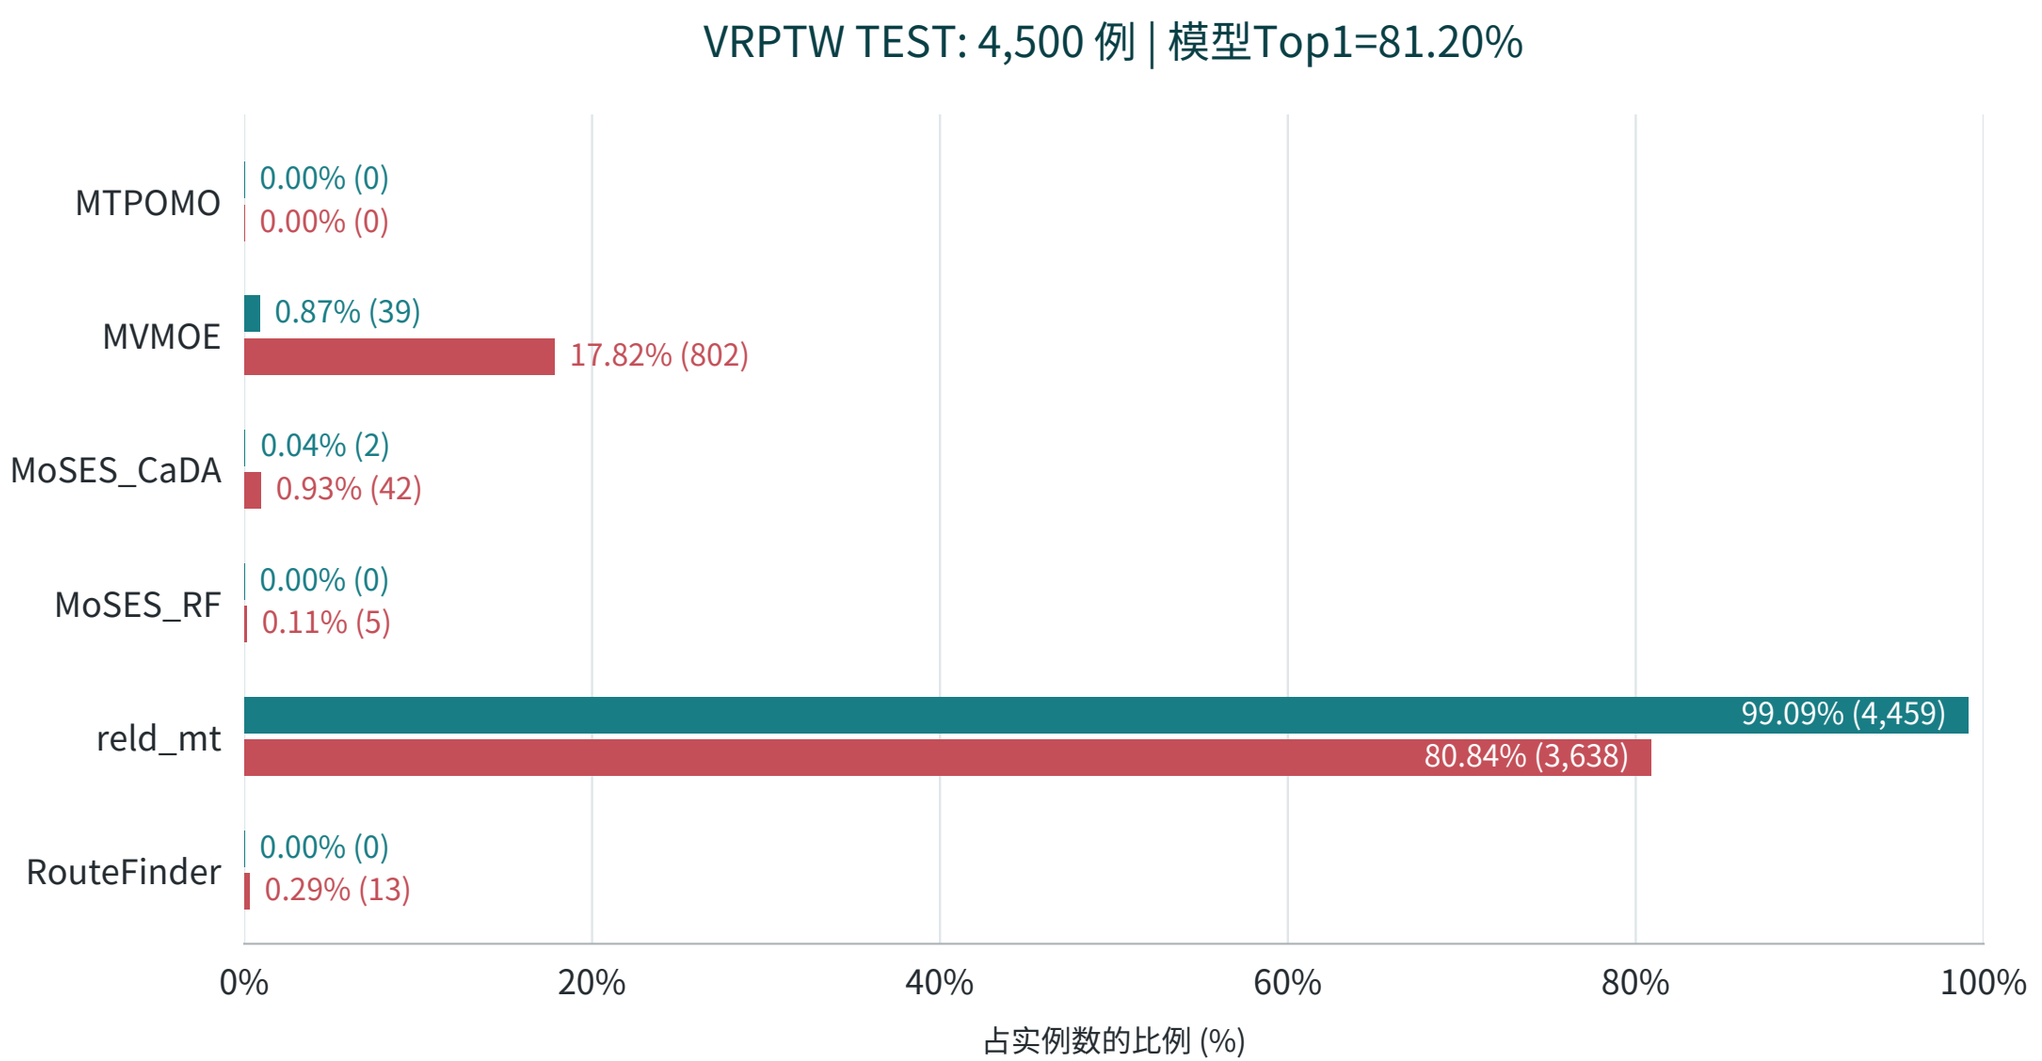

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | OVRPTW | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

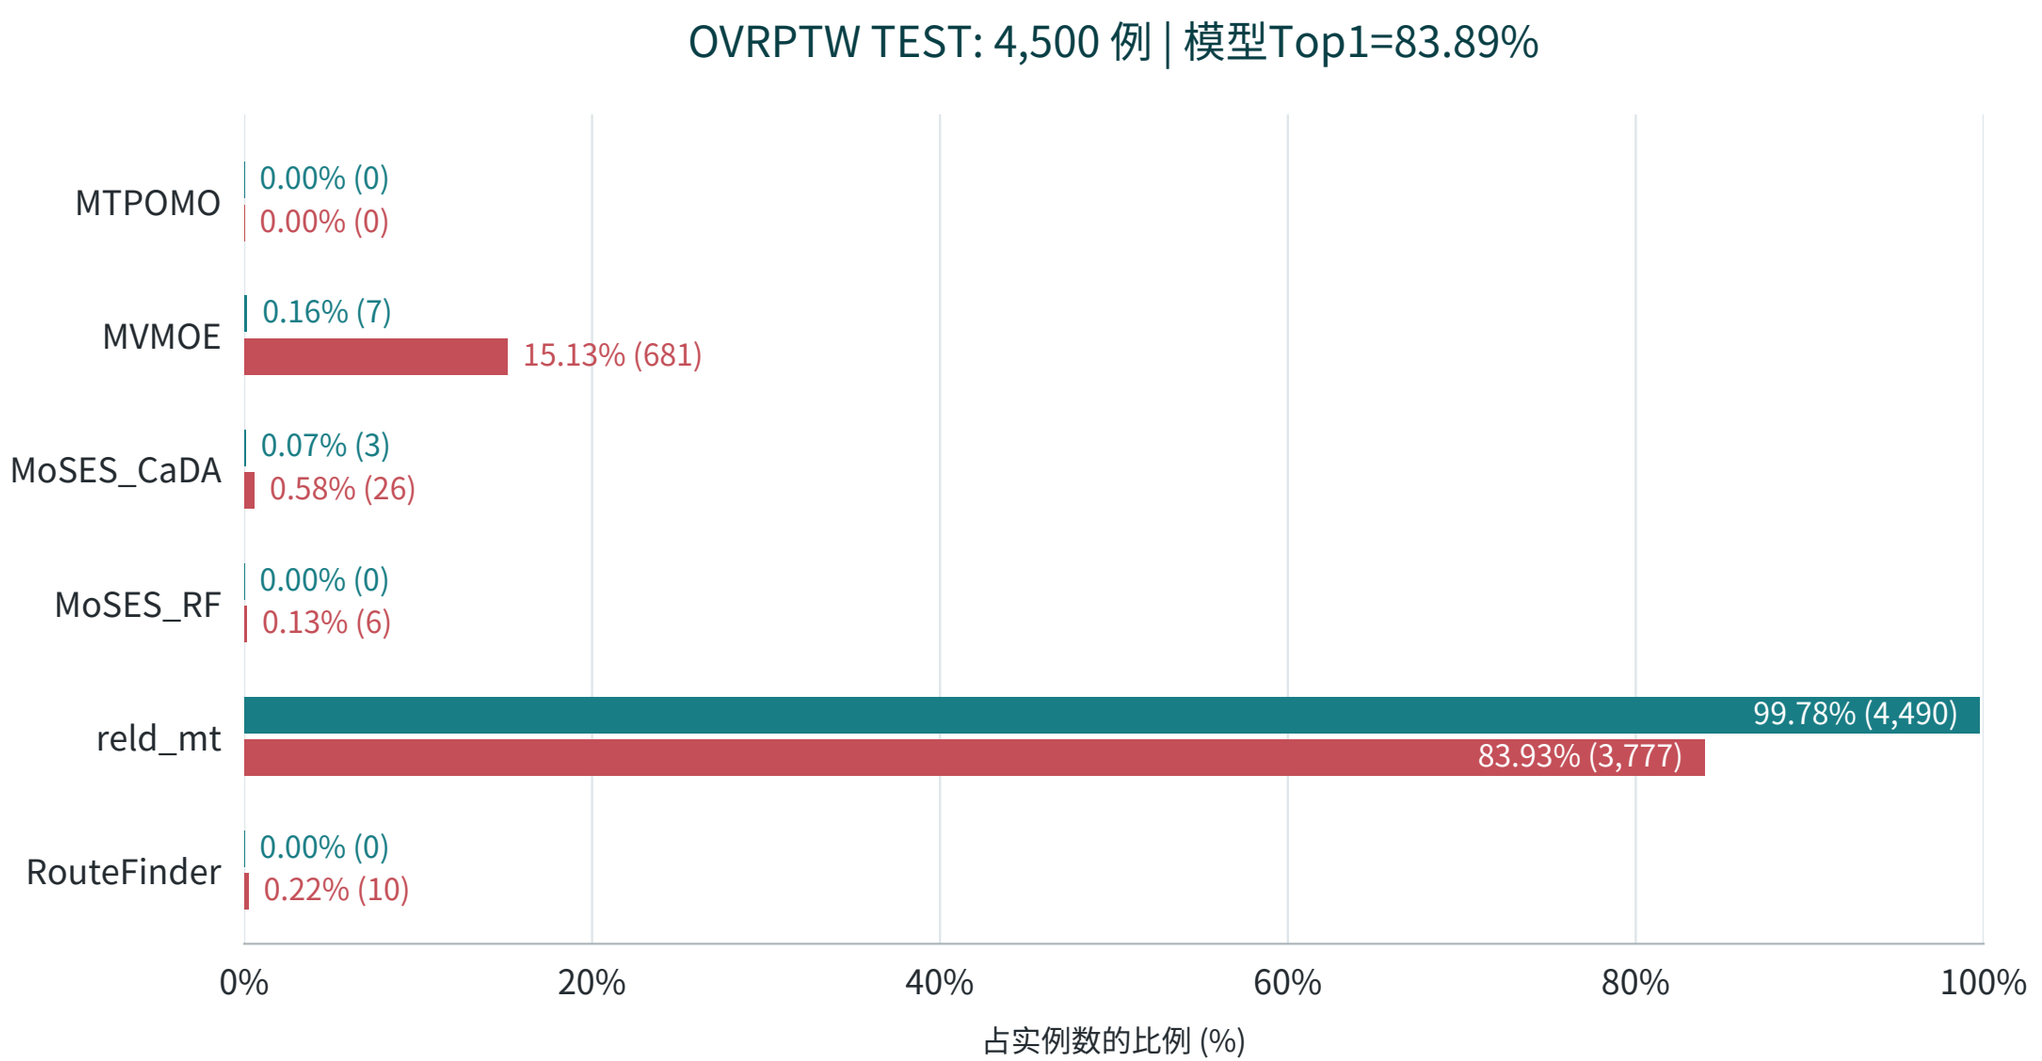

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | OVRPB | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

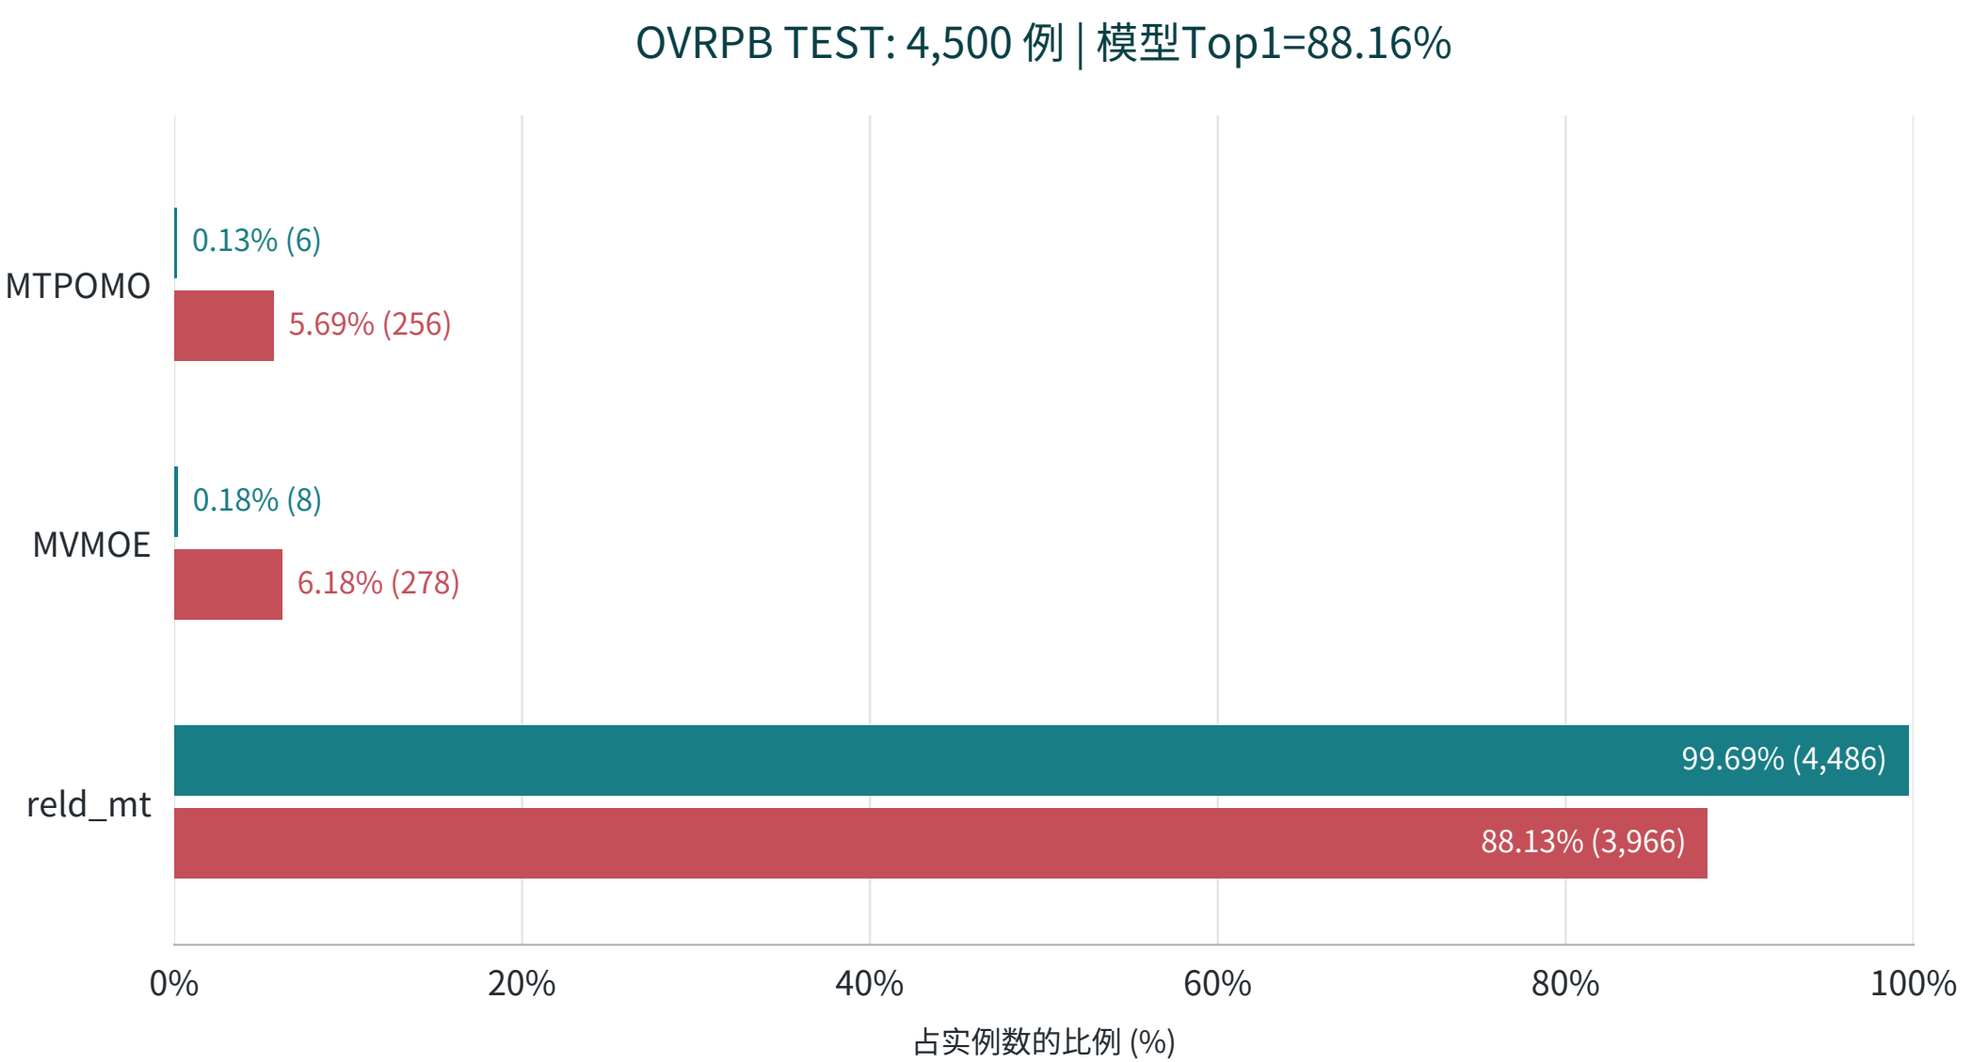

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | OVRPL | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

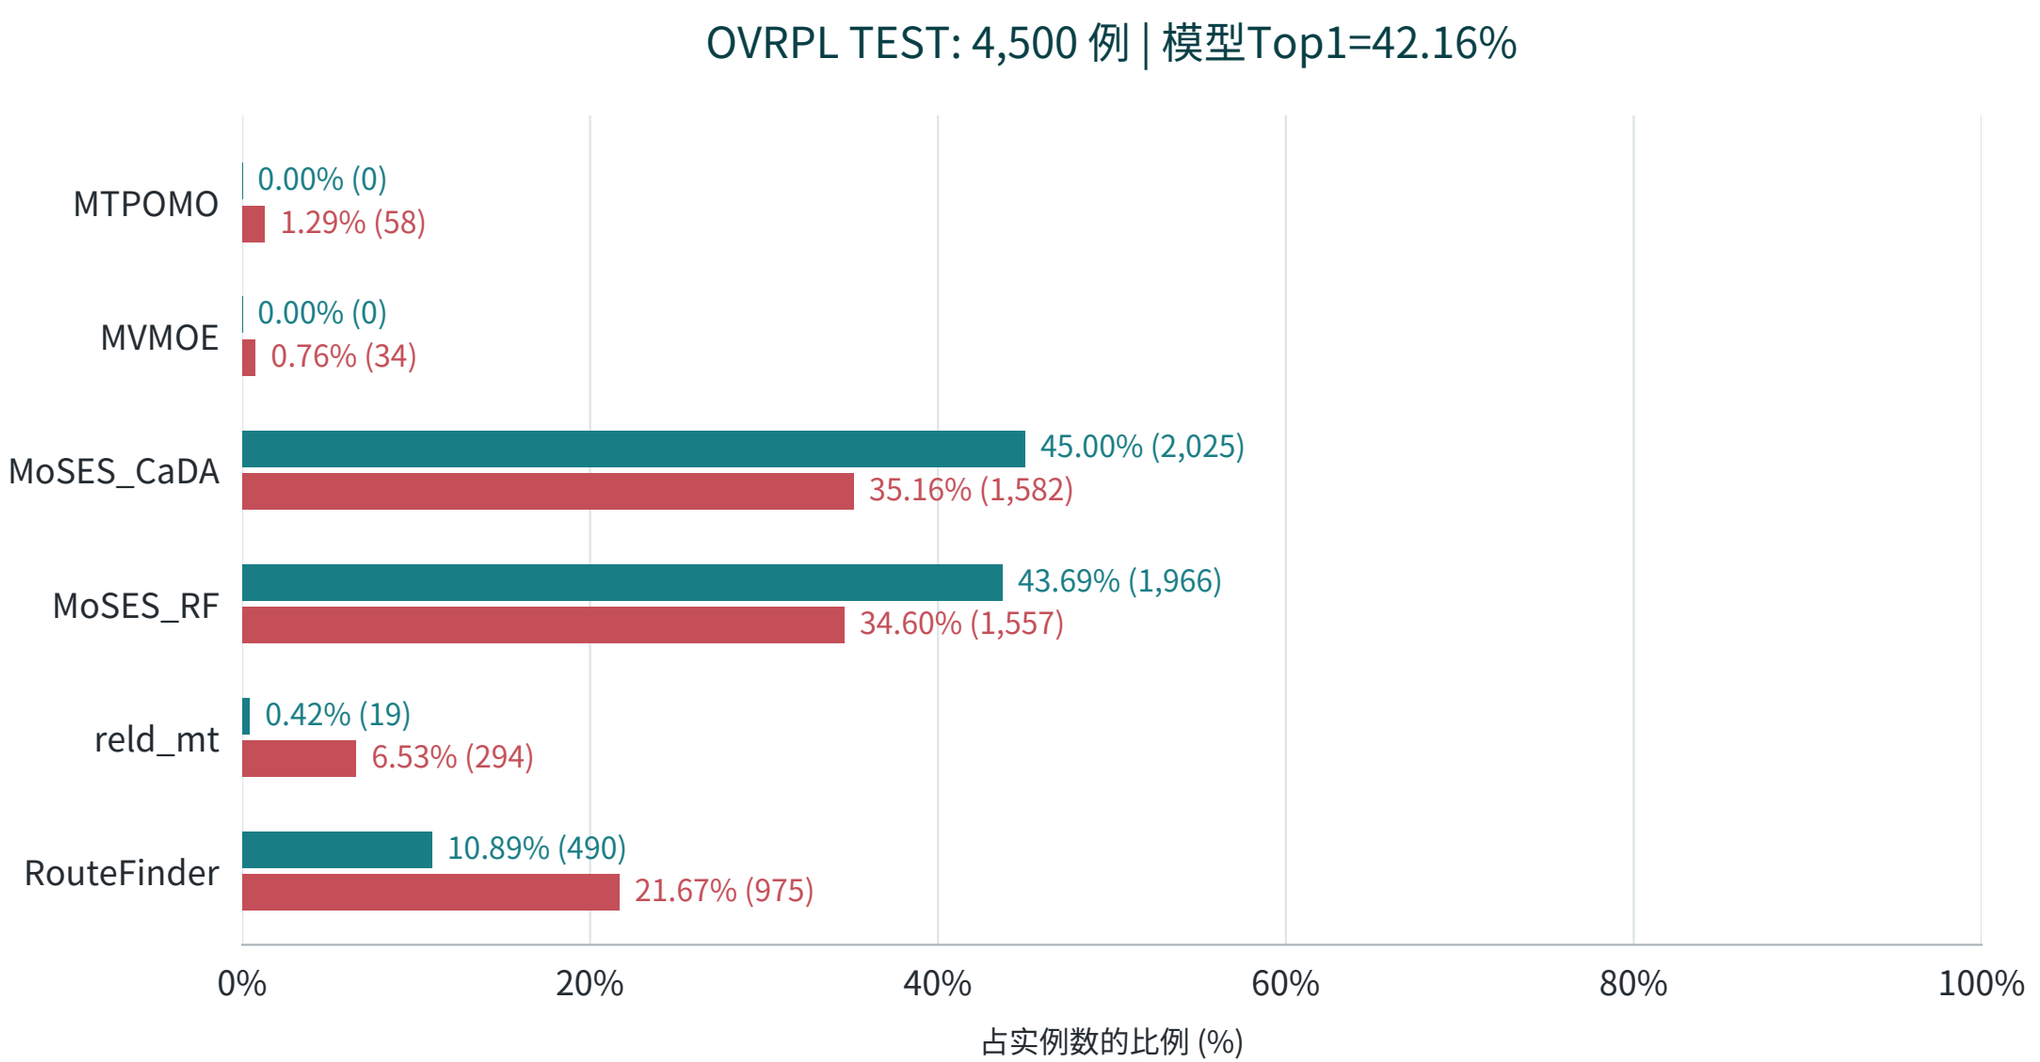

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | VRPBL | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

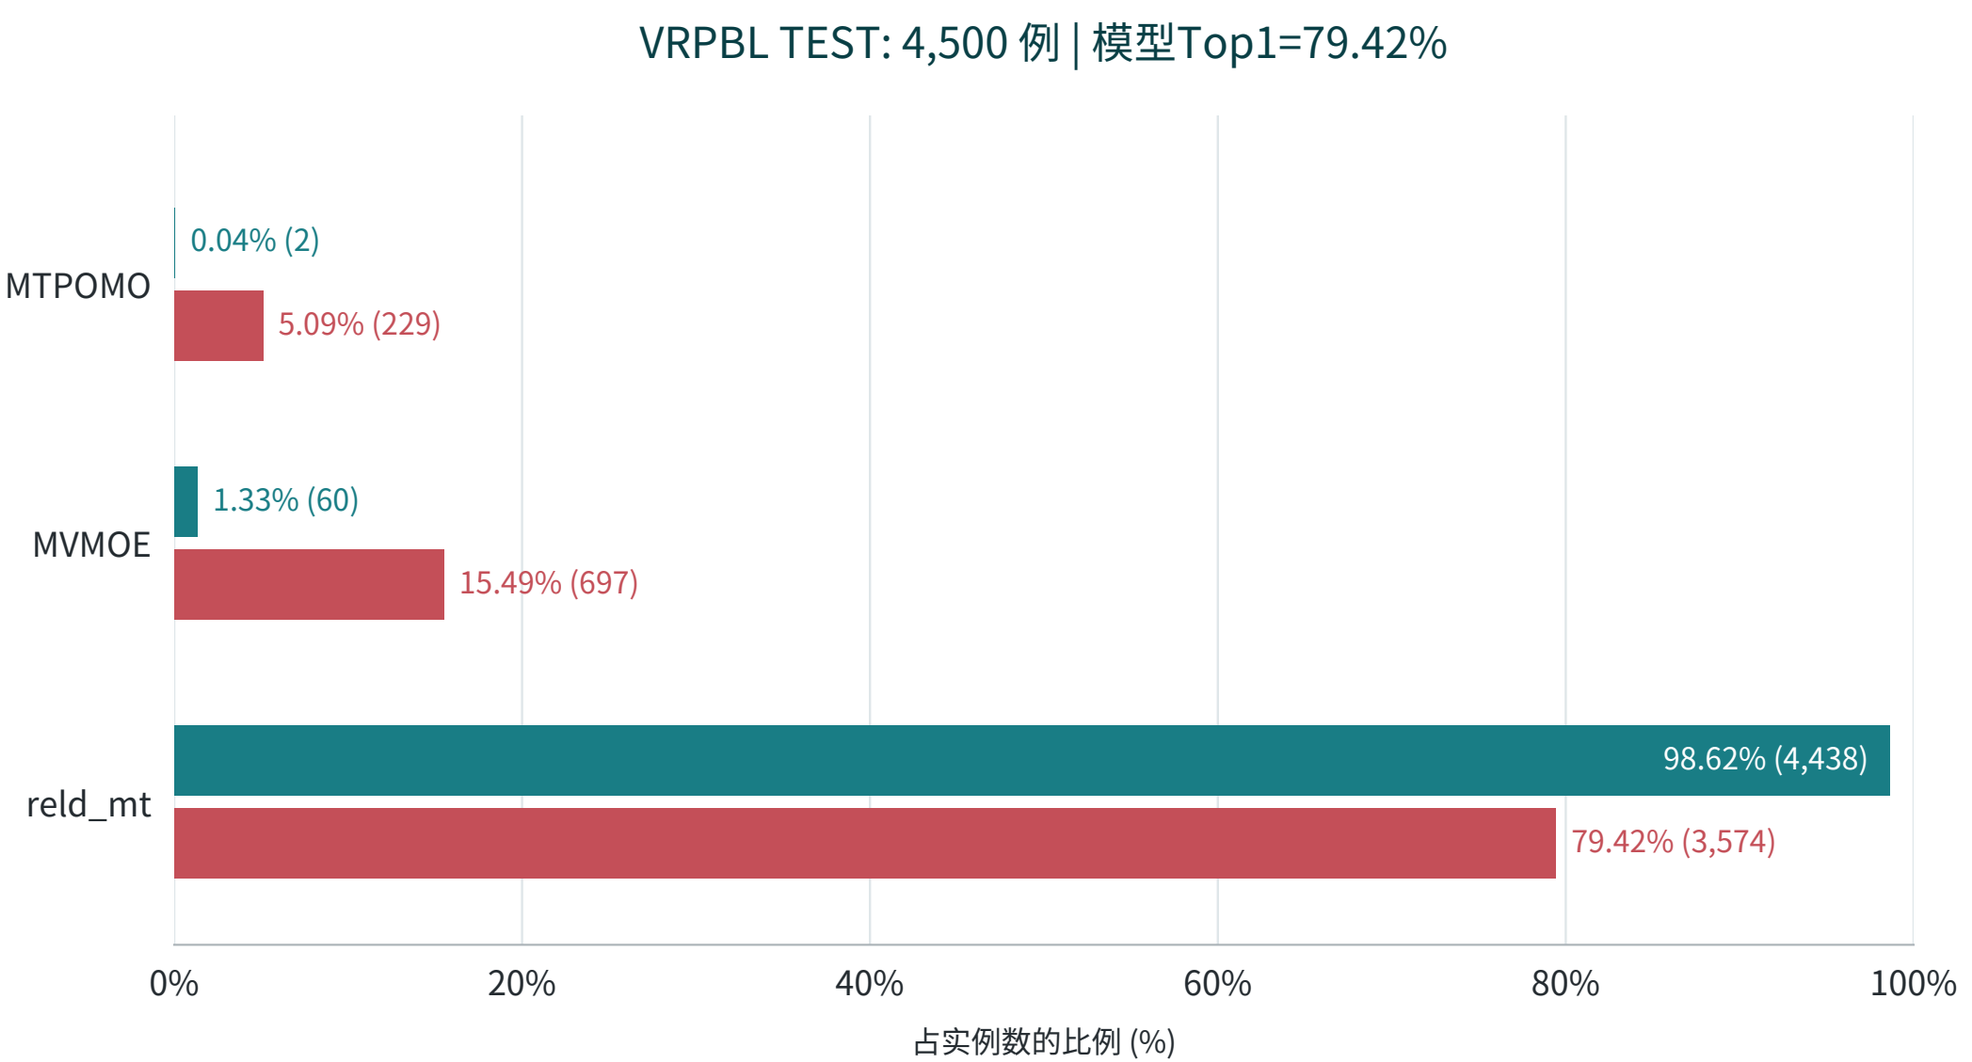

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | VRPBTW | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

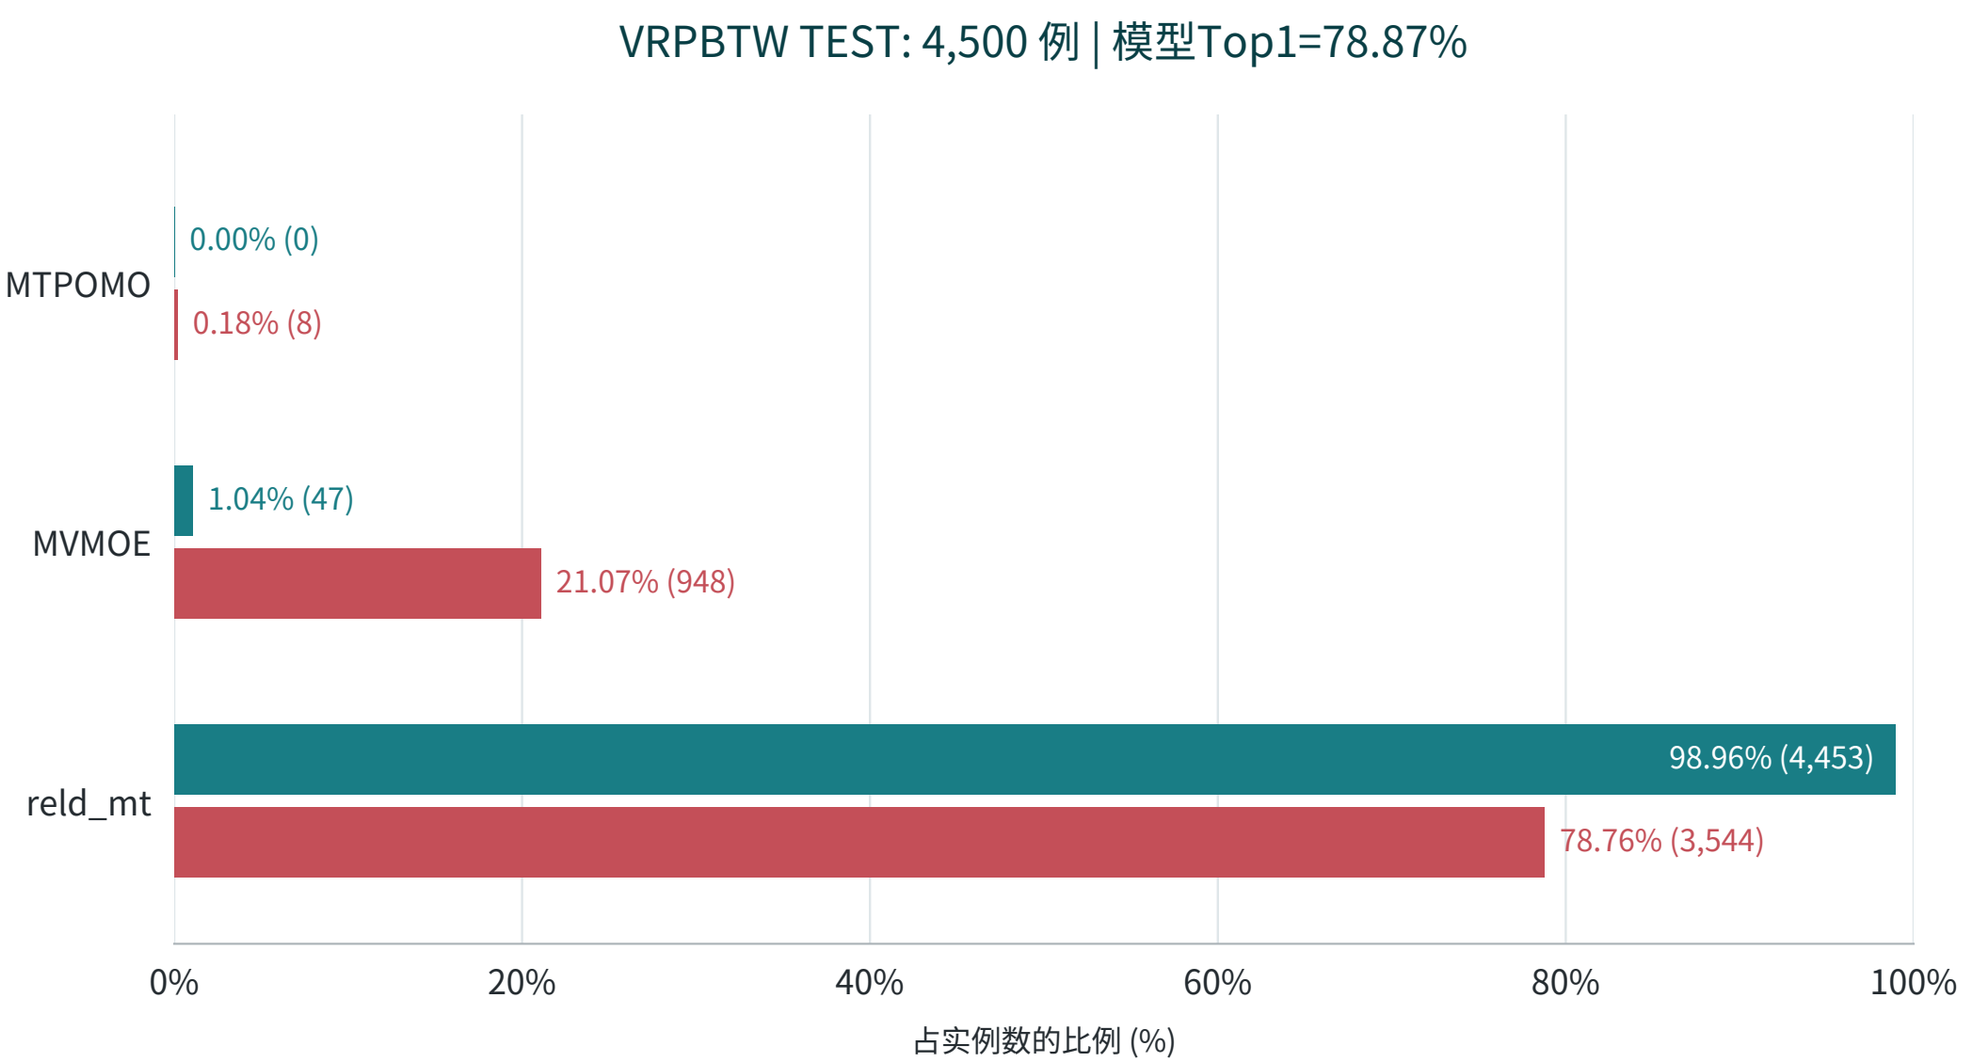

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | VRPLTW | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

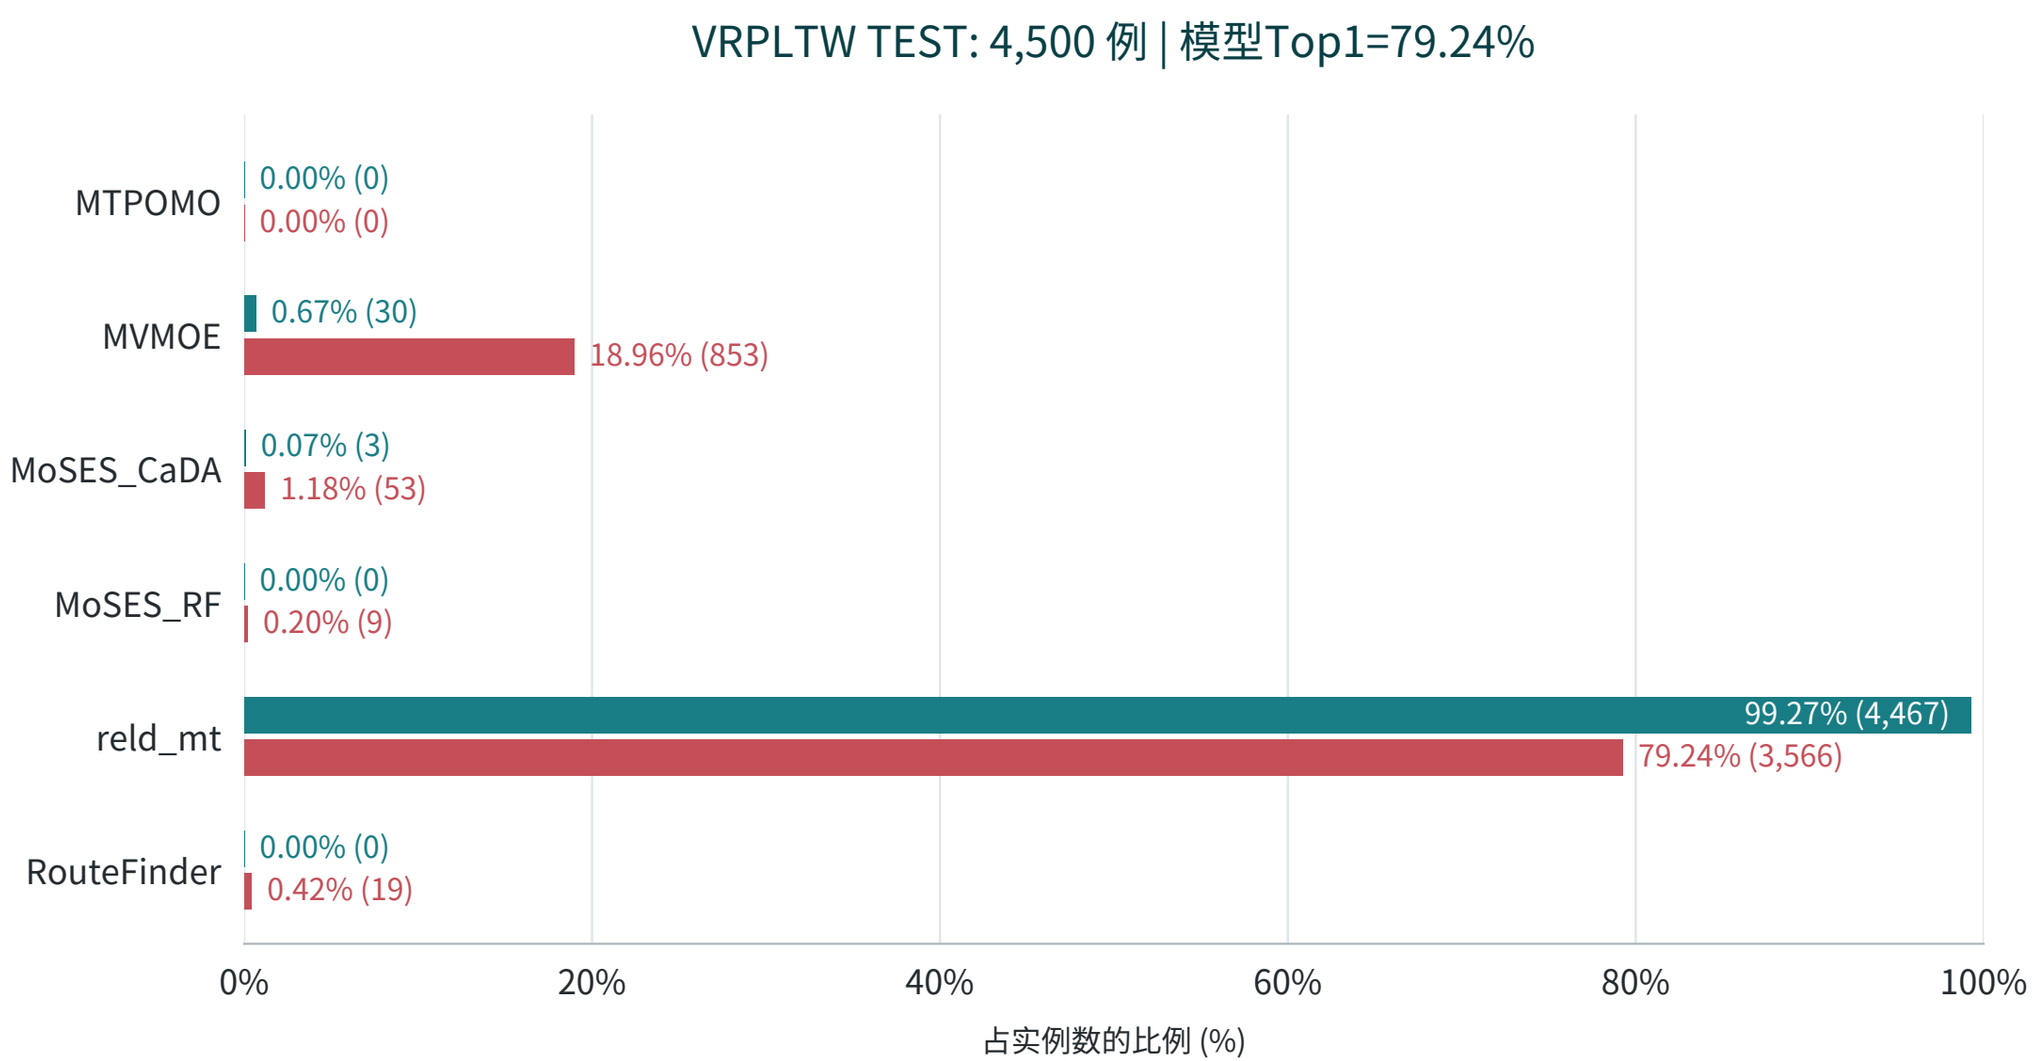

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | OVRPBL | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

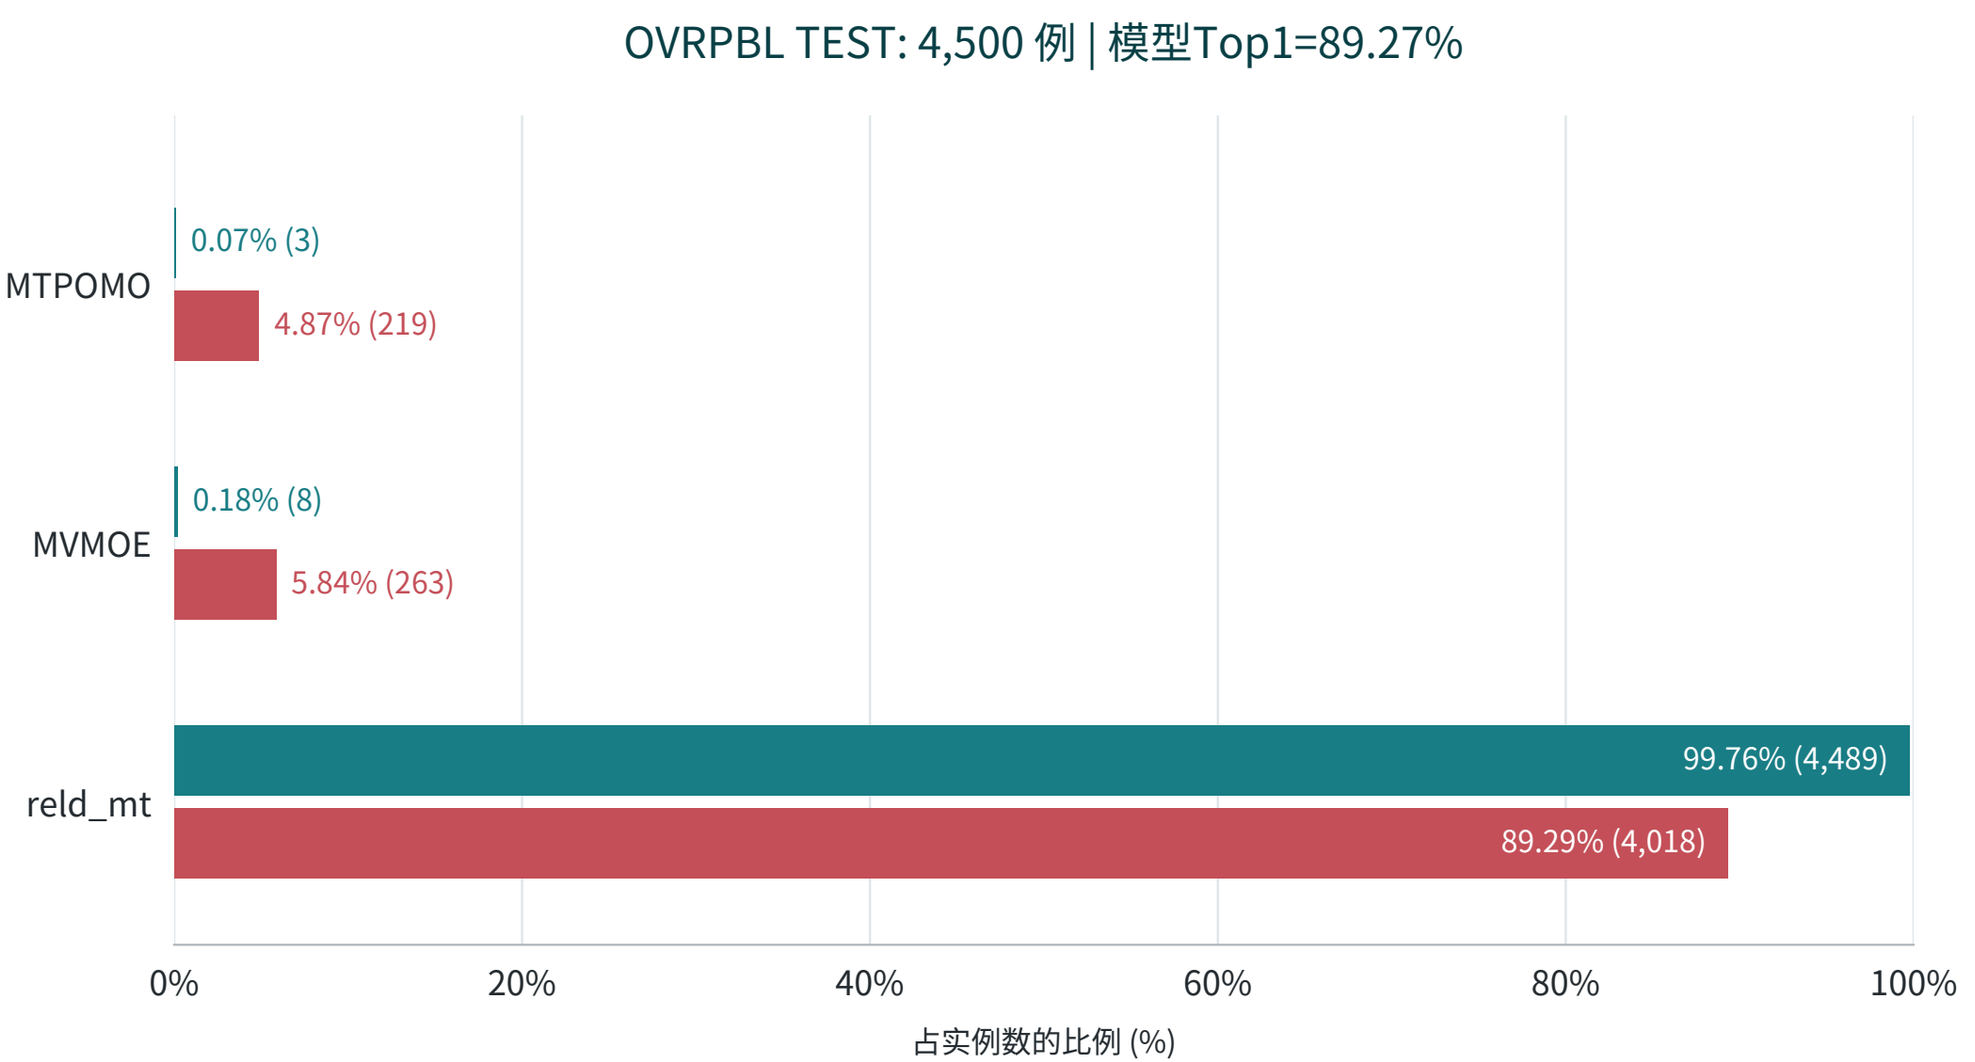

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | OVRPBTW | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

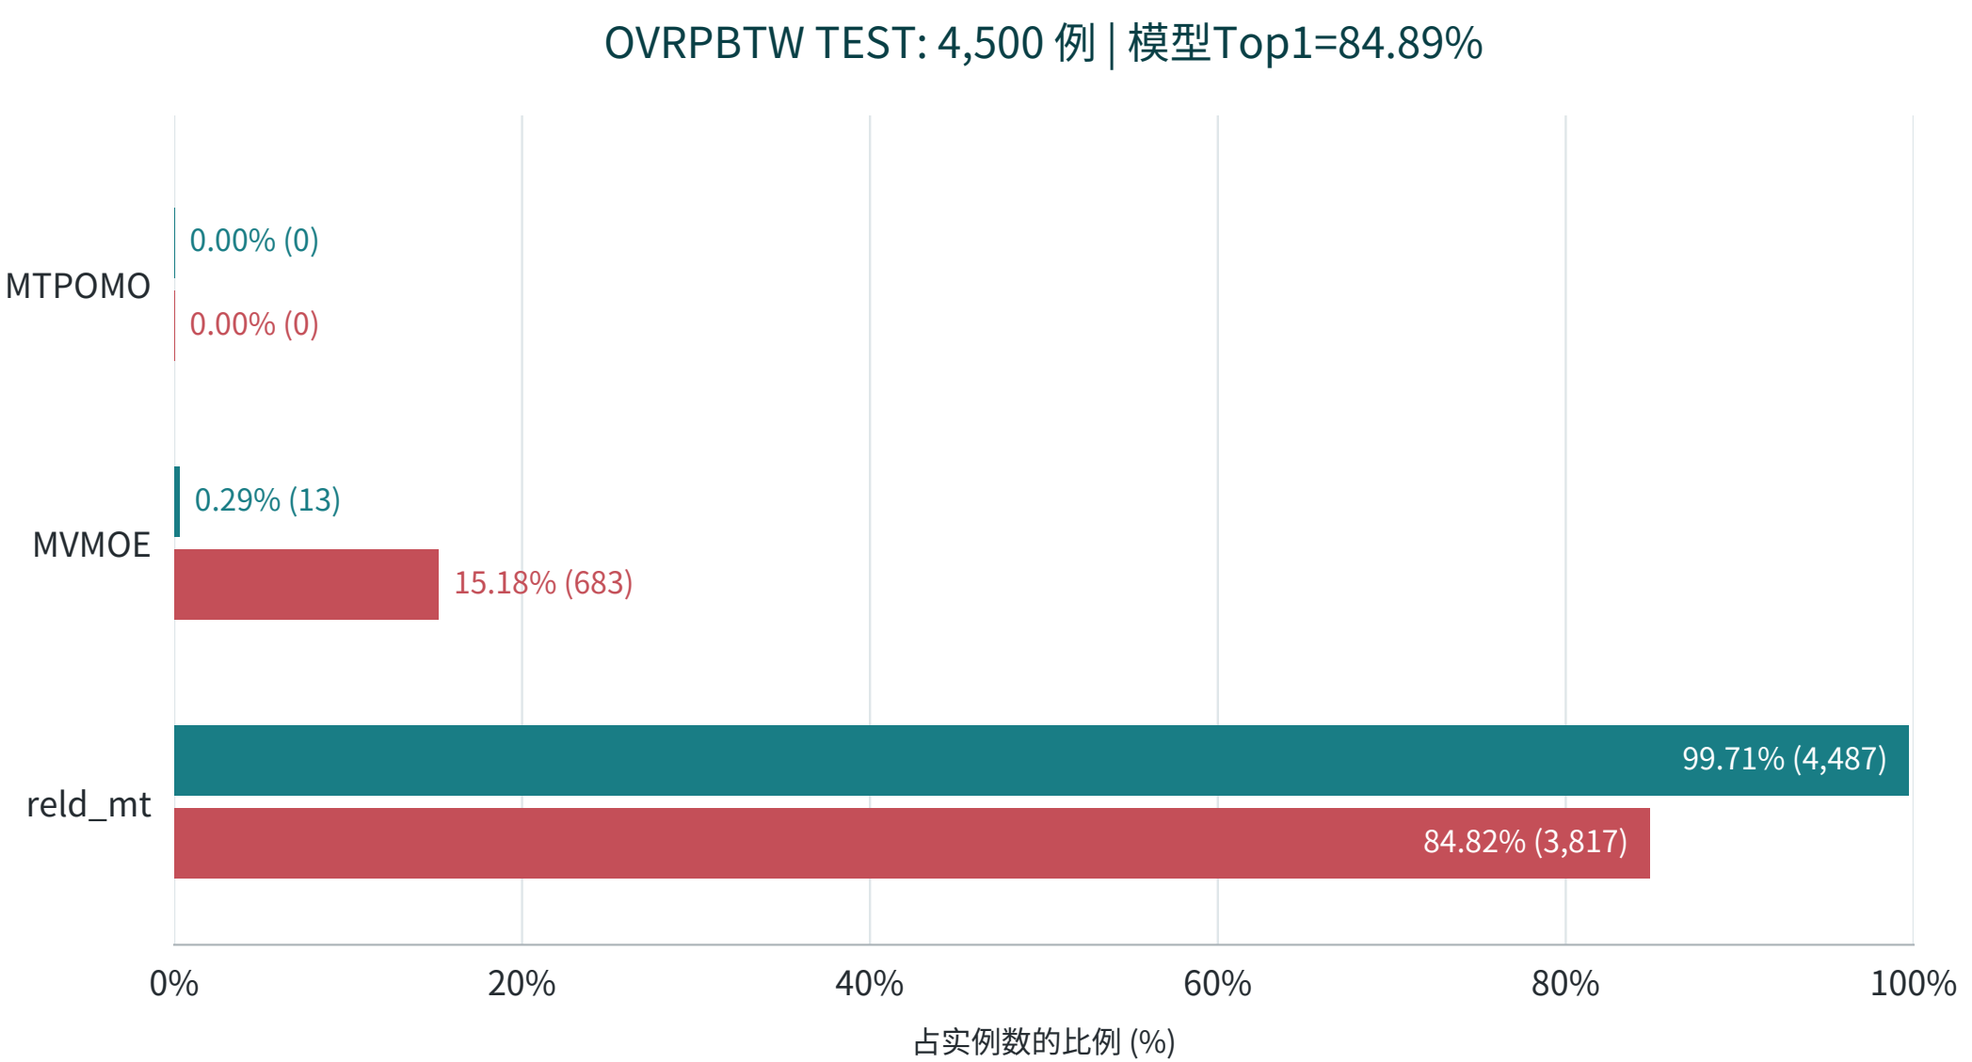

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | OVRPLTW | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

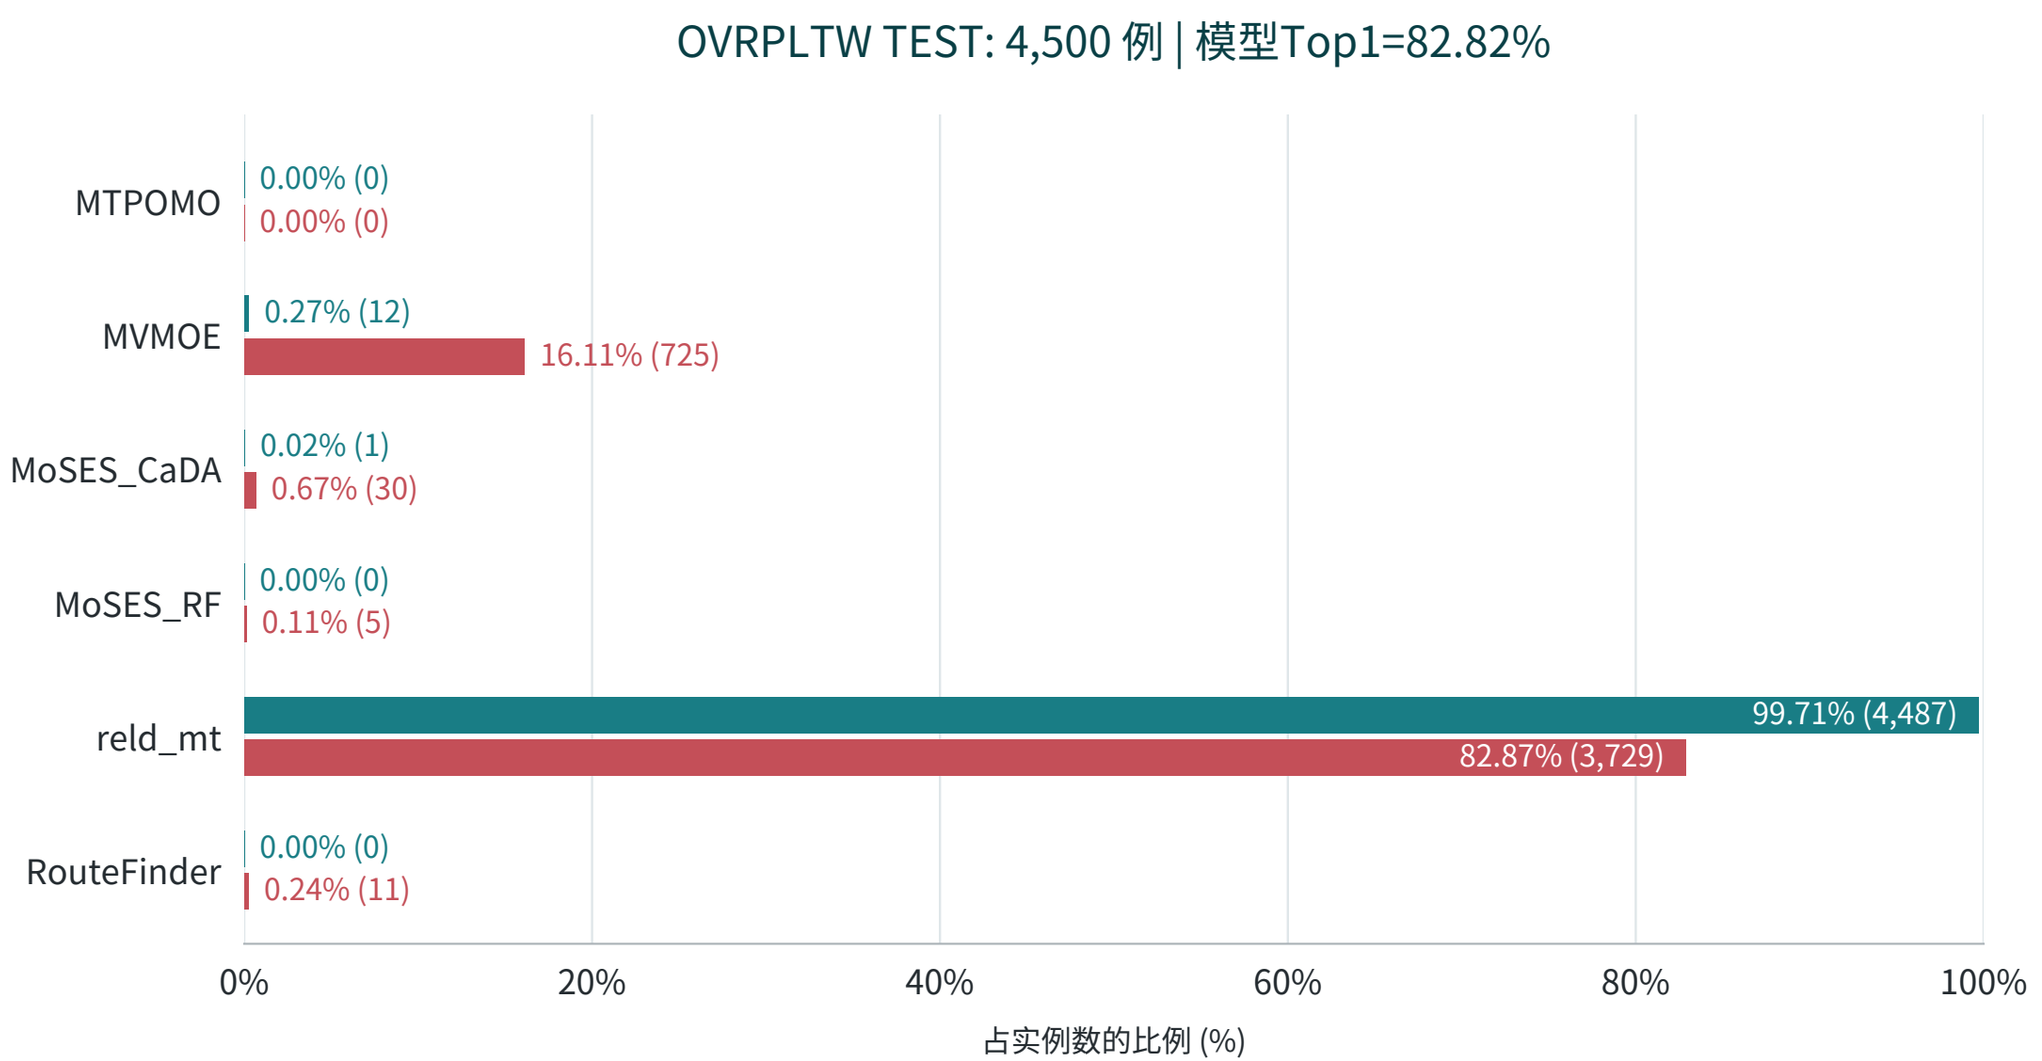

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | VRPBLTW | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

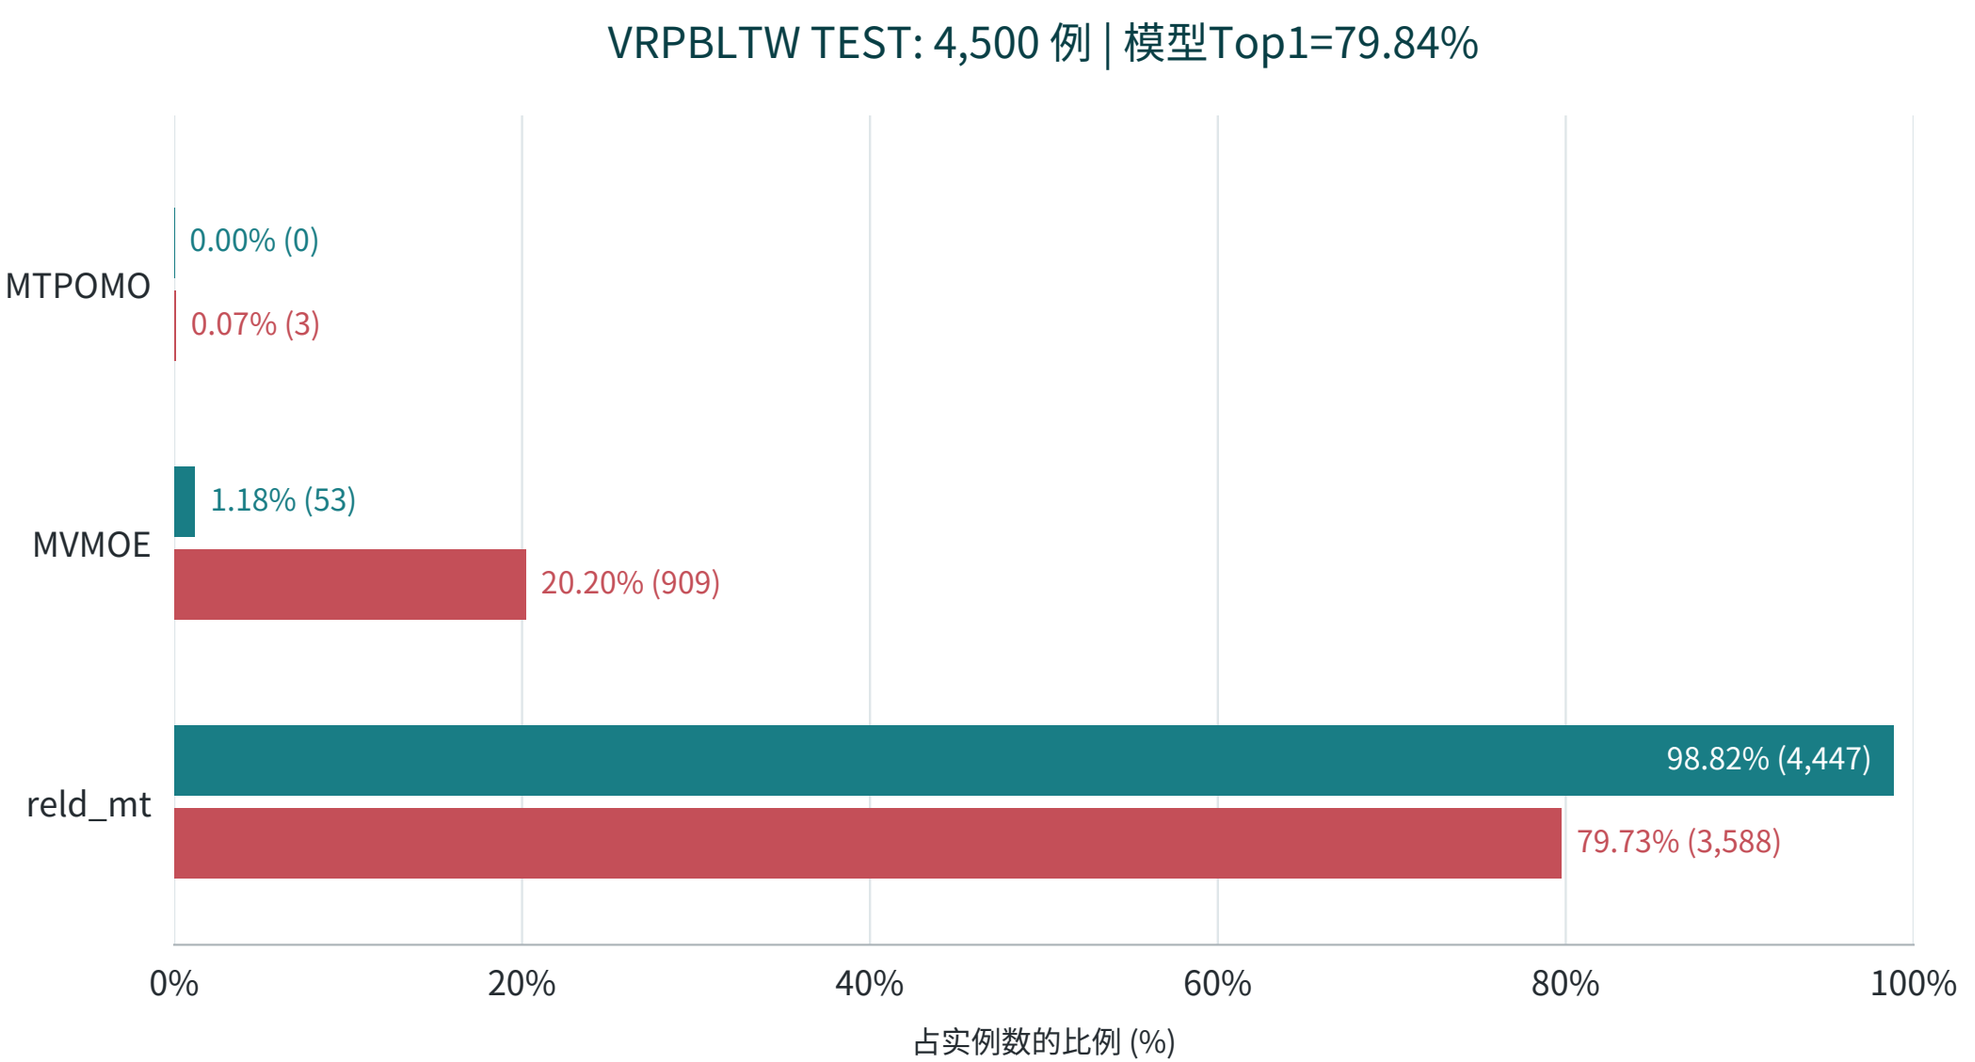

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.

R111/A_family_conditional | OVRPBLTW | 方法分布

同一锁定模型: epoch 29 / update 41760 / SHA256 2c6011ea4cc80373

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

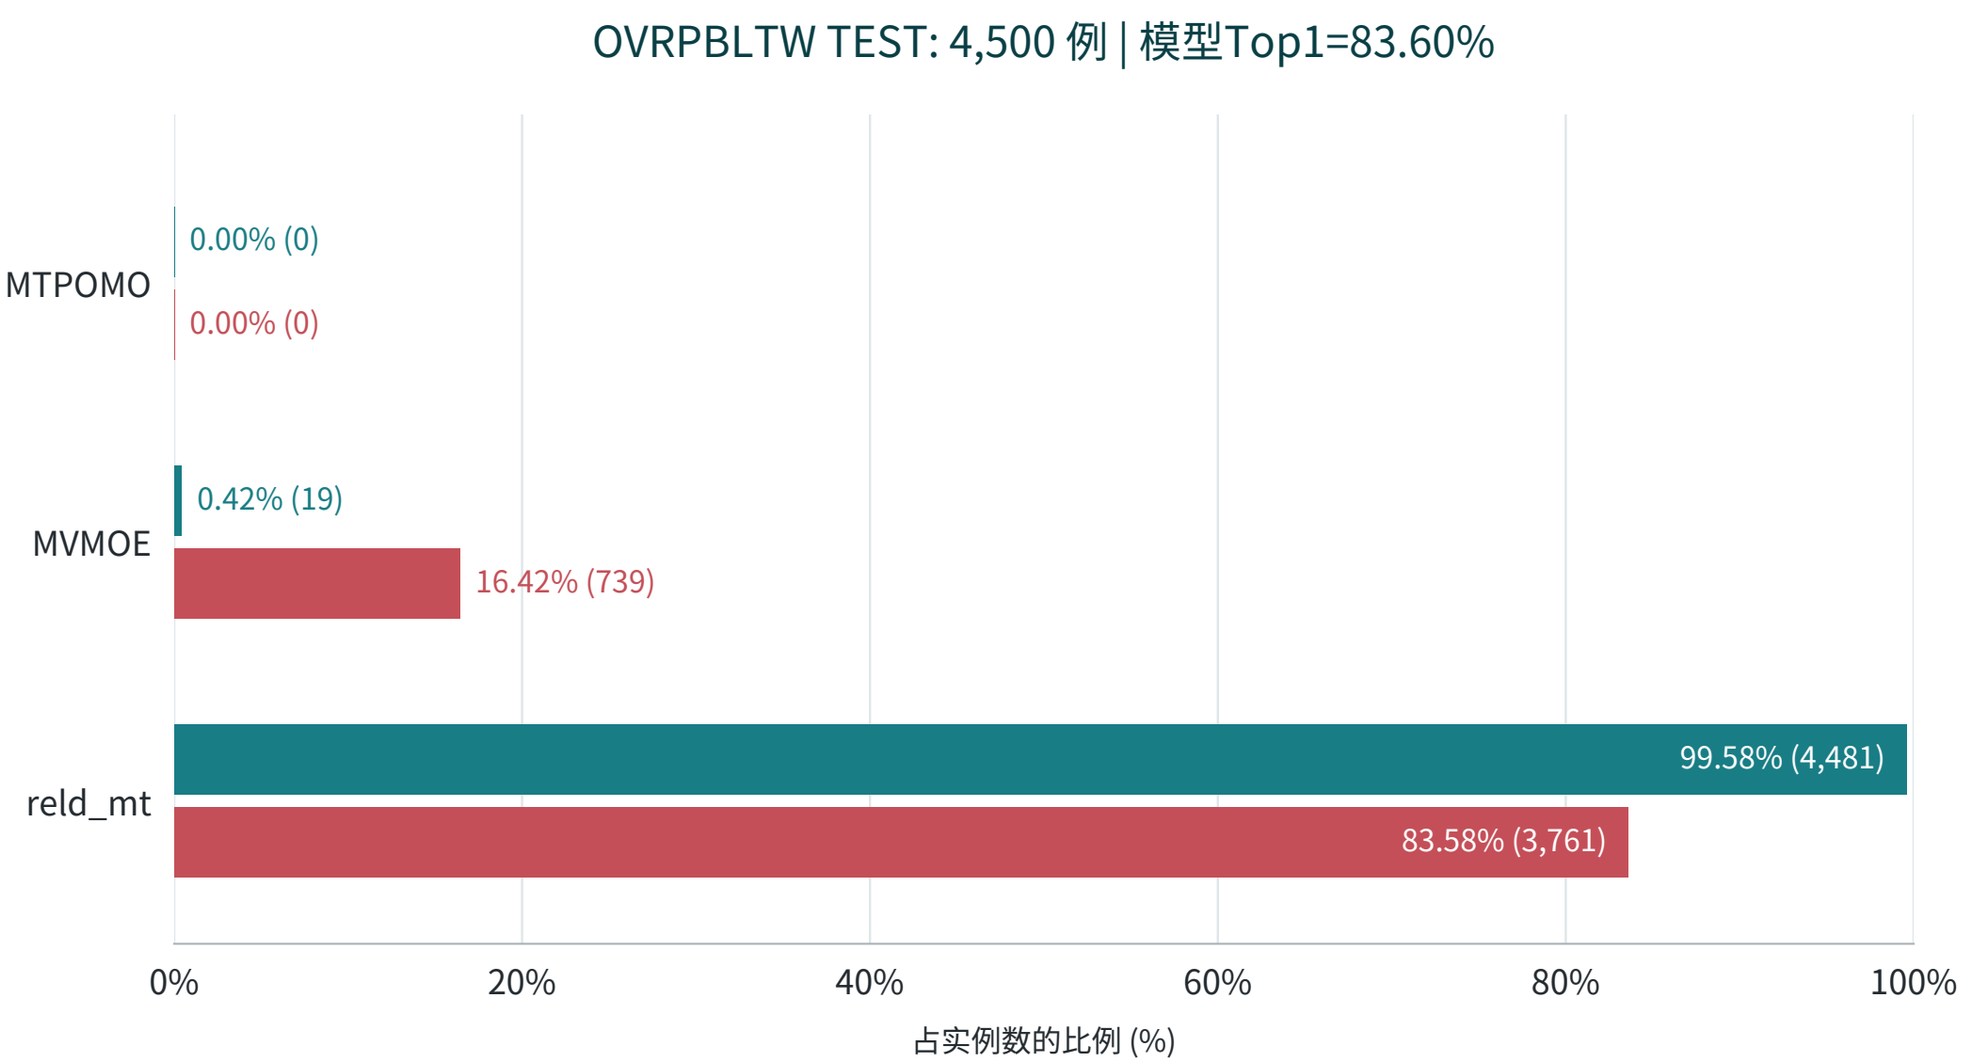

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R111/A_family_conditional: stable global solver-ID score ties. Same R111 lock; LIB inference only; no training/reselection/Rxx mixing.