
R91/B_utility_probabilities | TSP | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

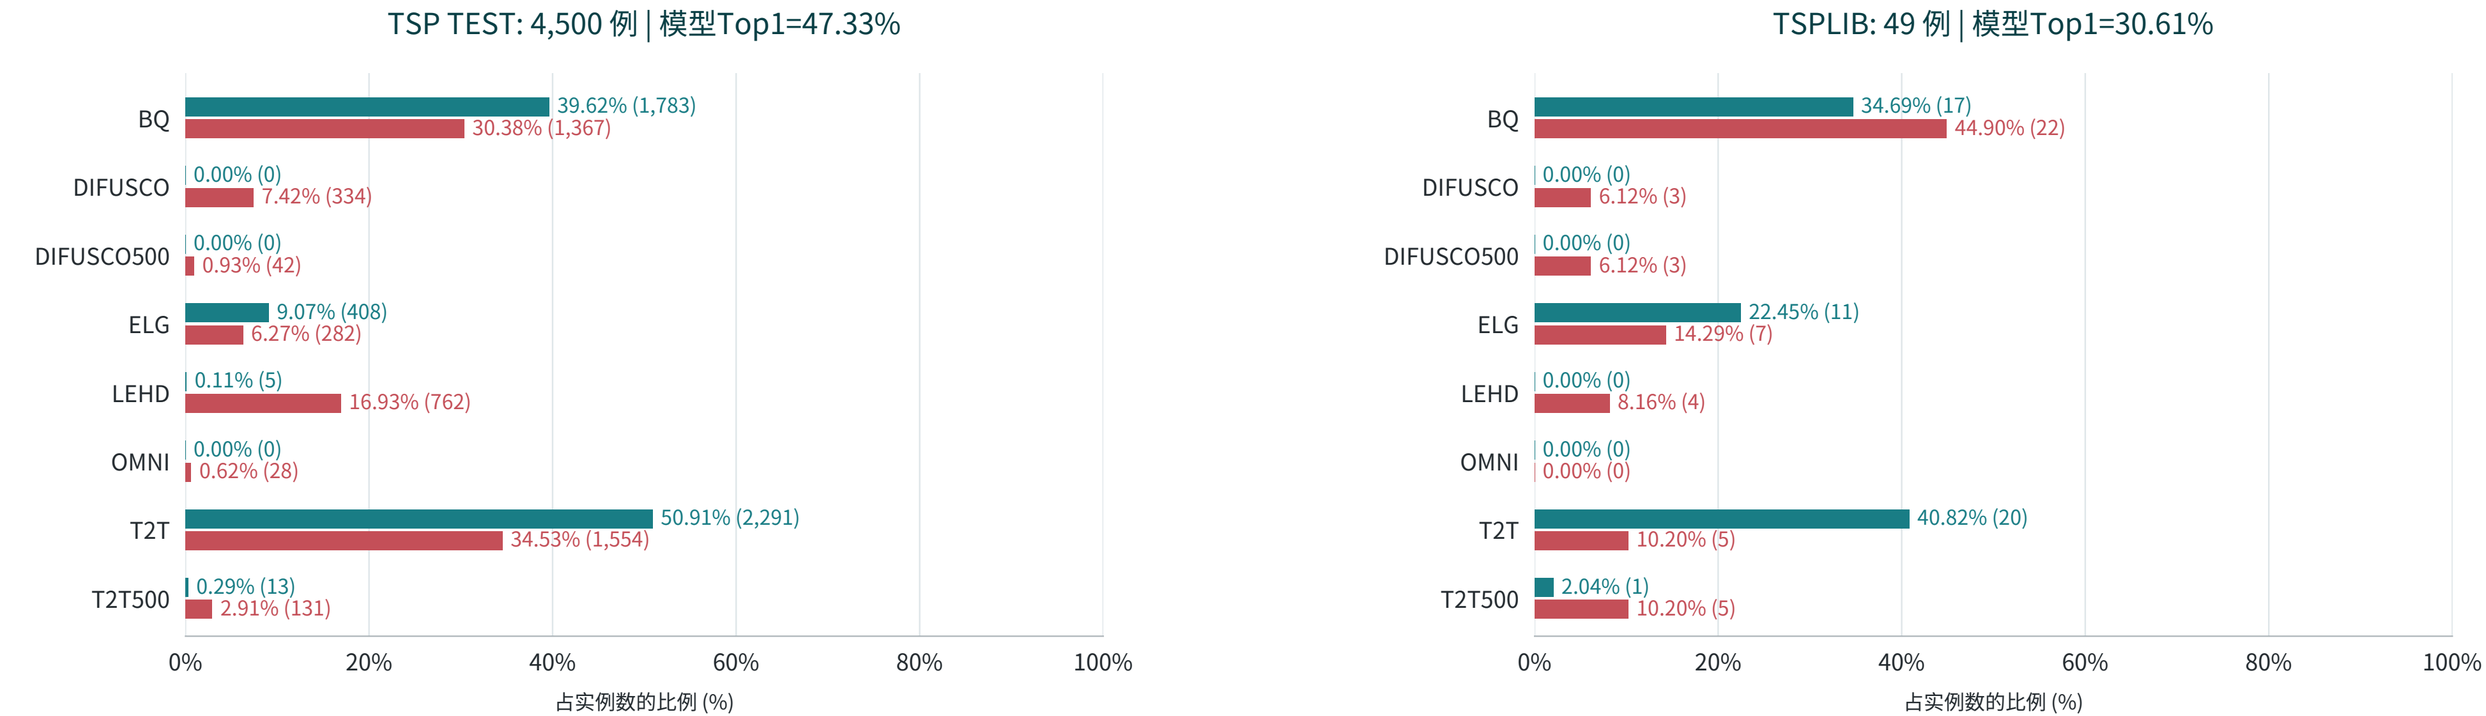

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | CVRP | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

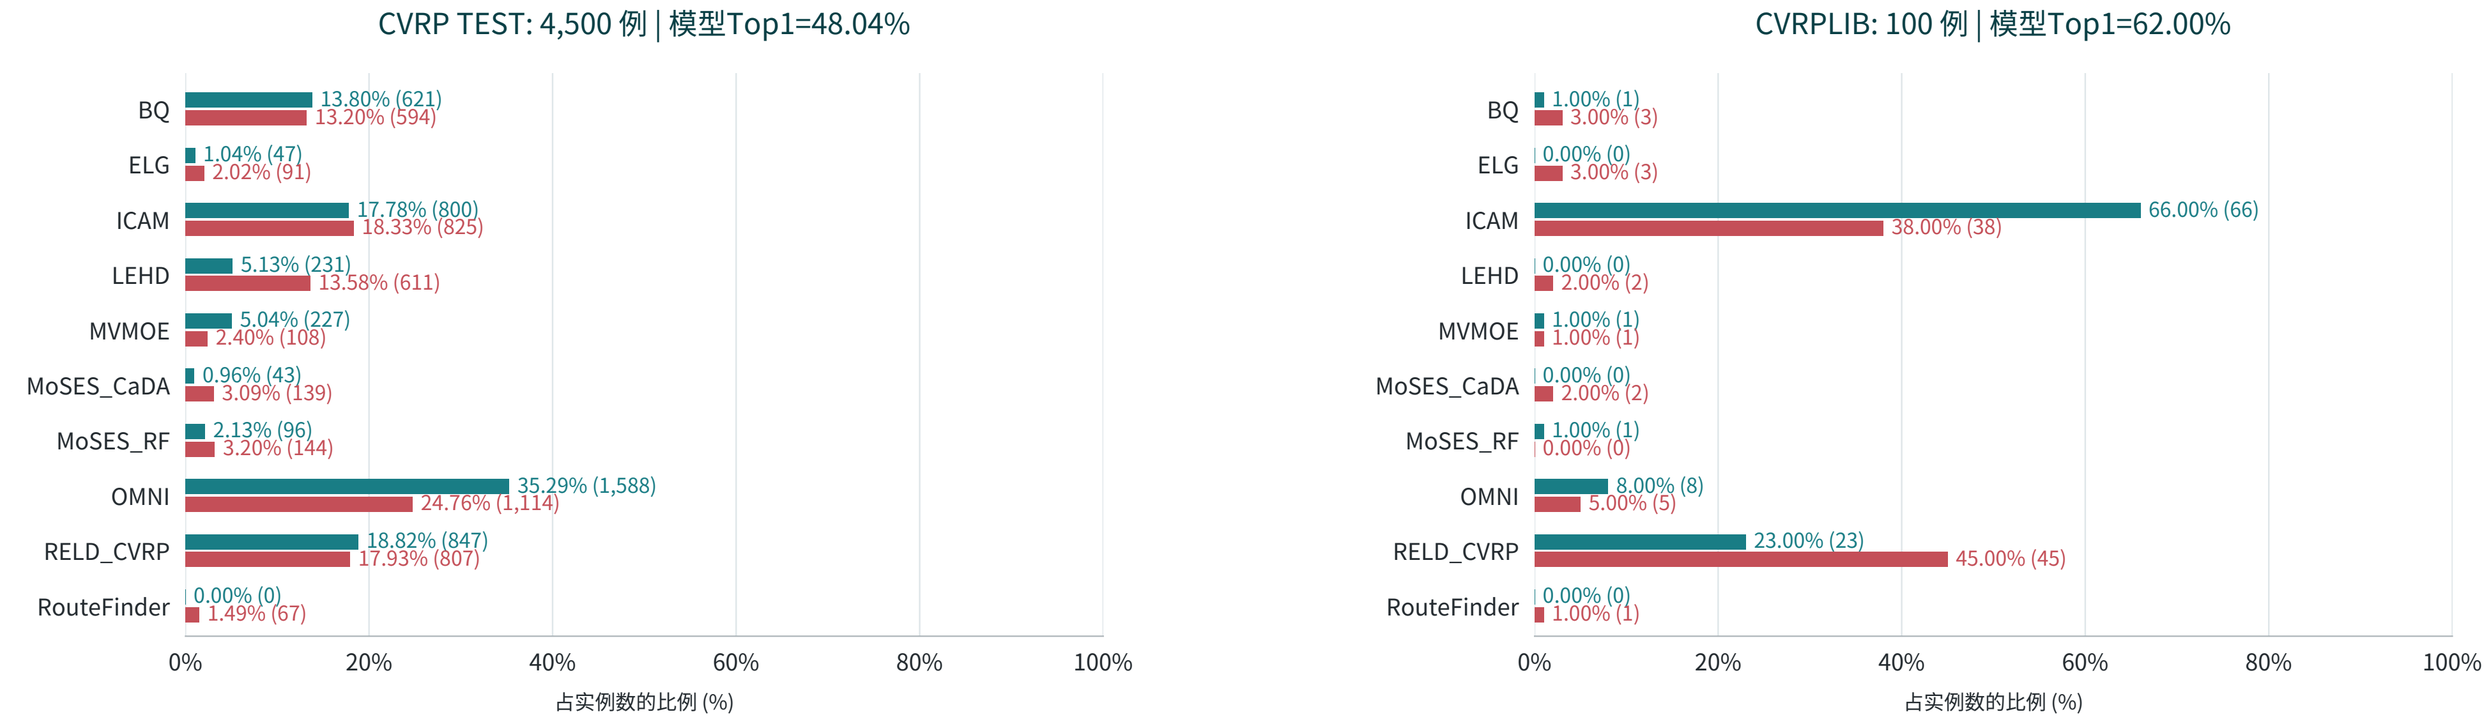

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | ATSP | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

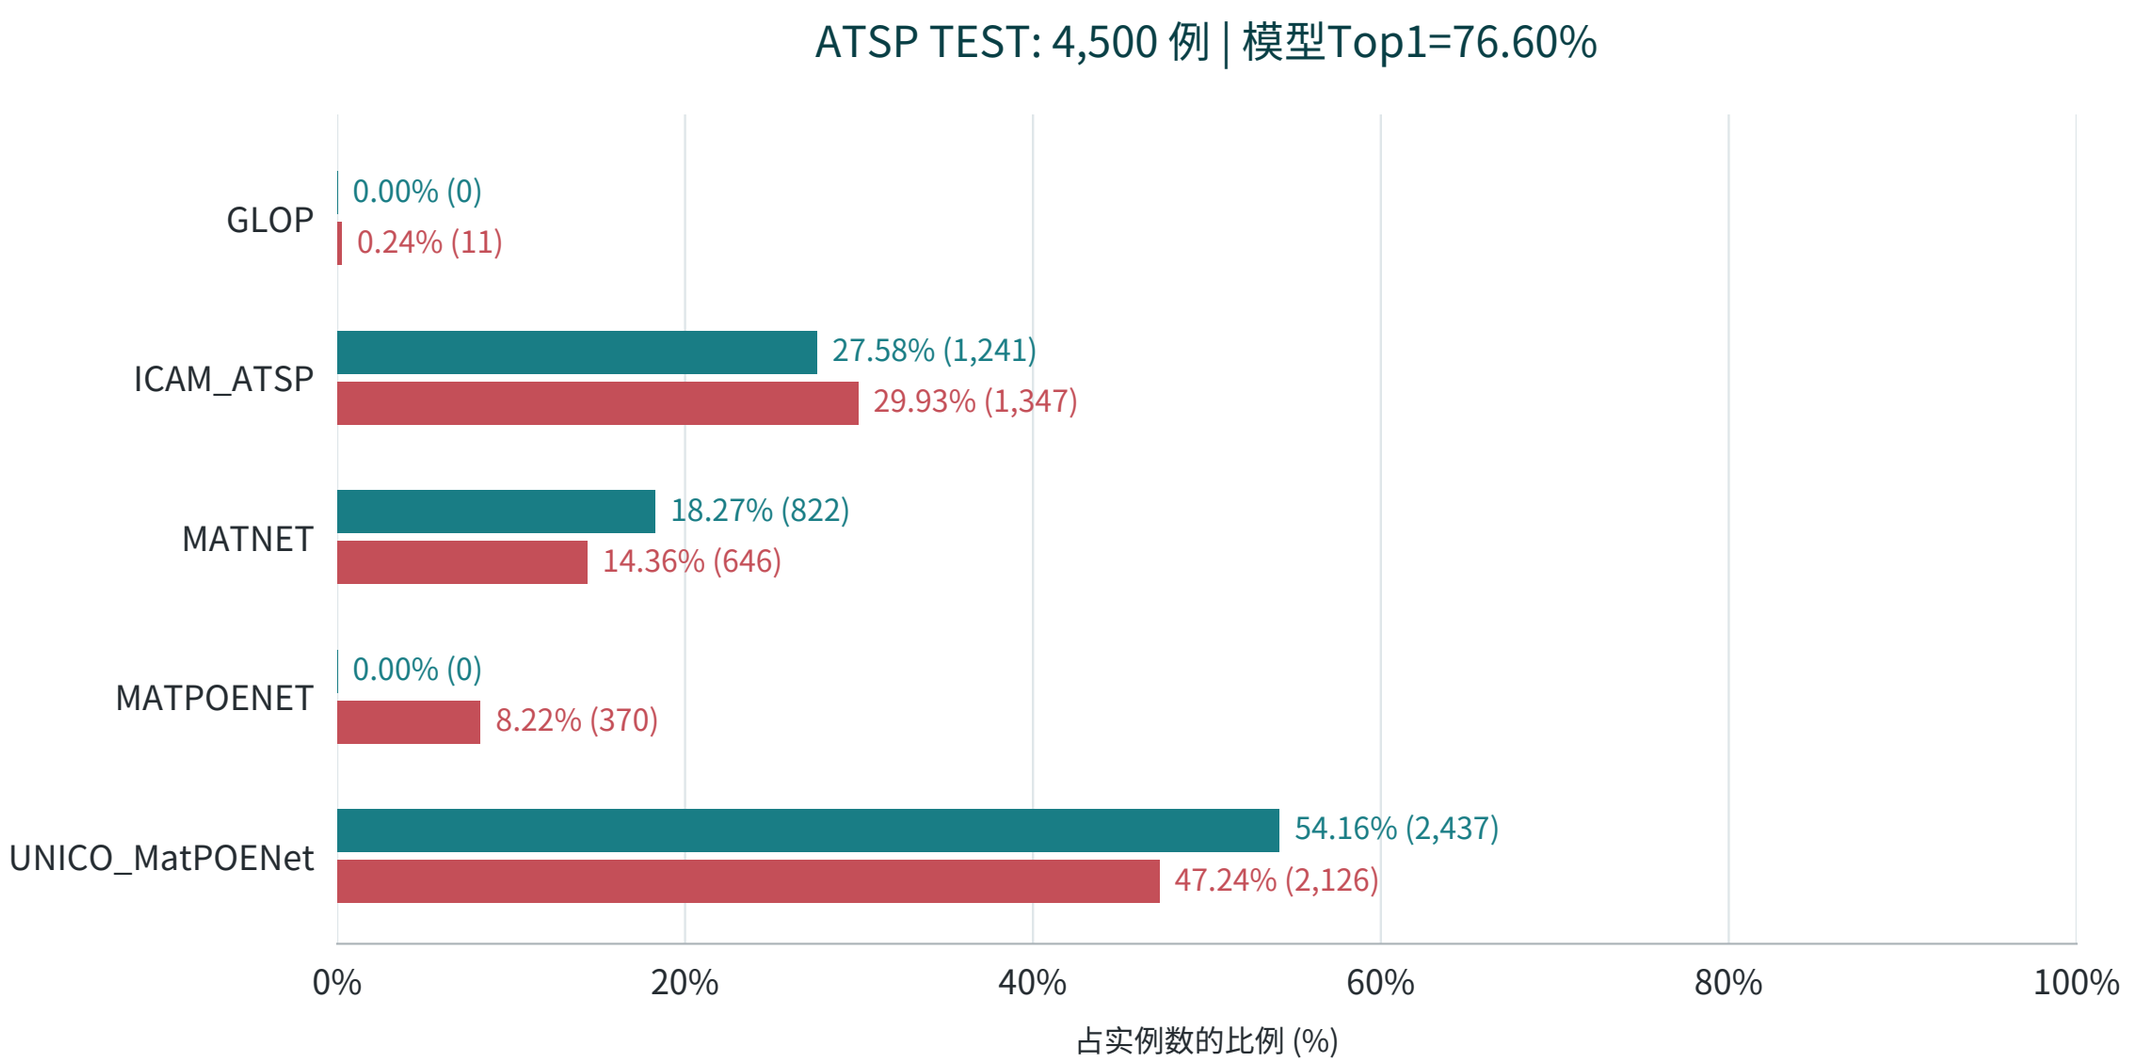

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | OVRP | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

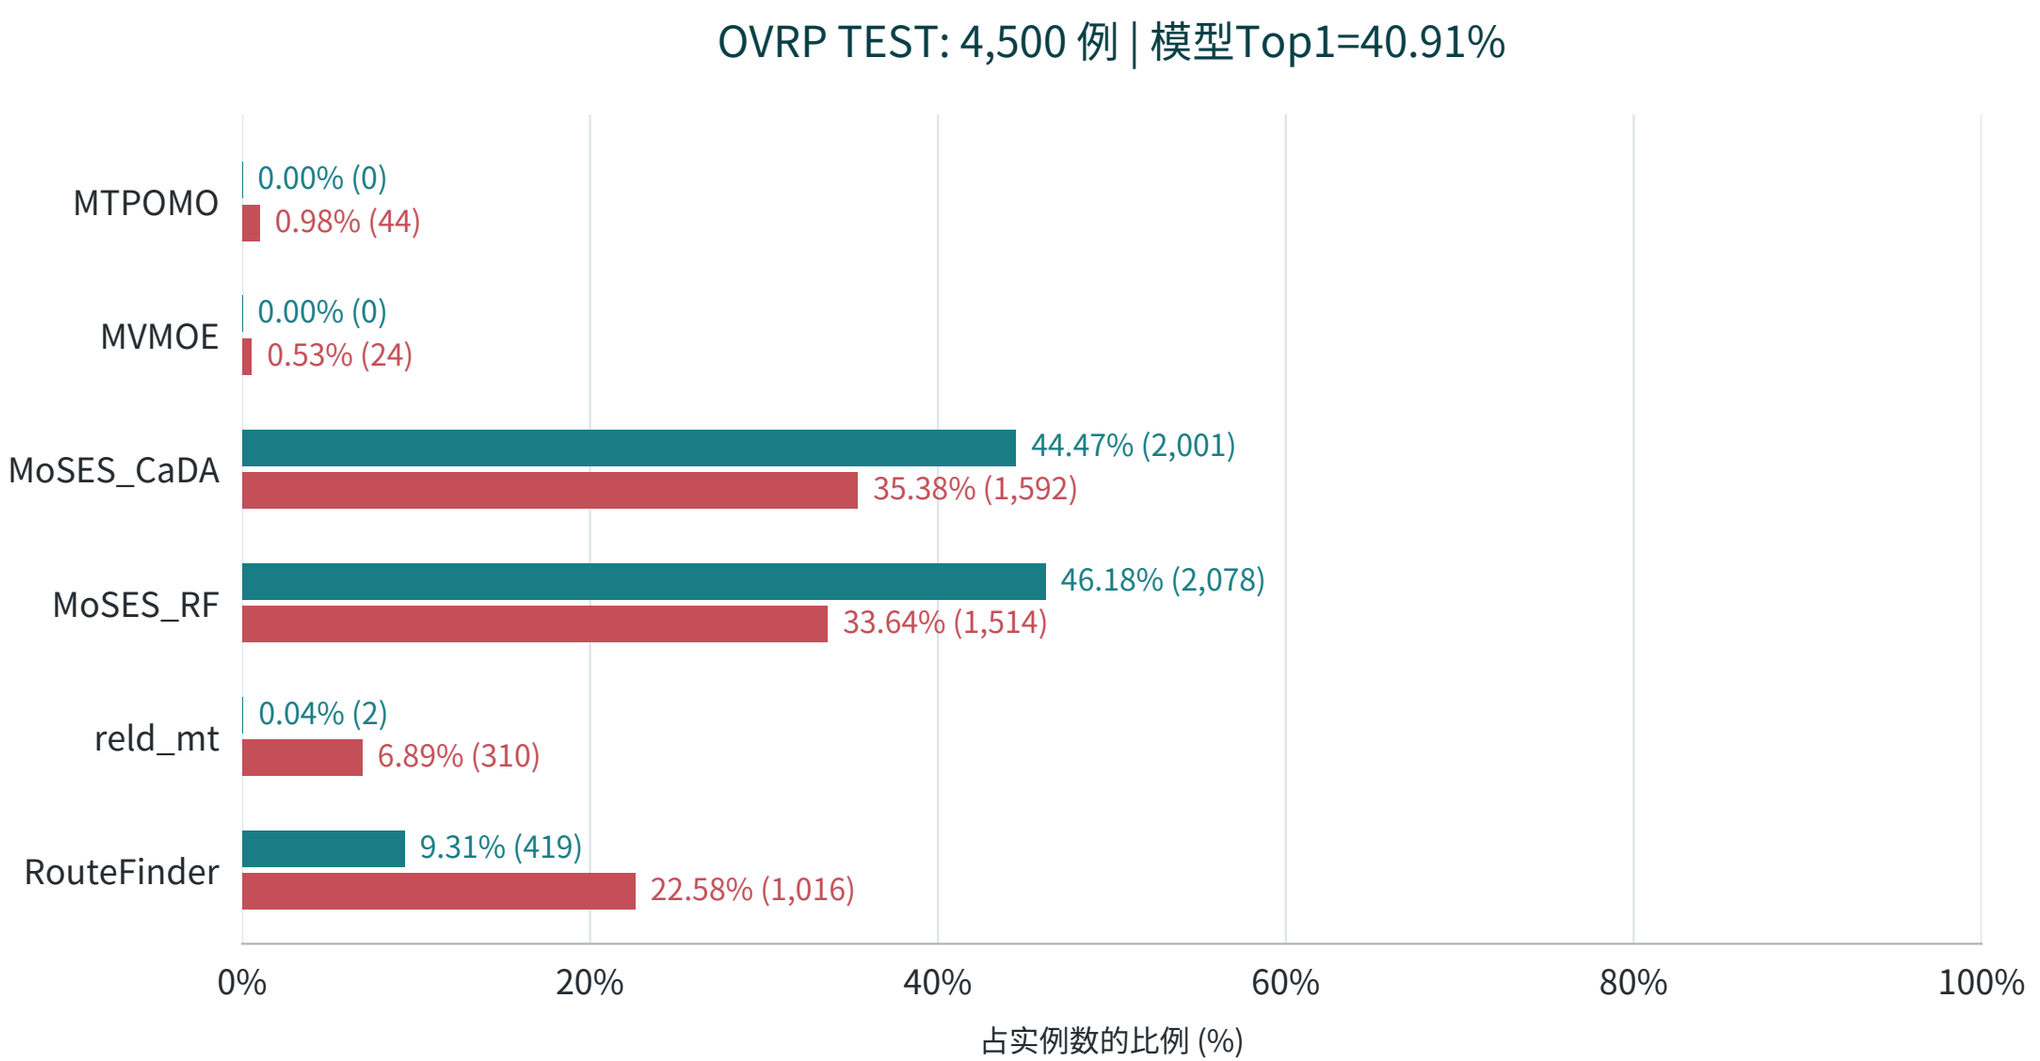

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | VRPB | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

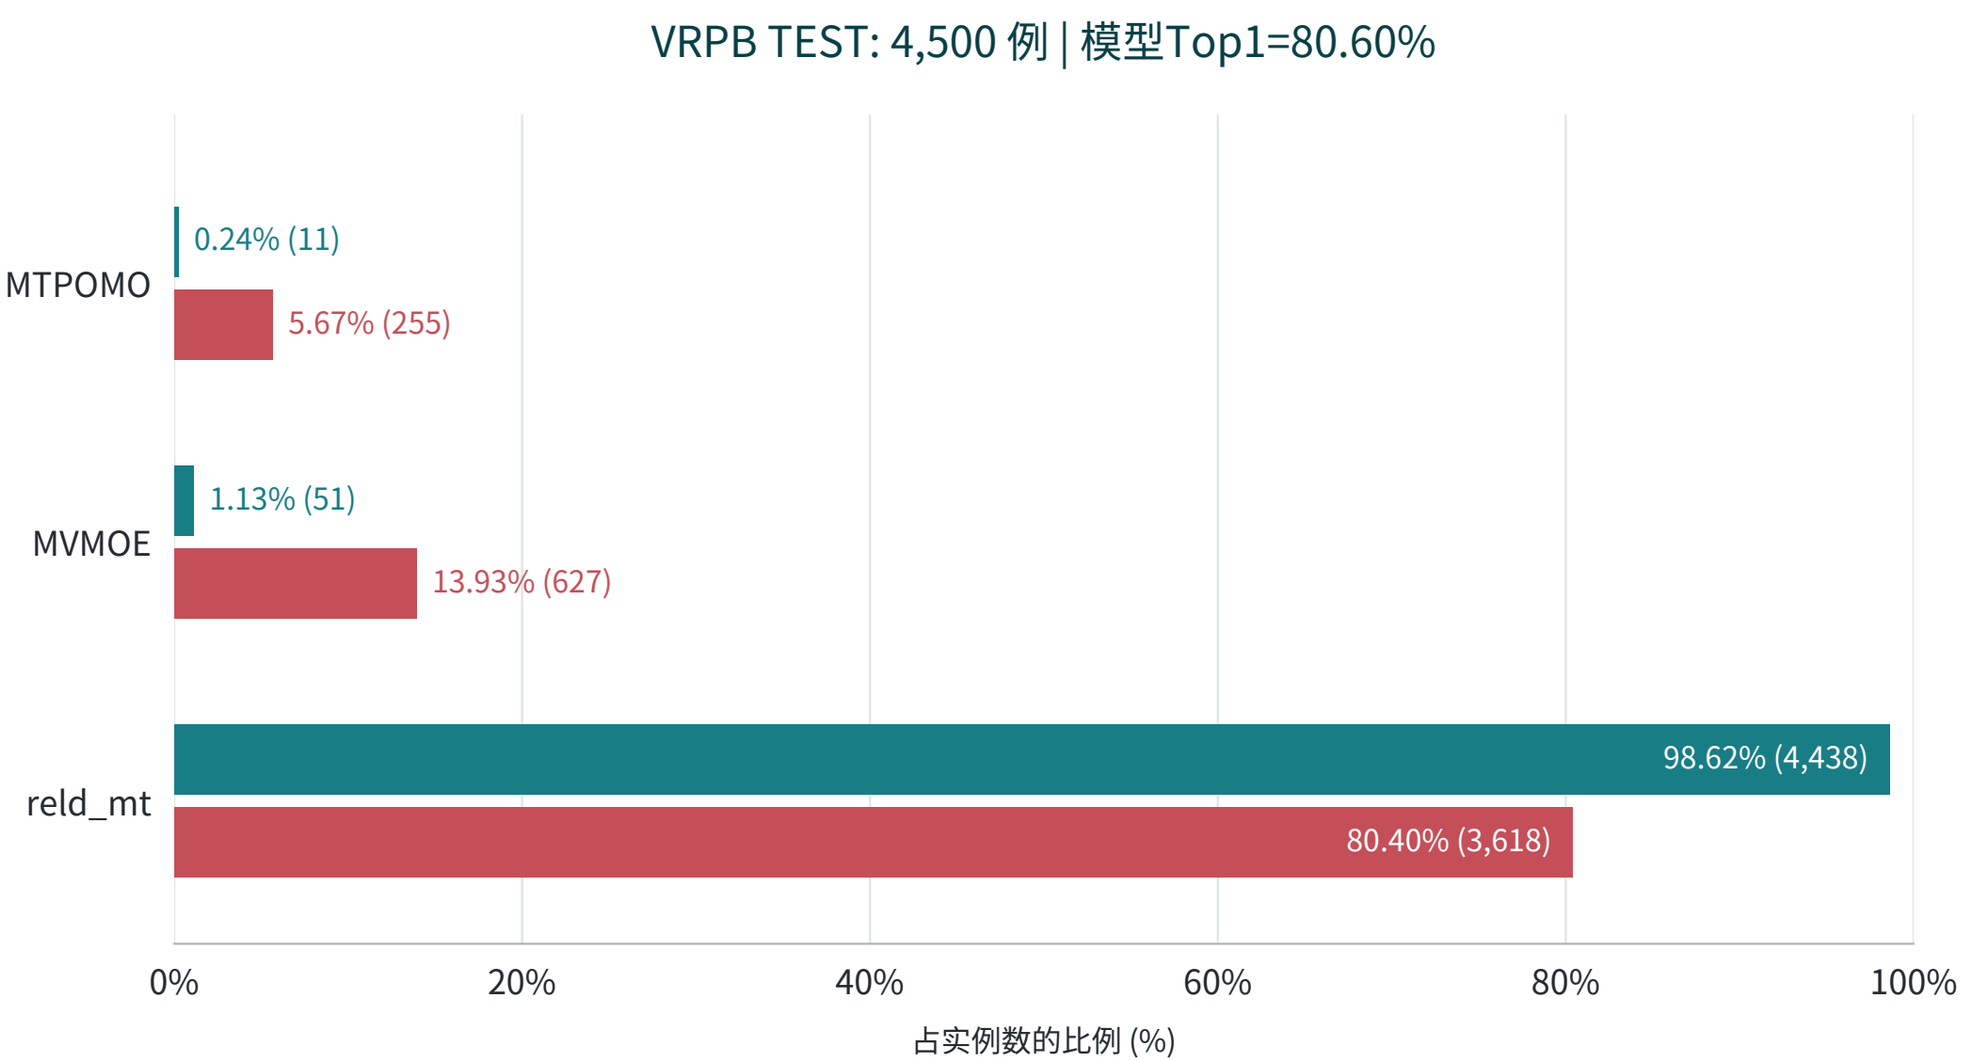

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | VRPL | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

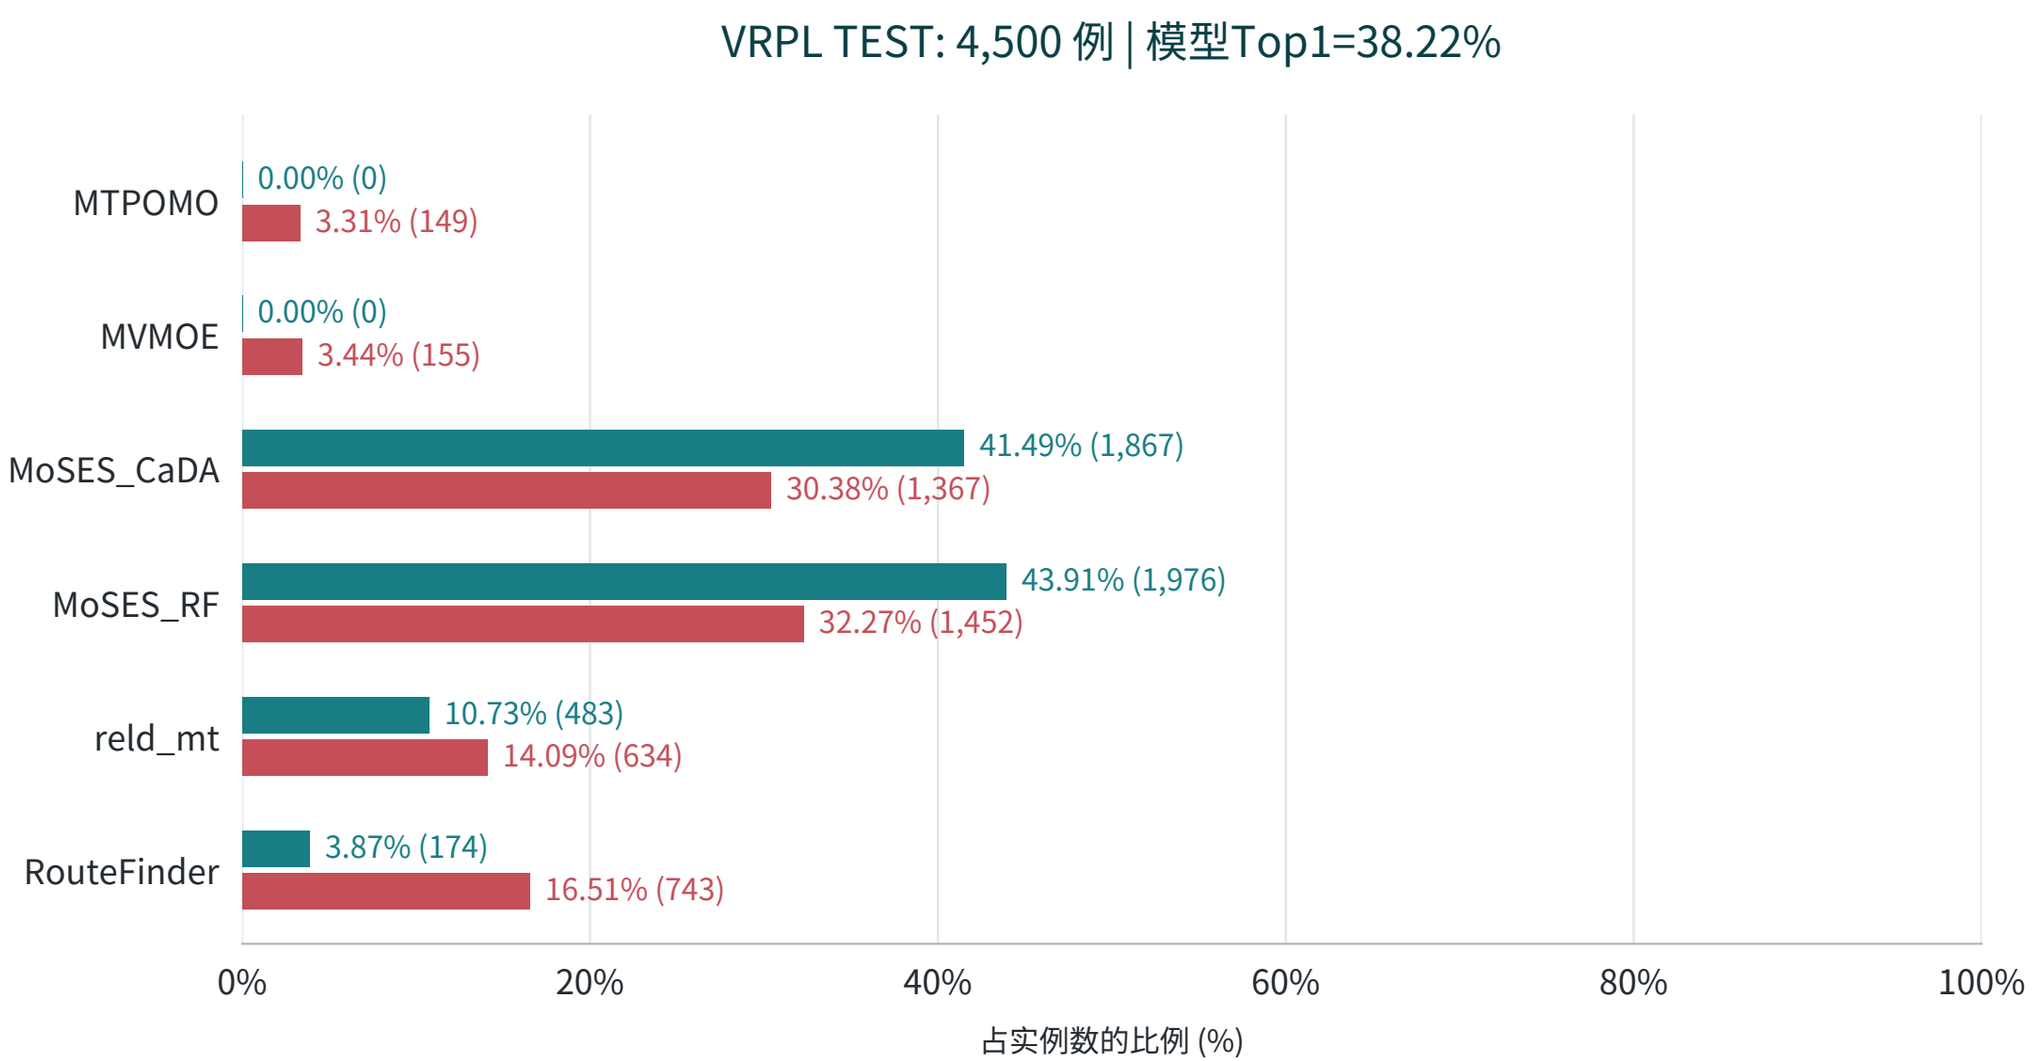

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | VRPTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

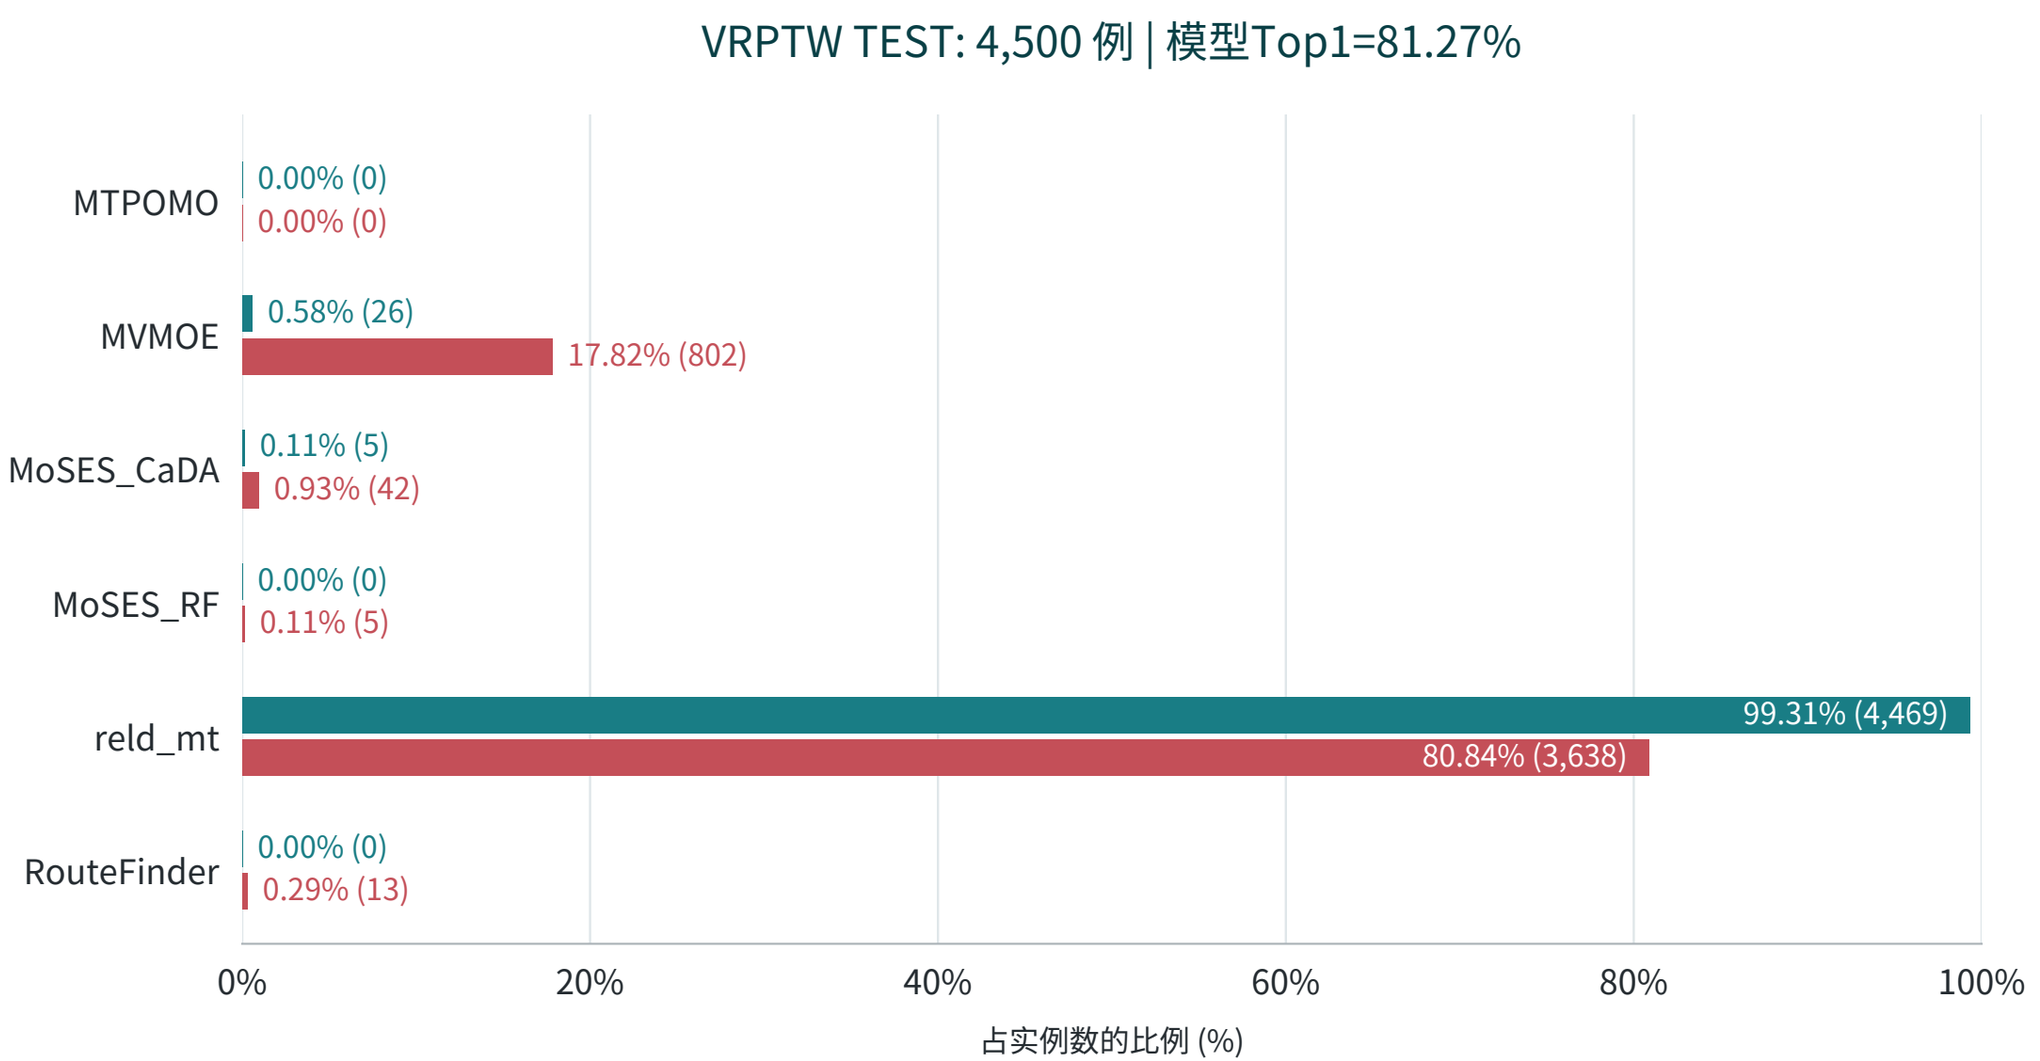

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | OVRPTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

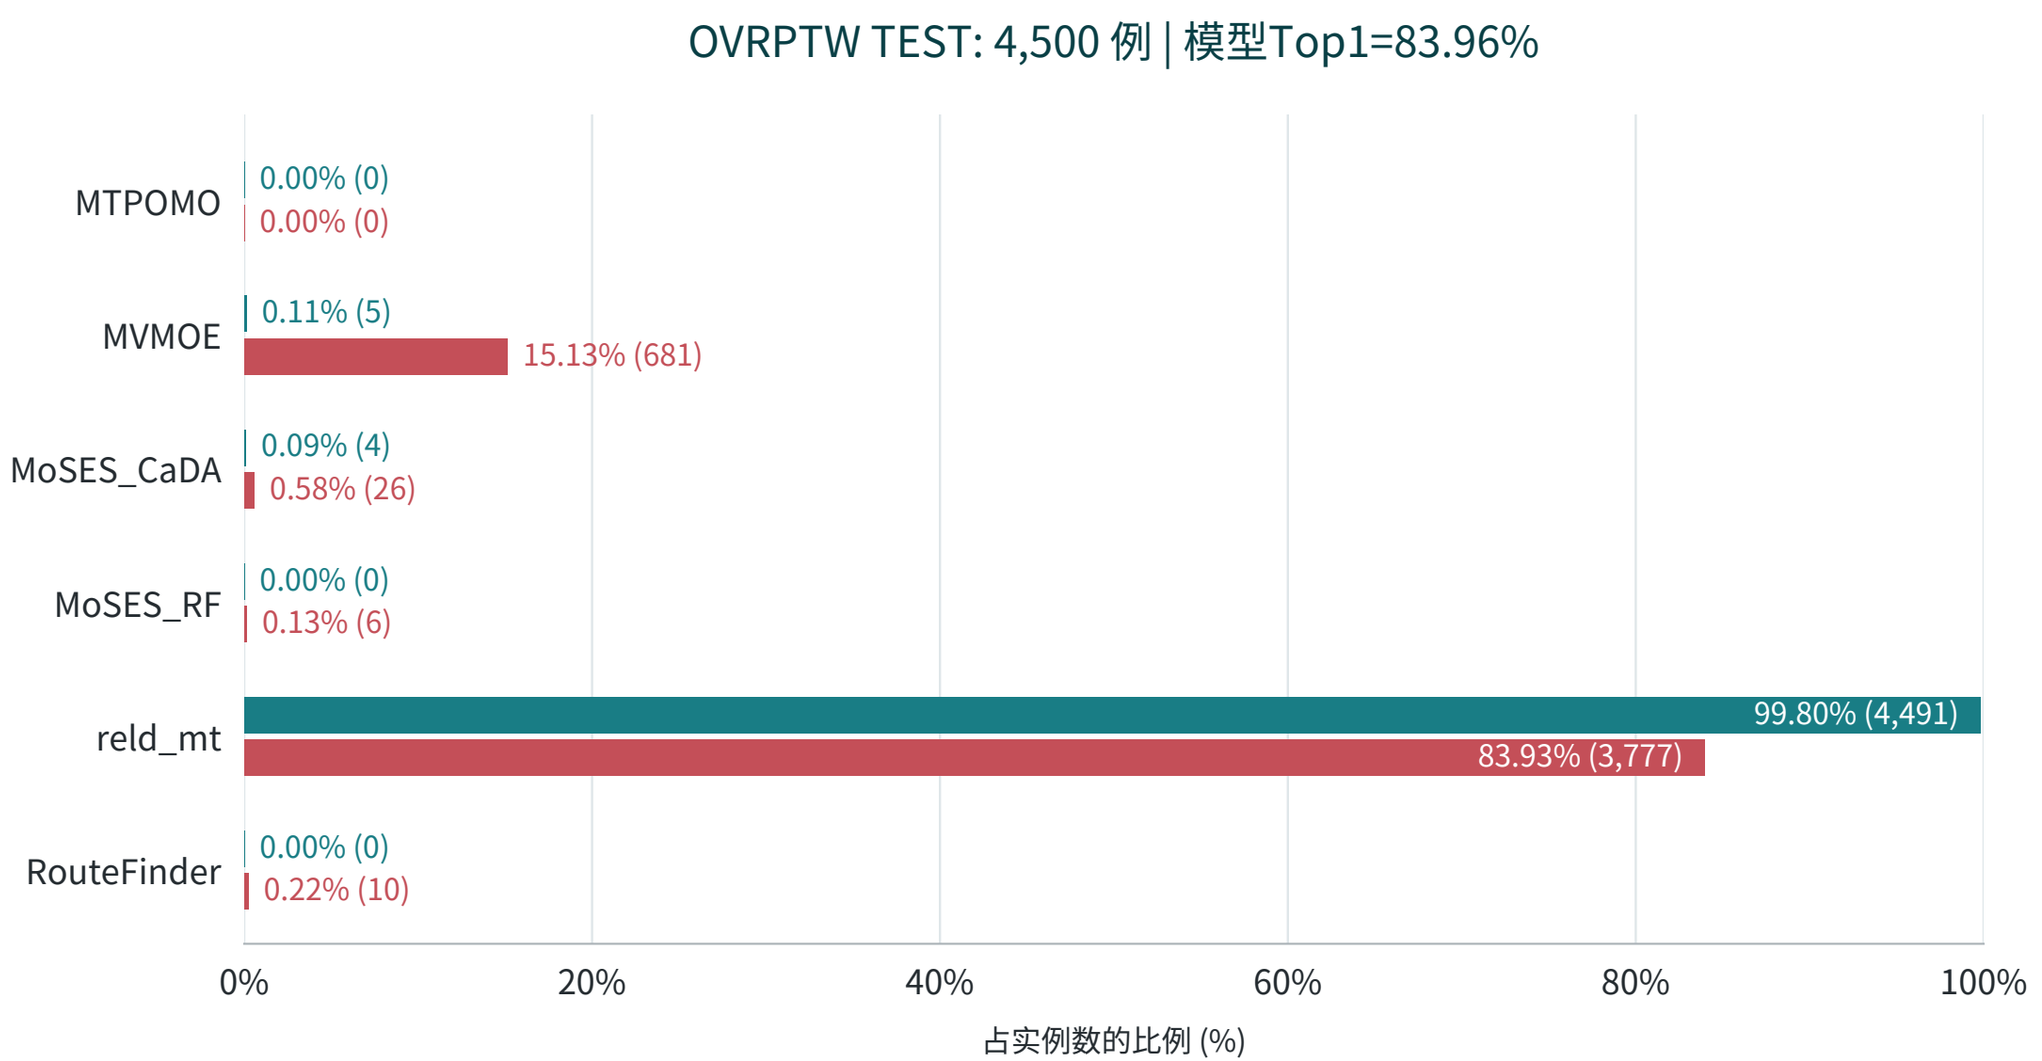

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | OVRPB | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

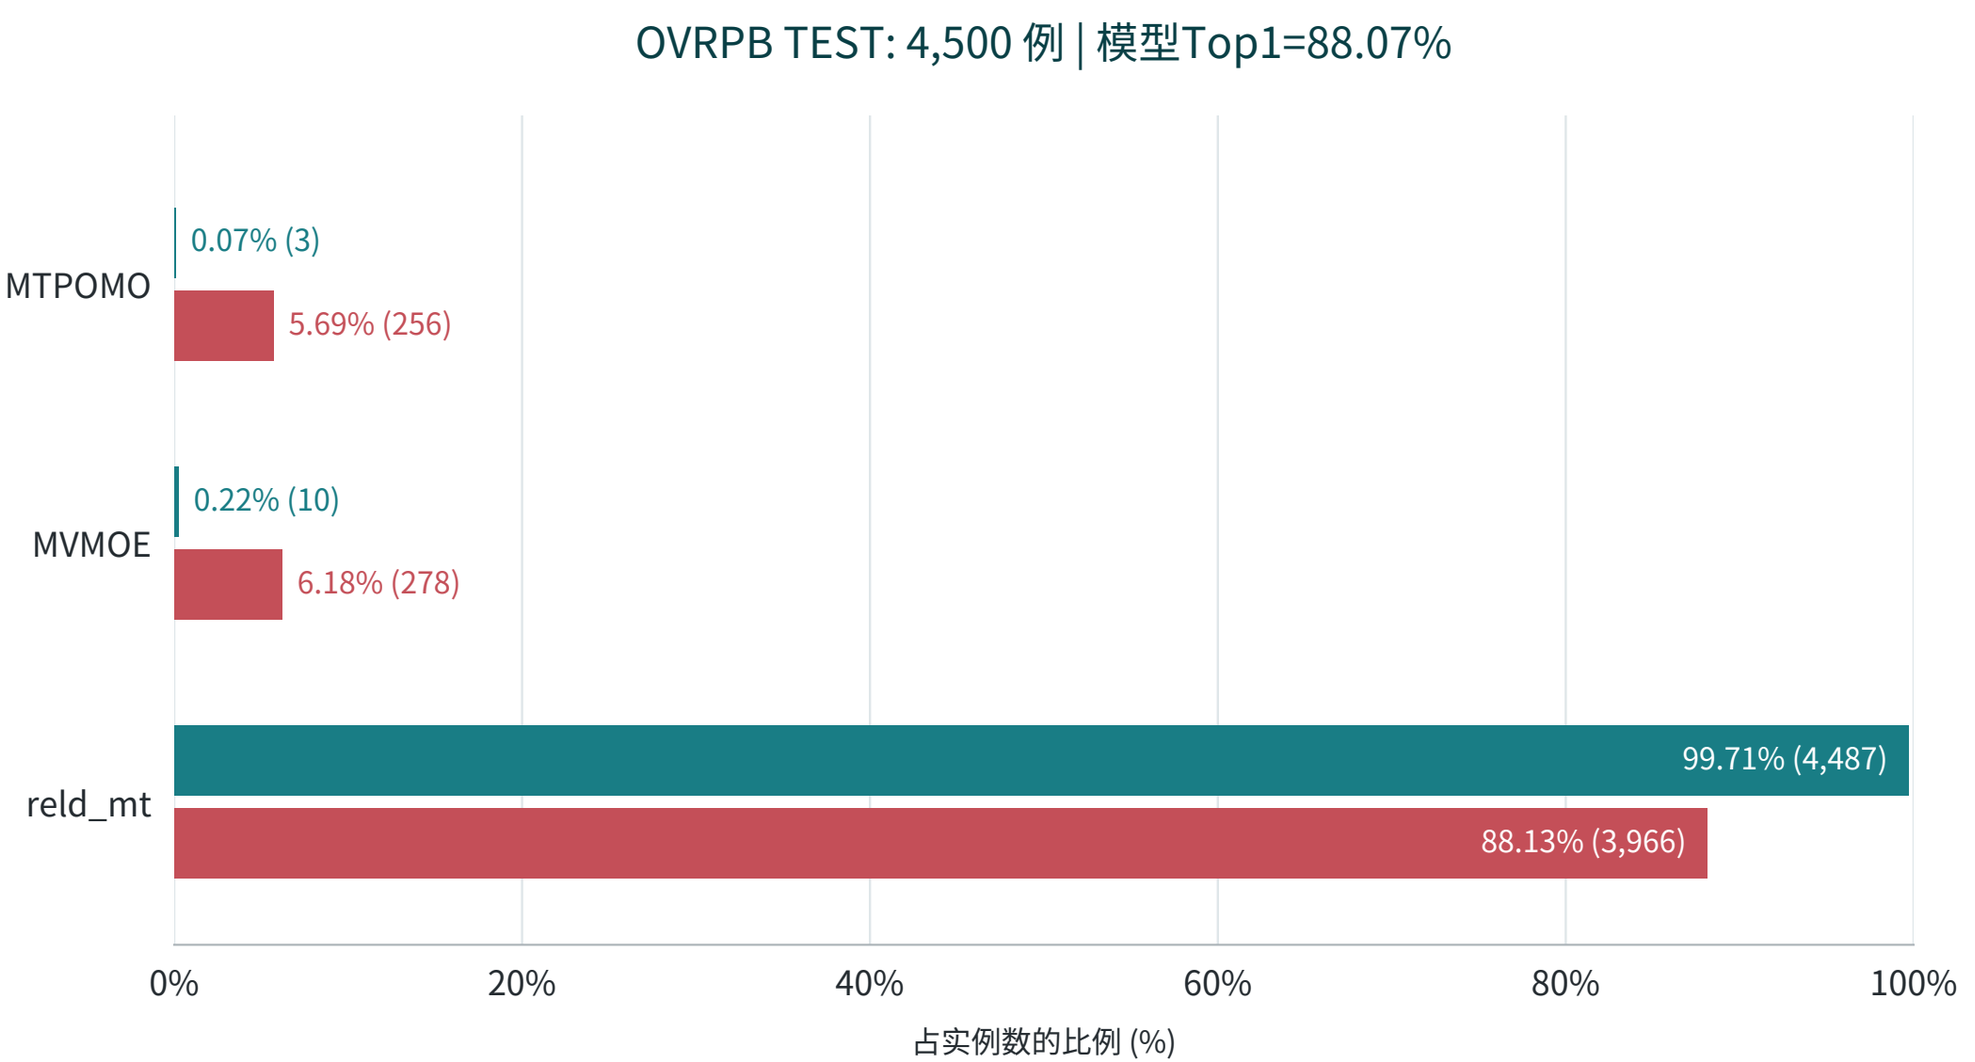

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | OVRPL | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

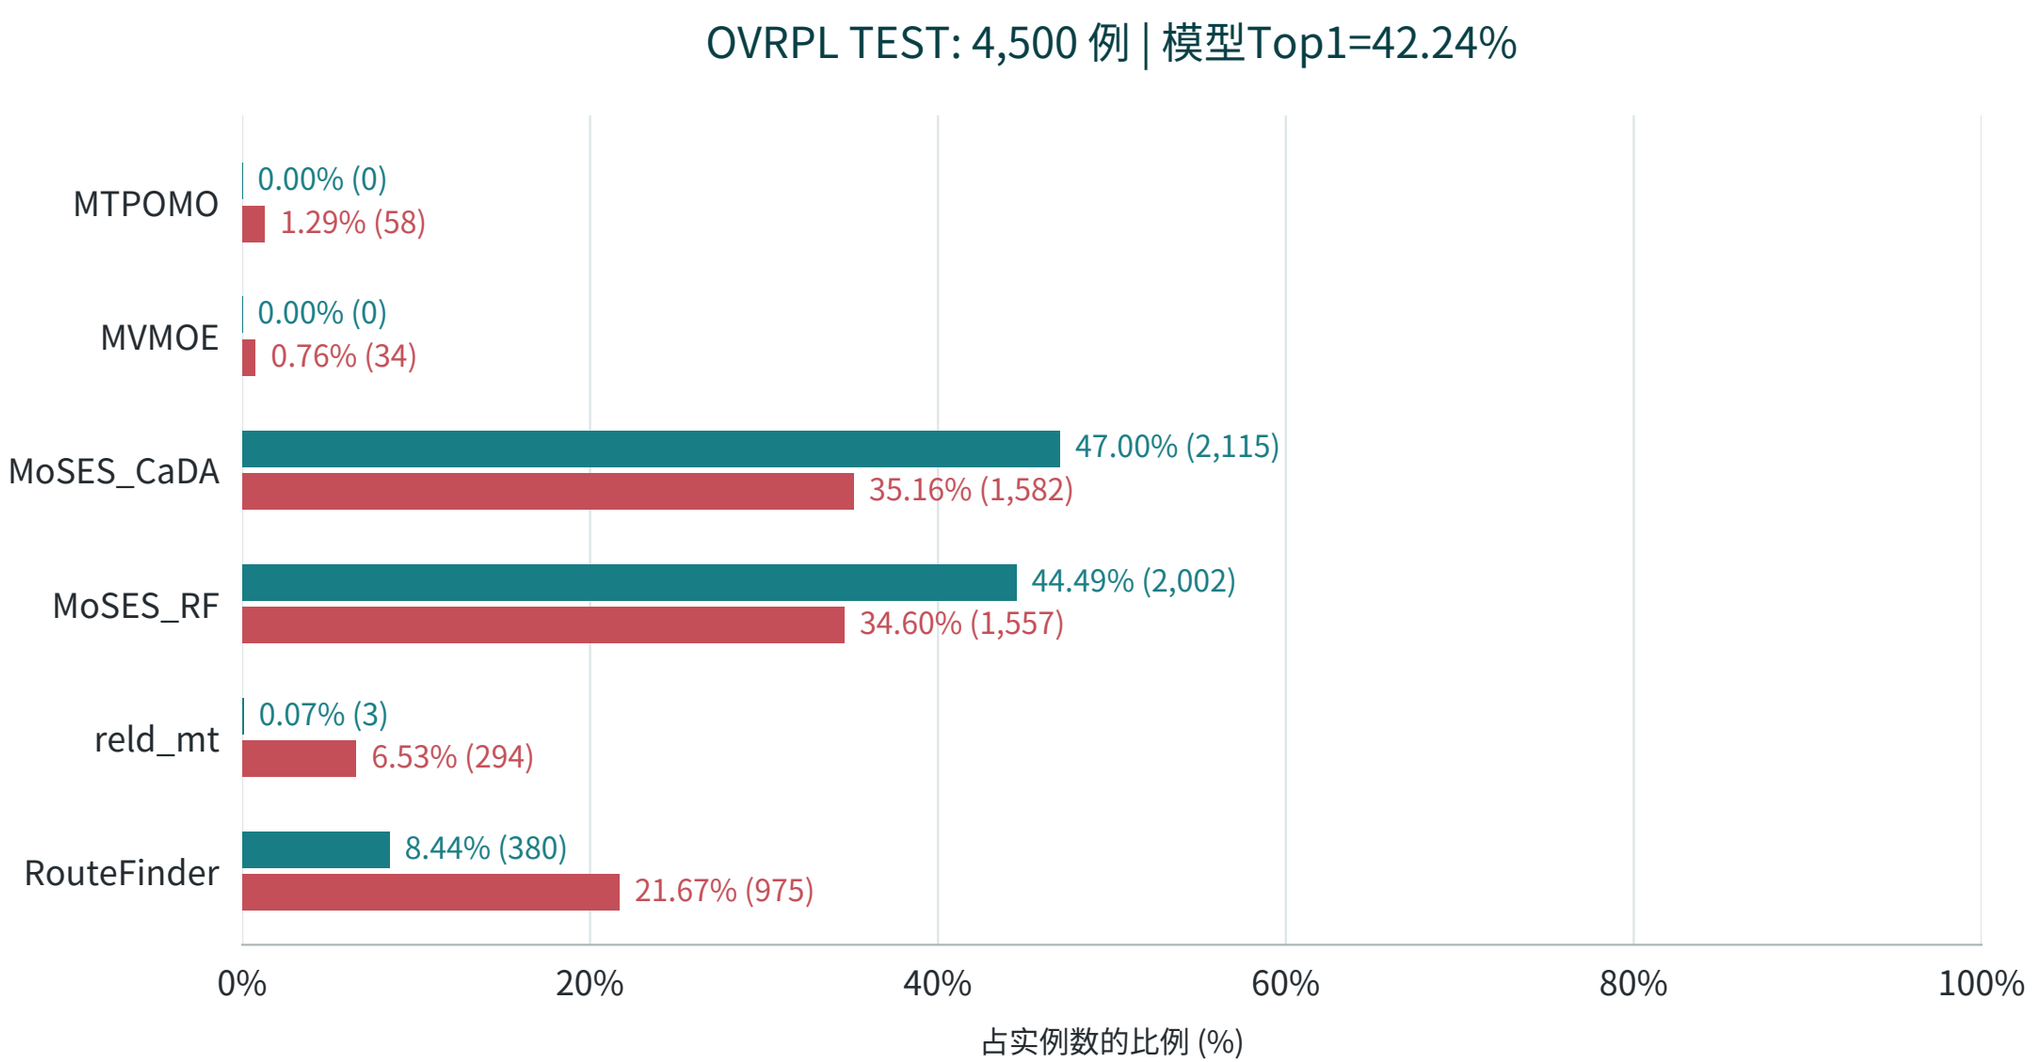

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | VRPBL | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

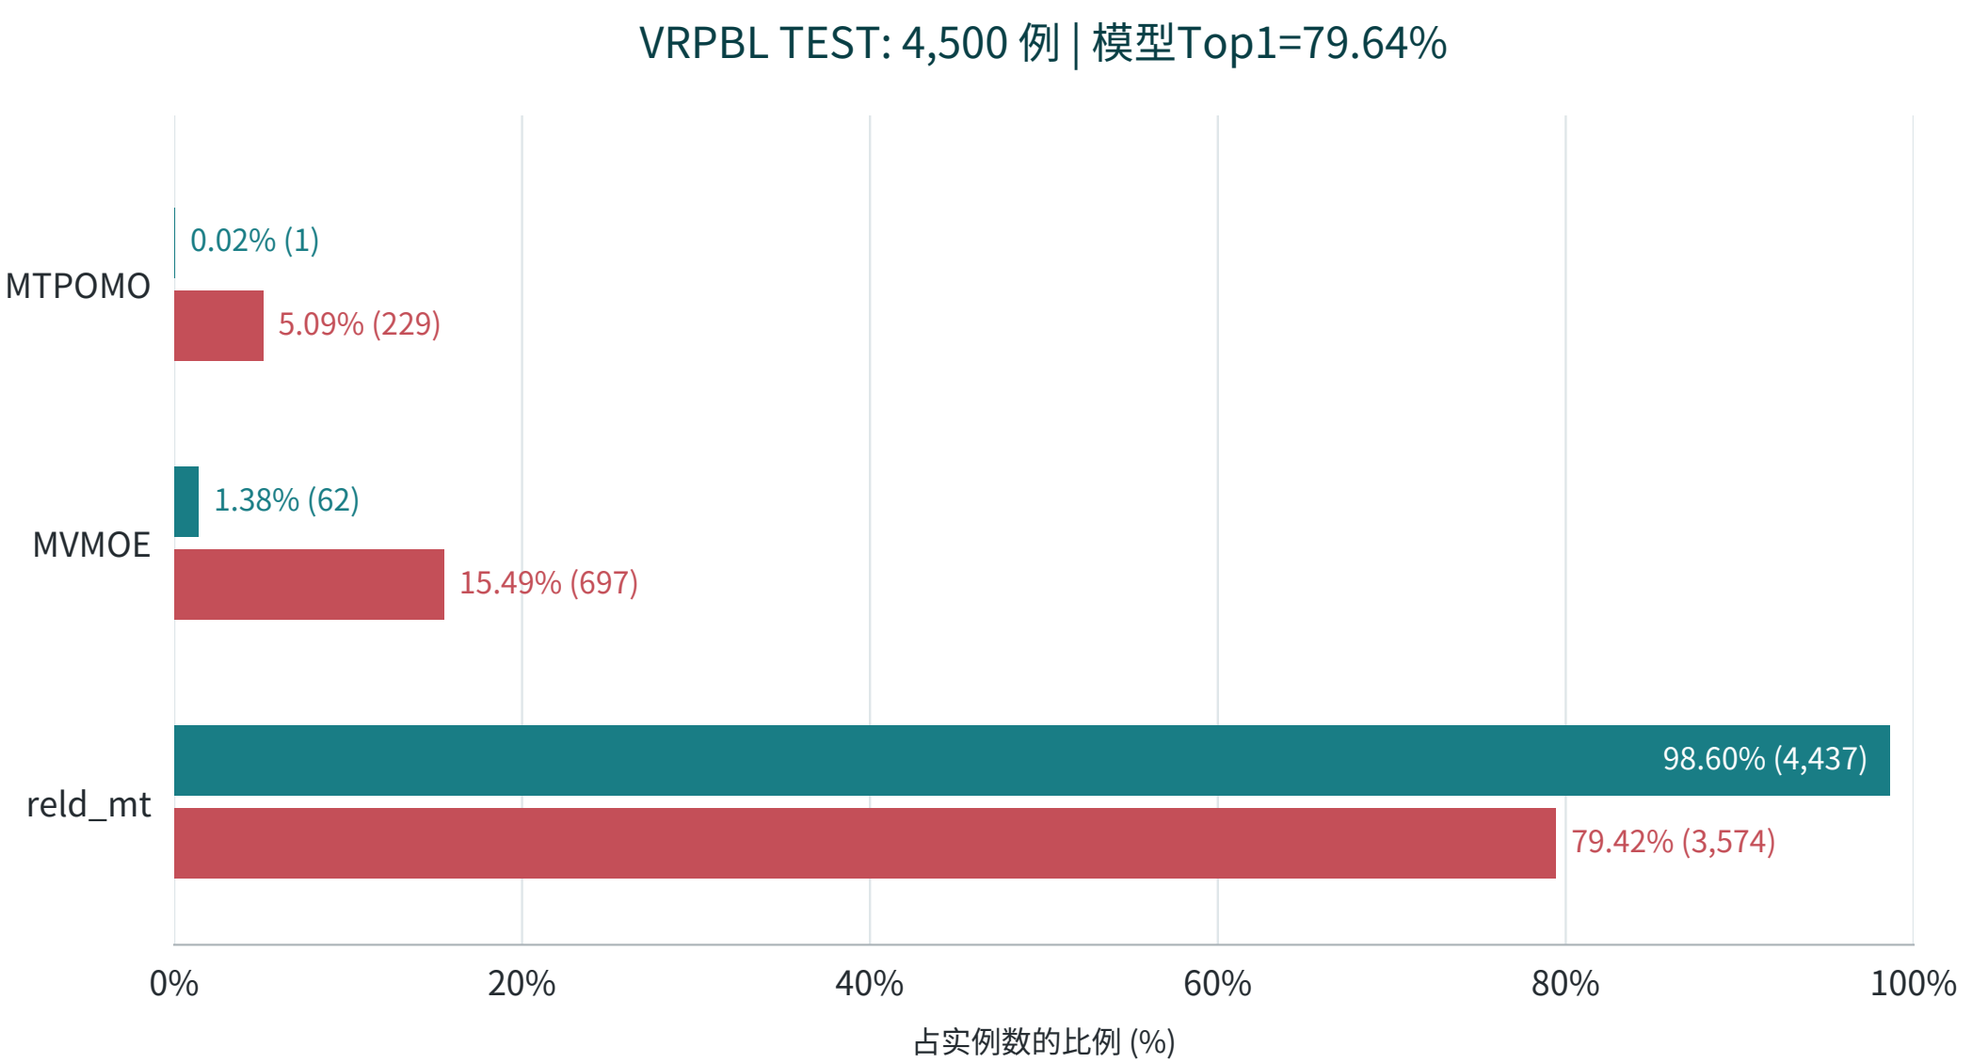

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | VRPBTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

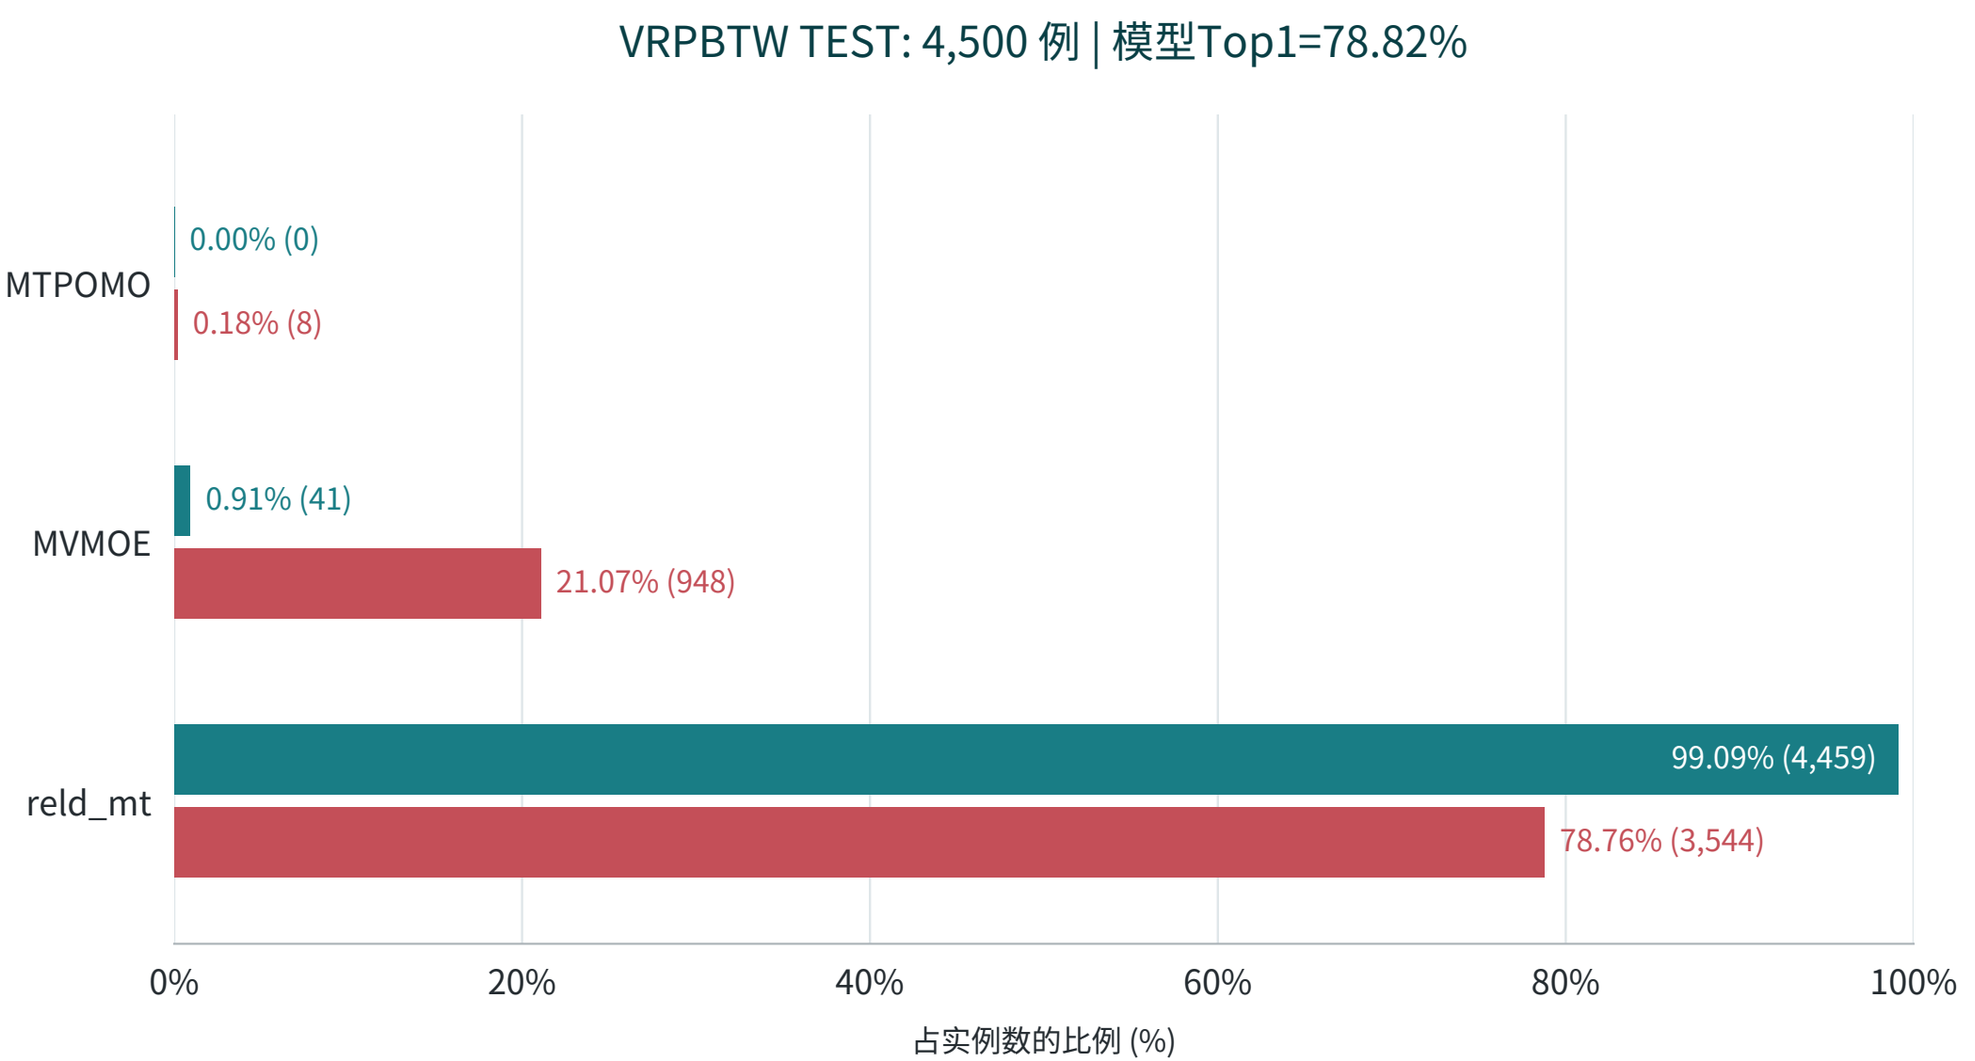

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | VRPLTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

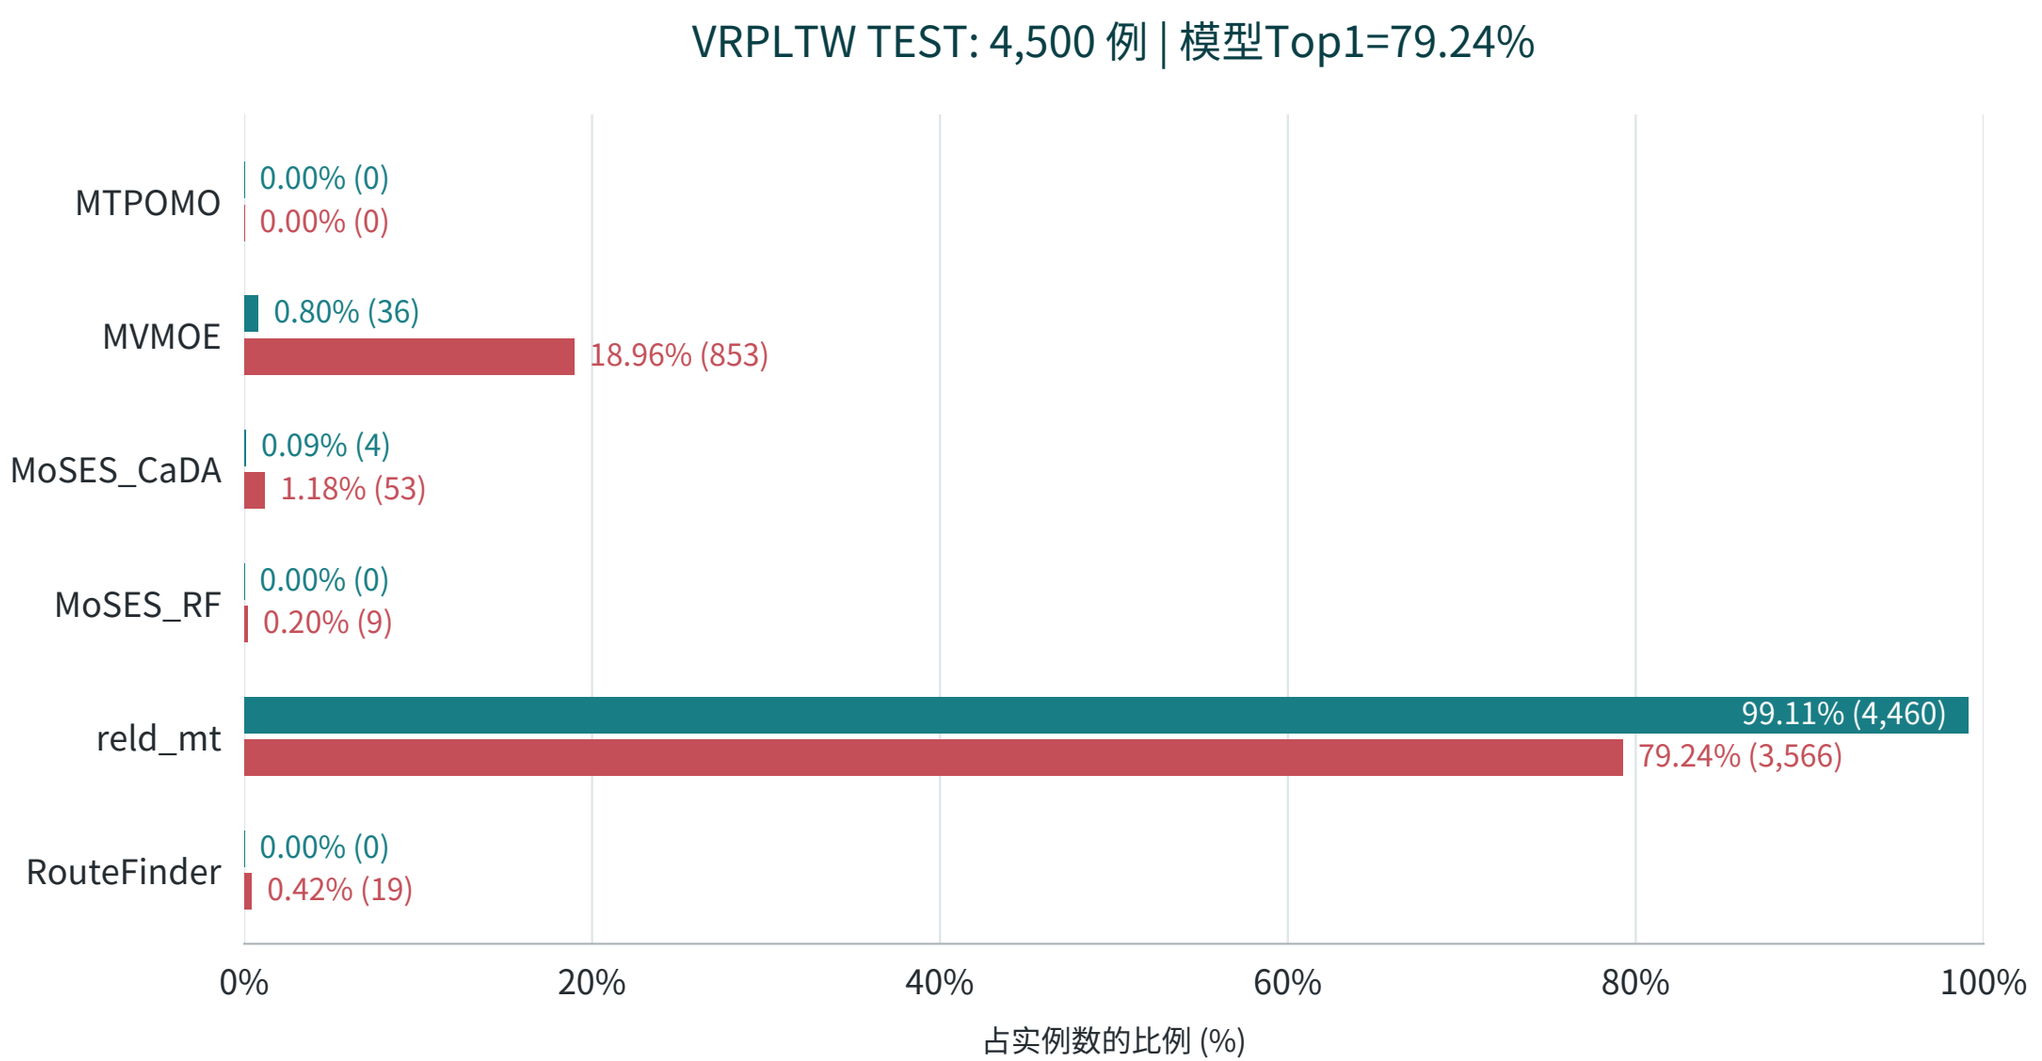

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | OVRPBL | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

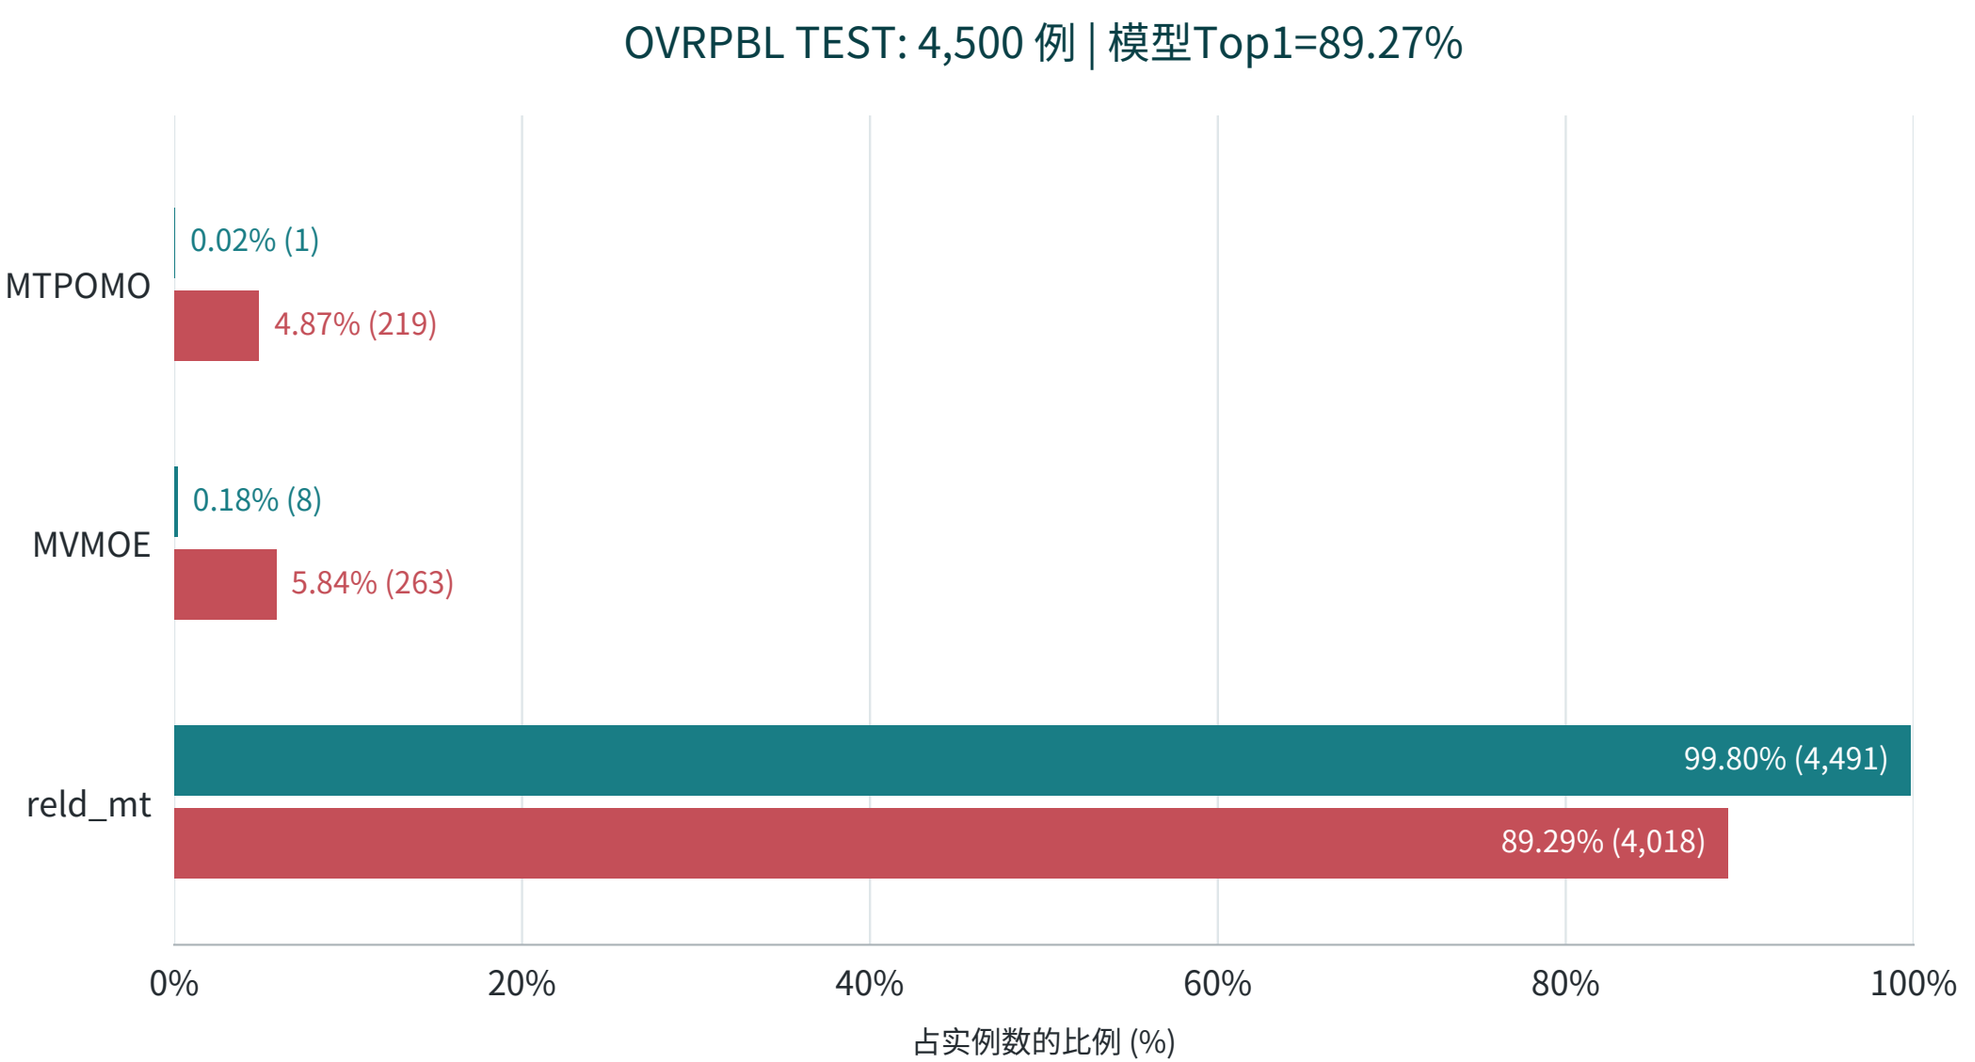

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | OVRPBTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

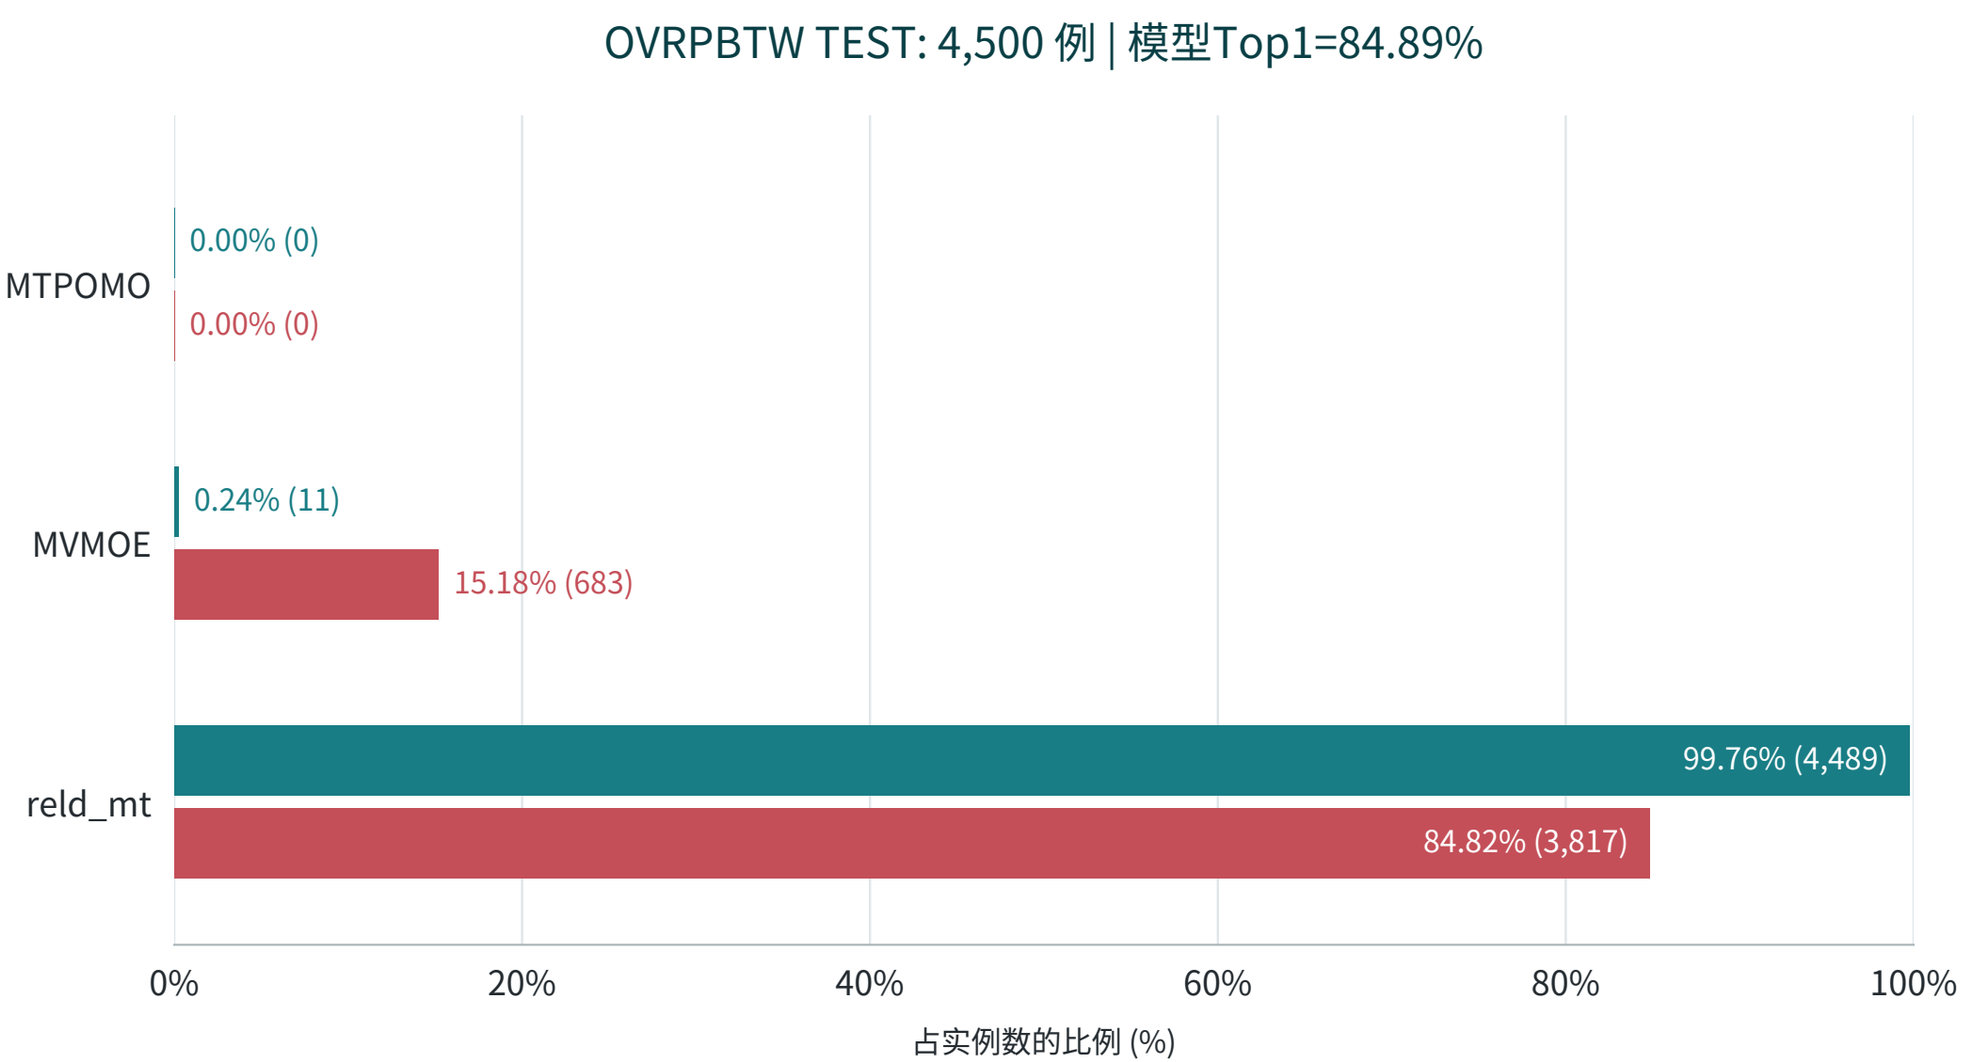

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | OVRPLTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

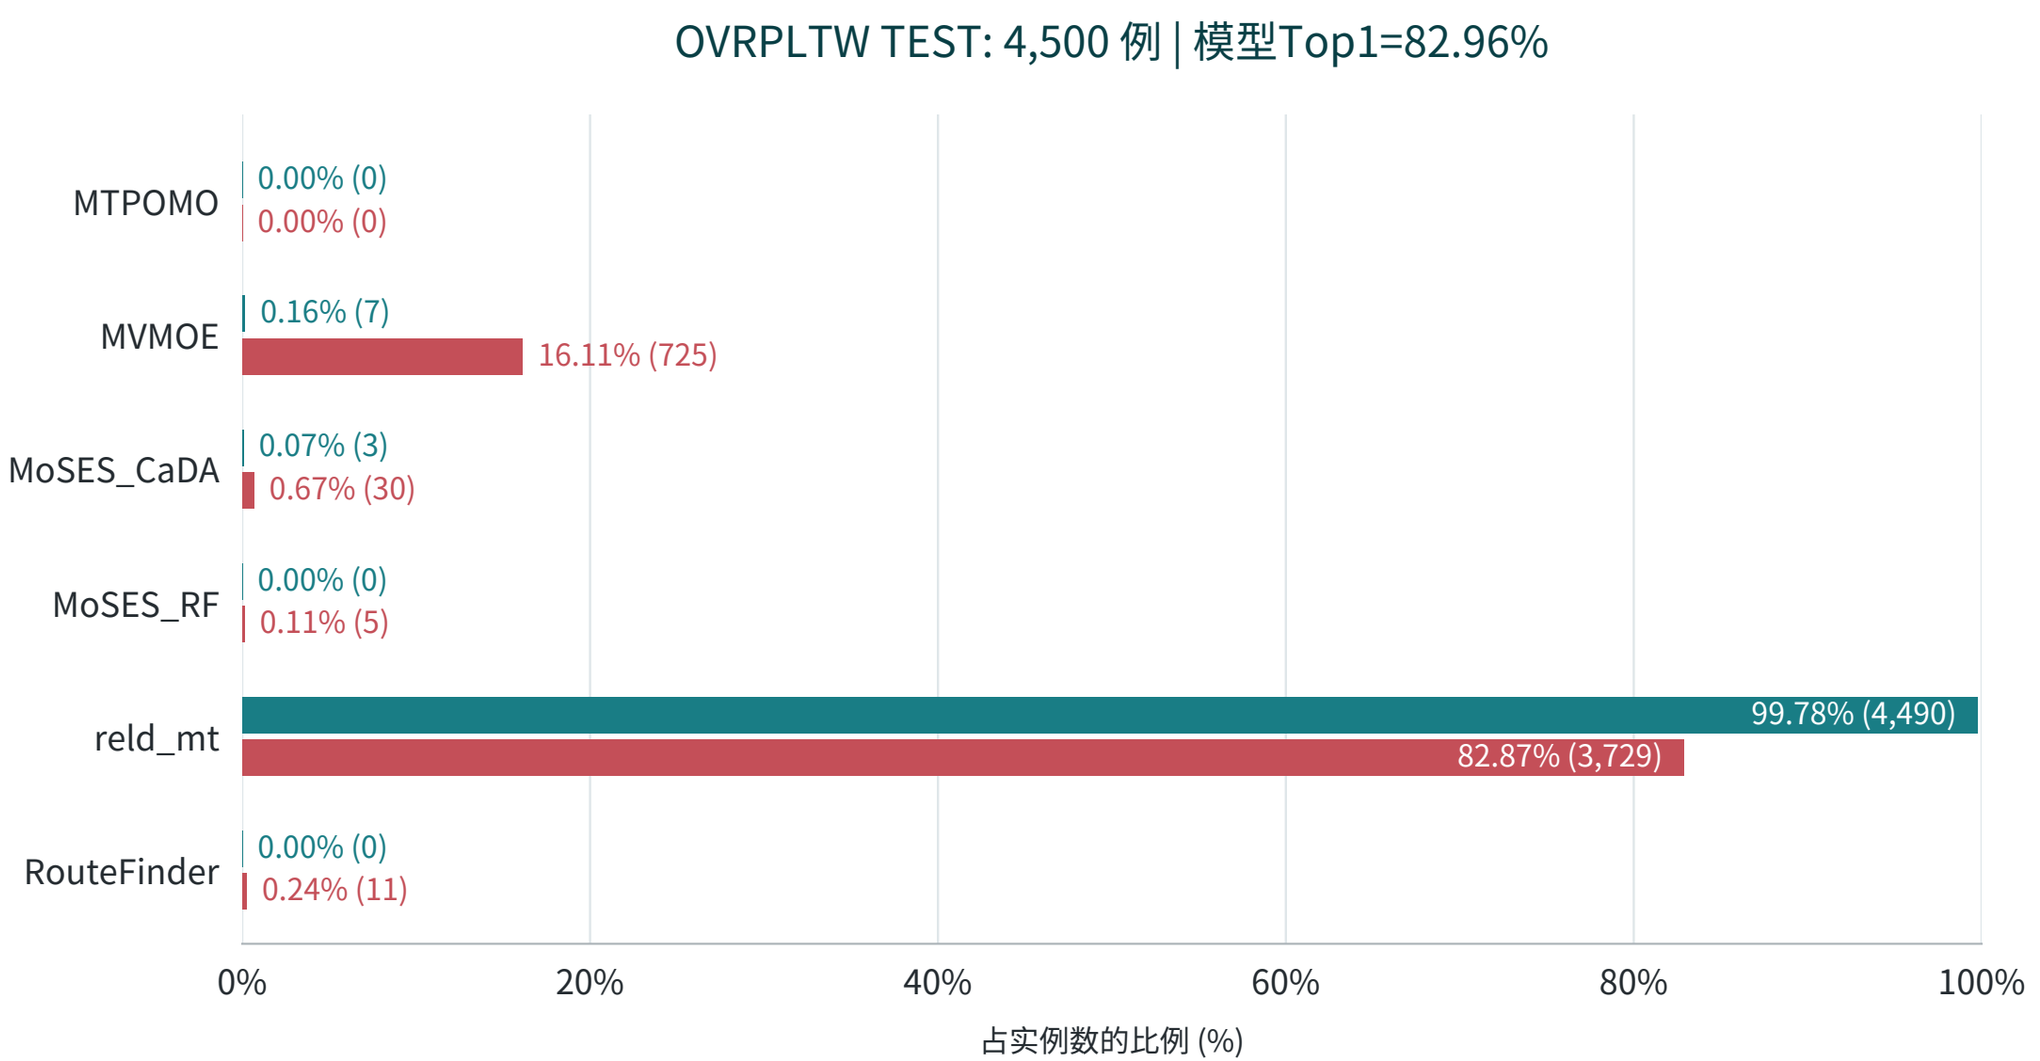

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | VRPBLTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

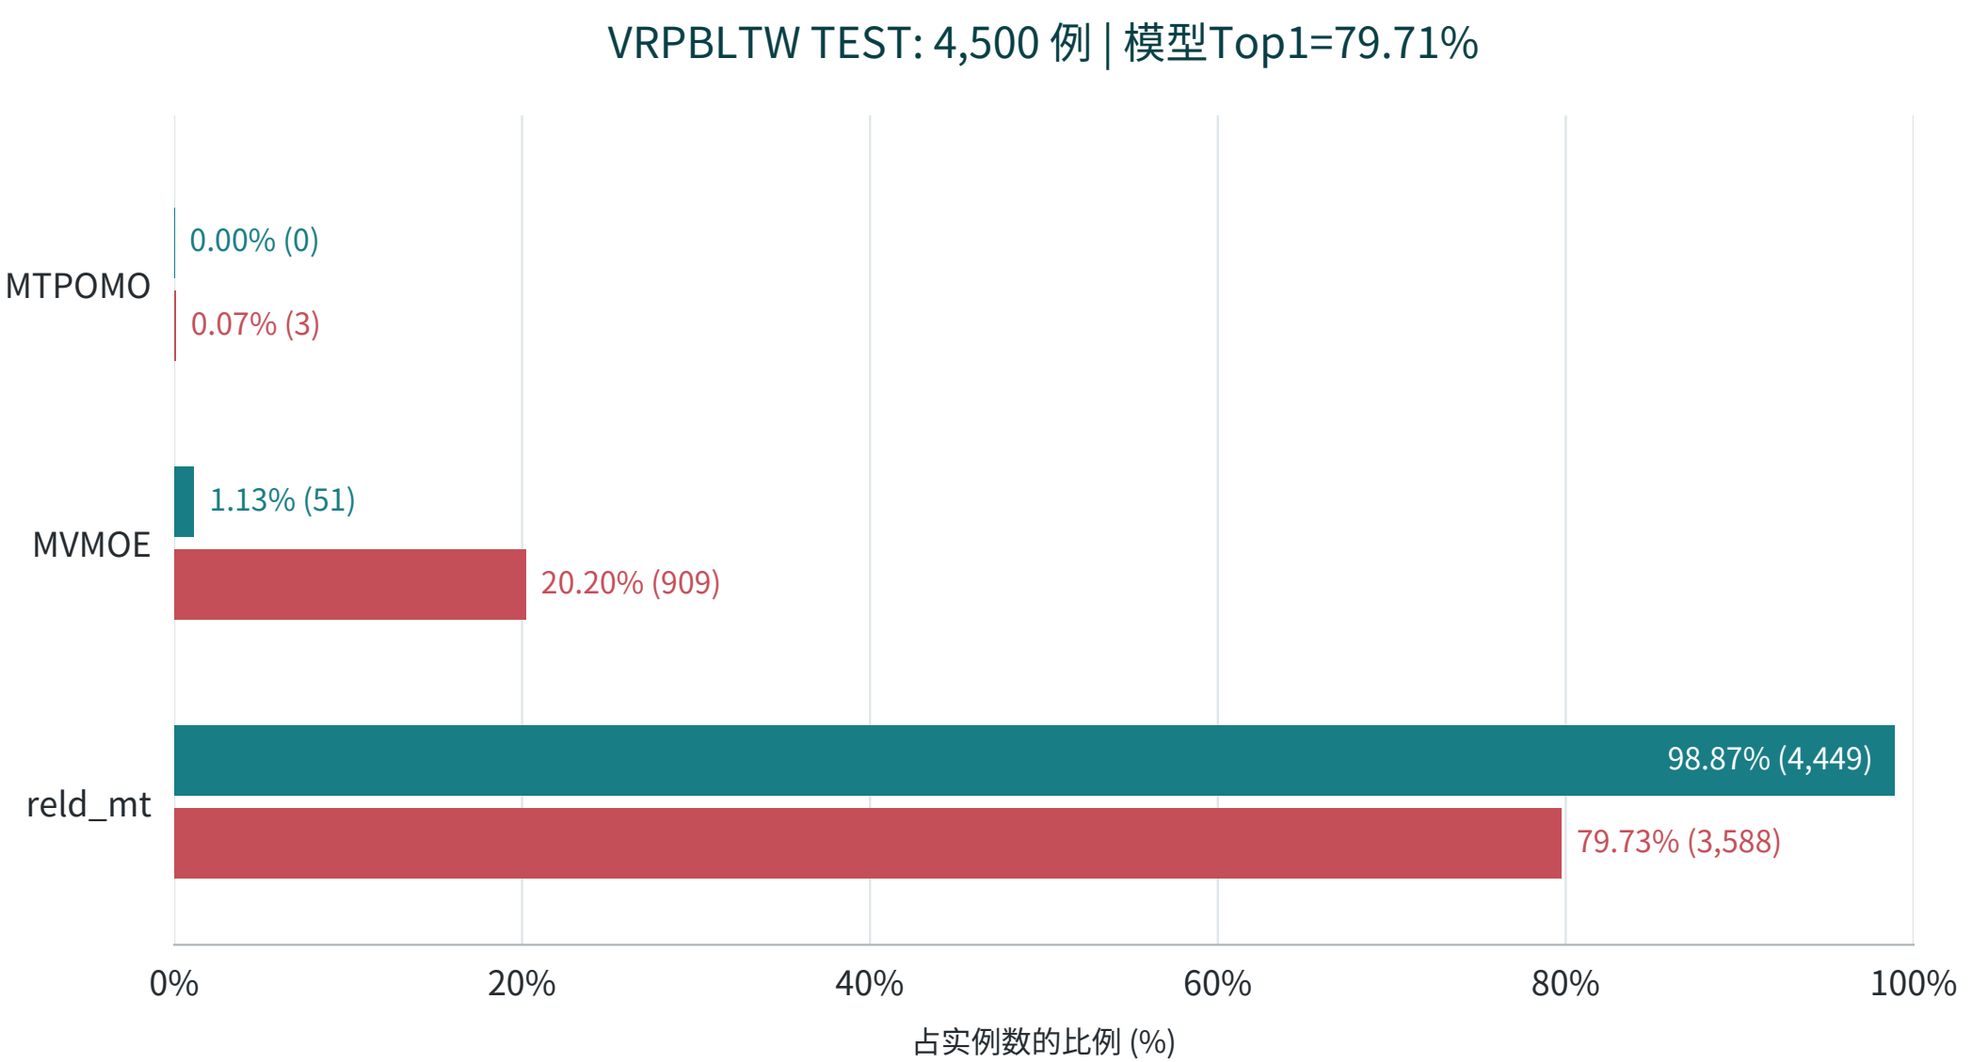

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.

R91/B_utility_probabilities | OVRPBLTW | 方法分布

同一锁定模型: epoch 28 / update 40320 / SHA256 cdcb5f1da1e3c30c

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

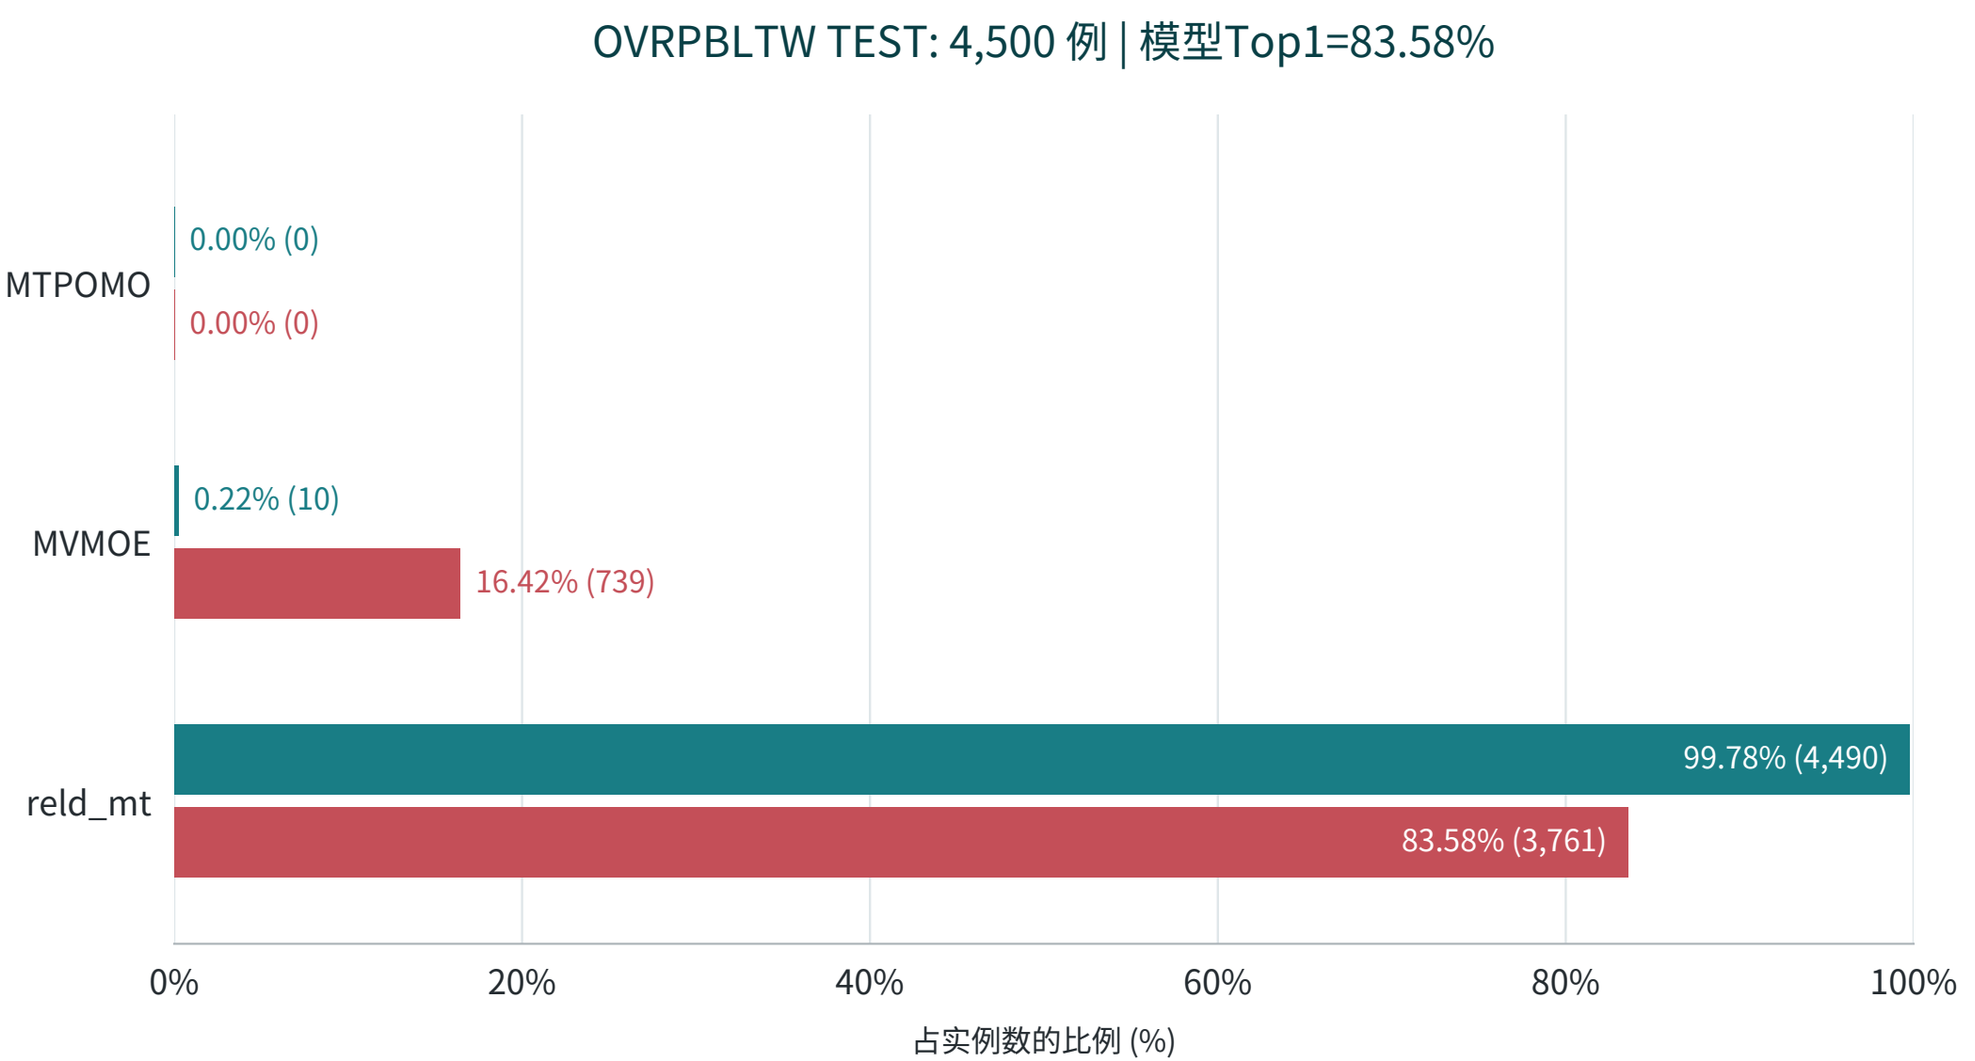

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R91/B_utility_probabilities: stable global solver-ID score ties. Same R91 lock; LIB inference only; no training/reselection/Rxx mixing.