R95/A | Locked full18 results

Same unique VAL checkpoint on VAL/TEST/LIB; native/FP64 ind; historical NSS weights disclosed.

epoch 25 | update 36000 | seed2 | fresh initialization

Data: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
VAL ALL	71.0000	66.2037	11.416660	11.427978	11.371692	-0.1929	+0.3948	0.4042
TEST ALL	71.2494	66.1802	11.373721	11.385299	11.329932	-0.1980	+0.3852	0.3929

Dataset	n	NSS Top1 (%)	R95 Top1 (%)	NSS cost	R95 cost
TSP TEST	4500	45.888889	46.822222	7.970400719	7.970641412
CVRP TEST	4500	45.977778	47.022222	18.004802368	18.009792180
TSPLIB	49	20.408163	22.448980	8.217907074	8.208846062
CVRPLIB	100	70.000000	63.000000	67.101111717	67.274415960

NSS: R79 weights trained on historical70114 TRAIN, selected using historical VAL; not retrained on new90k.

NSS TEST predictions were freshly computed on these4500 instances; old3895 TEST metrics are not reused.

SBS is fitted on the new81000 TRAIN only. Oracle is the per-instance legal-pool minimum.

ALL is the equal-problem mean; mixed raw cost is descriptive. TEST informed prior research.

Method selection and true winner use separate colors on the same axes; Top1 is per-instance accuracy.

Selection head: original_score_mlp_maximin | objective: Original R77 CE .35 / comparison .35 / risk .02 / R-Drop ramp .35; dropout .1 in both arms.

R95/A | VAL: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.0000	66.2037	11.416660	11.427978	11.371692	-0.1929	+0.3948	0.4042	per-problem TRAIN SBS
TSP	46.6222	33.1111	8.024960	8.045354	7.990533	-0.2535	+0.4309	0.4198	T2T
CVRP	46.7556	18.7111	18.159205	18.269377	18.064087	-0.6030	+0.5266	0.6920	RELD_CVRP
ATSP	76.6444	47.4889	1.638767	1.676905	1.632471	-2.2743	+0.3857	0.3817	UNICO_MatPOENet
OVRP	40.7556	35.7556	7.461601	7.469579	7.415777	-0.1068	+0.6179	0.6289	MoSES_RF
VRPB	81.0444	80.8444	9.353701	9.354876	9.318750	-0.0126	+0.3751	0.3815	reld_mt
VRPL	38.1333	33.0889	12.432058	12.437959	12.383444	-0.0474	+0.3926	0.4008	MoSES_RF
VRPTW	80.0000	79.9556	18.819009	18.819431	18.766139	-0.0022	+0.2817	0.2989	reld_mt
OVRPTW	83.8000	83.7778	10.143363	10.143730	10.116859	-0.0036	+0.2620	0.2591	reld_mt
OVRPB	88.4889	88.5111	6.357879	6.357254	6.341078	+0.0098	+0.2650	0.2779	reld_mt
OVRPL	40.6000	35.9111	7.439315	7.445709	7.390416	-0.0859	+0.6617	0.6747	MoSES_RF
VRPBL	78.9111	78.5111	9.368055	9.371523	9.328366	-0.0370	+0.4255	0.4289	reld_mt
VRPBTW	78.4889	78.4222	19.945809	19.950430	19.851084	-0.0232	+0.4772	0.4579	reld_mt
VRPLTW	78.8444	78.7556	18.764476	18.765871	18.707843	-0.0074	+0.3027	0.3187	reld_mt
OVRPBL	89.2889	89.2000	6.369520	6.370093	6.352824	-0.0090	+0.2628	0.2741	reld_mt
OVRPBTW	83.5333	83.4444	10.660639	10.661098	10.623245	-0.0043	+0.3520	0.3254	reld_mt
OVRPLTW	83.5111	83.4889	10.157395	10.157423	10.129818	-0.0003	+0.2722	0.2754	reld_mt
VRPBLTW	79.4667	79.4000	19.793428	19.797044	19.706420	-0.0183	+0.4415	0.4297	reld_mt
OVRPBLTW	83.1111	83.2889	10.610708	10.609955	10.571302	+0.0071	+0.3728	0.3509	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R95/A | TEST: ALL and18 tasks

TRAIN-fitted SBS and unchanged native/FP64 costs; no per-task checkpoint assembly.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)	TRAIN SBS
ALL	71.2494	66.1802	11.373721	11.385299	11.329932	-0.1980	+0.3852	0.3929	per-problem TRAIN SBS
TSP	46.8222	34.5333	7.970641	7.989621	7.937593	-0.2376	+0.4163	0.4087	T2T
CVRP	47.0222	17.9333	18.009792	18.124983	17.918509	-0.6355	+0.5094	0.6614	RELD_CVRP
ATSP	76.7333	47.2444	1.635442	1.674207	1.629441	-2.3155	+0.3682	0.3674	UNICO_MatPOENet
OVRP	40.0889	33.6444	7.447367	7.455750	7.400487	-0.1124	+0.6335	0.6426	MoSES_RF
VRPB	80.7778	80.4000	9.348764	9.351810	9.315298	-0.0326	+0.3593	0.3628	reld_mt
VRPL	37.8889	32.2667	12.349759	12.356138	12.300958	-0.0516	+0.3967	0.4071	MoSES_RF
VRPTW	81.0889	80.8444	18.689516	18.690545	18.637408	-0.0055	+0.2796	0.2905	reld_mt
OVRPTW	83.9778	83.9333	10.092688	10.093063	10.068135	-0.0037	+0.2439	0.2348	reld_mt
OVRPB	88.1333	88.1333	6.370748	6.370826	6.352225	-0.0012	+0.2916	0.2982	reld_mt
OVRPL	41.7556	34.6000	7.464366	7.472542	7.418033	-0.1094	+0.6246	0.6337	MoSES_RF
VRPBL	79.5556	79.4222	9.394770	9.396379	9.355967	-0.0171	+0.4147	0.4184	reld_mt
VRPBTW	78.7778	78.7556	19.664242	19.665725	19.577666	-0.0075	+0.4422	0.4373	reld_mt
VRPLTW	79.3333	79.2444	18.801268	18.803136	18.745143	-0.0099	+0.2994	0.3170	reld_mt
OVRPBL	89.3111	89.2889	6.375422	6.375741	6.359310	-0.0050	+0.2533	0.2641	reld_mt
OVRPBTW	84.9556	84.8222	10.658958	10.659591	10.624748	-0.0059	+0.3220	0.2940	reld_mt
OVRPLTW	82.9556	82.8667	10.085695	10.086112	10.059001	-0.0041	+0.2654	0.2659	reld_mt
VRPBLTW	79.7333	79.7333	19.705535	19.707068	19.613284	-0.0078	+0.4704	0.4500	reld_mt
OVRPBLTW	83.5778	83.5778	10.662003	10.662149	10.625574	-0.0014	+0.3428	0.3190	reld_mt

vs_SBS=100*(mean_cost/SBS_cost-1); vs_Oracle=100*(mean_cost/Oracle_cost-1).

actual regret=mean_i[100*(selected_i-oracle_i)/oracle_i]; not a ratio of means.

TRAIN81000 / VAL4500 / TEST4500 per problem. All18 problems have equal macro weight.

R95/A | LIB and locked provenance

Current R95 factory, same buffers and selected checkpoint; no solver execution or LIB tuning.

Split / Problem	Top1 (%)	SBS Top1 (%)	mean_cost	SBS cost	Oracle cost	vs_SBS (%)	vs_Oracle (%)	actual regret (%)
TSPLIB	22.4490	10.2041	8.208846	8.240435	8.142167	-0.3833	+0.8189	0.8281
CVRPLIB	63.0000	45.0000	67.274416	67.245364	66.945093	+0.0432	+0.4919	0.5920

SHA256: 04a92431b24969881607c41e464f25f6277df05e6893b84e712fd043e35b15e0

Unique selection: strict minimum full VAL macro_vs_sbs_pct with common new81000 TRAIN-fitted SBS; first wins ties

Inference: eval mode; fixed physical-node0 TSP slot3 role; original score MLP, pair differences and maximin; stable ascending-global-solver-ID tie break


Normalization: new81000 TRAIN only; no TEST/LIB refit.

R95/A | TSP | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/TSPLIB | native/FP64 ind

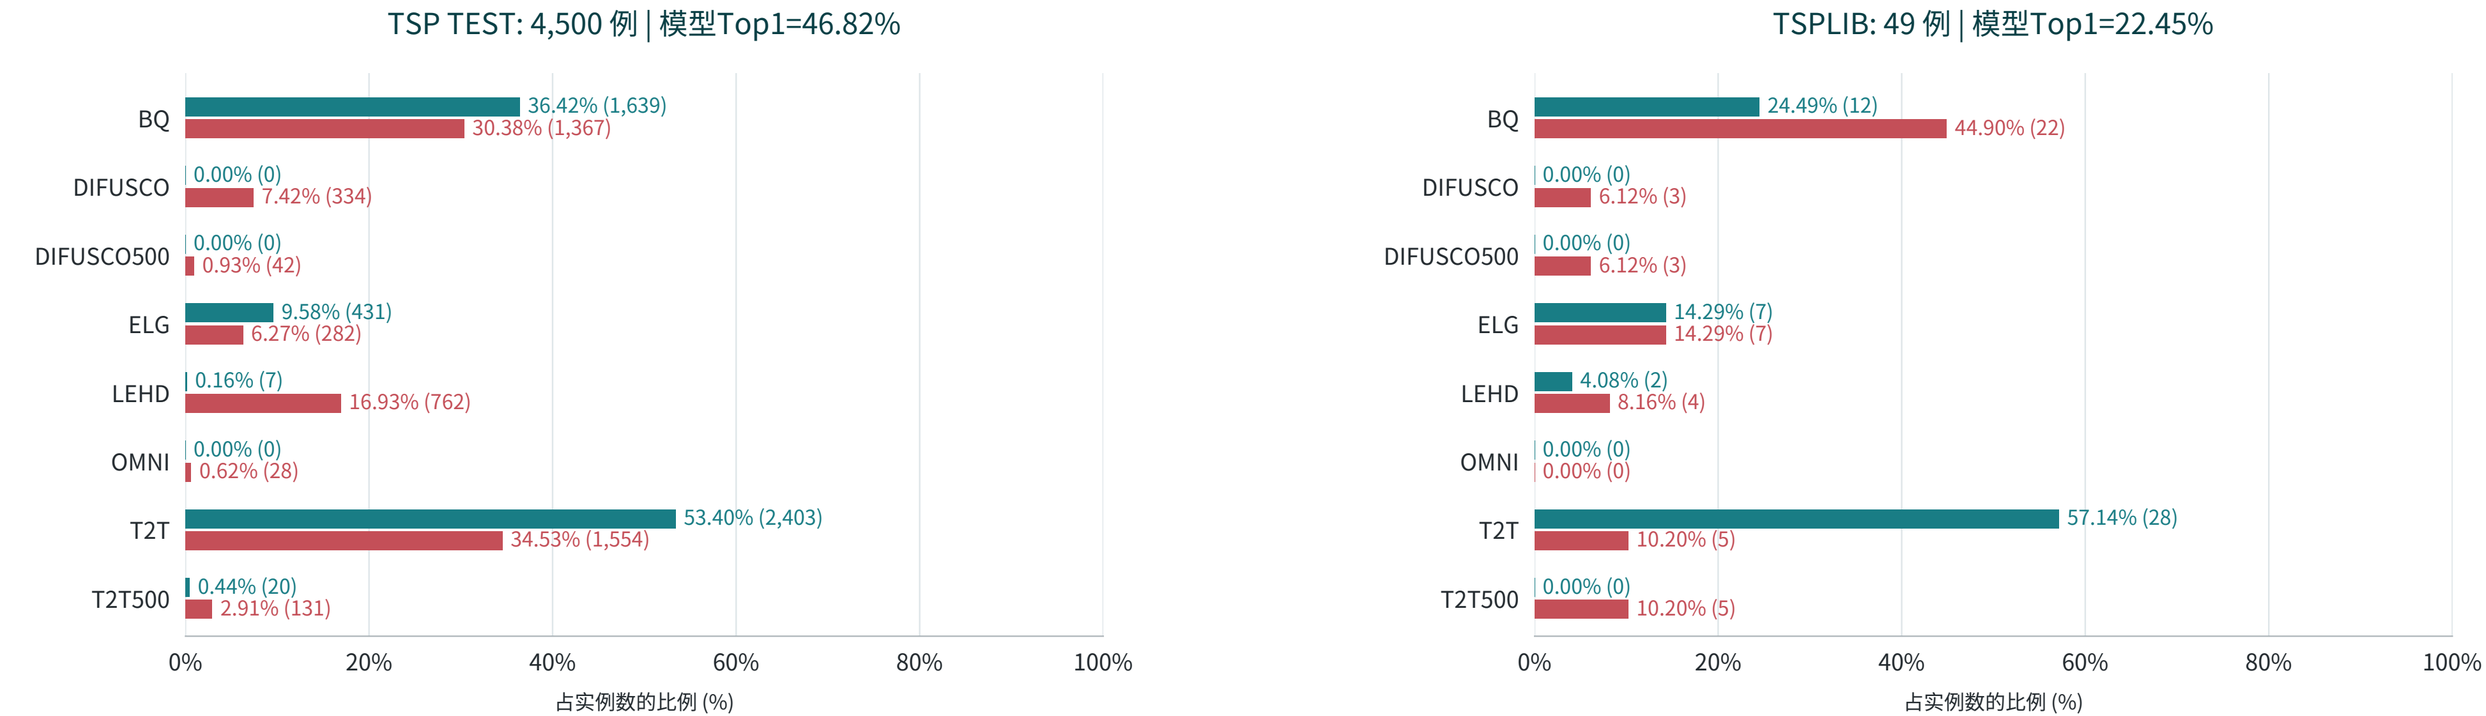

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | CVRP | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

LIB: data/CVRPLIB | native/FP64 ind

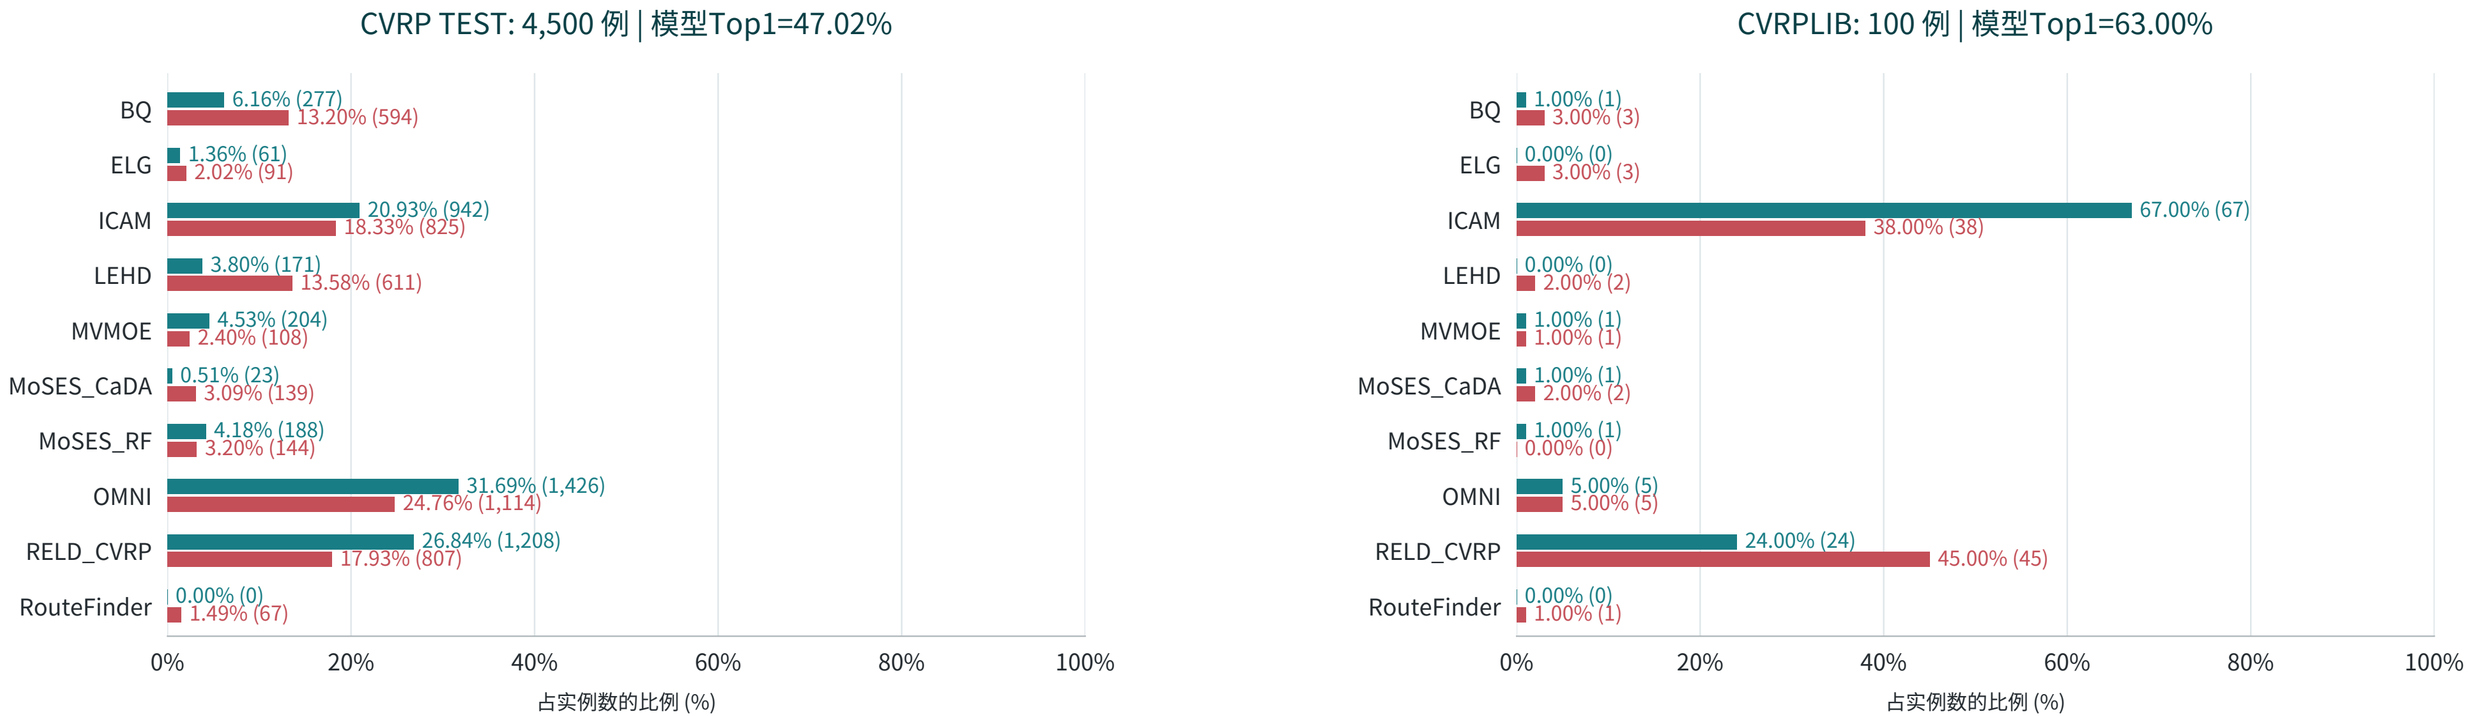

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | ATSP | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

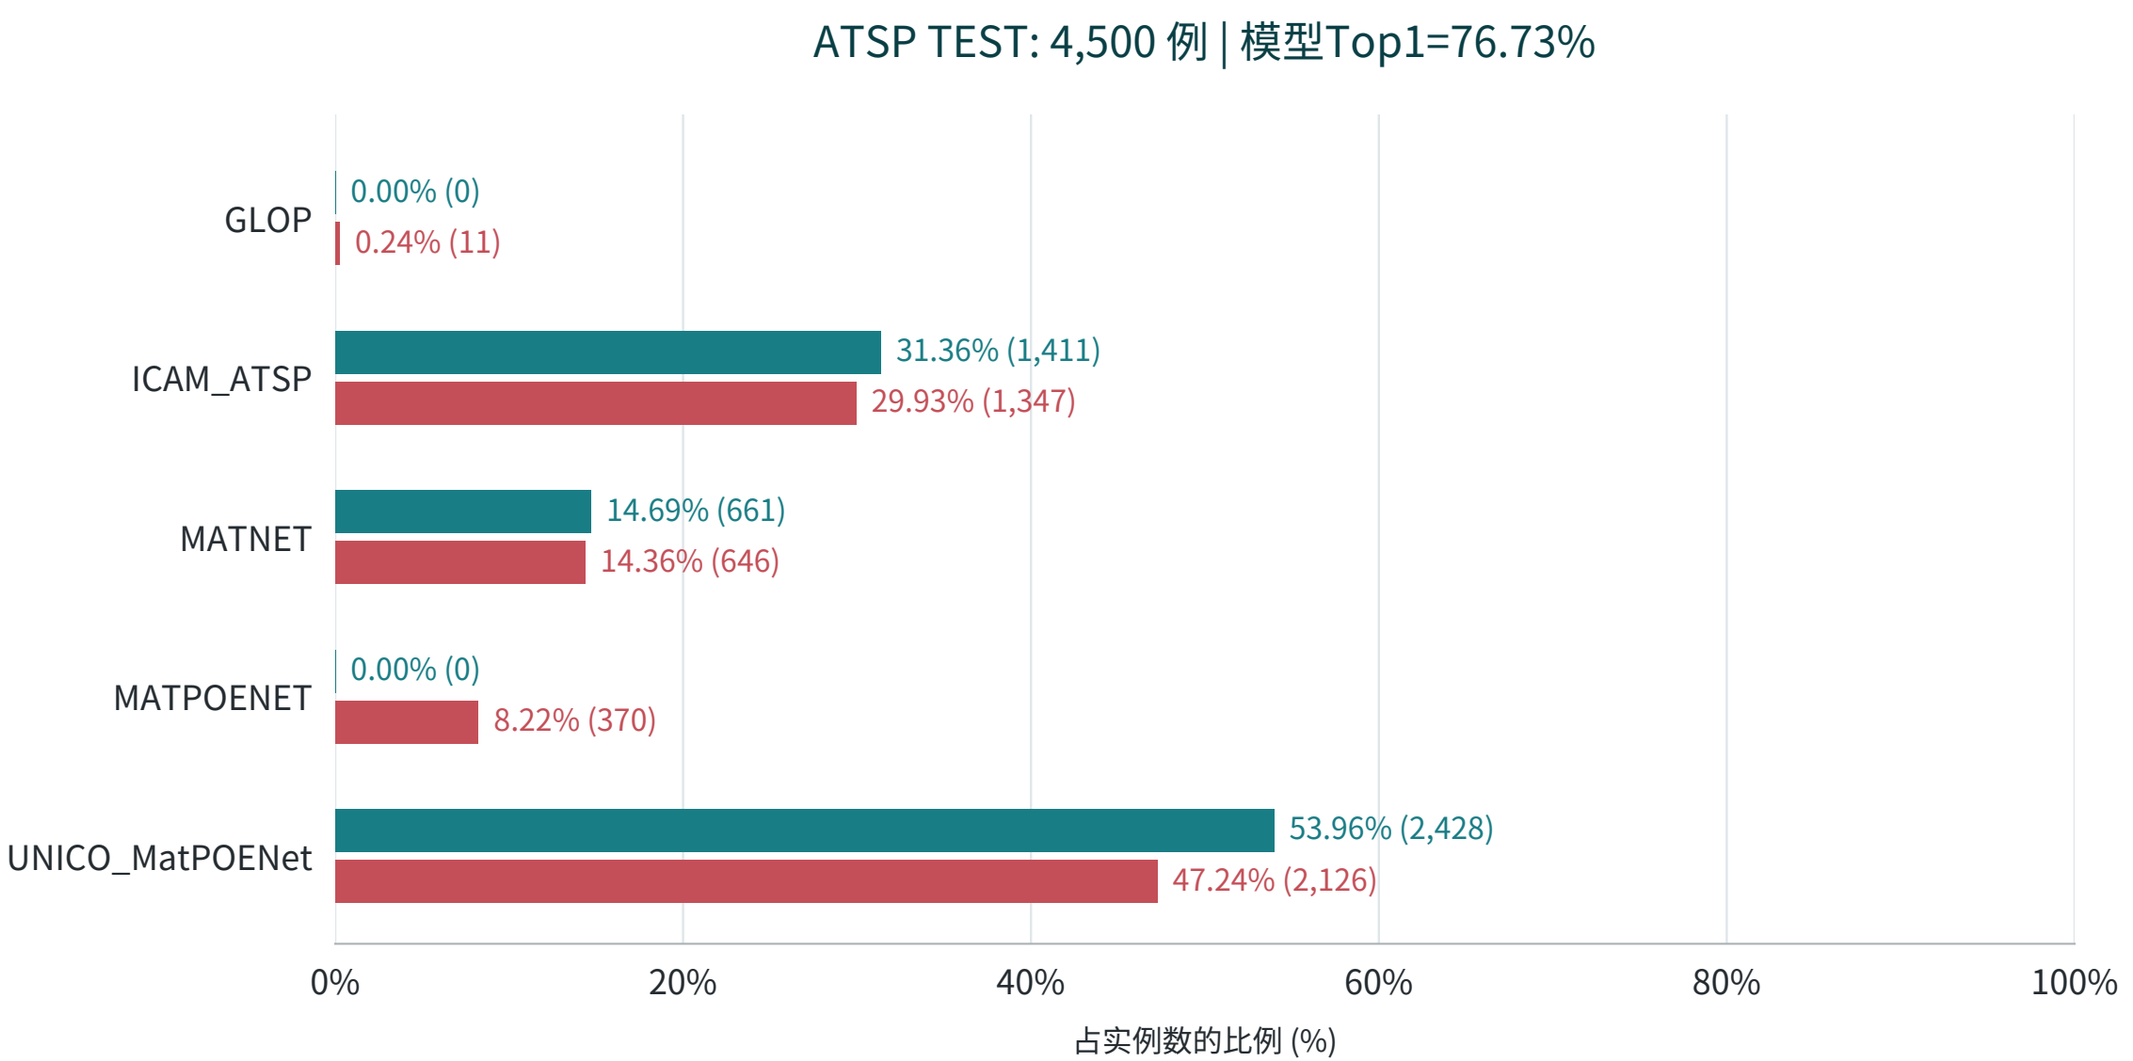

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | OVRP | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

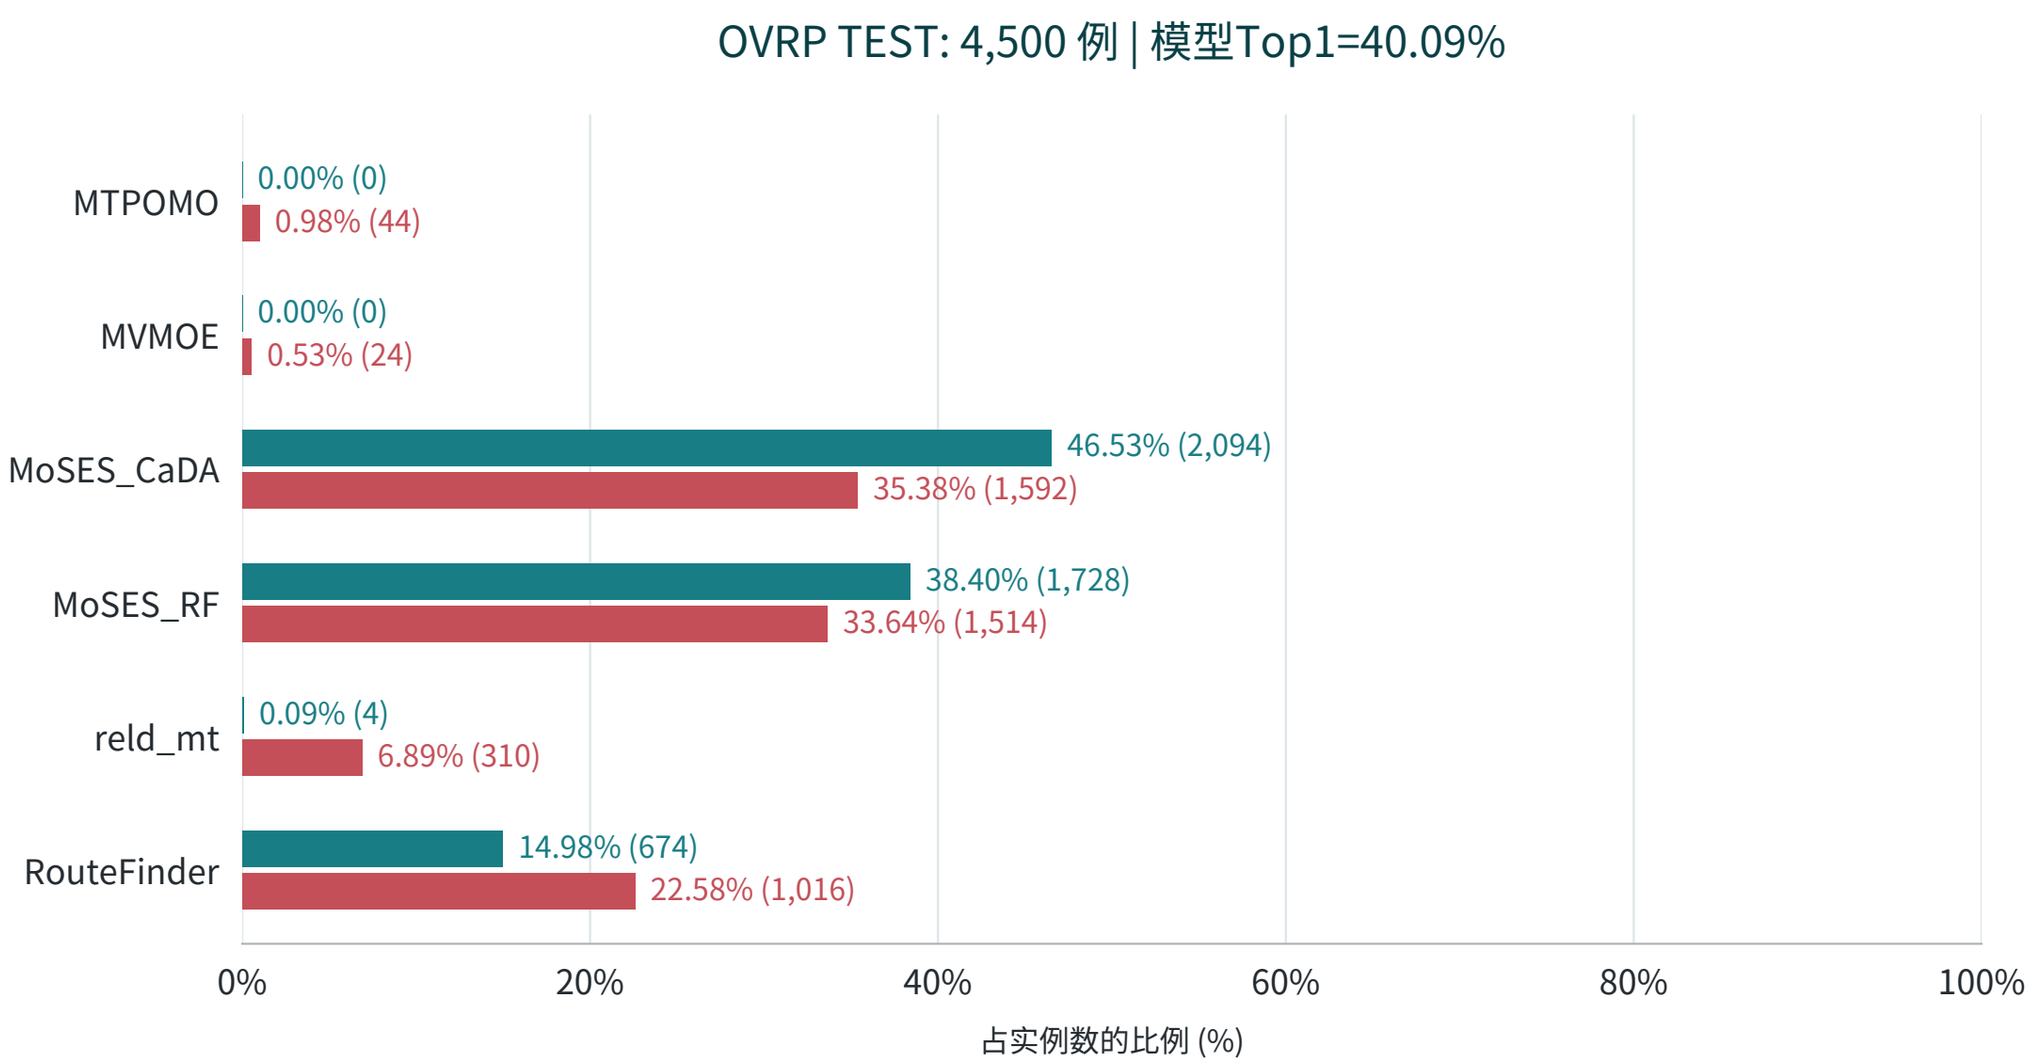

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | VRPB | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

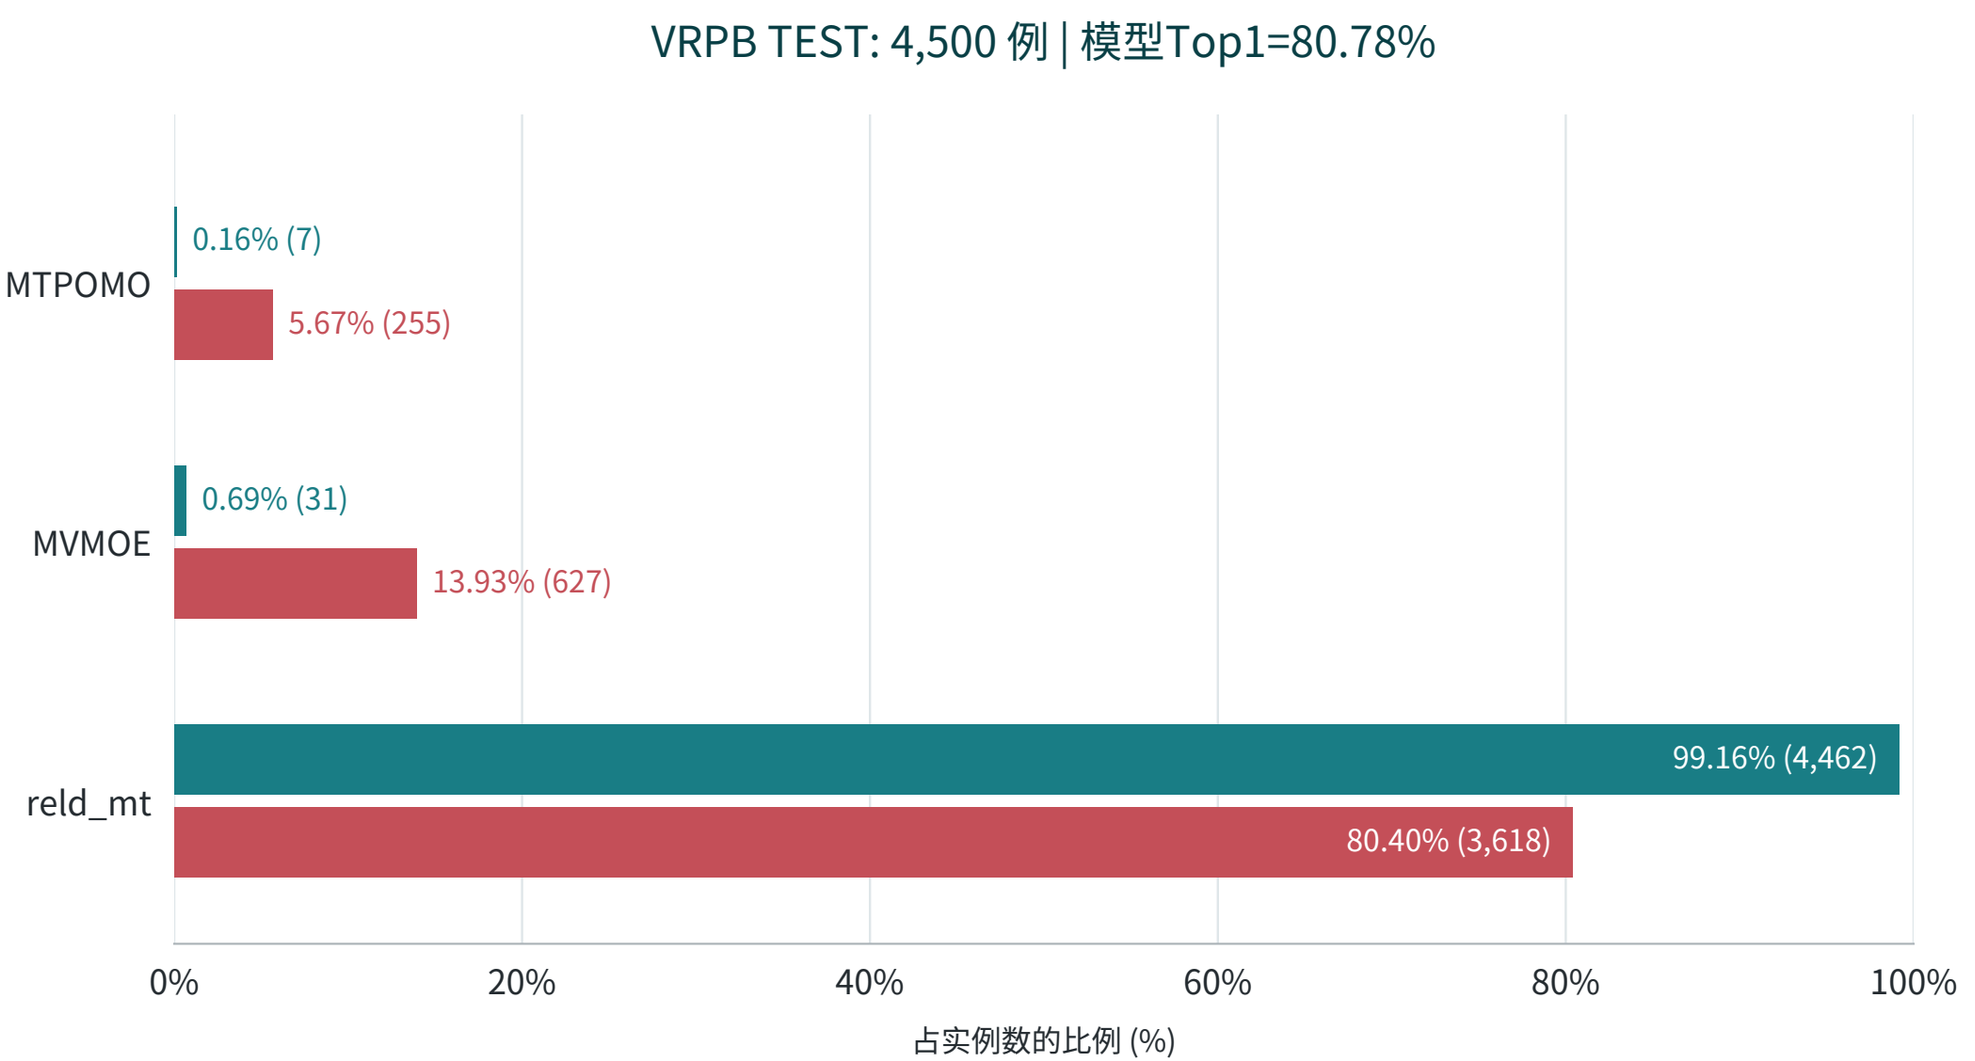

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | VRPL | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

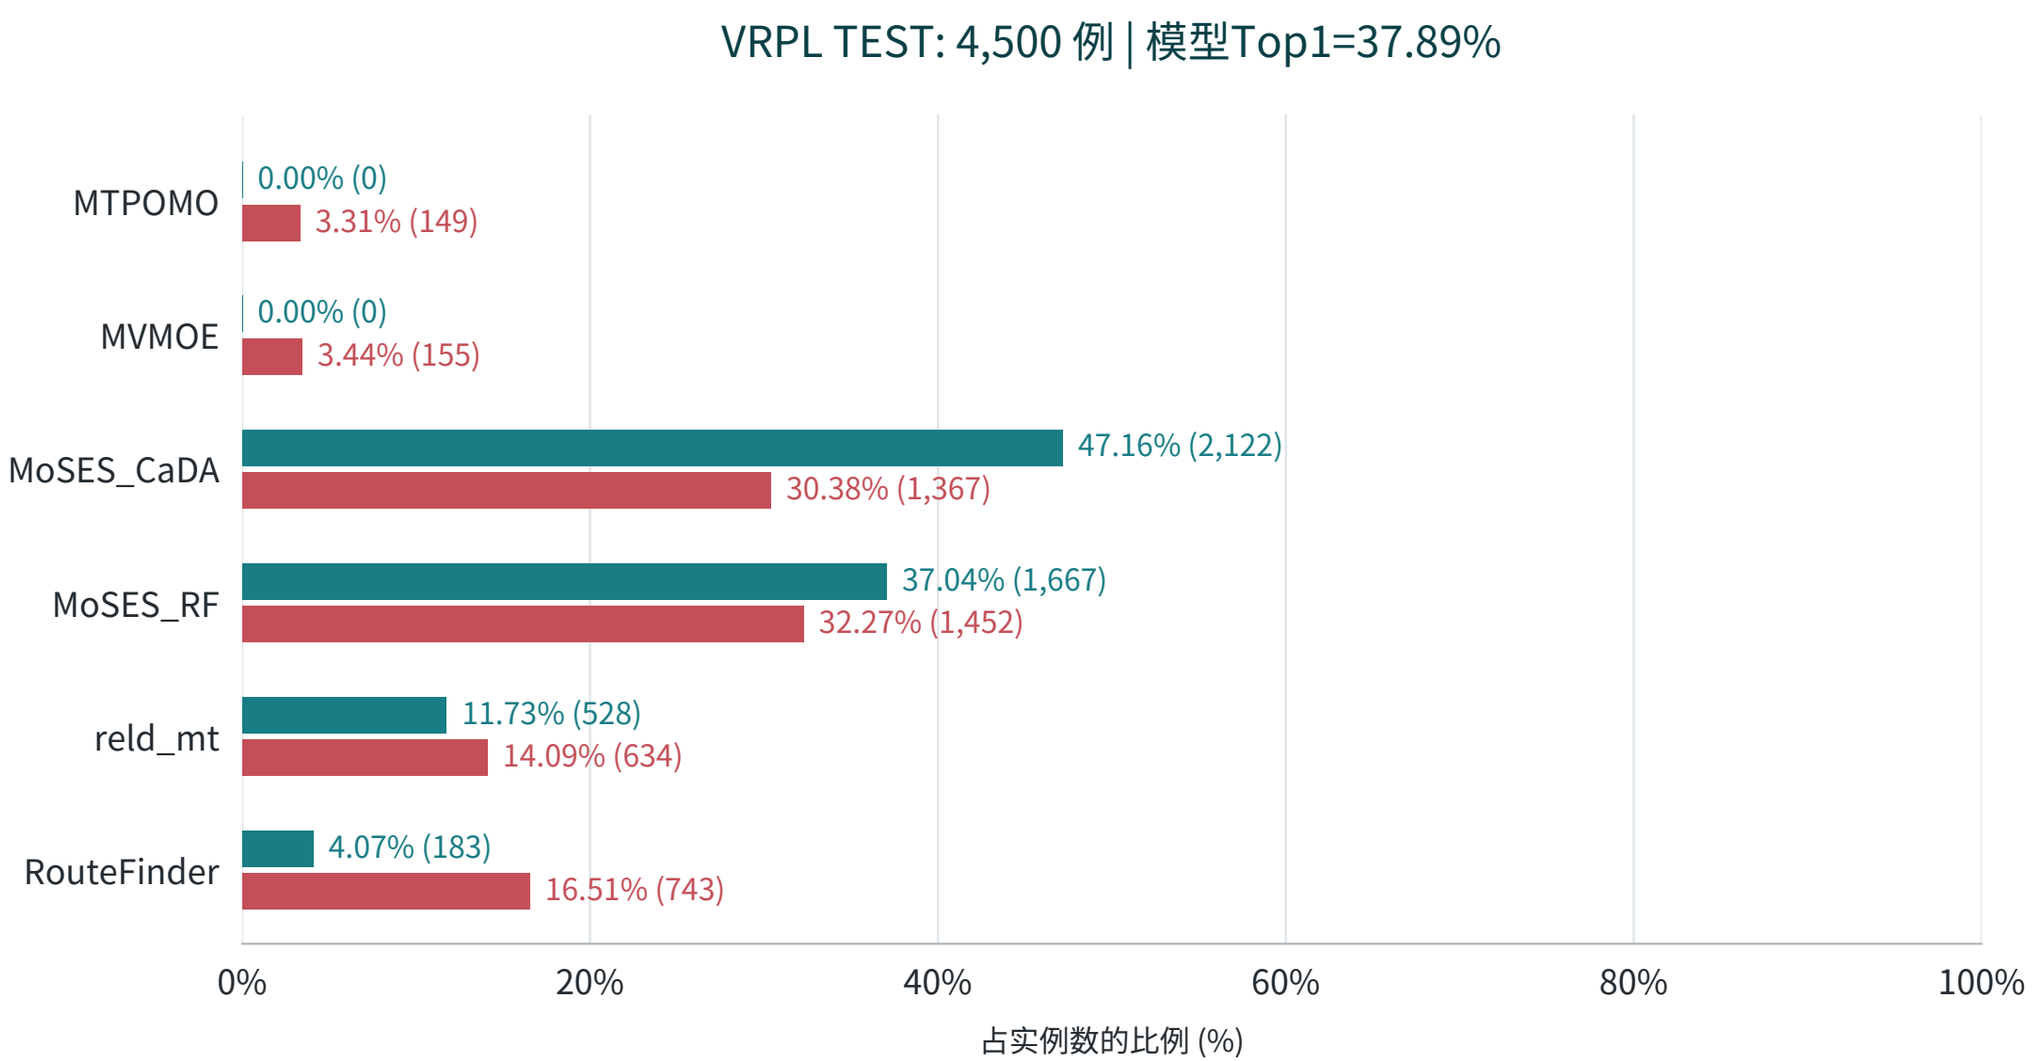

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | VRPTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

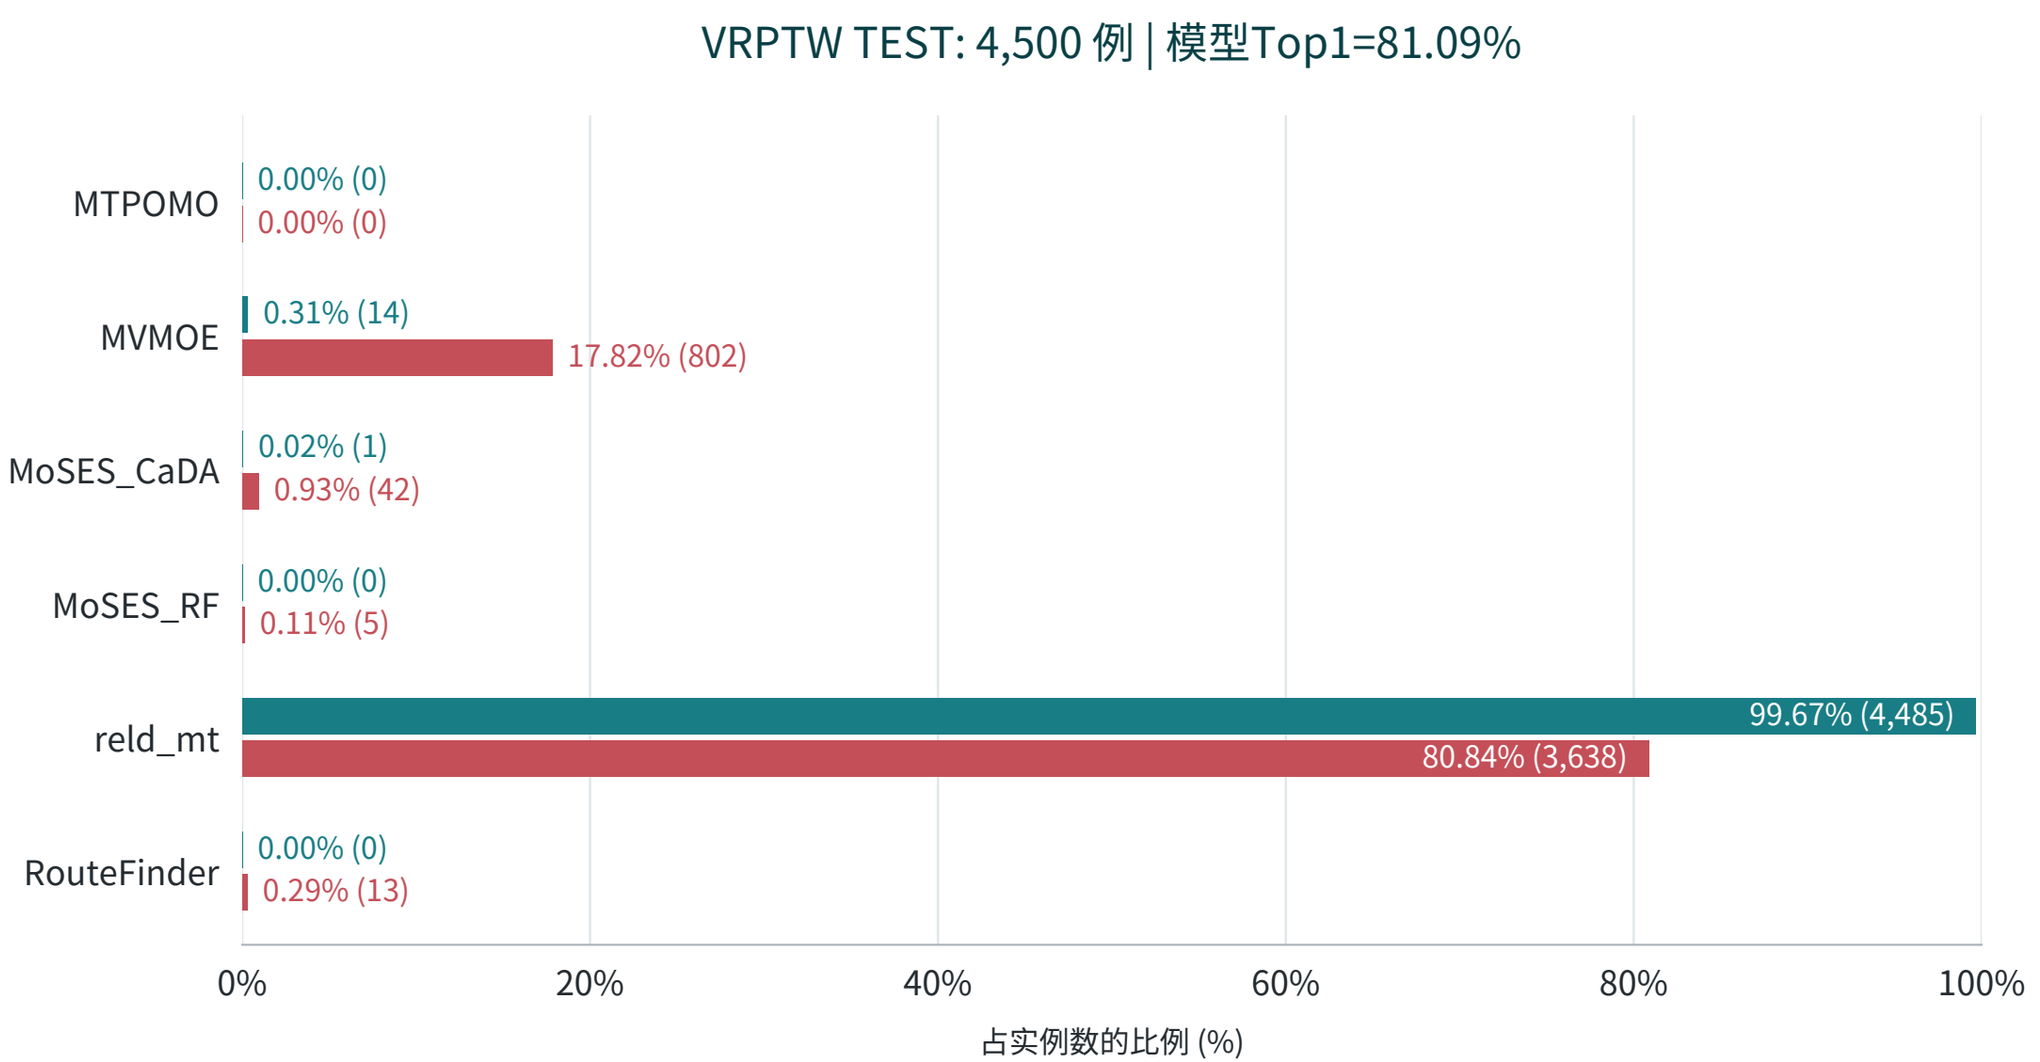

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | OVRPTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

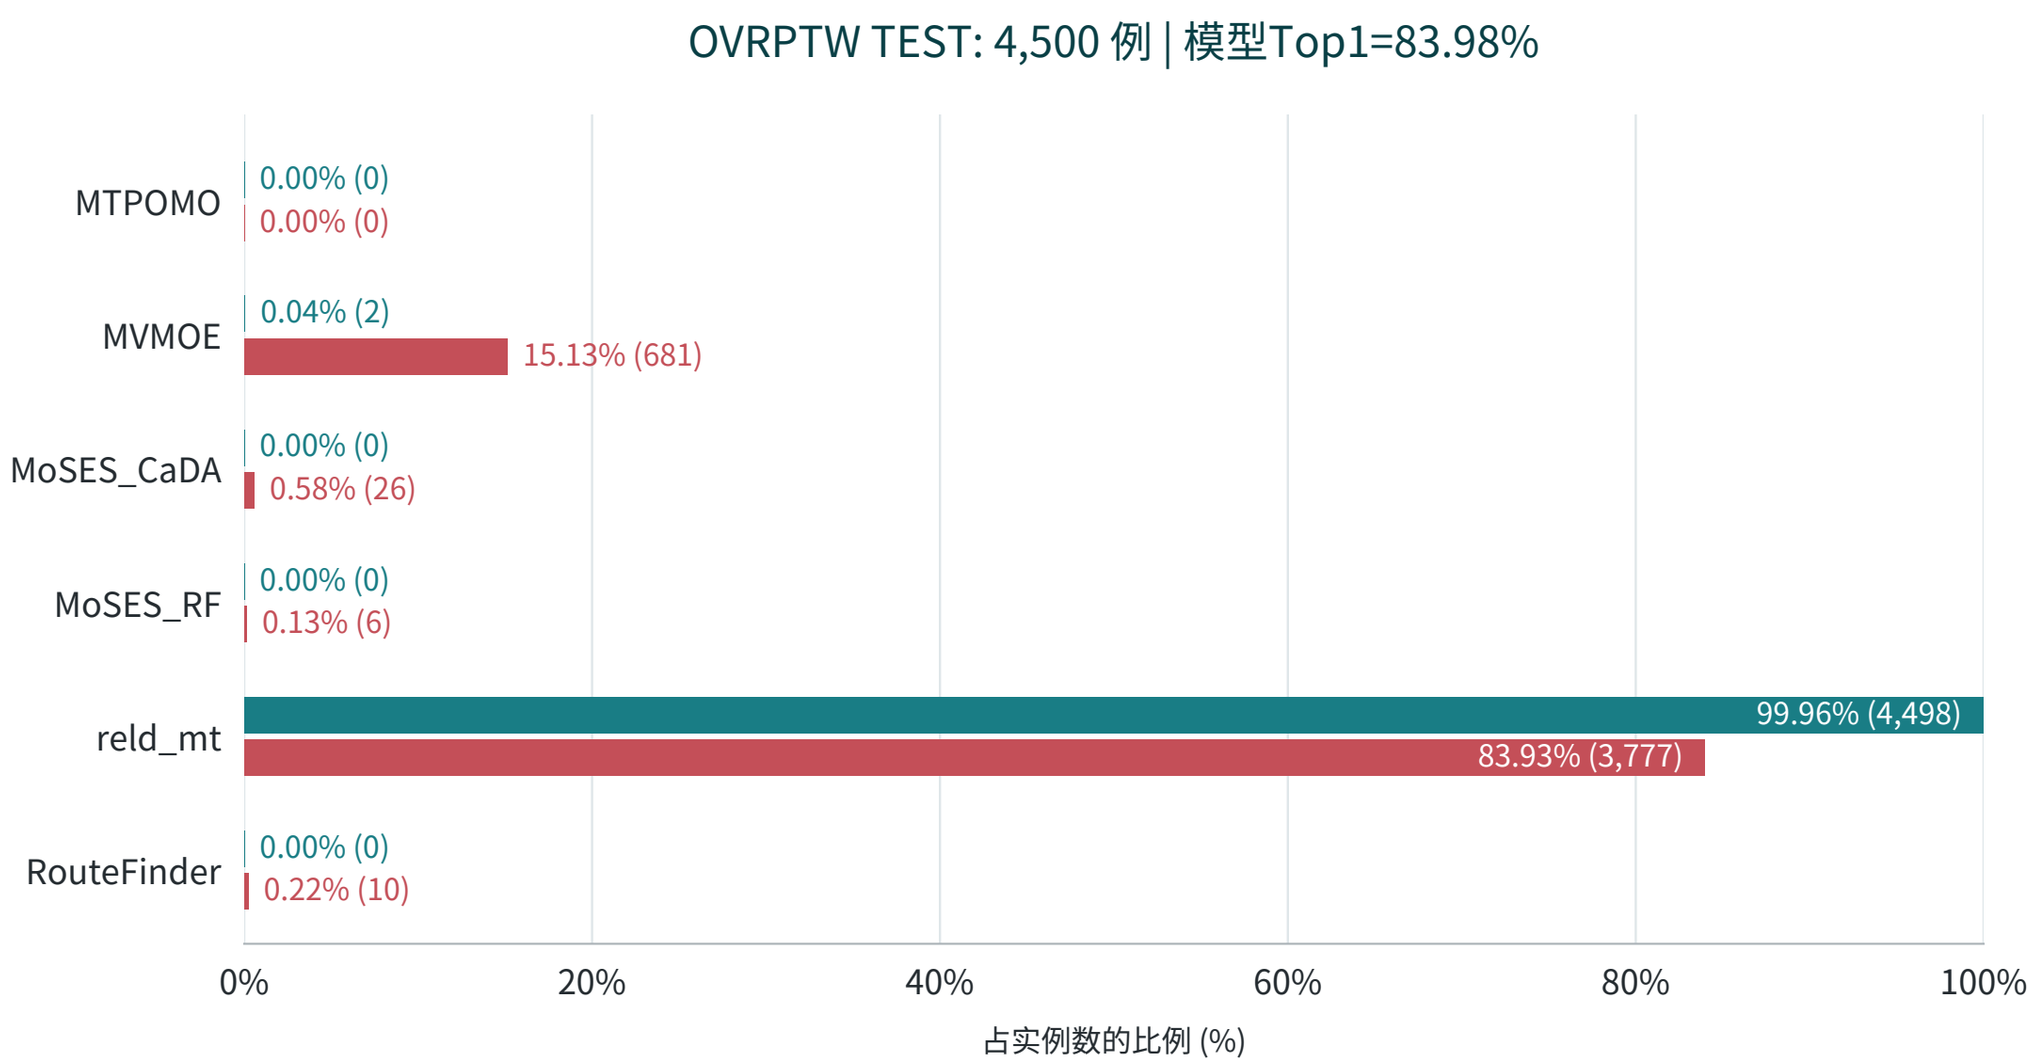

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | OVRPB | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

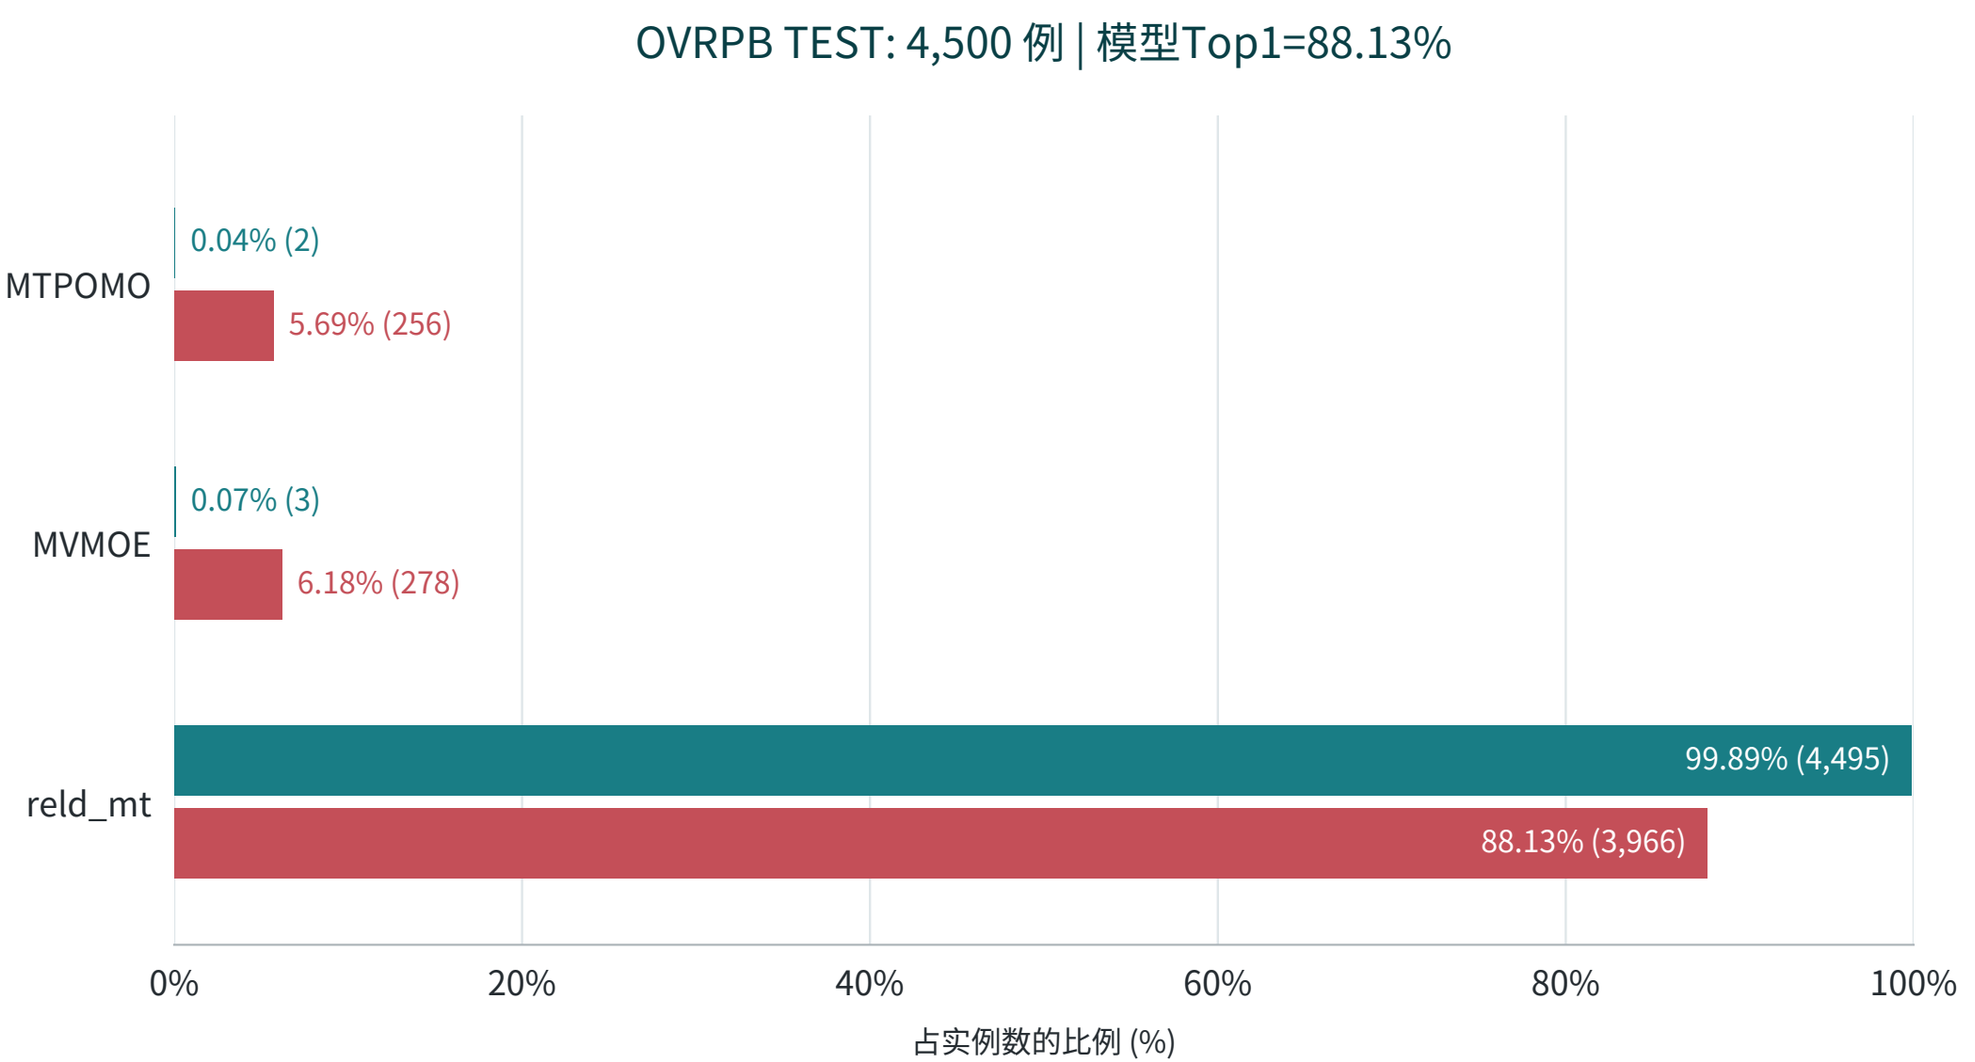

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | OVRPL | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

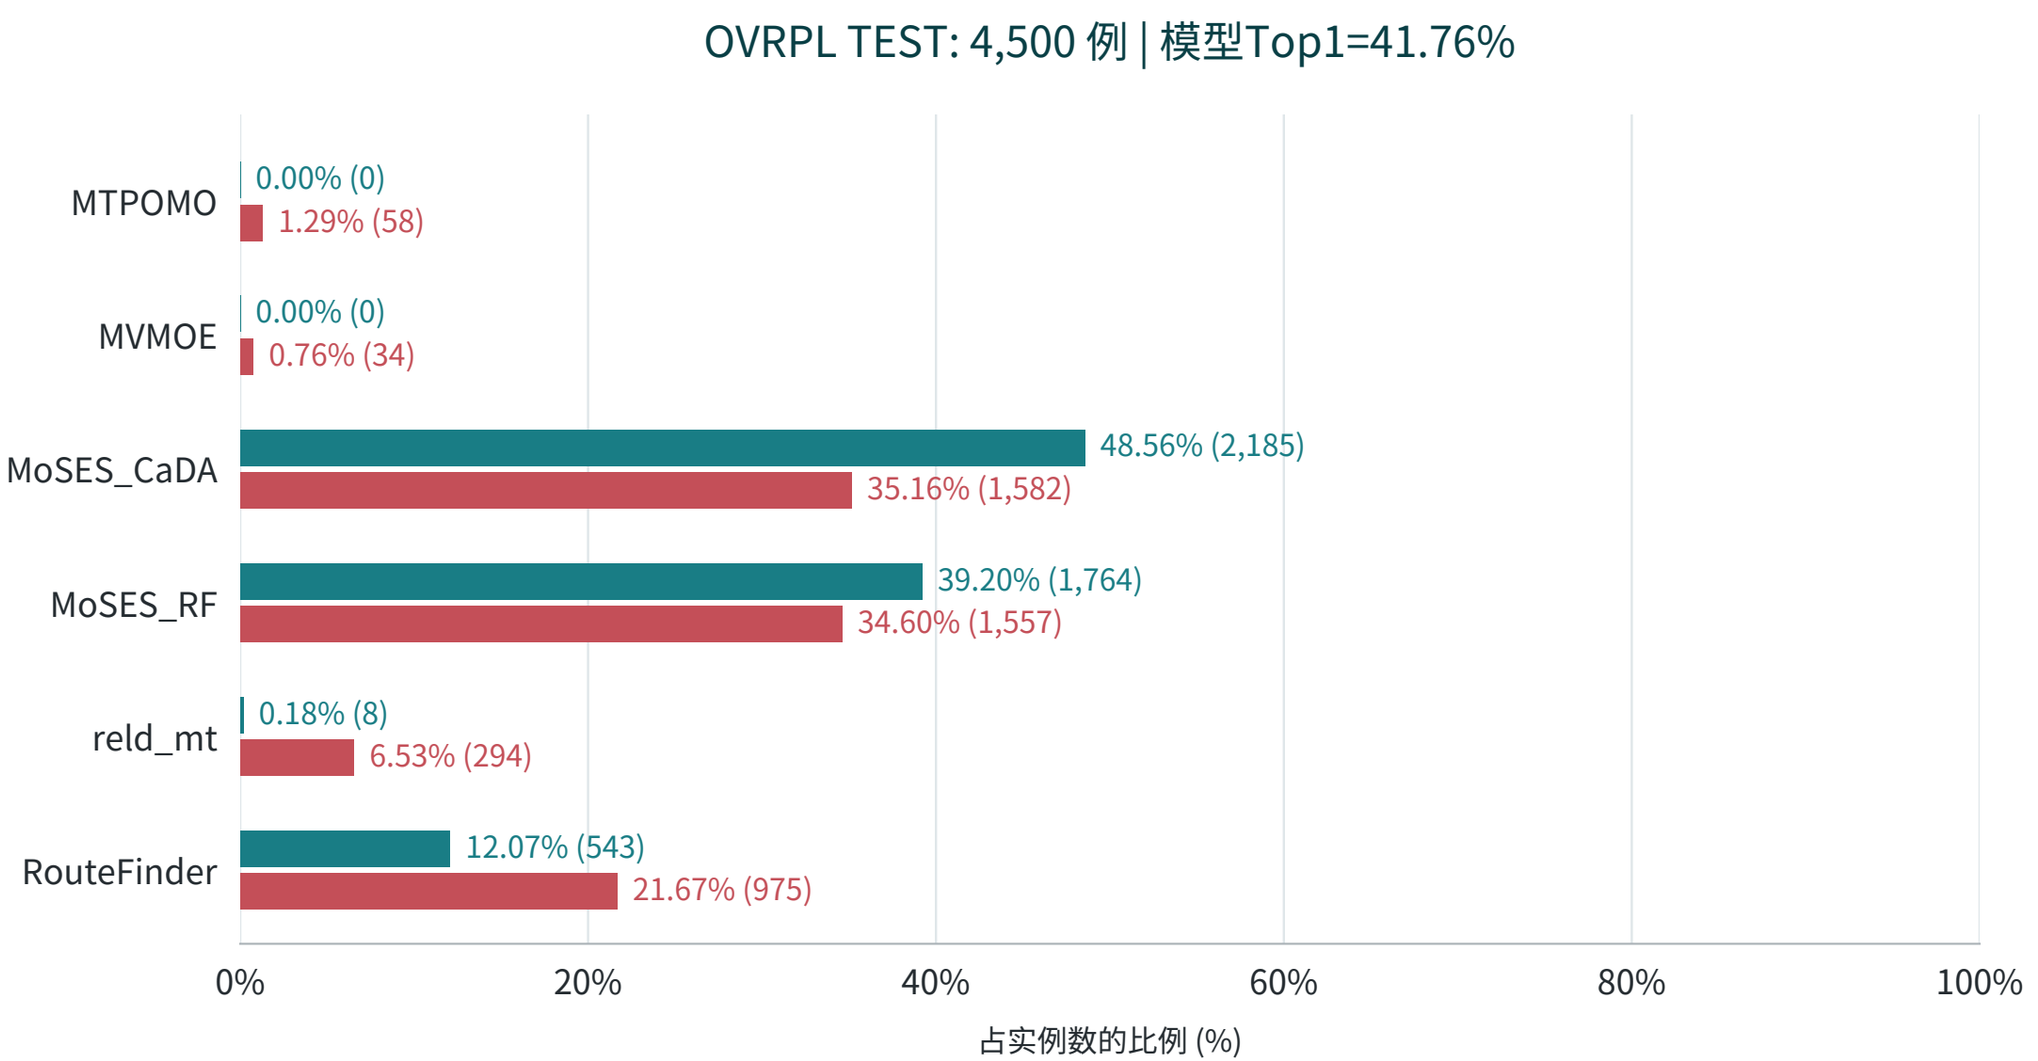

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | VRPBL | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

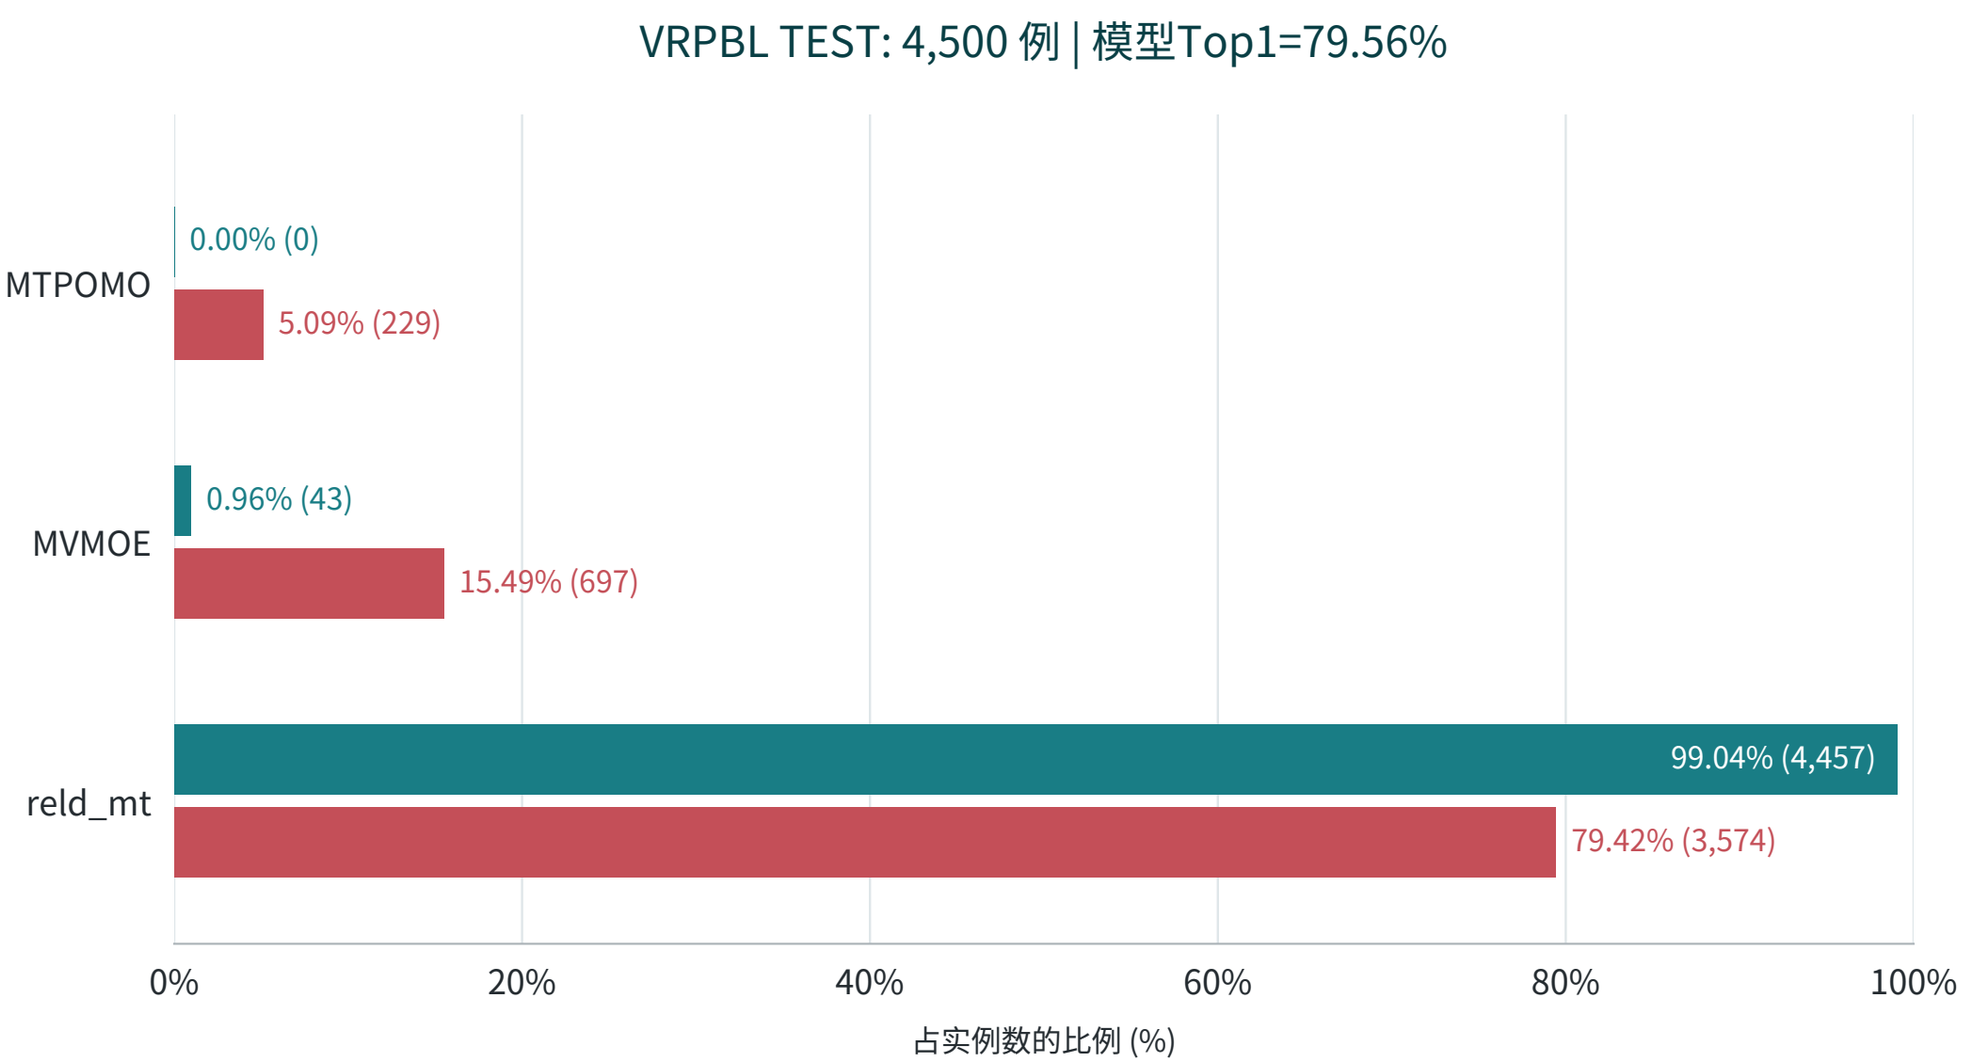

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | VRPBTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

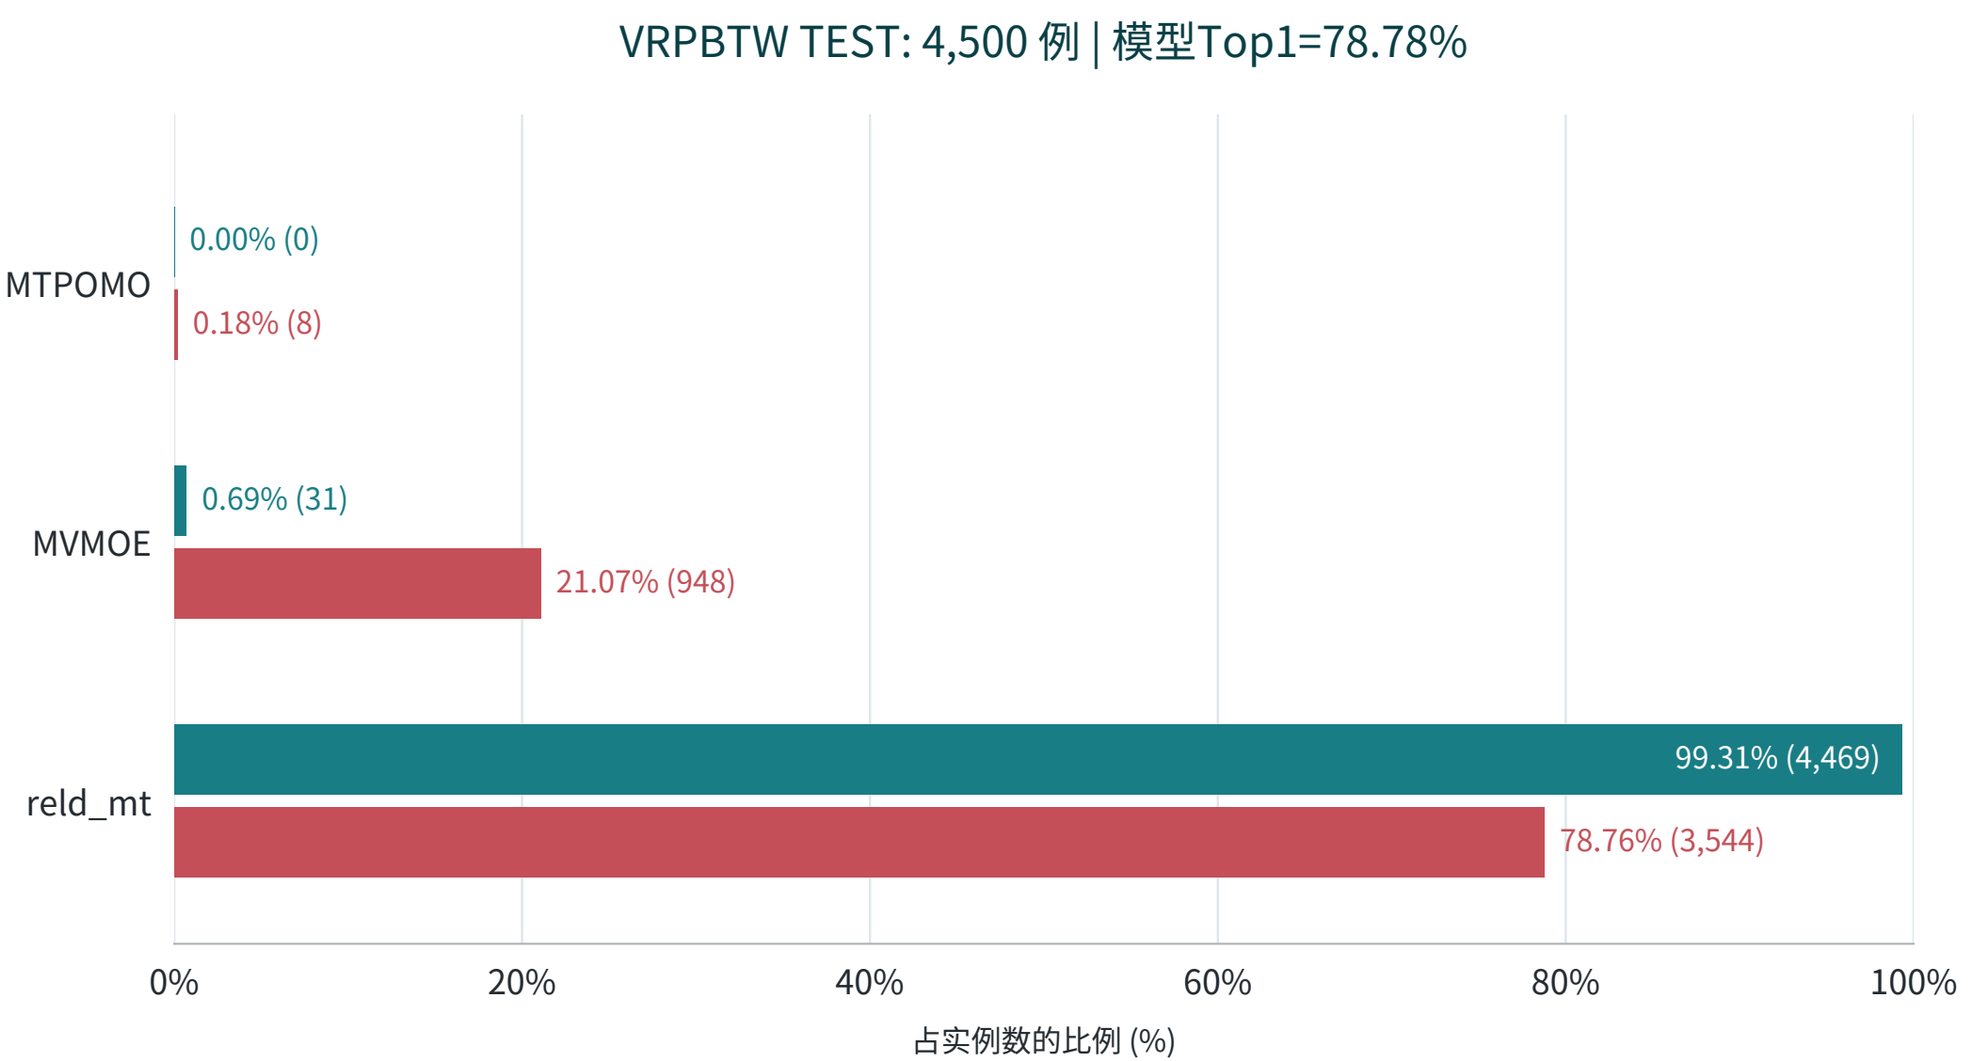

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | VRPLTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

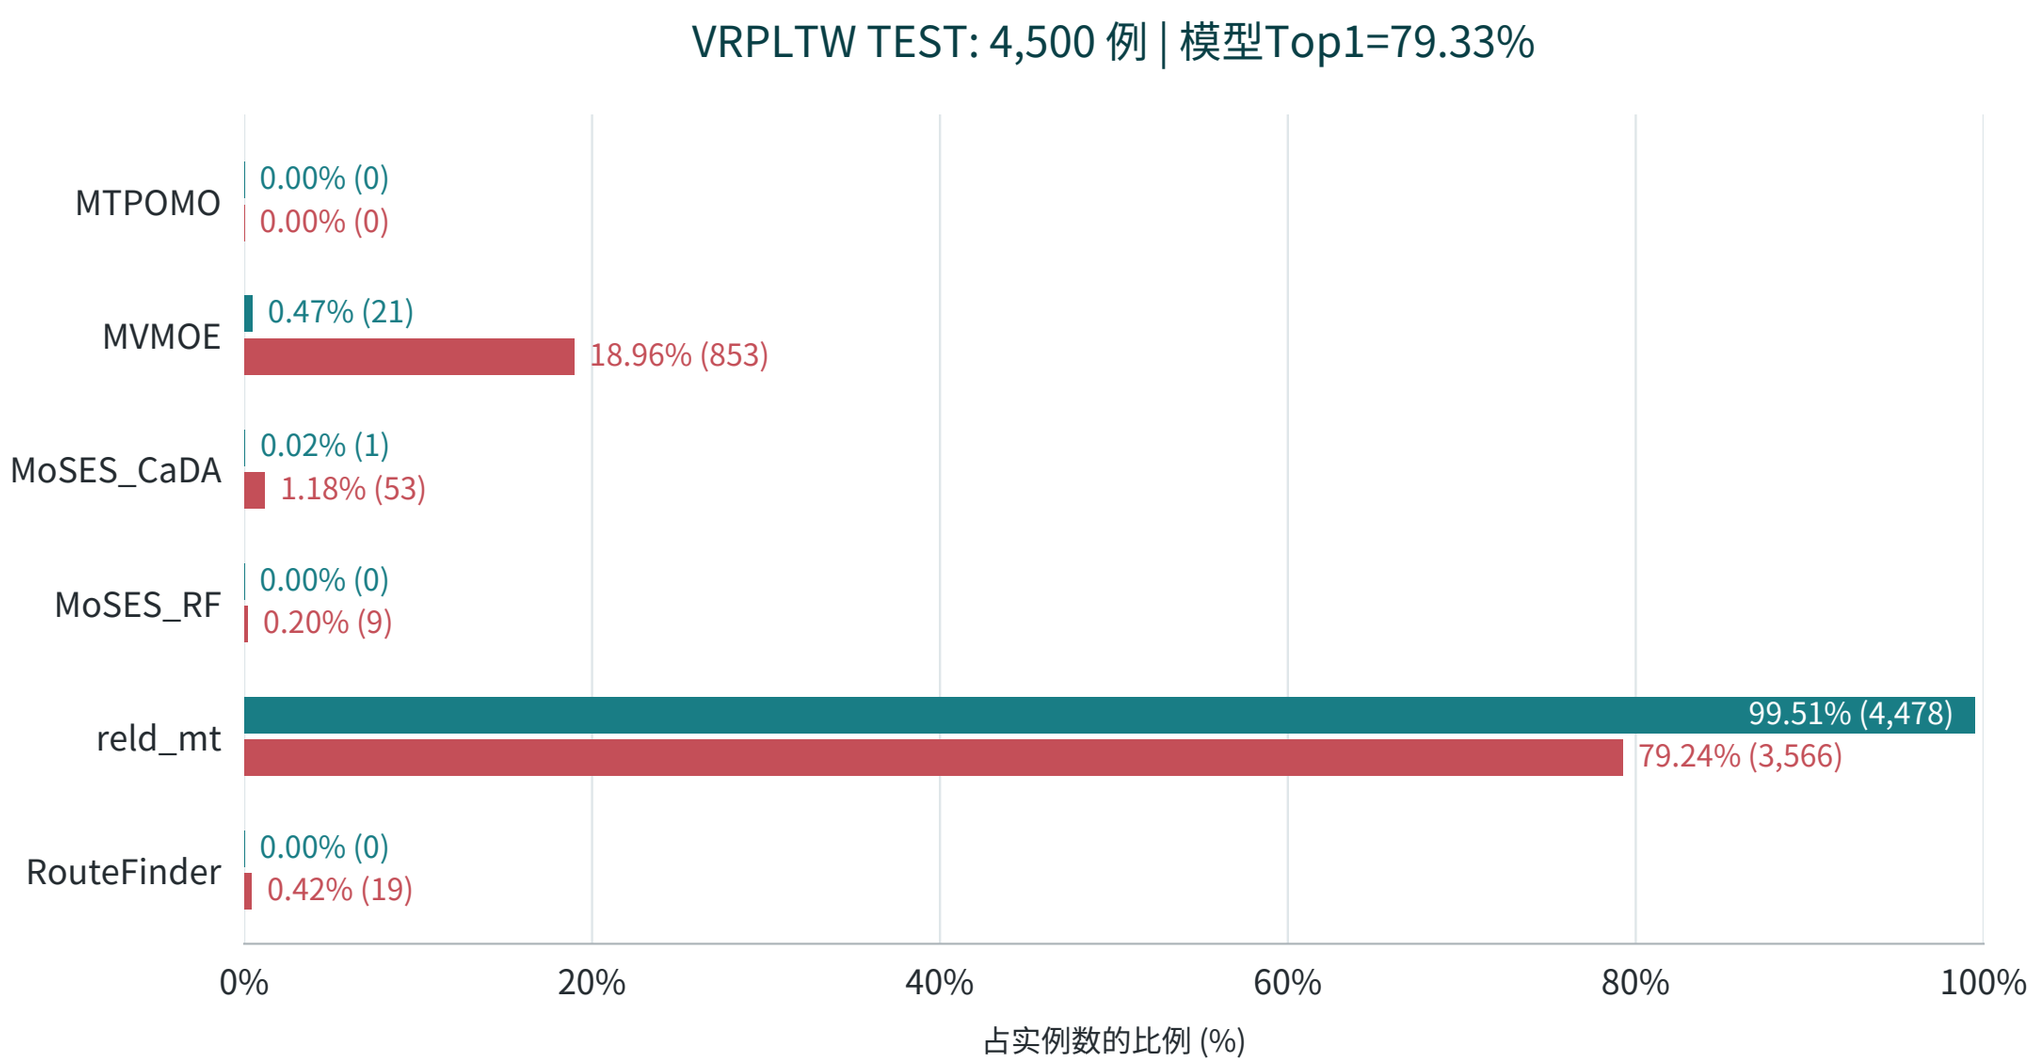

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | OVRPBL | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

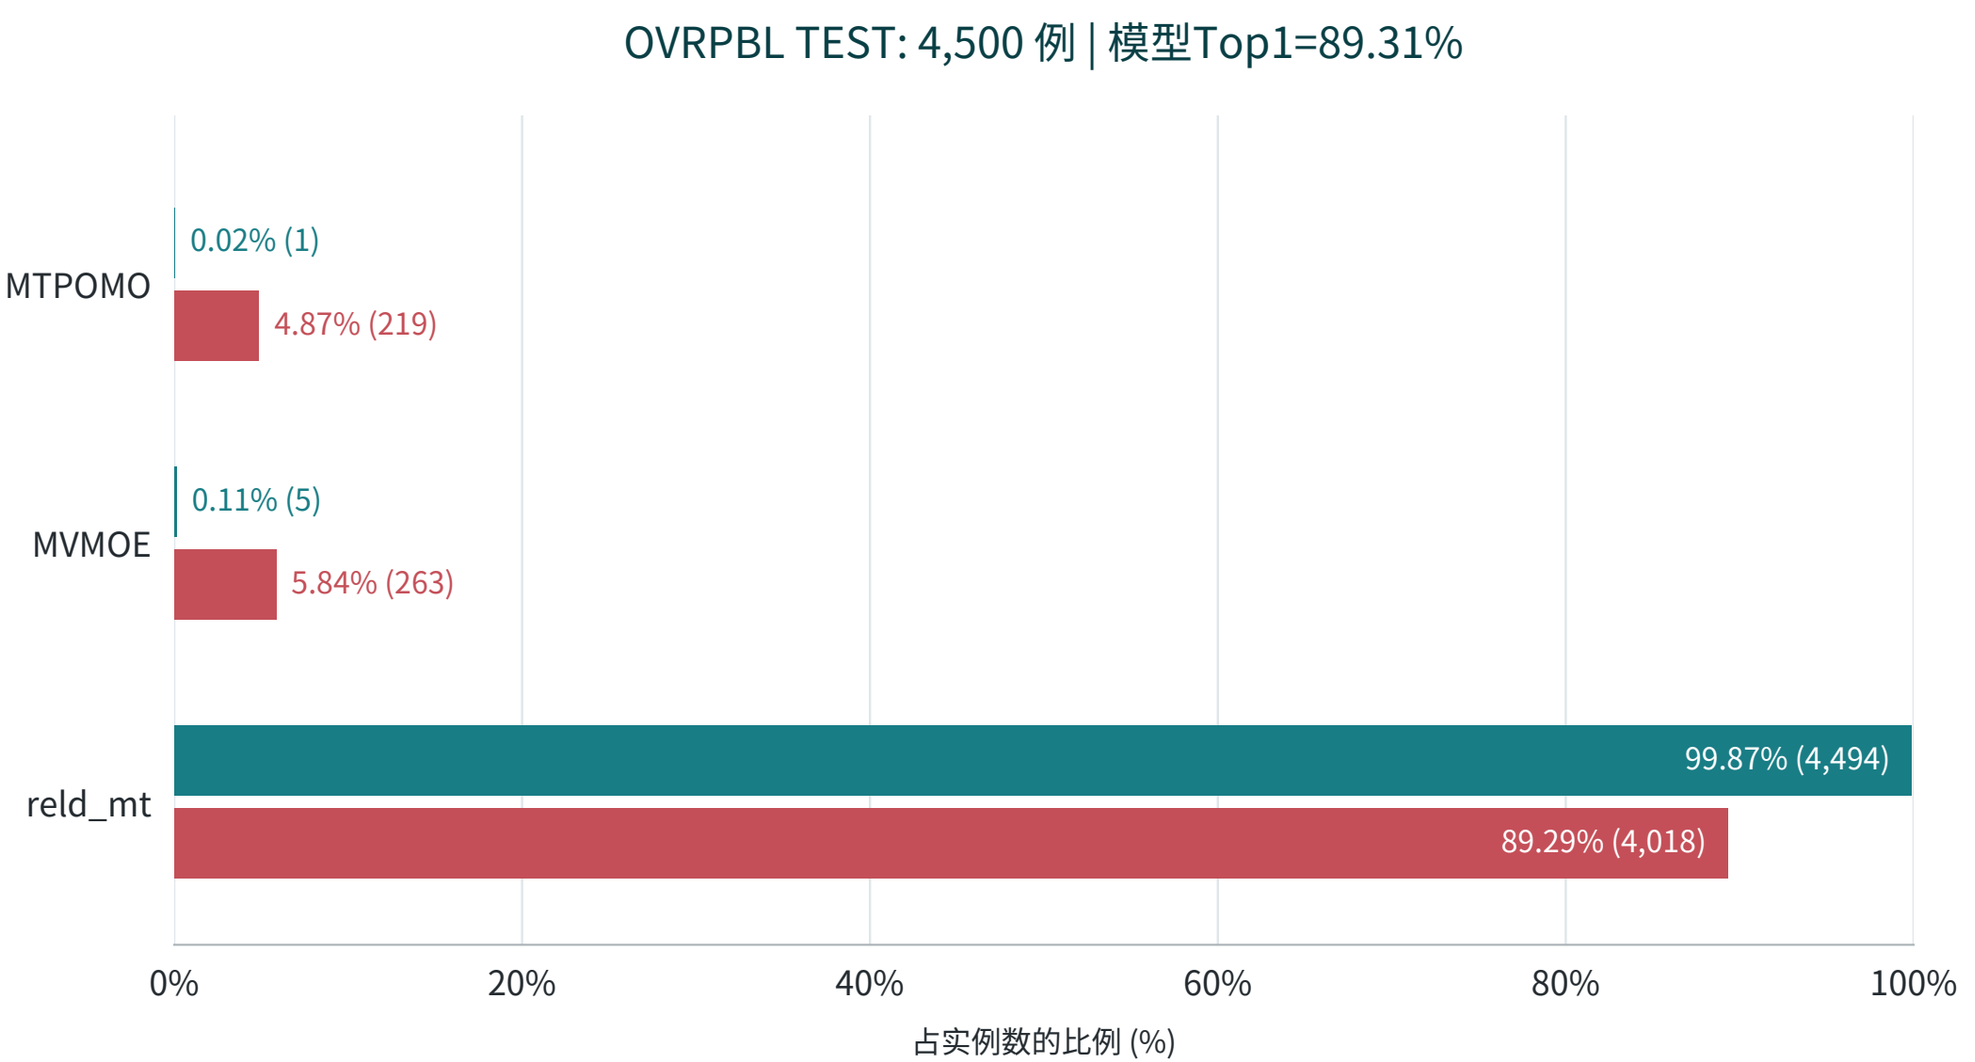

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | OVRPBTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

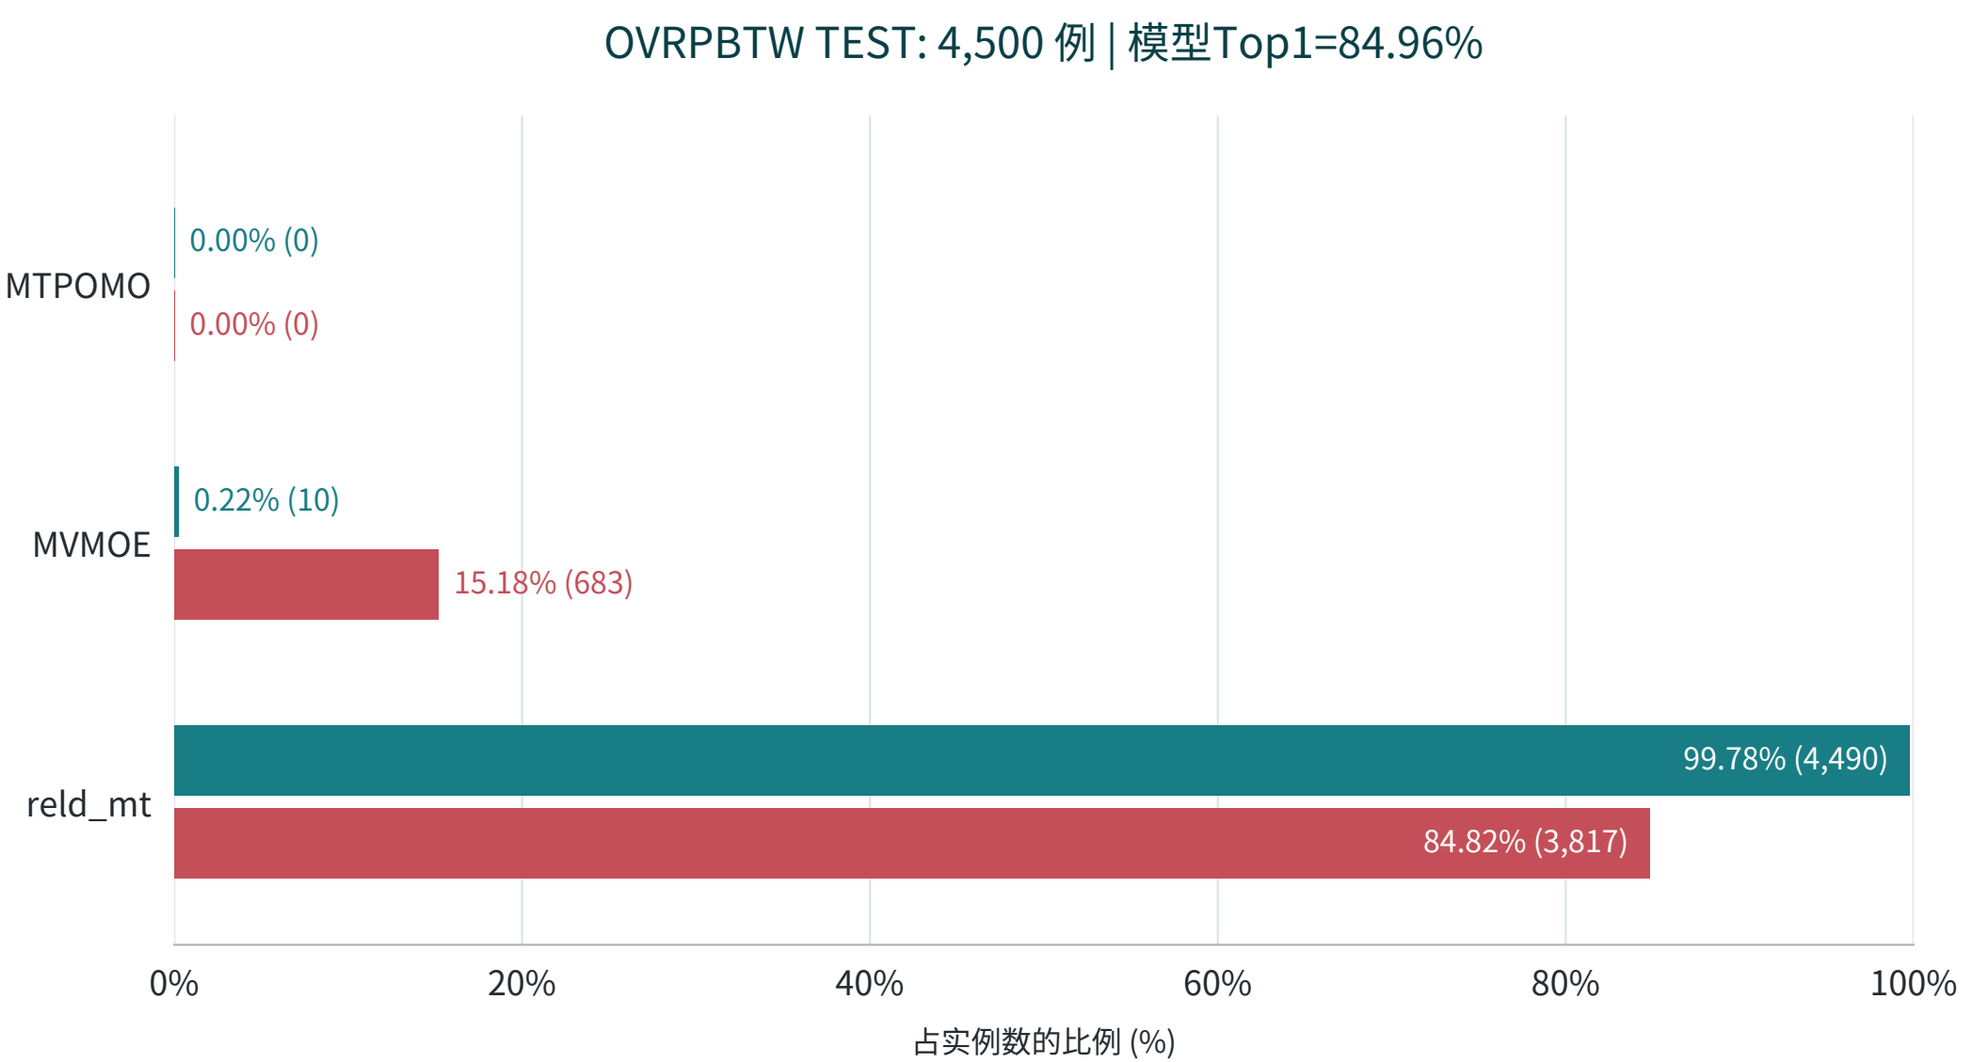

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | OVRPLTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

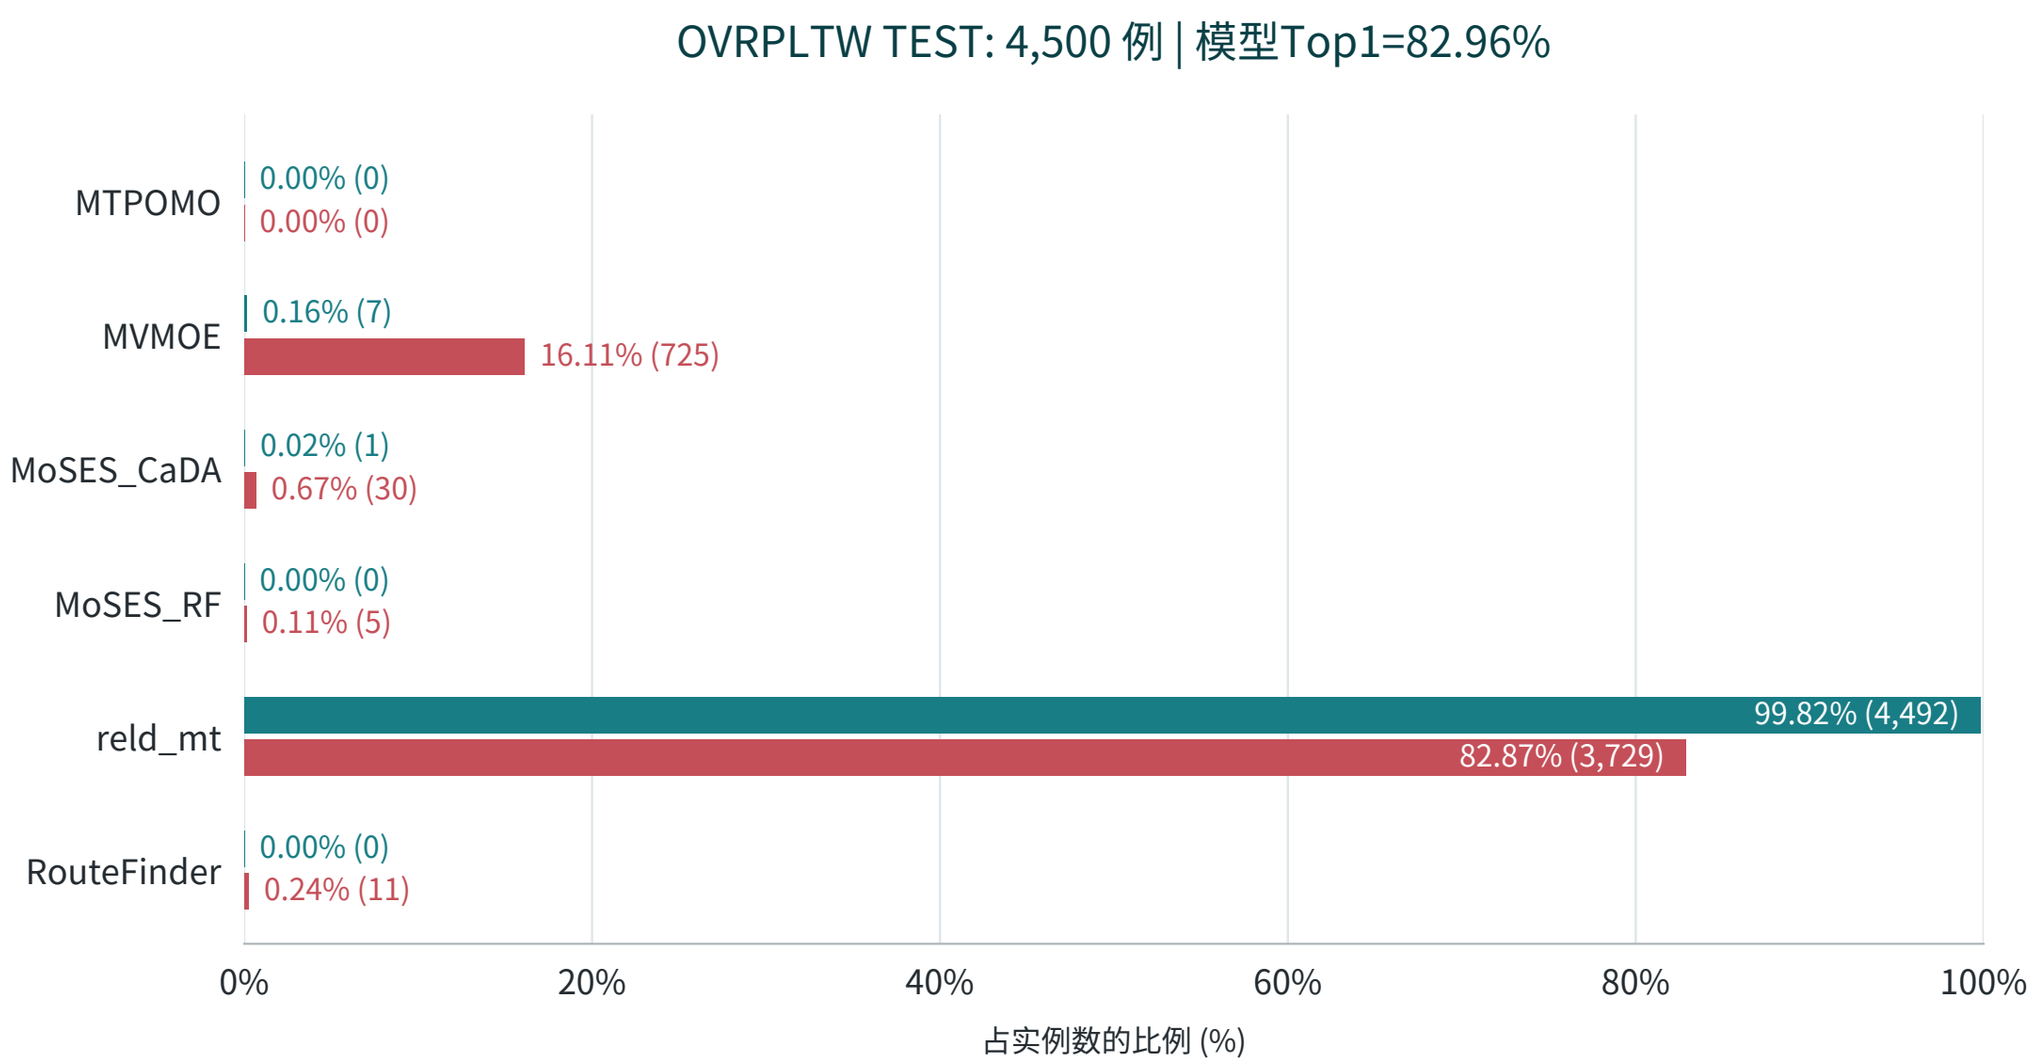

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | VRPBLTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

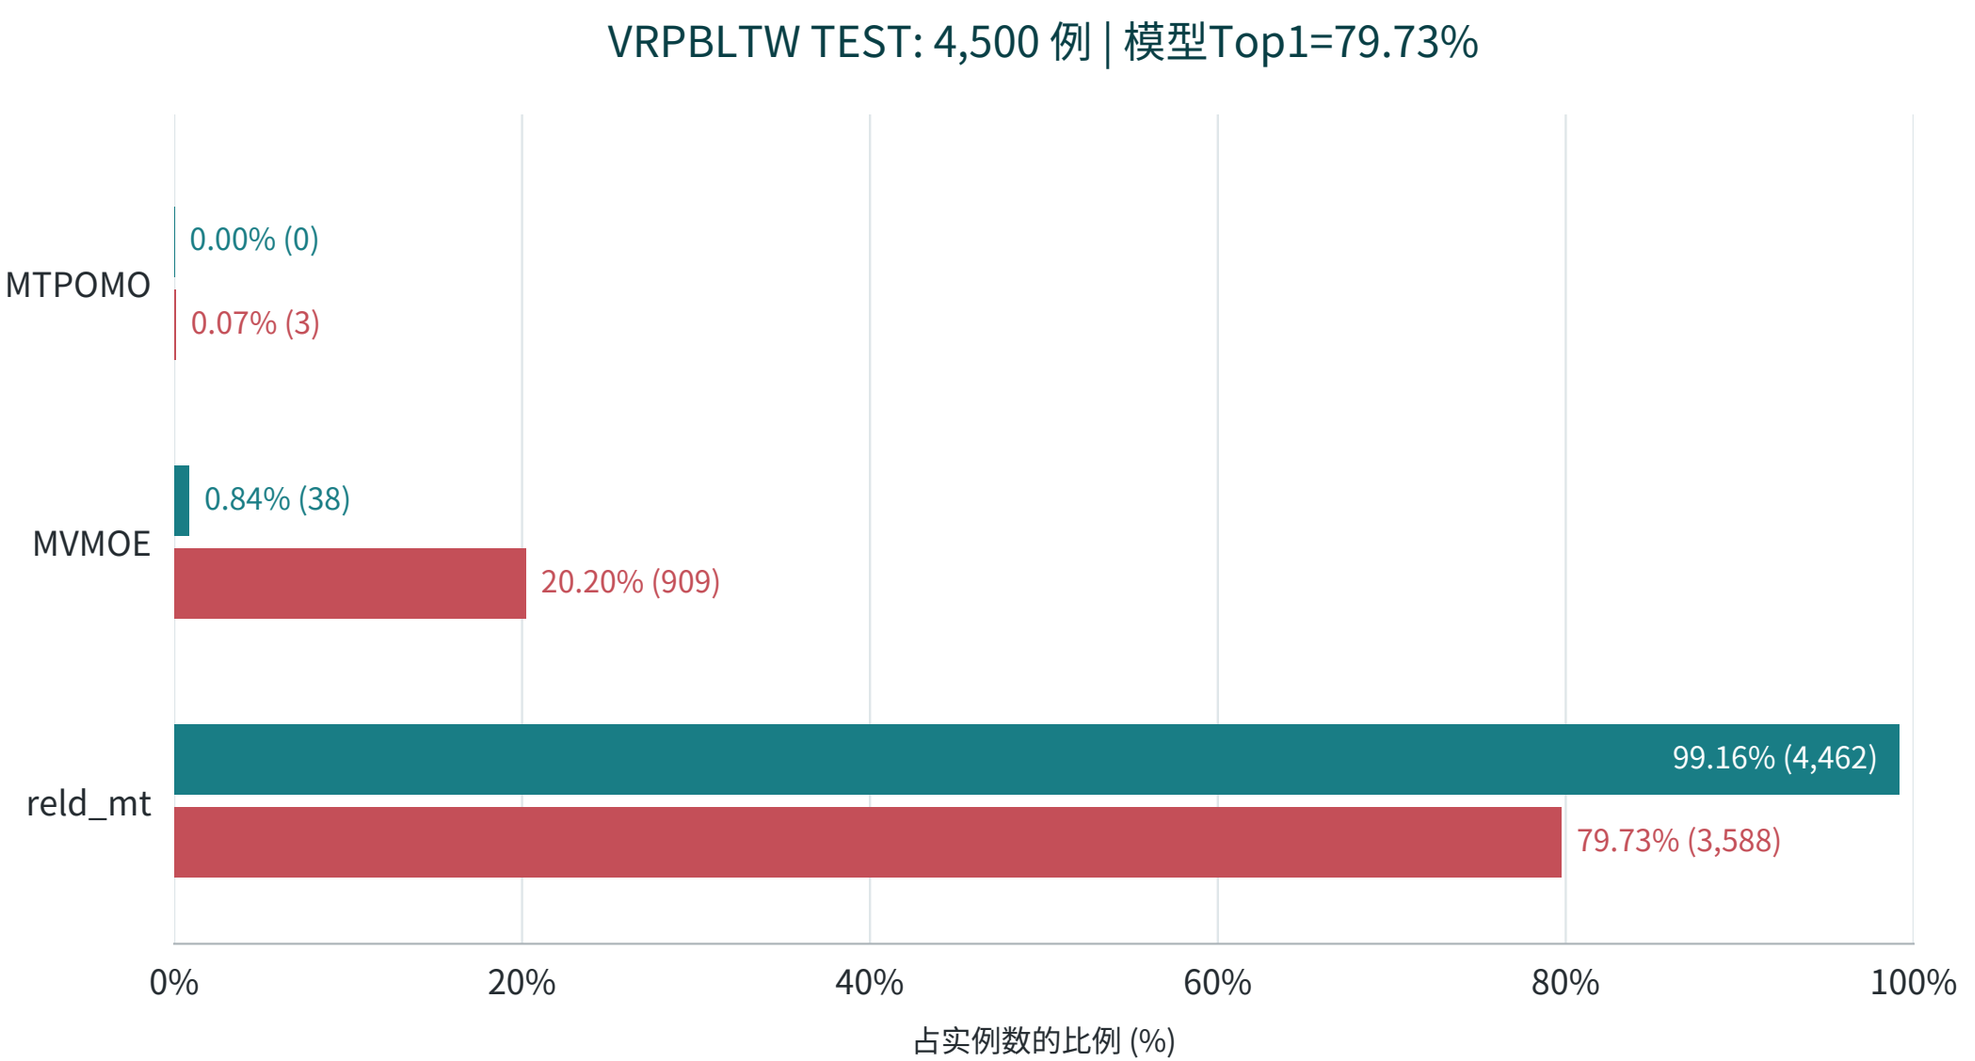

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。


R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.

R95/A | OVRPBLTW | 方法分布

同一锁定模型: epoch 25 / update 36000 / SHA256 04a92431b2496988

新 TEST 数据版本: selection_data_new90k_B_filtered_single_reld_mt_seed2_20261018

标签: 原生 native/FP64 ind; 仅读锁定预测

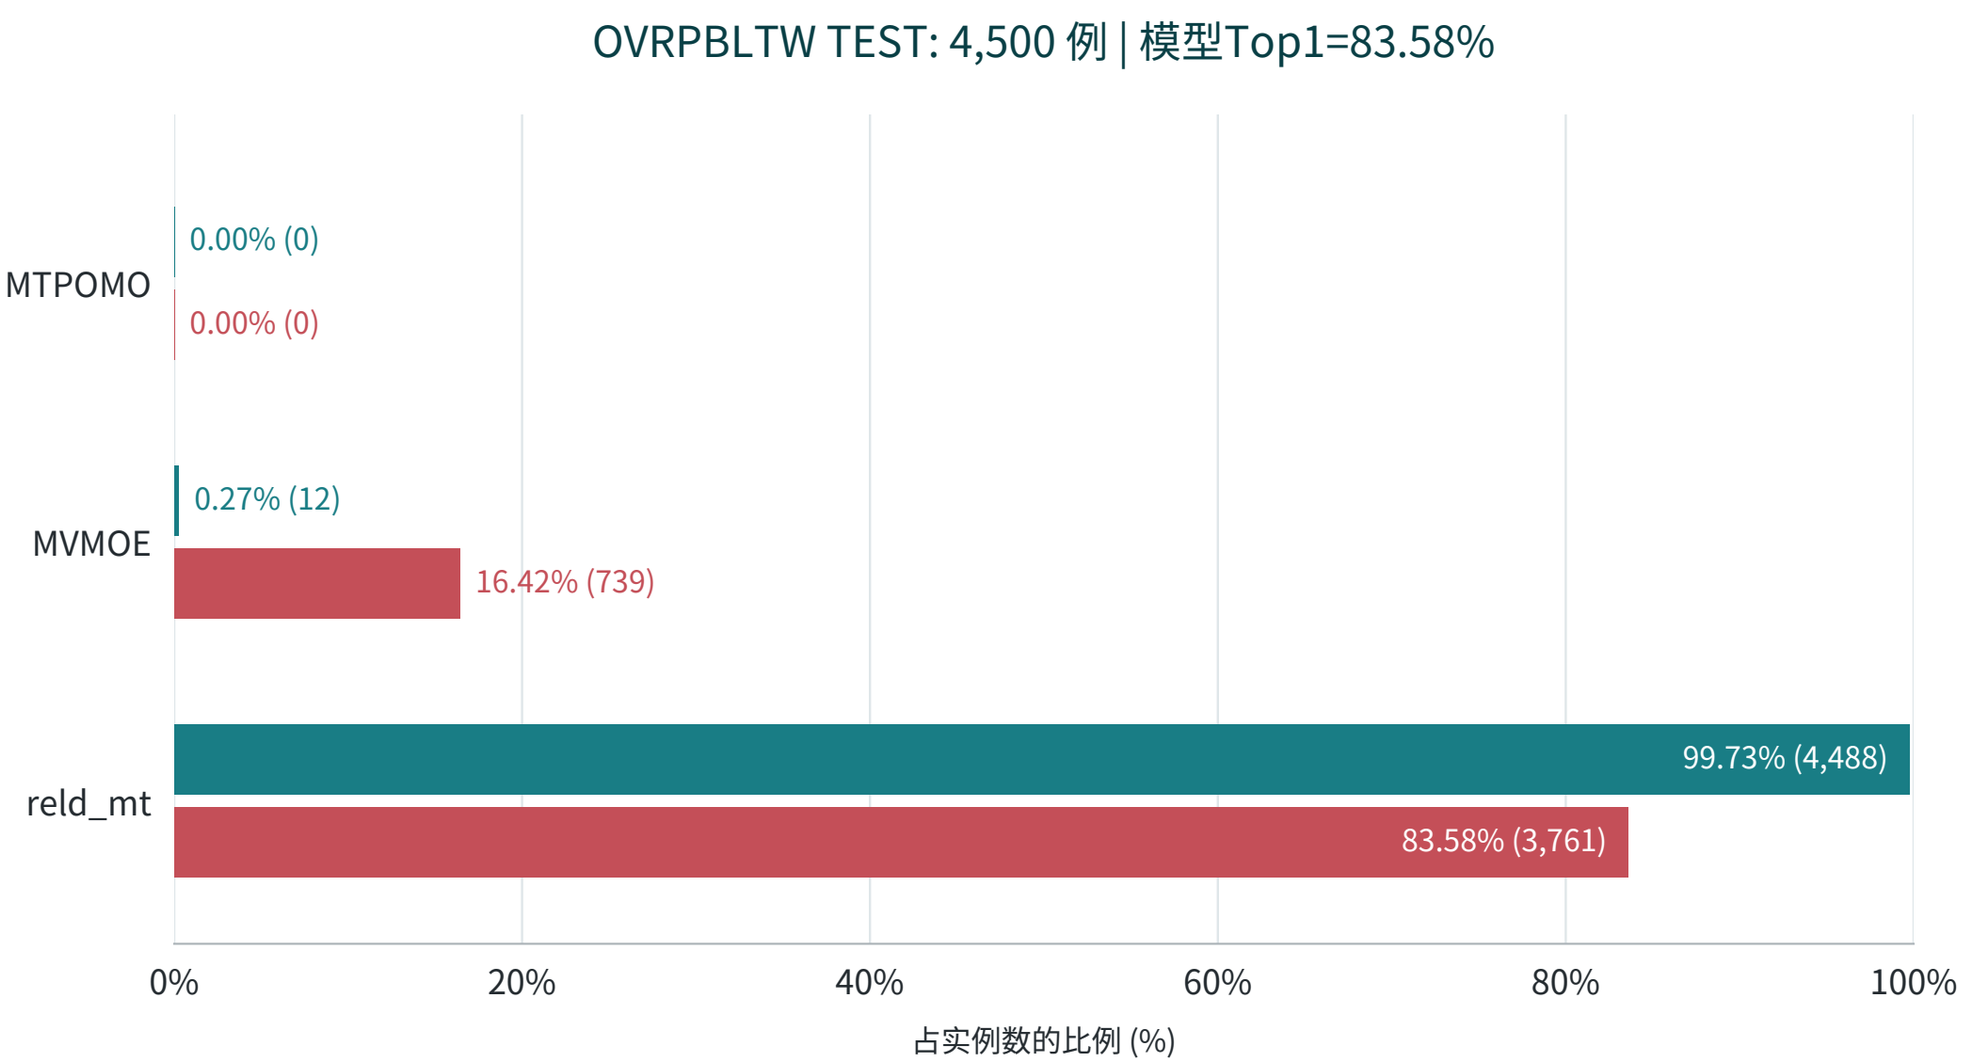

标注: % (次数); 候选按 TEST 名称对齐，包含零次数候选。

模型Top1 = 100 * mean(pred == saved native winner); 不是最大选择频率。

R95/A: stable global solver-ID score ties. Same R95 lock; LIB inference only; no training/reselection/Rxx mixing.