



COMPUTER NETWORKS

Sivaraman Eswaran Ph.D.

Department of Computer Science and Engineering

COMPUTER NETWORKS

Computer Networks and the Internet


Sivaraman Eswaran Ph.D.

Department of Computer Science and Engineering

How do packet loss and delay occurs?


packets *queue* in router buffers

- packets queue, wait for turn
- arrival rate to link (temporarily) exceeds output link capacity: packet loss

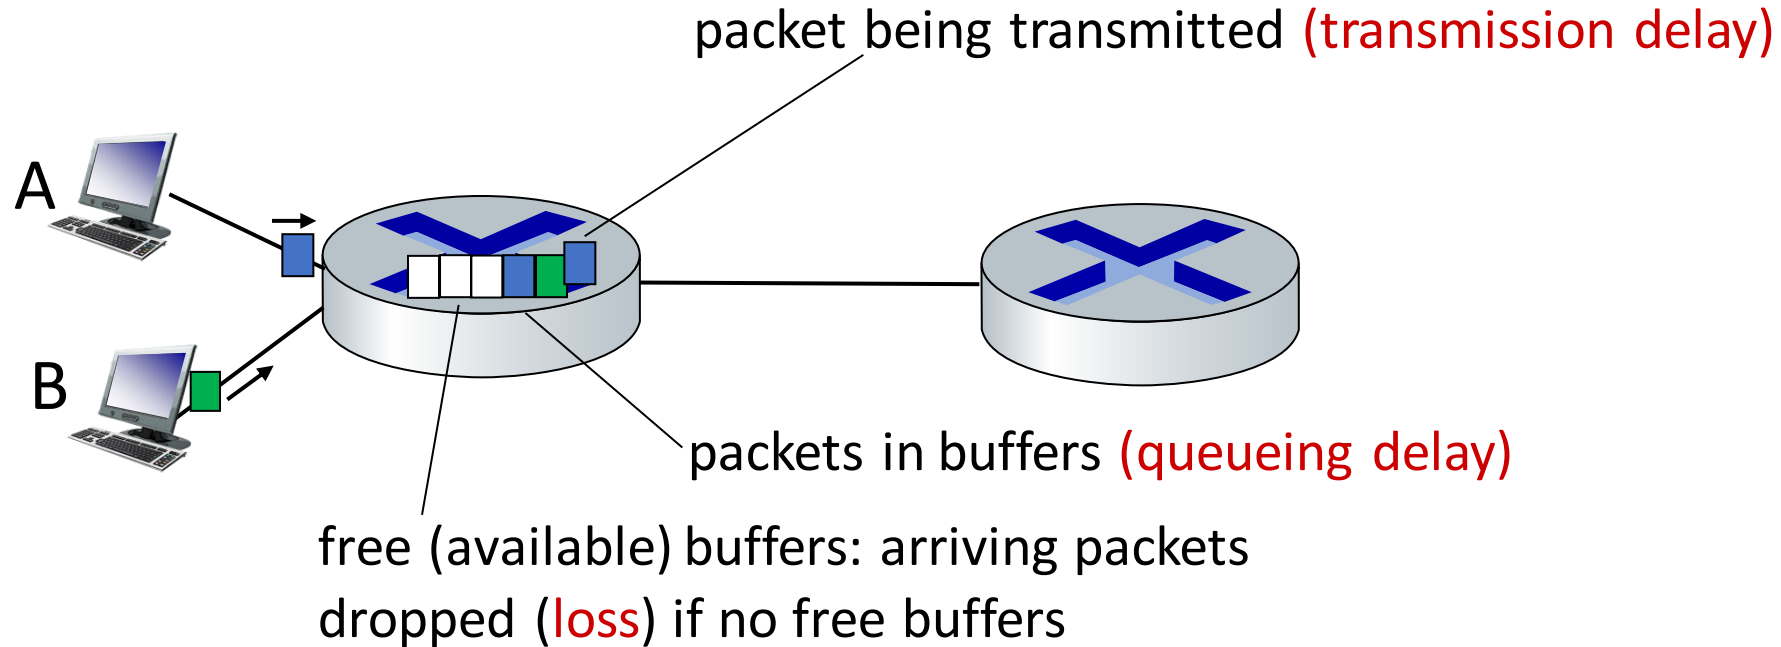

COMPUTER NETWORKS

Performance: Packet Delay – 4 Sources

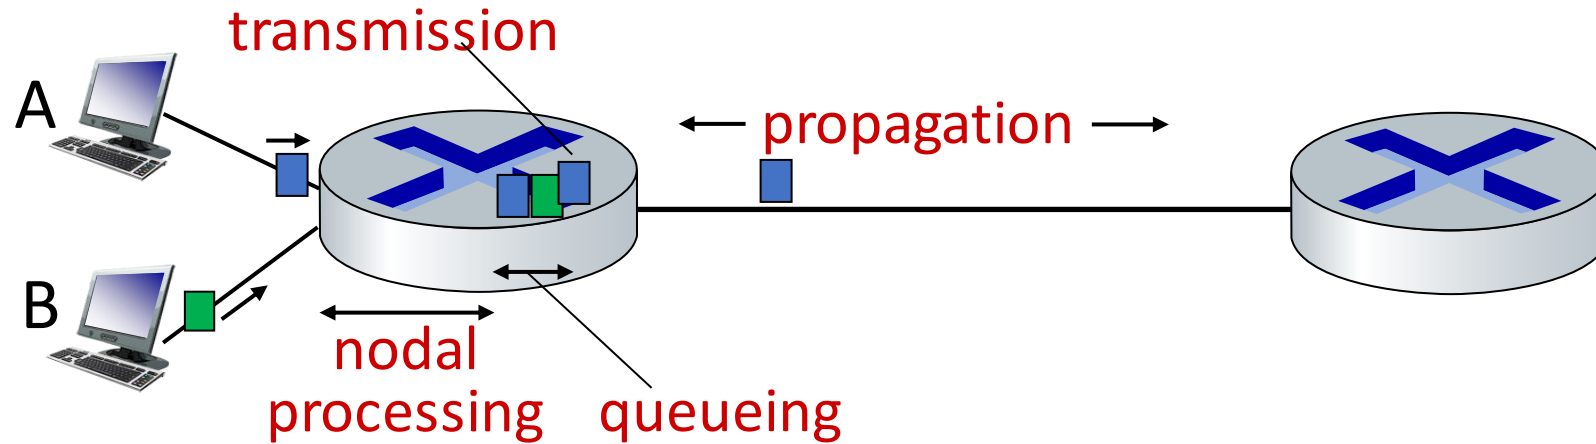

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

d_{proc} : nodal processing


- check bit errors
- determine output link
- typically < msec

d_{queue} : queueing delay

- time waiting at output link for transmission
- depends on congestion level of router

COMPUTER NETWORKS

Performance: Packet Delay – 4 Sources

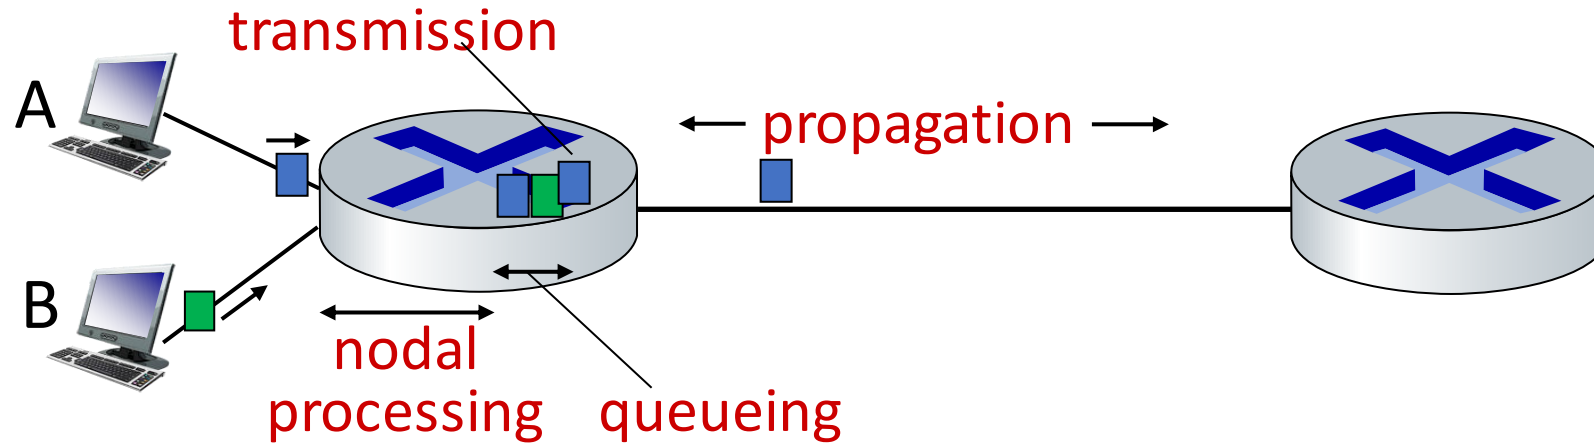

* Check out the online interactive exercises:
http://gaia.cs.umass.edu/kurose_ross

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

d_{trans} : transmission delay:

- L : packet length (bits)
- R : link transmission rate (bps)

$$d_{\text{trans}} = L/R$$

d_{prop} : propagation delay:

- d : length of physical link
- s : propagation speed ($\sim 2 \times 10^8$ m/sec)

$$d_{\text{prop}} = d/s$$

d_{trans} and d_{prop}
very different


COMPUTER NETWORKS

Transmission Delay vs Propagation Delay

Transmission Delay	Propagation Delay
Time required for the router to push out the packet.	Time it takes a bit to propagate from one router to the next.
A function of the packet's length and the transmission rate of the link.	A function of the distance between the two routers.
$d_{trans} = L/R$	$d_{prop} = d/s$
Nothing to do with the distance between the two routers.	Nothing to do with the packet's length or the transmission rate of the link.

COMPUTER NETWORKS


Performance: Delay – Caravan Analogy

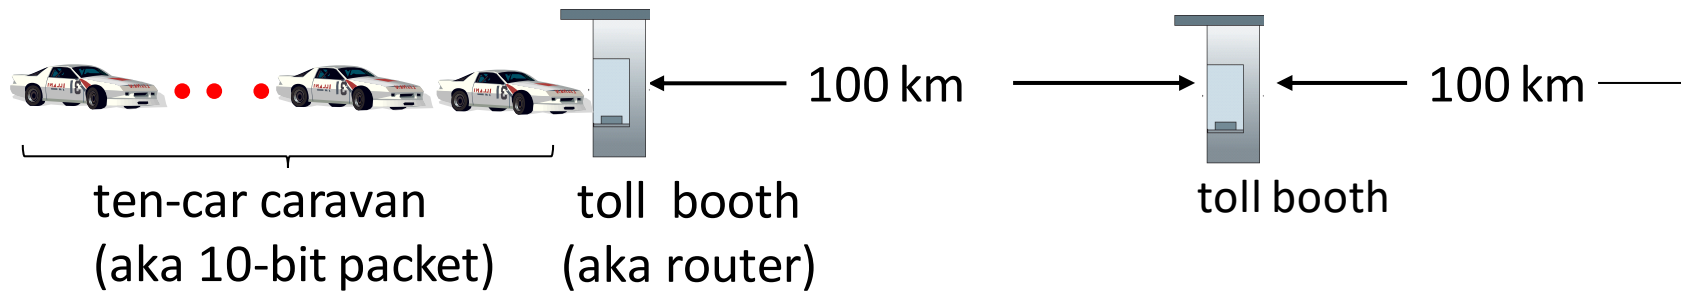

- cars “propagate” at 100 km/hr
- toll booth takes 12 sec to service car (bit transmission time)
- car ~ bit; caravan ~ packet
- **Q: How long until caravan is lined up before 2nd toll booth?**
- time to “push” entire caravan through toll booth onto highway = $12 \times 10 = 120$ sec
- time for last car to propagate from 1st to 2nd toll booth: $100\text{km} / (100\text{km/hr}) = 1$ hr
- **A: 62 minutes**

COMPUTER NETWORKS

Performance: Delay – Caravan Analogy (more)

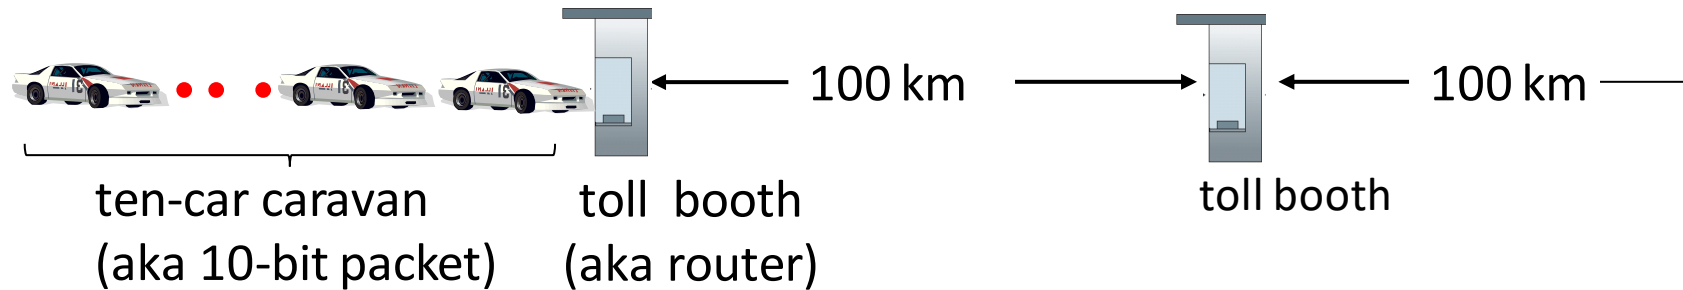

- suppose cars now “propagate” at 1000 km/hr
- and suppose toll booth now takes one min to service a car
- **Q: Will cars arrive to 2nd booth before all cars serviced at first booth?**

A: Yes! after 7 min, first car arrives at second booth; three cars still at first booth



Thank You
For Your Attention



THANK YOU

Sivaraman Eswaran Ph.D.

Department of Computer Science and Engineering

sivaramane@pes.edu

+91 80 6666 3333 Extn 834