

GitHub URL

Github URL for Vercel

Vercel URL

W12-P1: Refine code of /demo/shop_43/node

The screenshot displays a development environment with a code editor on the left and a browser preview on the right.

Code Editor (Left):

- EXPLORER:** Shows the file structure of the project. The file `demo/shop_43/page.jsx` is selected and highlighted with a red box.
- Code:** The code in `page.jsx` is shown. It includes imports for `Wrapper` and `Product_43`, and a `useEffect` hook that fetches data from a local API. The code is also highlighted with a red box.
- TERMINAL:** Shows the output of the development server, including the message "Server running on port 5000" and the URL "http://localhost:5000/api/st".

Browser Preview (Right):

- Address Bar:** Shows the URL `localhost:3000/de...`.
- Page Content:** The page displays the title "TKUDemo" and the user name "Victor Hsu, 213410243". Below this, the section "Womens" is shown, featuring a grid of product images and their names: "Blue Tanktop", "25 Floral Blouse", "20 Floral Dress", "80 Red Dots Dress", and "80".

5398e32 victor_xu

Sat Dec 6 11:06:20 2025 +0800

W12-P1: Refine code of /demo/sh

W12-P2: Deploy code to Vercel

=> npm run build

The screenshot displays the Visual Studio Code interface during the deployment of a Next.js application. The Explorer panel on the left shows the project structure, with the 'package.json' file selected. The main editor shows the 'package.json' file with the 'build' script highlighted. The Output panel at the bottom shows the command 'npm run build' and its output, including a list of routes.

```
demo > w12-next-fullstack-43 > client_43 > {} package.json > ...
```

```
1 {
2   "name": "w10-next-43",
3   "version": "0.1.0",
4   "private": true,
5   "scripts": {
6     "dev": "next dev",
7     "build": "next build",
8     "start": "next start"
9   },
10  "dependencies": {
11    "@supabase/supabase-js": "^2.86.2",
12    "next": "16.0.3",
13    "react": "19.2.0",
14    "react-dom": "19.2.0",
15    "styled-components": "^6.1.19"
16  },
17  "devDependencies": {
18    "@tailwindcss/postcss": "^4",
19    "babel-plugin-react-compiler": "1.0.0",

```

PROBLEMS 2 OUTPUT DEBUG CONSOLE TERMINAL PORTS GITLENS POLYGLOT NOTEBOOK SPELL CHECKER 2

→ client_43 git:(master) ✖ npm run build

```
[baseline-browser-mapping] The data in this module is over two months old. To ensure accurate Baseline data, please update: `npm
[baseline-browser-mapping] The data in this module is over two months old. To ensure accurate Baseline data, please update: `npm
[baseline-browser-mapping] The data in this module is over two months old. To ensure accurate Baseline data, please update: `npm
✓ Collecting page data using 7 workers in 265.7ms
[baseline-browser-mapping] The data in this module is over two months old. To ensure accurate Baseline data, please update: `npm
✓ Generating static pages using 7 workers (8/8) in 256.3ms
✓ Finalizing page optimization in 4.9ms
```

Route (app)

```
• /
• /_not-found
• /demo/shop_43/node
f /demo/shop_43/node/[category]
• /demo/shop_43/supa
f /demo/shop_43/supa/[category]
• /exams/midterm
• /exams/midterm/p1_43
• /exams/midterm/p2_43
```

• (Static) prerendered as static content
f (Dynamic) server-rendered on demand

→ client_43 git:(master) ✖

=> npm start

The screenshot displays the Visual Studio Code interface for a Next.js project. The Explorer sidebar on the left shows the file structure, with the `.next` directory highlighted. The main editor shows the `package.json` file for the `client_43` directory. The `scripts` section of `package.json` is configured as follows:

```
1 {
2   "name": "w10-next-43",
3   "version": "0.1.0",
4   "private": true,
5   > Debug
6   "scripts": {
7     "dev": "next dev",
8     "build": "next build",
9     "start": "next start"
10  },
11  "dependencies": {
12    "@supabase/supabase-js": "^2.85.2",
13    "next": "16.0.3",
14    "react": "19.2.0",
15    "react-dom": "19.2.0",
16    "styled-components": "^6.1.19"
17  },
18  "devDependencies": {
19    "@tailwindcss/postcss": "^4",
20    "babel-plugin-react-compiler": "1.0.0",

```

The terminal at the bottom shows the output of the `npm run build` and `npm run start` commands. The `npm run build` command successfully builds the application, and the `npm run start` command starts the development server on `http://localhost:3000`.

```
→ client_43 git:(master) ✗ npm run build
• /demo/shop_43/node
f /demo/shop_43/node/[category]
• /demo/shop_43/supa
f /demo/shop_43/supa/[category]
• /exams/midterm
• /exams/midterm/p1_43
• /exams/midterm/p2_43

• (Static) prerendered as static content
f (Dynamic) server-rendered on demand

○ → client_43 git:(master) ✗ npm run start

> w10-next-43@0.1.0 start
> next start

▲ Next.js 16.0.3
- Local:      http://localhost:3000
- Network:    http://163.13.15.225:3000

✓ Starting...
✓ Ready in 150ms
```

=> Vercel, add environment variables

The image shows a VS Code editor on the left and the Vercel dashboard on the right. In VS Code, the `.env` file is open, showing two lines of environment variables: `VITE_SUPABASE_URL=https://mqpuxutrzlqeaxlccfpe.sl` and `VITE_SUPABASE_KEY=eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.e`. Both lines are highlighted with a red box. The Vercel dashboard on the right shows the project configuration for '1141-2n-next-victorhsu-43'. Under the 'Environment Variables' section, the same two variables are added: `VITE_SUPABASE_URL` with value `https://mqpuxutrzlqeaxlccfpe.supabase.c` and `VITE_SUPABASE_KEY` with value `eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.e`. Both entries are also highlighted with a red box. The 'Deploy' button is visible at the bottom of the dashboard.

=> Vercel homepage success

The image shows the Vercel homepage in a web browser. The address bar displays the URL `1141-2n-next-victorhsu-43-kyf2.vercel.app`, which is highlighted with a red box. The page content includes a navigation bar with links: `TkuDemo`, `HOME`, `DEMO +`, `TUTORIALS +`, `MIDTERM +`, `QUIZ1 +`, and `CONTACT`. Below the navigation bar, there is a large black area with the text `HomePage_43` and `VICTOR HSU, 213410243` in a red box.

=> Github repo and Vercel URL

Gitbub Next URL

Vercel Next URL

The screenshot shows a GitHub repository page for the user 'vic0627' with the repository name '1141-2n-next-victorhsu-43'. The URL in the browser's address bar is 'github.com/vic0627/1141-2n-next-victorhsu-43'. The repository is public and has 0 stars and 0 forks. The main content area shows a commit history table with the following entries:


Commit Message	Author	Time
update next version	vic0627	7a332dd · 4 minutes ago
public	W12-P1: Refine code of /demo/shop_43/node	23 minutes ago
src	W12-P1: Refine code of /demo/shop_43/node	23 minutes ago
.gitignore	W12-P1: Refine code of /demo/shop_43/node	23 minutes ago
README.md	W12-P1: Refine code of /demo/shop_43/node	23 minutes ago
jsconfig.json	W12-P1: Refine code of /demo/shop_43/node	23 minutes ago
next.config.mjs	W12-P1: Refine code of /demo/shop_43/node	23 minutes ago

The right sidebar shows the 'About' section with a link to the Vercel deployment: '1141-2n-next-victorhsu-43-kyf2.verce...'. Below this are links for 'Readme', 'Activity', '0 stars', '0 watching', and '0 forks'. The 'Releases' section shows 'No releases published' and a link to 'Create a new release'.

=> Share to teacher and TA

htchung@gms.tku.edu.tw

sian-0018

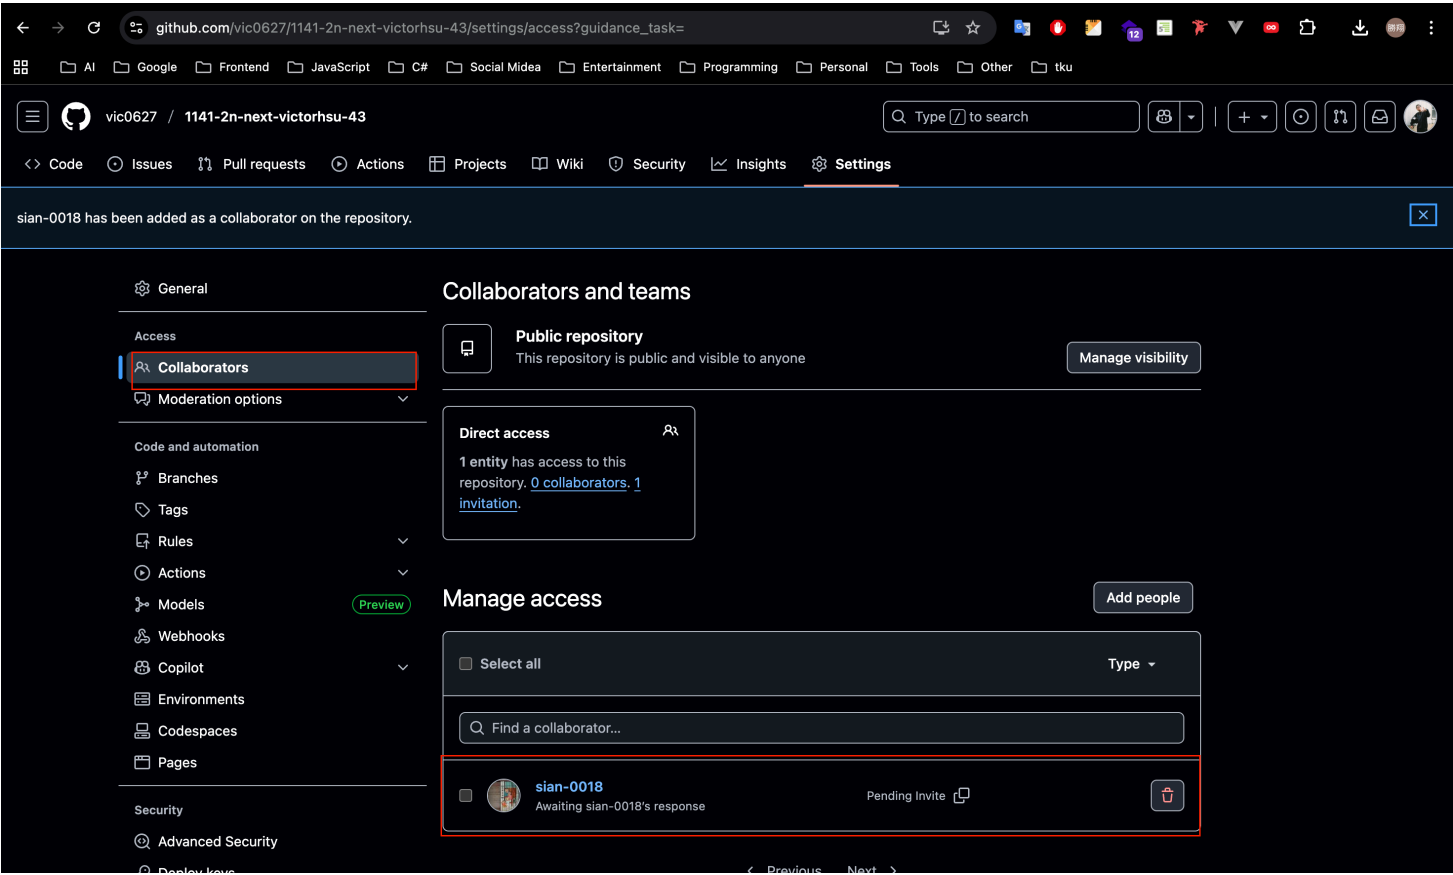

e2ce788 victor_xu Sat Dec 6 18:10:19 2025 +0800 W12-P2: Deploy code to Vercel

W12-P3: Implenment /demo/shop2_43/supabase to fetch products from Supabase

=> use SQL to get category2_43 data

SQL Editor

Search queries...

+

SHARED

FAVORITES

PRIVATE (4)

category2_43,shop2_43

Shop 43 Product Catalog

Drop posts table

Posts Table with Seed Data

COMMUNITY

Templates

Quickstarts

View running queries

category2_43,shop2_43

```
(28, 'Yellow Track Suit', 4, 135, '/images/ midterm/ womens/ yellow-track-suit.png', 'https://i.1bb.co/vicvwmt/yellow-track-suit.png'),
(29, 'White Blouse', 4, 20, '/images/ midterm/ womens/ white-vest.png', 'https://i.1bb.co/qBcrsJg/white-vest.png'),
(30, 'Camo Down Vest', 5, 325, '/images/ midterm/ mens/ camo-vest.png', 'https://i.1bb.co/xJS0T3Y/camo-vest.png'),
(31, 'Floral T-shirt', 5, 20, '/images/ midterm/ mens/ floral-shirt.png', 'https://i.1bb.co/qMQ75Q2/floral-shirt.png'),
(32, 'Black & White Longsleeve', 5, 25, '/images/ midterm/ mens/ long-sleeve.png', 'https://i.1bb.co/55z32tw/long-sleeve.png'),
(33, 'Pink T-shirt ', 5, 25, '/images/ midterm/ mens/ pink-shirt.png', 'https://i.1bb.co/Rwn8L8/pink-shirt.png'),
(34, 'Jean Long Sleeve', 5, 40, '/images/ midterm/ mens/ roll-up-jean-shirt.png', 'https://i.1bb.co/VpW4x5t/roll-up-jean-shirt.png'),
(35, 'Burgundy T-shirt', 5, 25, '/images/ midterm/ mens/ polka-dot-shirt.png', 'https://i.1bb.co/mh3VM1f/polka-dot-shirt.png');
select * from category2_43;
```

Results

Chart

Export

Source

Primary Database

Role postgres

Run

cid	cname	size	image_url	remote_image_url	link_url
1	hats	NULL	/images/ midterm/ homepage/ hats.png	https://i.1bb.co/cvpntL1/hats.png	/demo/shop_43/supabase/hats
2	jackets	NULL	https://i.1bb.co/px2tCc3/jackets.png	/images/ midterm/ homepage/ jackets.png	/demo/shop_43/supabase/jackets
3	sneakers	NULL	https://i.1bb.co/0jqHnp/sneakers.png	/images/ midterm/ homepage/ sneakers.png	/demo/shop_43/supabase/sneakers
4	womens	large	https://i.1bb.co/GCCdy8t/womens.png	/images/ midterm/ homepage/ womens.png	/demo/shop_43/supabase/womens
5	mens	large	https://i.1bb.co/R70vBrQ/men.png	/images/ midterm/ homepage/ mens.png	/demo/shop_43/supabase/mens

5 rows

=> use SQL to get shop2_43 data

The screenshot shows the Supabase SQL Editor interface. The query editor contains the following SQL query:

```
1 select * from shop2_43;
```

The query has been executed, and the results are displayed in a table with 11 rows. The table has the following columns: `pid`, `pname`, `cat_id`, `price`, `img_url`, and `remote_img_url`.

pid	pname	cat_id	price	img_url	remote_img_url
1	Brown Brim	1	25	/images/ midterm /hats/brown-brim.png	https://i.ibb.co/ZYw3VTp/brown-brim
2	Blue Beanie	1	18	/images/ midterm /hats/blue-beanie.png	https://i.ibb.co/yPkgK0X/blue-beanie
3	Brown Cowboy	1	35	/images/ midterm /hats/brown-cowboy.png	https://i.ibb.co/QdJwmp/brown-cowbo
4	Grey Brim	1	25	/images/ midterm /hats/grey-brim.png	https://i.ibb.co/RjBLwxB/grey-brim.g
5	Green Beanie	1	18	/images/ midterm /hats/green-beanie.png	https://i.ibb.co/YTjW3vF/green-bean
6	Palm Tree Cap	1	14	/images/ midterm /hats/palm-tree-cap.png	https://i.ibb.co/rKBdVjX/palm-tree-
7	Red Beanie	1	18	/images/ midterm /hats/red-beanie.png	https://i.ibb.co/BLB646Z/red-beanie
8	Wolf Cap	1	14	/images/ midterm /hats/wolf-cap.png	https://i.ibb.co/1f2nMMW/wolf-cap.p
9	Blue Snapback	1	16	/images/ midterm /hats/blue-snapback.png	https://i.ibb.co/X2VJP2W/blue-snapb
10	Black Jean Shearling	2	125	/images/ midterm /jackets/black-shearling.png	https://i.ibb.co/XzcwL5s/black-shea
11	Blue Jean Jacket	2	90	/images/ midterm /jackets/blue-jean-jacket.png	https://i.ibb.co/m356vz0/blue-jean-

The interface also shows a sidebar with navigation options and a bottom status bar indicating 35 rows (limited to only 100 rows).

=> set foreign key


The screenshot shows the Supabase Table Editor interface. The table `shop2_43` is selected, and the `cat_id` column is highlighted. A modal dialog titled "Add foreign key relationship to shop2_43" is open, showing the process of adding a foreign key relationship to the `category2_43` table.

The modal dialog shows the following steps:


- Select a table to reference to: `category2_43`
- Select columns from `public.category2_43` to reference to `public.shop2_43`: `cat_id` → `cid`
- Which action is most appropriate? (Cascade)
- Action if referenced row is updated: Cascade
- Action if referenced row is removed: Set NULL

The modal dialog also includes a "Docs" link and a "Save" button.


=> set RLS policies for public access for all CRUD

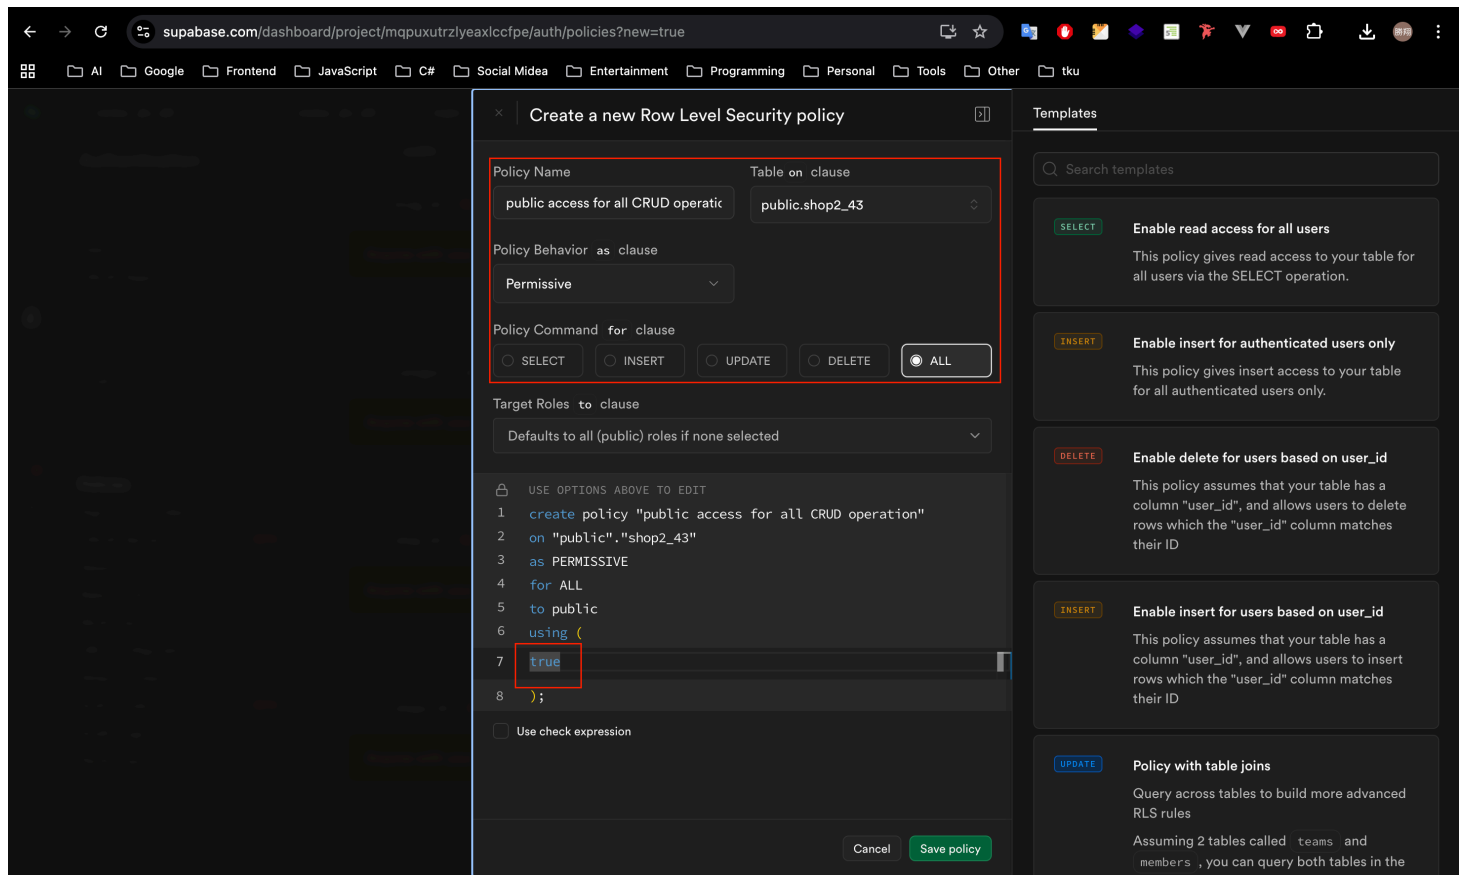

=> Chrome -- local

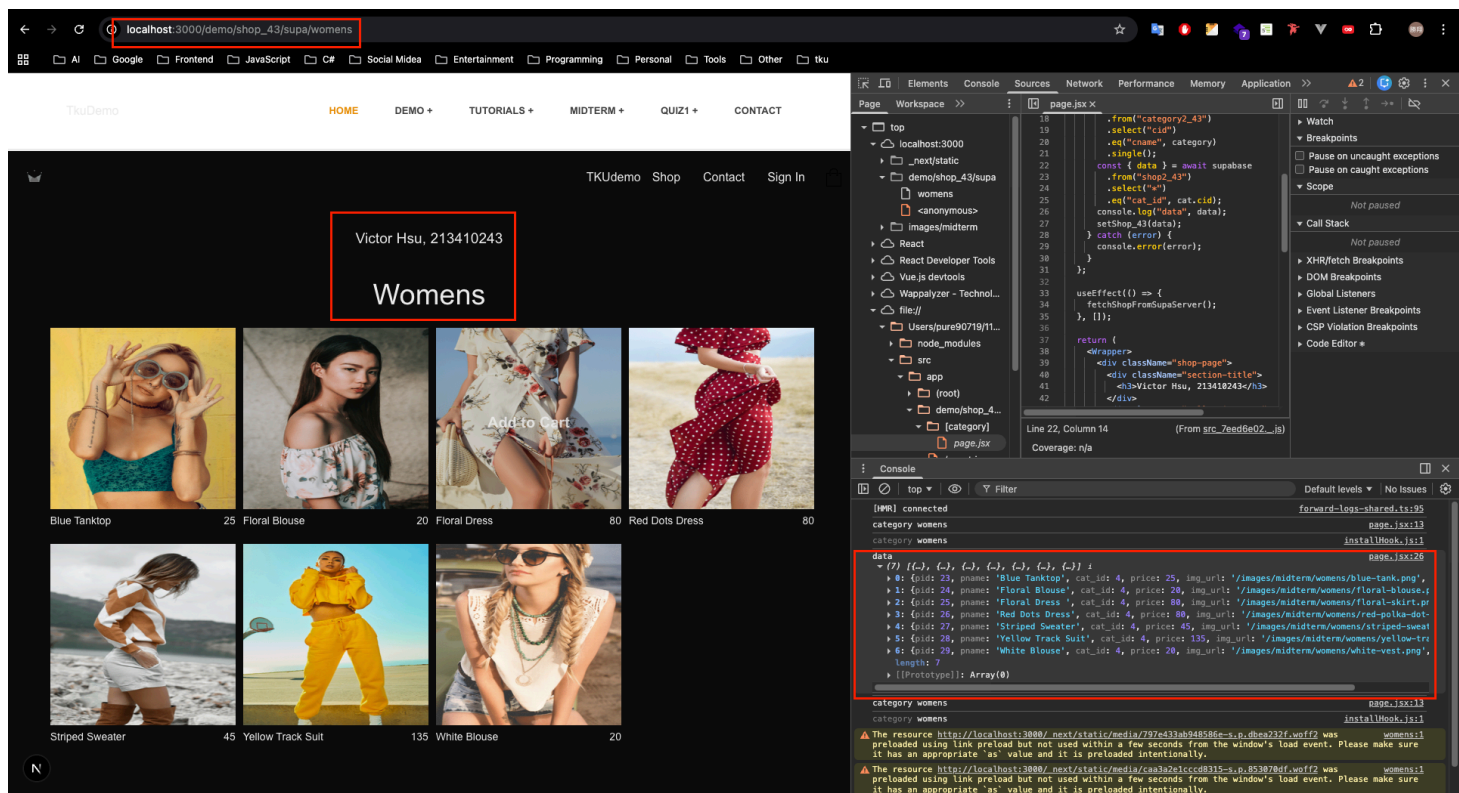

=> Chrome -- Vercel

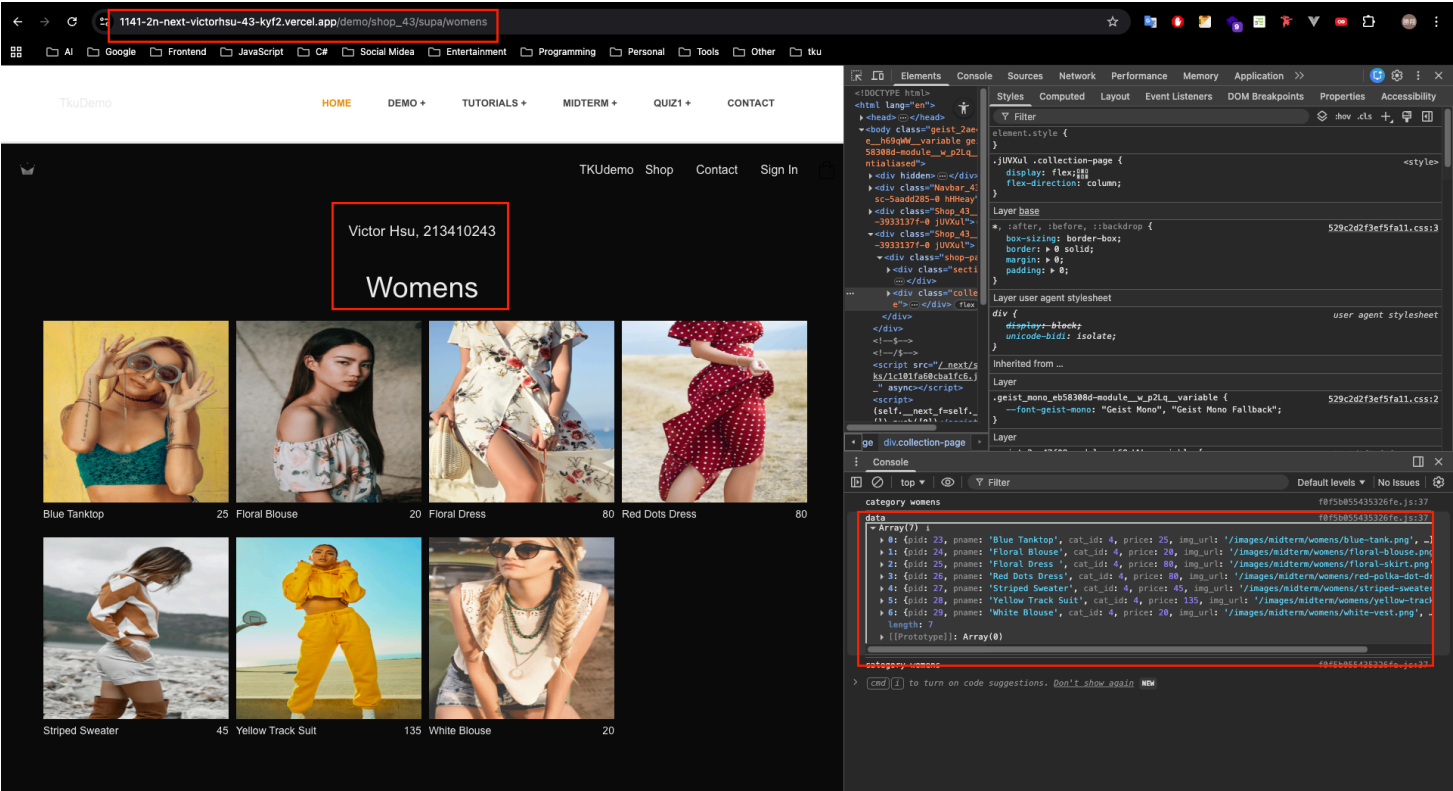

4a14524 victor_xu Sat Dec 6 18:10:27 2025 +0800 W12-P3: Implenent /demo/shop2_

W12-logs: git logs of W12

