


W07-P1: Use tailwind to style react icons and add a delete button

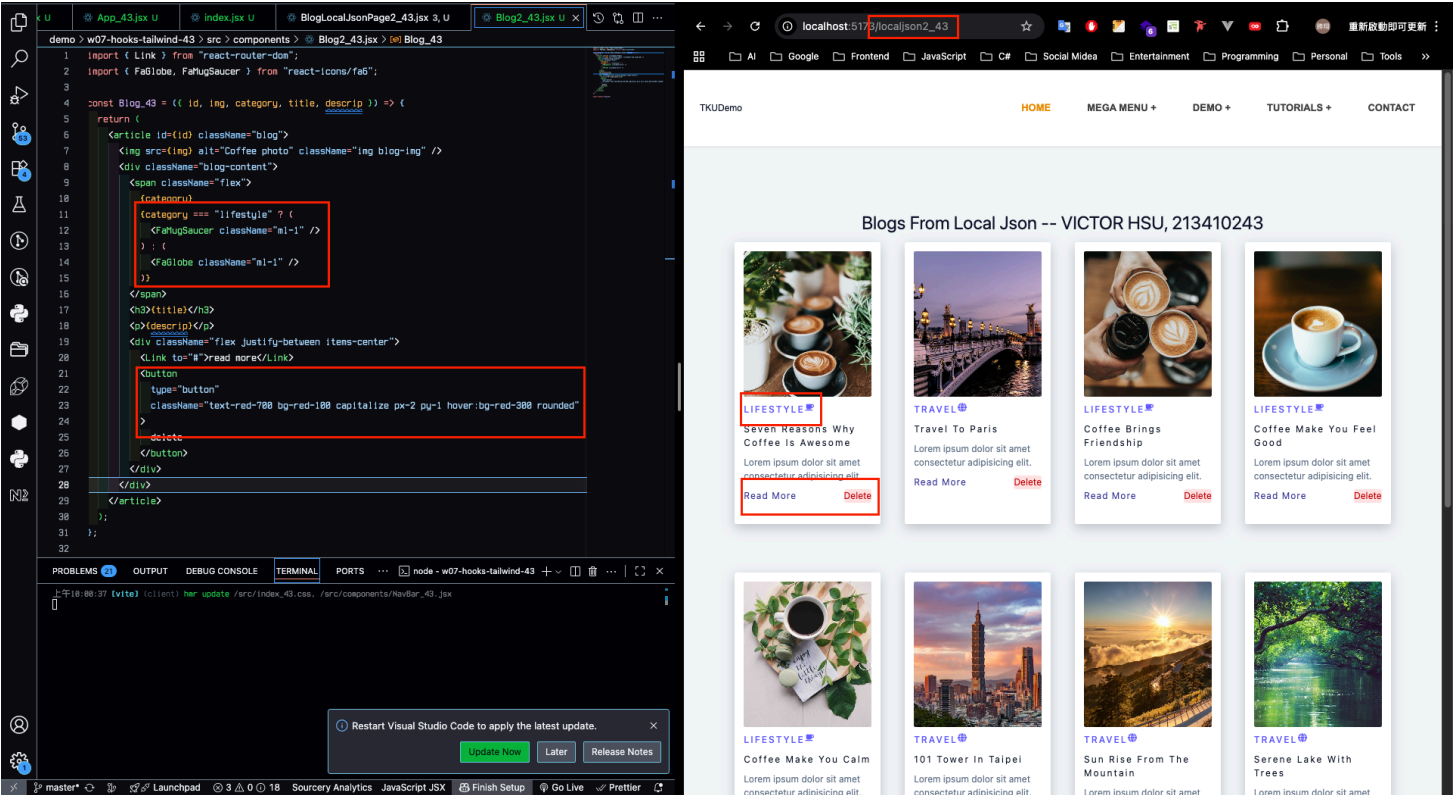

W07-P2: Implement delete a blog, clear all blogs, load all blogs

=> delete first blog


The screenshot shows a web browser at `localhost:7331` displaying a blog application. The page title is "Blogs From Local Json -- VICTOR HSU, 213410243". There are eight blog cards arranged in a 2x4 grid. The first card, titled "TRAVEL To Paris", is highlighted with a red box. Below the grid, there are two buttons: "Clear All Blogs" and "Load All Blogs". The developer console on the right shows the component tree with `BlogLocalJsonPage_43` selected, and the state of the component is visible in the props panel.

=> clear all blogs

The screenshot shows the same web application after the "Clear All Blogs" button has been clicked. The page title remains "Blogs From Local Json -- VICTOR HSU, 213410243". The grid of blog cards is now empty. The "Clear All Blogs" button is highlighted with a red box. The developer console on the right shows the component tree with `BlogLocalJsonPage_43` selected, and the state of the component is visible in the props panel.

The screenshot displays two files in Visual Studio Code. The left file, `BlogLocalJsonPage_2_43.jsx`, contains a stateful component `BlogLocalJsonPage_43` with a `removeItem` function. The right file, `Blog_43.jsx`, contains a component `Blog_43` that renders a button with the `onClickListener` `removeItem`. Red boxes highlight the `removeItem` function call in both files.

=> code for clear and load all blogs

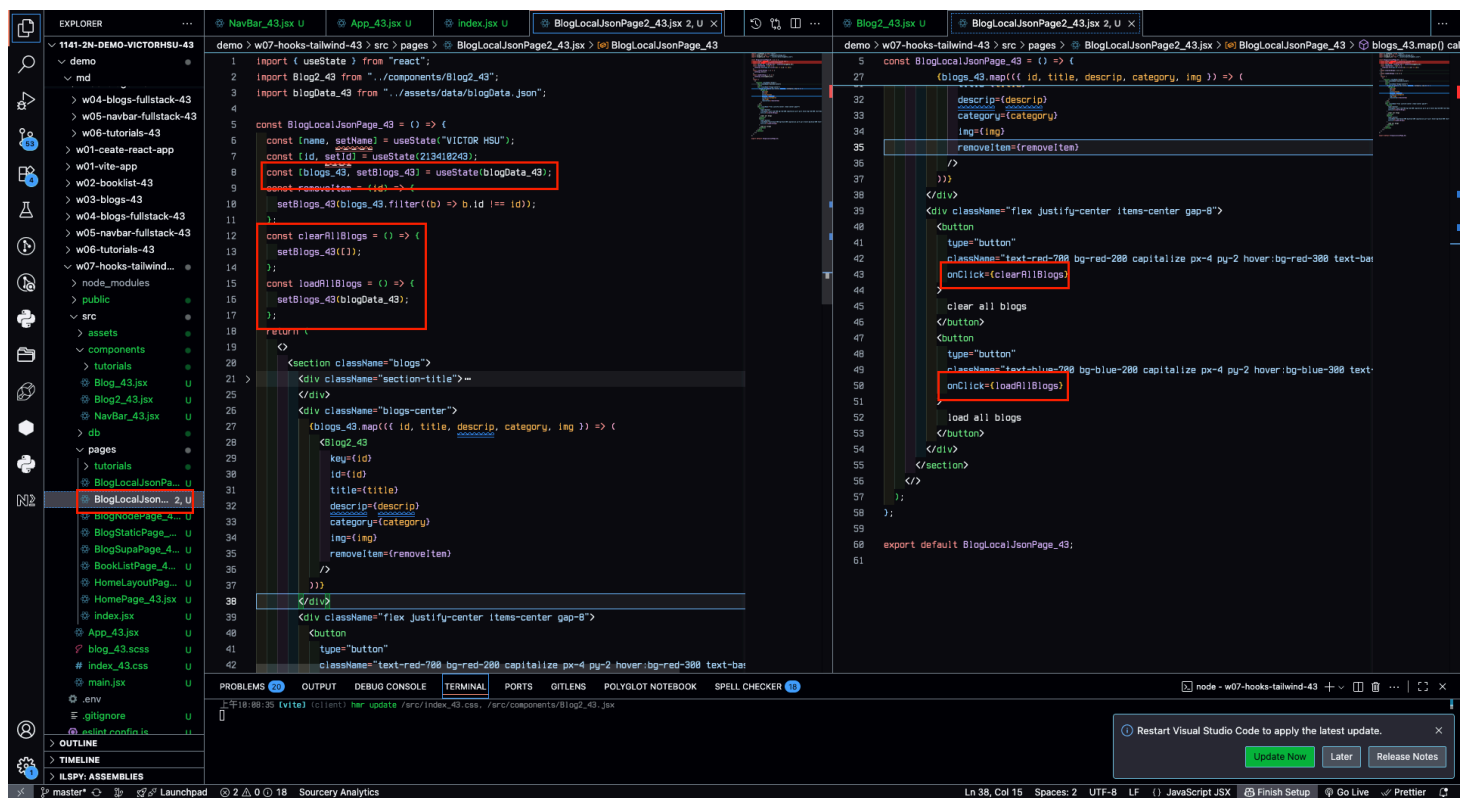


db8939c victor_xu

Sun Nov 2 10:35:04 2025 +0800

W07-P2: Implement delete a blog

W07-P3: Implement Alert_xx

=> code for Alert_xx

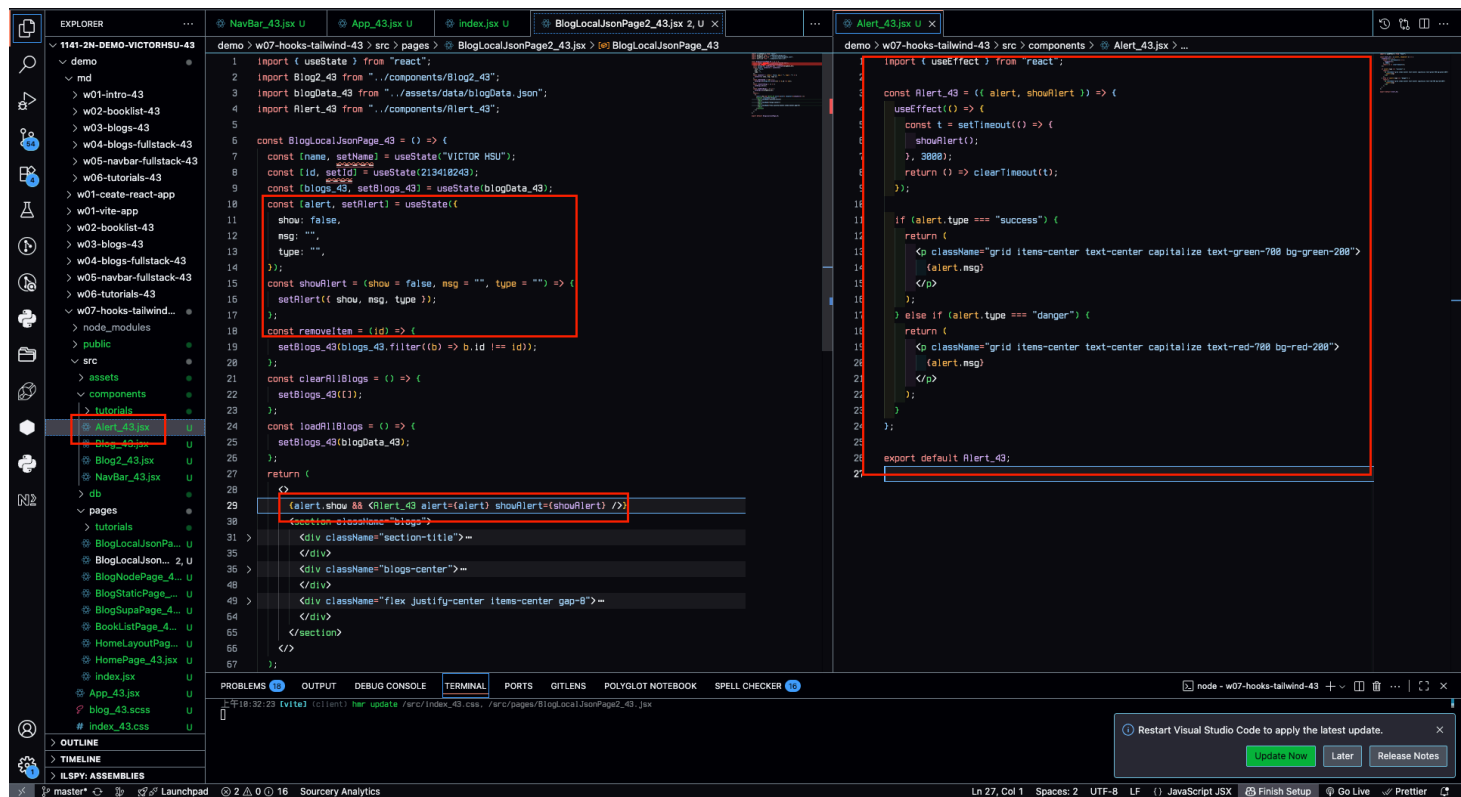

bddaab8 victor_xu

Sun Nov 2 10:35:21 2025 +0800

W07-P3: Implement Alert_43

W07-logs: git logs of W07

