


GitHub URL
Github URL for Vercel
Vercel URL

W14-P1: Use Context for Blogs_43

=> Chrome, show blogs_43 in Content component

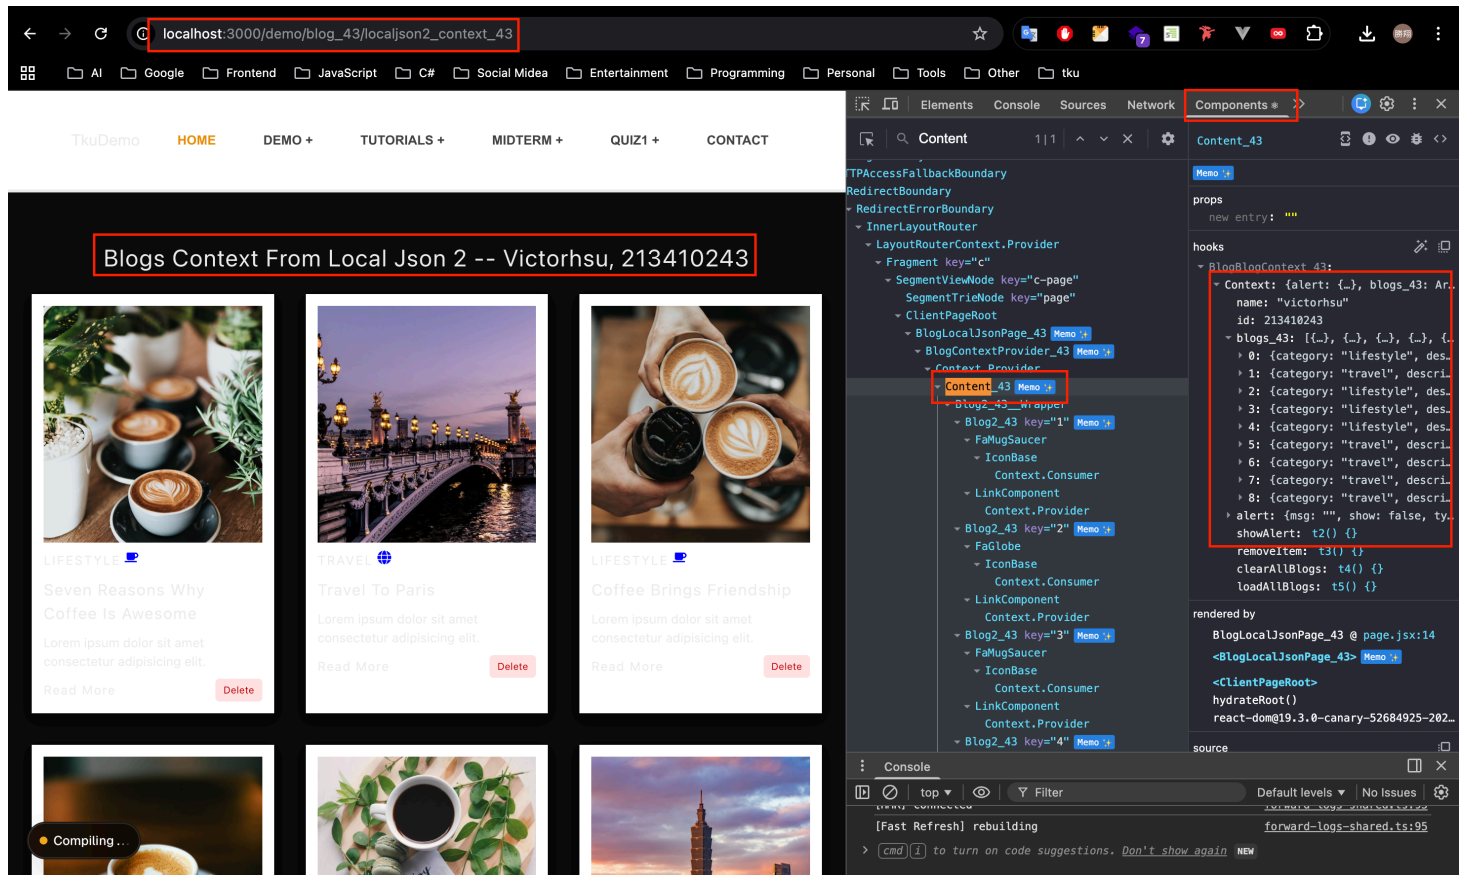

=> relevant code

The screenshot shows a VS Code editor with a project named '1141-2N-NEXT-VICTORHSU-43'. The Explorer panel on the left shows the file structure, with 'blogContext_43' highlighted. The main editor area displays two files: 'Content_43' and 'BlogContext_43'. The 'Content_43' file shows a component that uses the 'BlogContextProvider_43' and 'BlogContext_43' context. The 'BlogContext_43' file shows a context provider component that manages state for blogs, alerts, and item removal. The code is written in JavaScript/JSX and uses the 'useContext' and 'useState' hooks. The interface includes a terminal at the bottom with a command prompt and a status bar at the very bottom showing the current file and line information.

```
src > app > demo > blog_43 > localjson2_context_43 > page.jsx > Content_43
3 import Blog2_43 from "../components/Blog2_43";
4 import Wrapper from "../../assets/wrapper/Blog2_43";
5 import Alert_43 from "../components/Alert_43";
6
7 import {
8   BlogContextProvider_43,
9   useBlogBlogContext_43,
10 } from "../blogContext_43";
11
12 const BlogLocalJsonPage_43 = () => {
13   return (
14     <BlogContextProvider_43>
15     <Content_43 />
16     </BlogContextProvider_43>
17   );
18 }
19
20 const Content_43 = () => {
21   const {
22     name,
23     id,
24     blogs_43,
25     alert,
26     showAlert,
27     removeItem,
28     clearAllBlogs,
29     loadAllBlogs,
30   } = useBlogBlogContext_43();
31   return (
32     <div>
33       <h1>{name}</h1>
34       <h2>{id}</h2>
35       <h3>{blogs_43}</h3>
36       <h4>{alert}</h4>
37       <h5>{showAlert}</h5>
38       <h6>{removeItem}</h6>
39       <h7>{clearAllBlogs}</h7>
40       <h8>{loadAllBlogs}</h8>
41     </div>
42   );
43 }
44
45 export default BlogLocalJsonPage_43;
```

```
src > app > demo > blog_43 > localjson2_context_43 > _blogContext_43.jsx > BlogContext_43
6 export const BlogContextProvider_43 = ({ children }) => {
7   const [id] = useState(2134182343);
8   const [blogs_43, setBlogs_43] = useState(blogData_43);
9   const [alert, setAlert] = useState('');
10   const [showAlert, setShowAlert] = useState(false);
11   const [removeItem, setRemoveItem] = useState('');
12   const [clearAllBlogs, setClearAllBlogs] = useState('');
13   const [loadAllBlogs, setLoadAllBlogs] = useState('');
14
15   const showAlert = (show = false, msg = '', type = '') => {
16     setShowAlert(show);
17     setAlert(msg);
18   };
19
20   const removeItem = (id) => {
21     setRemoveItem(id);
22   };
23
24   const clearAllBlogs = () => {
25     setClearAllBlogs('');
26   };
27
28   const loadAllBlogs = () => {
29     setLoadAllBlogs('');
30   };
31
32   return (
33     <div>
34       <h1>{name}</h1>
35       <h2>{id}</h2>
36       <h3>{blogs_43}</h3>
37       <h4>{alert}</h4>
38       <h5>{showAlert}</h5>
39       <h6>{removeItem}</h6>
40       <h7>{clearAllBlogs}</h7>
41       <h8>{loadAllBlogs}</h8>
42     </div>
43   );
44 }
45
46 export default BlogContextProvider_43;
```

95e8395 victor_xu

Sat Dec 20 10:58:01 2025 +0800 W14-P1: Use Context for Blogs_4

=> Chrome, show BlogList2_43, Blog2_43 component

=> relevant code

```
1 import Wrapper from "@app/demo/_assets/wrapper/Blog2_43";
2 import Blog2_43 from "../Blog2_43";
3 import { useBlogBlogContext_43 } from "../_blogContext_43";
4
5 const BlogList2_43 = () => {
6   const { blogs_43 } = useBlogBlogContext_43();
7
8   return (
9     <Wrapper>
10       <div className="blogs-center">
11         {blogs_43.map((item) => {
12           const { id, title, descrip, category, img } = item;
13           return (
14             <Blog2_43
15               key={id}
16               id={id}
17               title={title}
18               descrip={descrip}
19               category={category}
20               img={img}
21             />
22           );
23         })}
24       </div>
25     </Wrapper>
26   );
27 };
28
29 export default BlogList2_43;
```

```
2 import { FaMugSaucer } from "react-icons/fa6";
3 import Link from "next/link";
4 import { useBlogBlogContext_43 } from "../_blogContext_43";
5
6 const Blog2_43 = ({ id, img, category, title, descrip }) => {
7   const { removeItem } = useBlogBlogContext_43();
8
9   return (
10     <article key={id} className="blog">
11       <img src={img} alt="Coffee photo" className="img blog-img" />
12       <div className="blog-content">
13         <span className="flex">
14           {category}
15           {category === "lifestyle" ? (
16             <FaMugSaucer className="ml-1" color="blue" size={14} />
17           ) : (
18             <FaGlobe className="ml-1" color="blue" size={14} />
19           )}
20         </span>
21         <h3>{title}</h3>
22         <p>{descrip}</p>
23         <div className="flex justify-between items-center">
24           <Link href="#">read more</Link>
25           <button
26             type="button"
27             className="text-red-700 bg-red-100 capitalize px-2 py-1"
28             onClick={() => removeItem(id)}
29           />
30         </div>
31       </div>
32     </article>
33   );
34 };
35
```

1141-2n-next-victorhsu-43 git:(master) X npm run dev
GET /demo/blog_43/localjson2_context_43 200 in 1221ms (compile: 1149ms, render: 71ms)

a55c46a victor_xu

Sat Dec 20 11:29:13 2025 +0800 W14-P2: Refine W14-P1 by using

W14-P3: Implement /demo/grocery_43 for Grocery_43

=> Chrome, add two data, and shown in components

The screenshot displays a development environment with three main components:


- Code Editor (Left):** Shows the `page.jsx` file for `GroceryPage_43`. The code uses `useState` to manage a list of items. A red box highlights the `const newItem` object and the `addItem` function. Another red box highlights the `addItem` prop in the `<Form>` component.
- Browser Preview (Center):** Shows the 'Grocery Bud' application running at `localhost:3000/de...`. It features a text input, an 'Add Item' button, and a list of items: 'Eggs' and 'Apple', each with a 'Delete' button.
- Redux DevTools (Right):** Shows the state of the application. The state is an array of items. A red box highlights the state after adding two items: `Eggs` and `Apple`.

```
const [items, setItems] = useState([]);
const addItem = (itemName) => {
  const newItem = {
    name: itemName,
    completed: false,
    id: nanoid(),
  };
  setItems([...items, newItem]);
  toast.success("Item added successfully!");
};

return (
  <Wrapper>
    <section className="section-center">
      <ToastContainer position="top-center" />
      <Form addItem={addItem} />
      <Items items={items} />
    </section>
  </Wrapper>
);
```

```
State: {(), {()}}
0: {completed: false, id: "FwEcv980ZAL...", name: "Eggs", completed: false, id: "FwEcv980ZALnxbzGMuMR9", new entry: ""}
1: {completed: false, id: "JhLEabe2yRL...", name: "Apple", completed: false, id: "JhLEabe2yRLQFsB53cpc4", new entry: ""}
```

=> relevant code

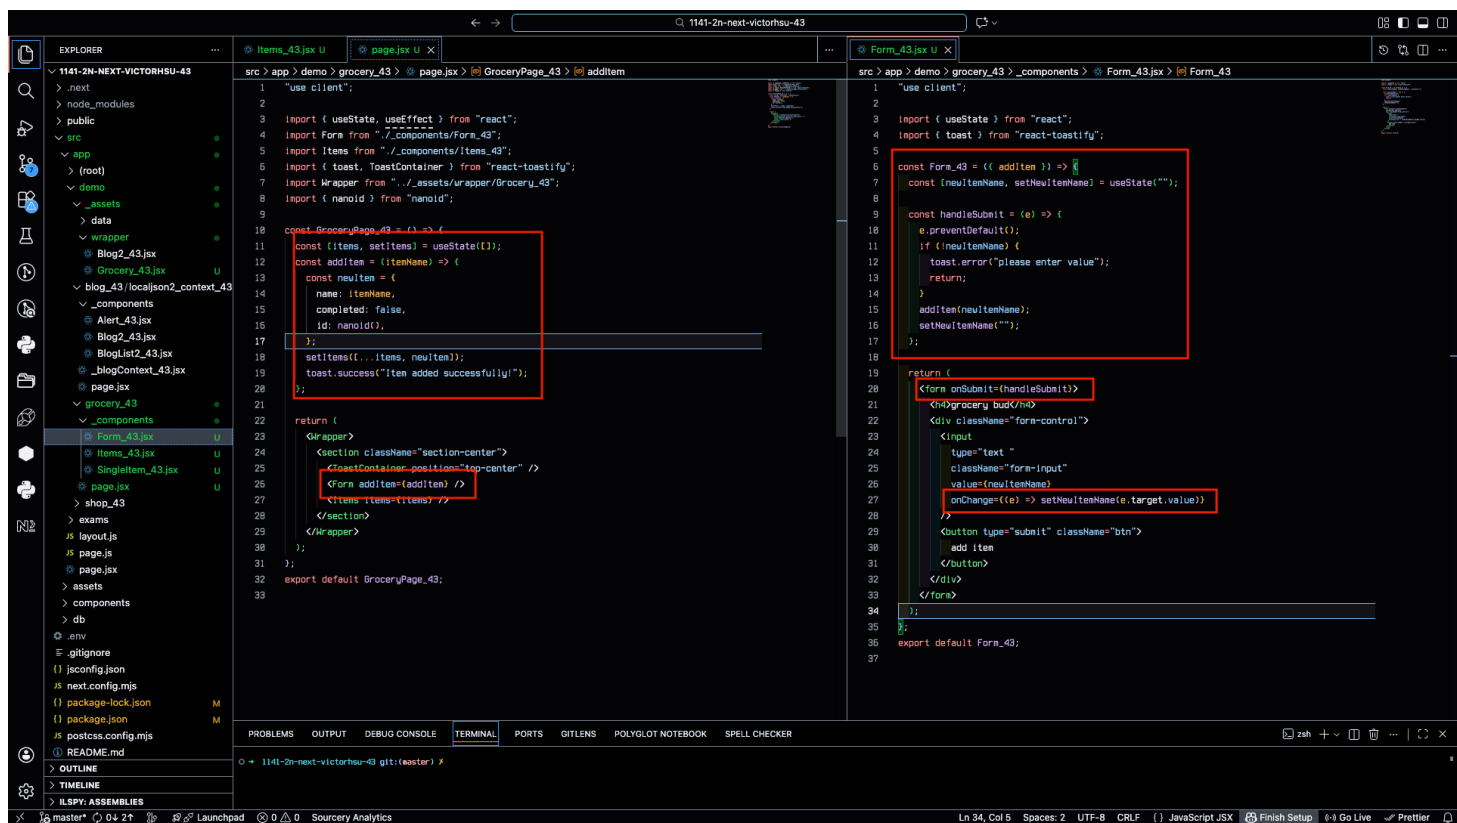

7d15909 victor_xu Sun Dec 21 13:33:56 2025 +0800 W14-P3: Implement /demo/grocery.

W14-logs: git logs of W14

