

W07-P1: implement /grocery_43 (client approach)

=> Add two items, and show the local storage

The screenshot displays a web application running on `http://localhost:3000`. The application is titled "Grocery Bud" and features a form with an "Add Item" button. Below the form, there are two items listed: "Apple" and "Eggs", each with a "Delete" button. The file explorer on the left shows the project structure, with the `grocery_43` directory highlighted. The code editor shows the `Navbar_43.tsx` file, which contains the navigation links. The terminal at the bottom shows the command `npm audit fix` being executed. The DevTools console on the right shows the local storage data, which includes the items "Apple" and "Eggs".


Key	Value
list	[{"name": "Apple", "completed": false, "id": 0}, {"name": "Eggs", "completed": false, "id": 1}]

de08dc1 victor_xu

Sat Apr 11 16:24:15 2026 +0800 W07-P1: implement /grocery_43 (

W07-P2: deploy to Vercel

=> show /grocery_43 in Vercel

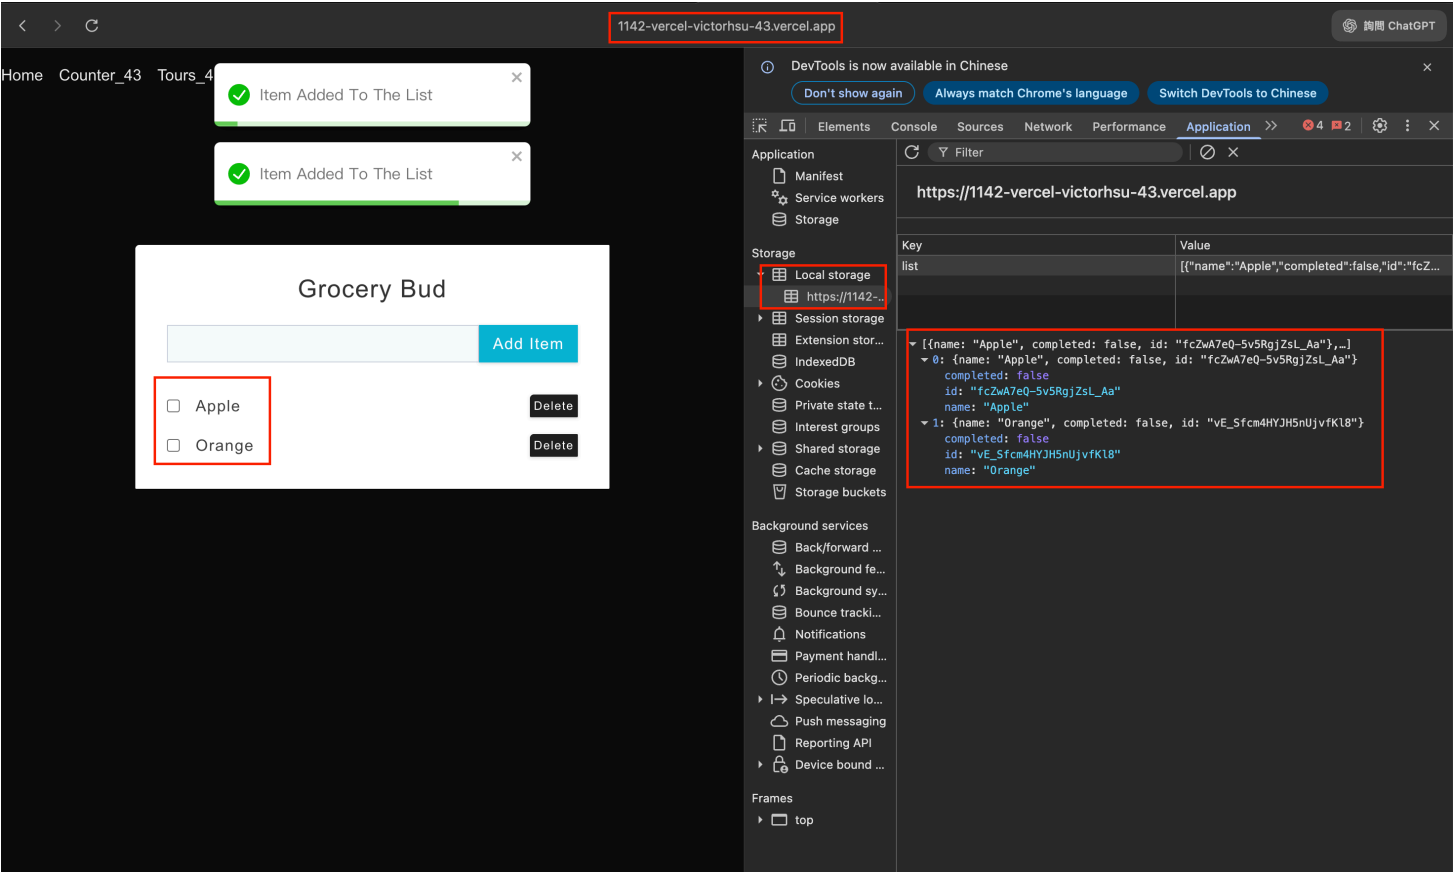

004d99c victor_xu

Sat Apr 11 17:08:55 2026 +0800 W07-P2: deploy to Vercel

W07-P3: Grocery READ and CREATE

=> Add 3 items into Grocery database table and fetch these three items (READ)

supabase.com

victor_prisma_43

main

Grocery

Filter by id, completed, name or ask AI

Sort

RLS disabled

Index Advisor

Enable Realtime

Role postgres

	id	int4	completed	bool	name	text
	1		FALSE		Eggs	
	2		FALSE		apple	
	3		TRUE		orange	

Page 1 of 1 100 rows 3 records

localhost:3000

Home Counter_43 Tours_43 Actions_43 Users_db_43 Grocery_43

Grocery Bud (Db)

Add Item

☐ Eggs

☐ Apple

☒ Orange

Delete

Delete

Delete

DevTools is now available in Chinese

Don't show again Always match Chrome

Elements

<!DOCTYPE html>
<html lang="en">
<head>
</head>
<body class="geist_a71539c9-module_T19VSG_v
variable geist_mono_8d43a2aa-module_8Li5zG_v
variable antialiased" style=
<div hidden=></div>
<nav class="max-w-3xl mx-auto py-4 flex gap
-x-4"></nav>
<main class="max-w-3xl mx-auto py-4">
<div class="sc-bdnAzt hhugli" => \$0
<section class="section-center">
</div>
<!--\$-->
<!--\$-->
</main>
<script id="R">
self.__next_r__=w6j098PyTpV0k1WX6fZTI
</script>
<script src="/_next/static/chunks/%58turboho
ack%5D_browser_dev_hmr-client_hmr-client_ts
_956a8d3a...js" async></script>
<script>(self.__next_f=self.__next_f||
[]).push([0])</script>

max-w-3xl-mx-auto-py-4 div.sc-bdnAzt.hhugli

Styles

Computed

Layout

Event Listeners

Filter

hov .cls +, ,

element.style {

Layer base

*, :after, :before, ::backdrop

globals.css:29

{

box-sizing: border-box;

border: 0 solid;

margin: 0;

padding: 0;

}

Layer user agent stylesheet

div {

display: block;

unicode-bidi: isolate;

}

Inherited from ...

=> code for READ all items

EXPLORER

1142-VERCEL-VICTORHSU-43

> .next

> node_modules

> prisma

> schema.prisma

> public

> src

> actions

> grocery_43.ts

> userAction_43.ts

> app

> _assets

> grocery_43

> grocery_db_43

> _components

> Form_43.jsx

> Items_43.jsx

> SingleItem_43...

> page.jsx

> tours_43

> users_db_43

> favicon.ico

> globals.css

> layout.tsx

> page.tsx

> components

> NavBar_43.tsx

> generated/prisma

SingleItem_43.jsx

src > app > grocery_db_43 > _components > SingleItem_43 > SingleItem_43


```
1 const SingleItem_43 = ({ item }) => {  
2   return (  
3     <div className='single-item'>  
4       <input  
5         type='checkbox'  
6         checked={item.completed}>  
7     </input>  
8     <p  
9       style={{  
10        textTransform: 'capitalize',  
11        textDecoration: item.completed && 'line-through',  
12      }}>  
13       {item.name}  
14     </p>  
15     <button  
16       className='btn remove-btn'  
17       type='button'  
18     >  
19       delete  
20     </button>  
21   </div>  
22   );  
23 }  
24 export default SingleItem_43;  
25
```

Items_43.jsx


src > app > grocery_db_43 > _components > Items_43 > ...

```
1  
2  
3 import SingleItem from './SingleItem_43';  
4 import { fetchGrocery } from '@actions/grocery_43';  
5  
6 const Items = async () => {  
7   const items = await fetchGrocery();  
8   return (  
9     <div className='items'>  
10      {items.map((item) => {  
11        return (  
12          <SingleItem  
13            key={item.id}>  
14            item={item}>  
15          </div>  
16        );  
17      })}  
18    </div>  
19  );  
20 }  
21 export default Items;  
22
```

=> Add a item cheese (CREATE)

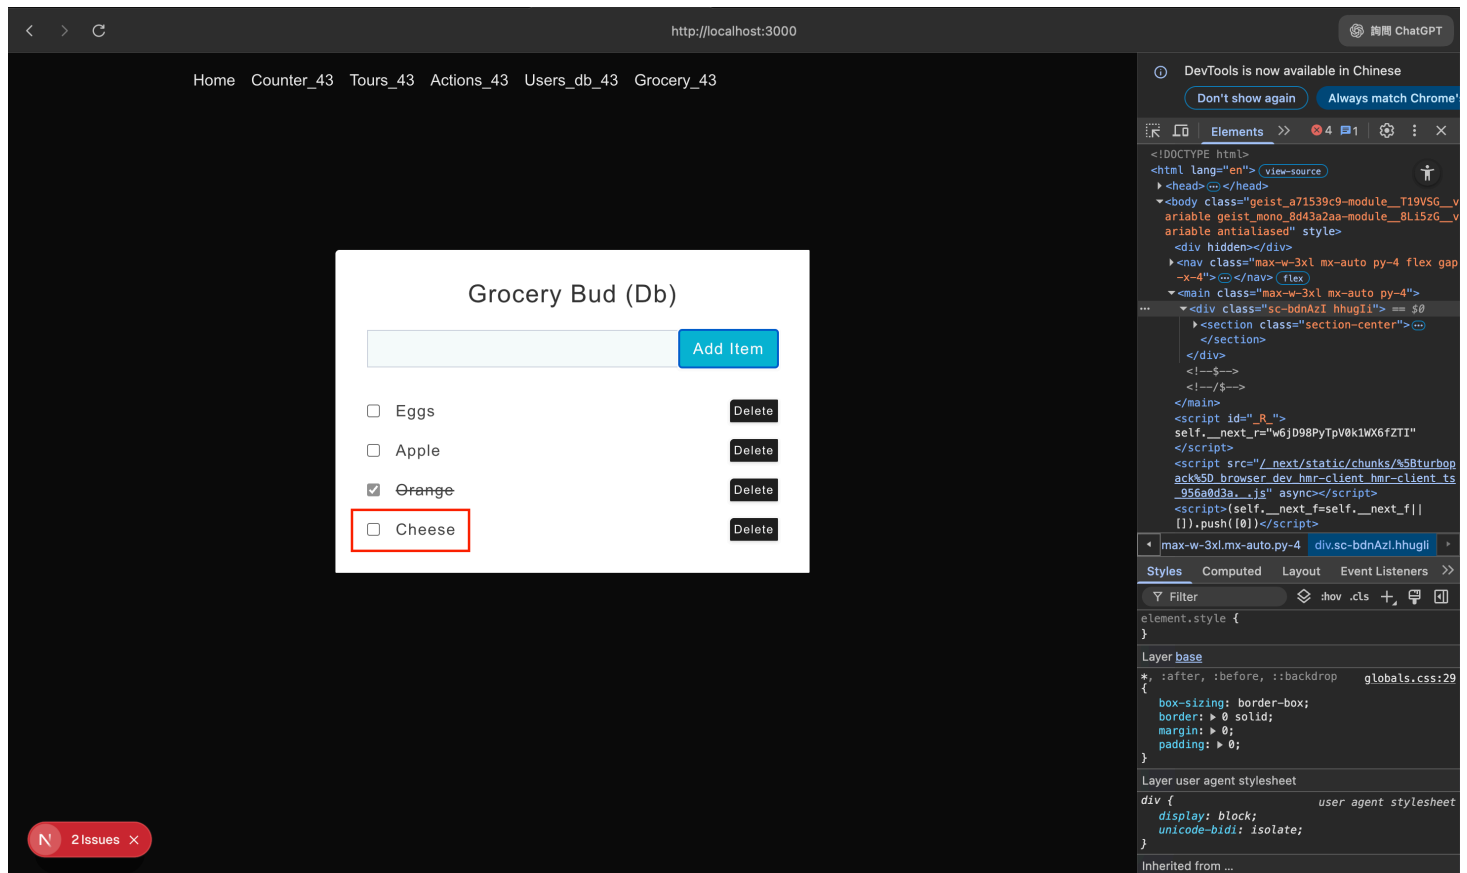

=> code for CREATE a item

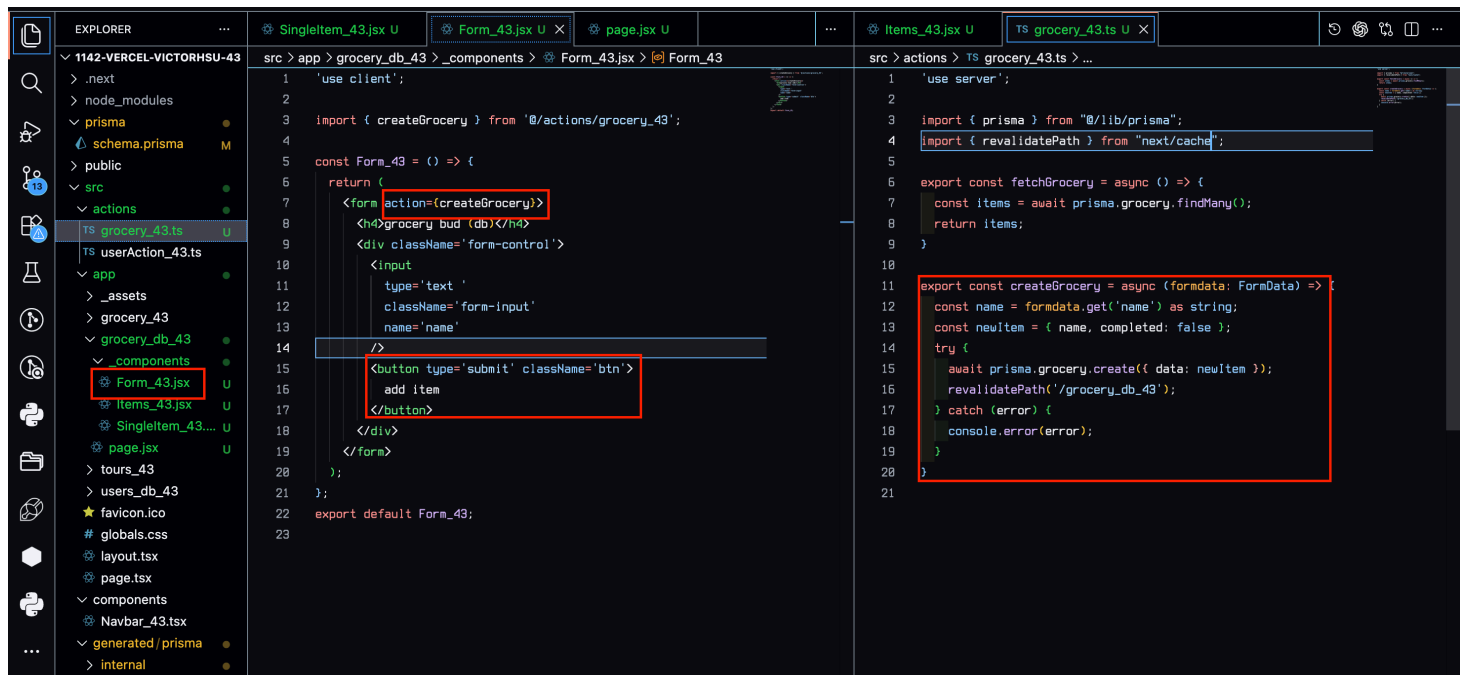

W07-logs: git logs of W07

vic0627 / 1142-vercel-victorhsu-43Public

NotificationsFork0Star0

<> Code🕒 Issues🔗 Pull requests🔄 Actions📁 Projects🛡 Security and quality📈 Insights

Commits

📄 master

All usersAll time

Commits on Apr 11, 2026

W07-P3: Grocery READ and CREATE

vic0627 committed 2 minutes ago · ✓ 1 / 1

5598cc5📄<>

W07-P2: deploy to Vercel

vic0627 committed 2 minutes ago

004d99c📄<>

W07-P1: implement /grocery_43 (client approadh)

vic0627 committed 47 minutes ago · ✓ 1 / 1

de08dc1📄<>