

My github URL

Vercel URL

W12-P1: Add 4 initial product data to Supabase

=> npx prisma db seed to add 4 data

The screenshot displays a development environment with three main components:


- Code Editor:** Shows the Prisma client generation and database push commands. The code includes a Prisma client configuration and a Prisma adapter for PostgreSQL.
- Terminal:** Shows the execution of the command `npx prisma db seed` and the resulting output, indicating that the seed command has been executed successfully.
- Supabase Table Editor:** Shows the 'Product' table with 4 rows of data. The table has columns for 'id', 'name', and 'company'.

id	name	company
09f1bf47-0540-4ec3-9f24-2551df1f36ab	contemporary sofa	Comfora
c0734a7f-d761-4bd7-aeaa-e2053d54616a	chic chair	Luxora
d14dd34e-9e68-4666-b94d-ca702747241	comfy bed	Homestead
f36786ab-db6f-4c52-a0e7-f3f43bc941a4	avant-garde lamp	Modenza


3c35036 max920612 Wed May 13 19:00:32 2026 +0800 W12-P1: Add 4 initial product data to Supabase

W12-P2: Sign In and Sign Out with links

=> Not signed in, show Login and Register

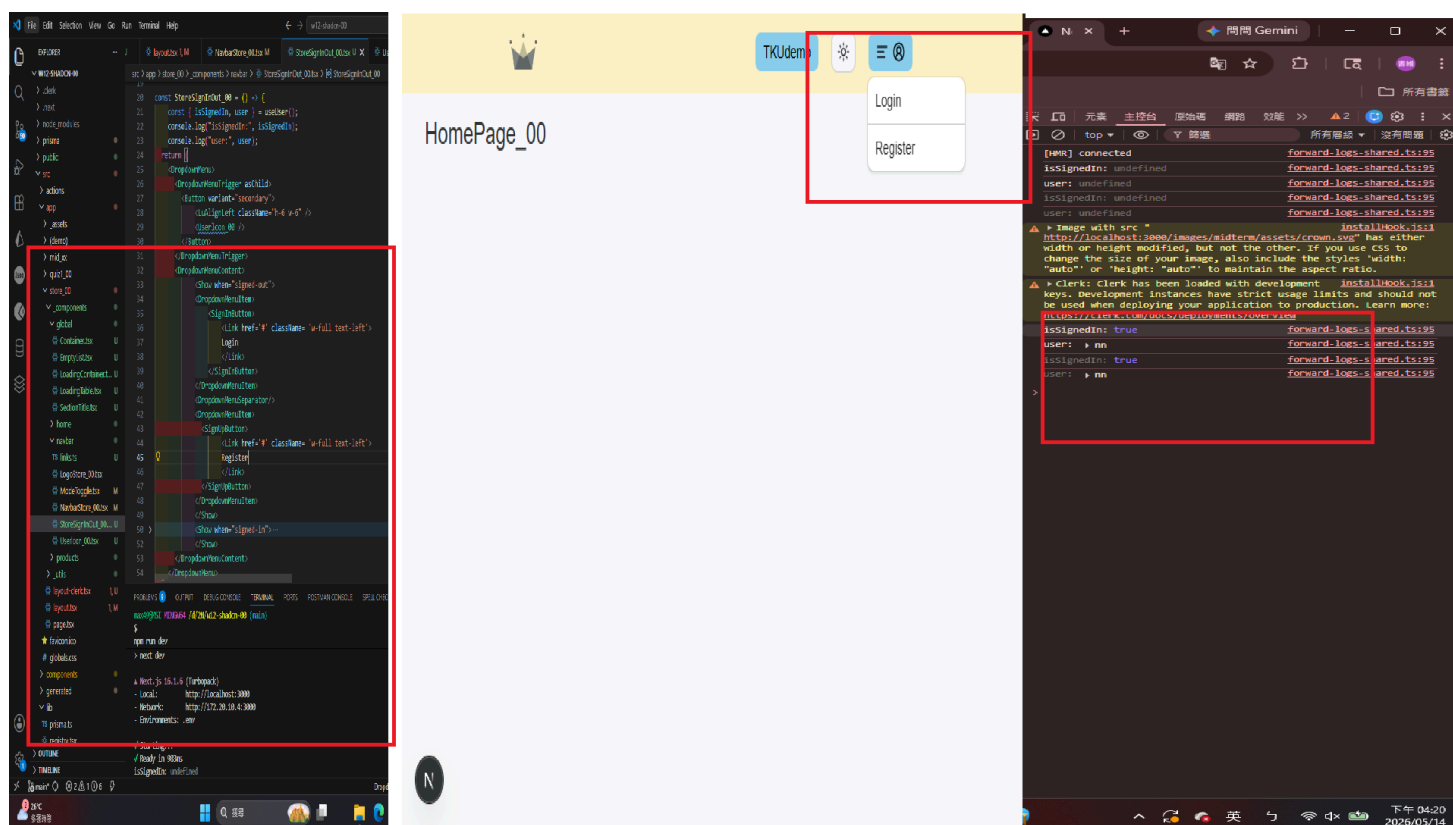

=> already signed in, show links, linksAdmin, and Logout

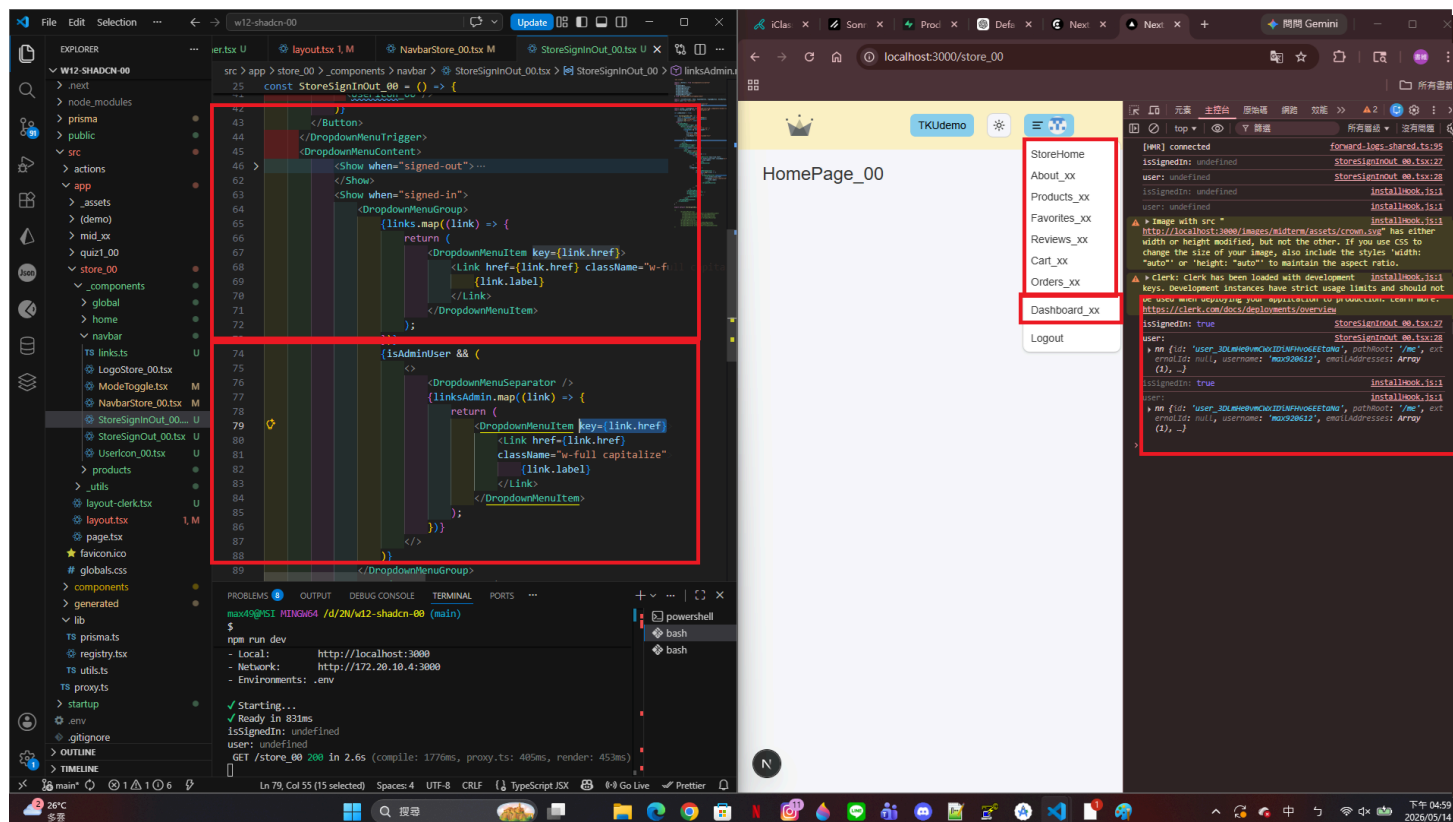

0d9c014 max920612 Wed May 13 20:34:10 2026 +0800 W12-P2: Sign In and Sign Out with links

W12-P3: Check isAdminUser

=> isAdminUser is true, shown in Chrome

The screenshot shows a web application running in a Chrome browser. The address bar displays `localhost:3000/store_00`. The main content area shows `HomePage_00`. A navigation menu is visible on the right side of the page, with `Dashboard_xx` highlighted. The Redux DevTools sidebar on the right shows the state of the application. The state is an object with the following properties:

- `isSignedIn`: `undefined`
- `isAdminUser`: `true`
- `user`: `undefined`
- `isSignedIn`: `undefined`
- `isAdminUser`: `true`
- `user`: `undefined`
- `isSignedIn`: `true`
- `isAdminUser`: `true`
- `user`: `{id: 'user_30c9b0612max920612@protonmail.com', password: 'me', email: null, username: 'max920612', emailAddresses: Array(1), ...}`

The state is shown in a sequence of updates, with the final state being:

```
{
  isSignedIn: true,
  isAdminUser: true,
  user: {
    id: 'user_30c9b0612max920612@protonmail.com',
    password: 'me',
    email: null,
    username: 'max920612',
    emailAddresses: Array(1),
    ...
  }
}
```

=> related code for checking isAdminUser

The screenshot shows a VS Code editor with a file explorer on the left, a code editor in the center, and a terminal at the bottom. The file explorer shows a project structure for 'w12-shadcn-00'. The code editor displays the file 'StoreSignInOut_00.tsx'. The code defines a function 'StoreSignInOutAuth_00' which checks if a user is an admin. The terminal shows the output of a 'npm run dev' command, indicating the application is running on port 3000.

```
src > app > store_00 > components > navbar > StoreSignInOut_00.tsx > ...  
1 import {auth} from '@clerk/nextjs/server'  
2 import StoreSignInOut_00 from './StoreSignInOut_00'  
3  
4 const StoreSignInOutAuth_00 = async () => {  
5   const {userId} = await auth()  
6   const isAdminUser = userId === process.env.ADMIN_USER_ID  
7   return <StoreSignInOut_00 isAdminUser={isAdminUser} />  
8 }  
9  
10 export default StoreSignInOutAuth_00  
11
```

```
src > app > store_00 > components > navbar > StoreSignInOut_00.tsx > ...  
28 const StoreSignInOut_00 = ({isAdminUser}: StoreSignInOut_00Props) => {  
29   const {isSignedIn, user} = useUser();  
30   console.log("isSignedIn:", isSignedIn);  
31   console.log("isAdminUser:", isAdminUser);  
32   console.log("user:", user);  
33   return (  
34     <DropdownMenu>  
35       <DropdownMenuTrigger asChild>  
36         <Button variant="secondary">...  
37       </Button>  
38     </DropdownMenuTrigger>  
39     <DropdownMenuContent>  
40       <Show when="signed-out">...  
41     </Show>  
42     <Show when="signed-in">  
43       <DropdownMenuGroup>  
44         {links.map((link) => {  
45           // ?  
46           <DropdownMenuSeparator />  
47           {links.map((link) => {  
48             return (  
49               <DropdownMenuItem key={link.href}>  
50                 <Link href={link.href}>  
51                   <span className="w-full capitalize">  
52                     {link.label}</span>  
53                 </Link>  
54               </DropdownMenuItem>  
55             </Link>  
56           </Link>  
57         </Link>  
58       </DropdownMenuContent>  
59     </Show>  
60   </DropdownMenu>  
61 )};  
62
```

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS POSTMAN CONSOLE SPELL CHECKER  
$ npm run dev  
user: undefined  
GET /store_00_200 in 738ms (compile: 295ms, proxy.ts: 20ms, render: 423ms)  
POST /store_00_200 in 129ms (compile: 10ms, proxy.ts: 44ms, render: 75ms)  
GET /store_00_200 in 38ms (compile: 4ms, proxy.ts: 16ms, render: 17ms)  
GET /store_00_200 in 50ms (compile: 5ms, proxy.ts: 16ms, render: 29ms)  
GET /store_00_200 in 81ms (compile: 11ms, proxy.ts: 37ms, render: 33ms)  
isSignedIn: undefined  
isAdminUser: true  
user: undefined  
GET /store_00_200 in 211ms (compile: 9ms, proxy.ts: 25ms, render: 178ms)
```

=> isAdminUser is false

The screenshot shows a VS Code editor with a file explorer on the left, a code editor in the center, and a terminal at the bottom. The file explorer shows a project structure for 'w12-shadcn-00'. The code editor displays the file 'StoreSignInOut_00.tsx'. The terminal shows the output of a 'npm run dev' command, indicating the application is running on port 3000. A browser window is open in the foreground, showing the application running at 'localhost:3000/store_00'. The browser shows a 'HomePage_00' with a sidebar menu and a main content area. The sidebar menu includes links for 'StoreHome', 'About_xx', 'Products_xx', 'Favorites_xx', 'Reviews_xx', 'Cart_xx', 'Orders_xx', 'Dashboard_xx', and 'Logout'. The main content area shows a list of users with their names, email addresses, and roles. The role 'isAdminUser' is highlighted in red.

```
src > app > store_00 > components > navbar > StoreSignInOut_00.tsx > ...  
1 import {auth} from '@clerk/nextjs/server'  
2 import StoreSignInOut_00 from './StoreSignInOut_00'  
3  
4 const StoreSignInOutAuth_00 = async () => {  
5   const {userId} = await auth()  
6   const isAdminUser = userId === process.env.ADMIN_USER_ID  
7   return <StoreSignInOut_00 isAdminUser={isAdminUser} />  
8 }  
9  
10 export default StoreSignInOutAuth_00  
11
```

```
src > app > store_00 > components > navbar > StoreSignInOut_00.tsx > ...  
28 const StoreSignInOut_00 = ({isAdminUser}: StoreSignInOut_00Props) => {  
29   const {isSignedIn, user} = useUser();  
30   console.log("isSignedIn:", isSignedIn);  
31   console.log("isAdminUser:", isAdminUser);  
32   console.log("user:", user);  
33   return (  
34     <DropdownMenu>  
35       <DropdownMenuTrigger asChild>  
36         <Button variant="secondary">...  
37       </Button>  
38     </DropdownMenuTrigger>  
39     <DropdownMenuContent>  
40       <Show when="signed-out">...  
41     </Show>  
42     <Show when="signed-in">  
43       <DropdownMenuGroup>  
44         {links.map((link) => {  
45           // ?  
46           <DropdownMenuSeparator />  
47           {links.map((link) => {  
48             return (  
49               <DropdownMenuItem key={link.href}>  
50                 <Link href={link.href}>  
51                   <span className="w-full capitalize">  
52                     {link.label}</span>  
53                 </Link>  
54               </DropdownMenuItem>  
55             </Link>  
56           </Link>  
57         </Link>  
58       </DropdownMenuContent>  
59     </Show>  
60   </DropdownMenu>  
61 )};  
62
```

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS POSTMAN CONSOLE SPELL CHECKER  
$ npm run dev  
user: undefined  
GET /store_00_200 in 738ms (compile: 295ms, proxy.ts: 20ms, render: 423ms)  
POST /store_00_200 in 129ms (compile: 10ms, proxy.ts: 44ms, render: 75ms)  
GET /store_00_200 in 38ms (compile: 4ms, proxy.ts: 16ms, render: 17ms)  
GET /store_00_200 in 50ms (compile: 5ms, proxy.ts: 16ms, render: 29ms)  
GET /store_00_200 in 81ms (compile: 11ms, proxy.ts: 37ms, render: 33ms)  
isSignedIn: undefined  
isAdminUser: true  
user: undefined  
GET /store_00_200 in 211ms (compile: 9ms, proxy.ts: 25ms, render: 178ms)
```

Commits

main

All users

All time

Commits on May 17, 2026

W12-P3: Check isAdminUser

max920612 committed now

0e4dfd1

<>

Commits on May 14, 2026

W12-P2: Sign In and Sign Out with links

max920612 committed 3 days ago

4446afc

<>

W12-P1: Add 4 initial product data to Supabase

max920612 committed 3 days ago

f7ec960

<>