

My github URL

Vercel URL

[Name] victor hsu

[Student ID] 213410243

W15-P1: Shown in Vercel

=> local demo


The screenshot displays a local development environment. On the left, a code editor (VS Code) shows the file explorer with a project structure including components like 'SalesPage_43'. The main editor window displays the code for 'SalesPage_43', which includes imports for table components, a function to fetch admin orders, and a JSX element for the sales page. A red box highlights the JSX element. The bottom panel shows the terminal with the command 'npm run dev' and the output of the development server.

On the right, a web browser (Chrome) shows the application running at 'localhost:3000/store_43/admin_43/sales_43'. The browser displays a 'Dashboard' with a 'Sales' section highlighted by a red box. Below the 'Sales' section, there is a table with the following data:


Email	Products	Order Total	Tax	Shipping	Date
pure90719@gmail.com	2	\$300.00	\$15.00	\$20.00	May 31, 2026

Below the table, it shows 'Total Orders : 1'. A 'Create Sales' button is visible in the top right corner of the sales section.

=> success of npm run build

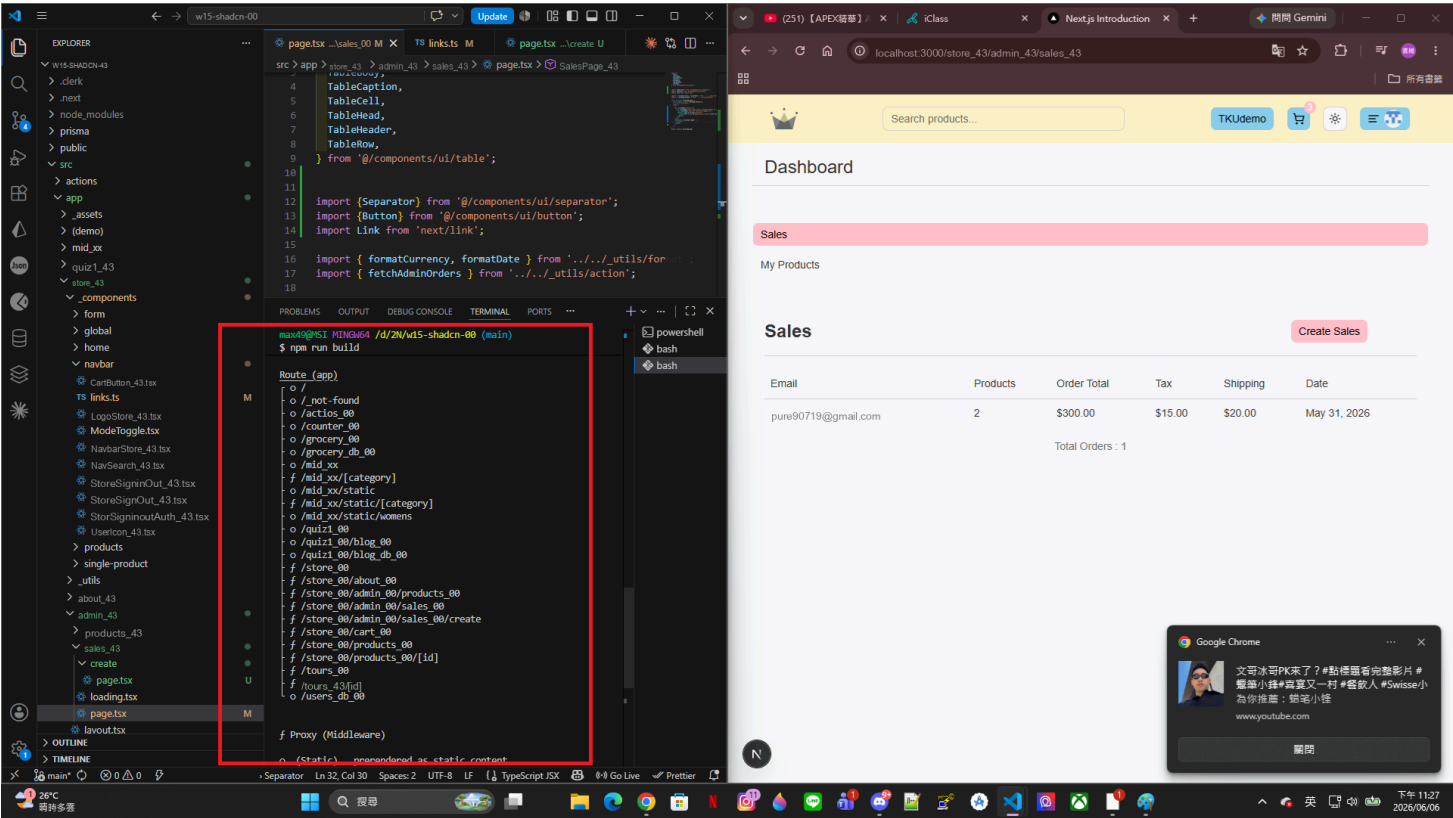


=> Vercel demo

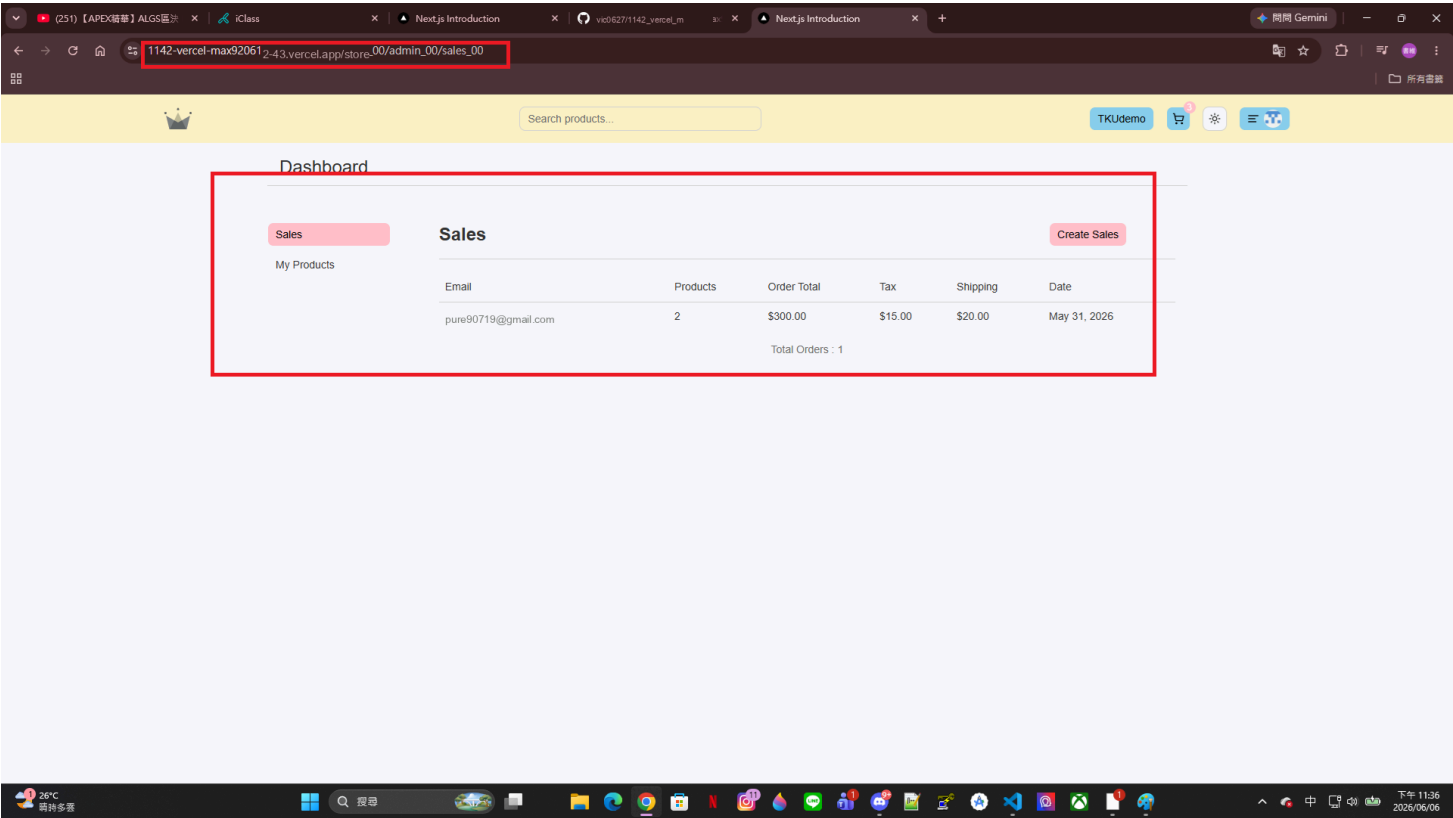


W15-P2: Show AdminProducts table for CRUD

=> Chrome demo (initial 4 products)

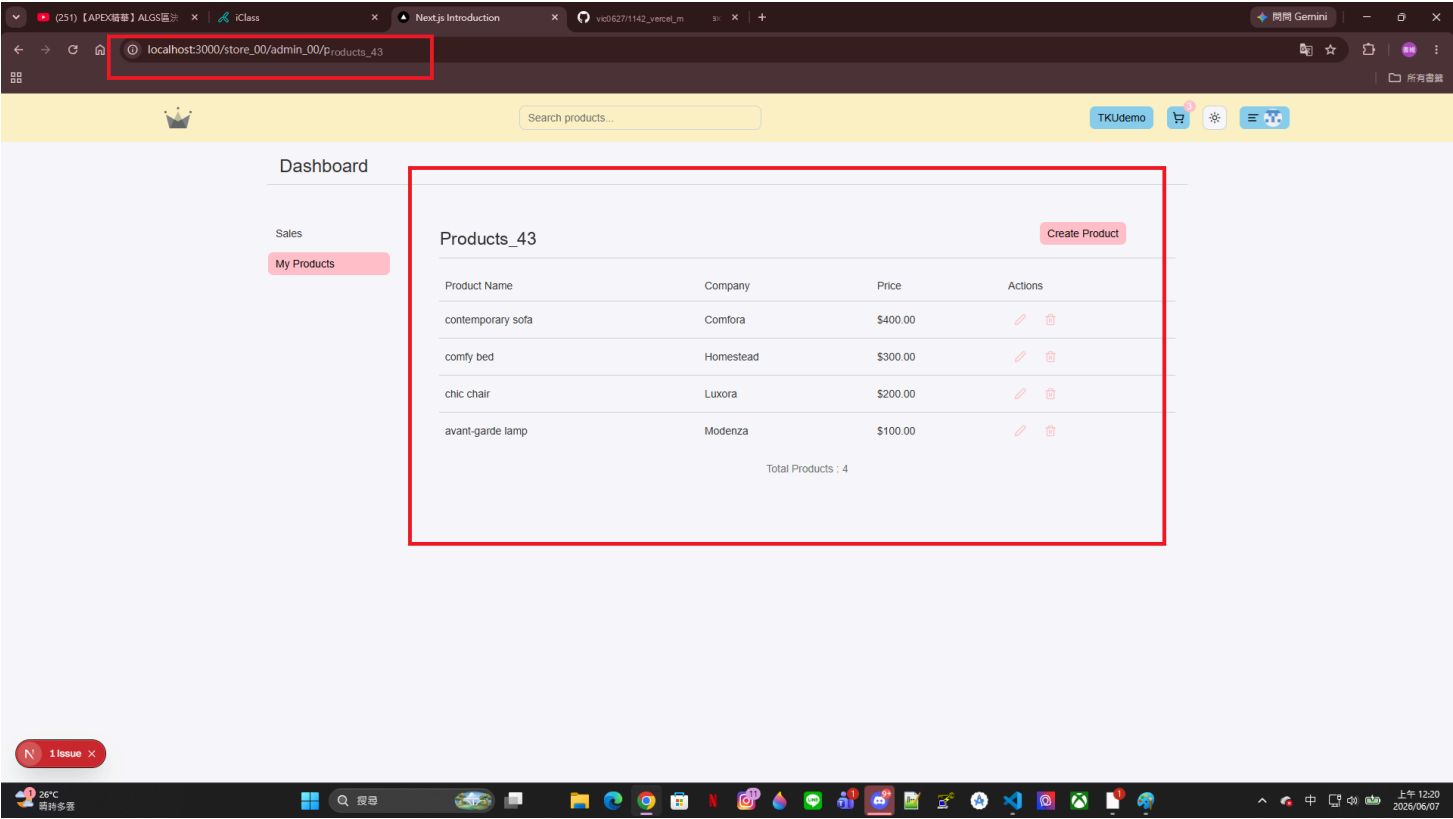

=> Chrome demo (delete a product, 3 left)

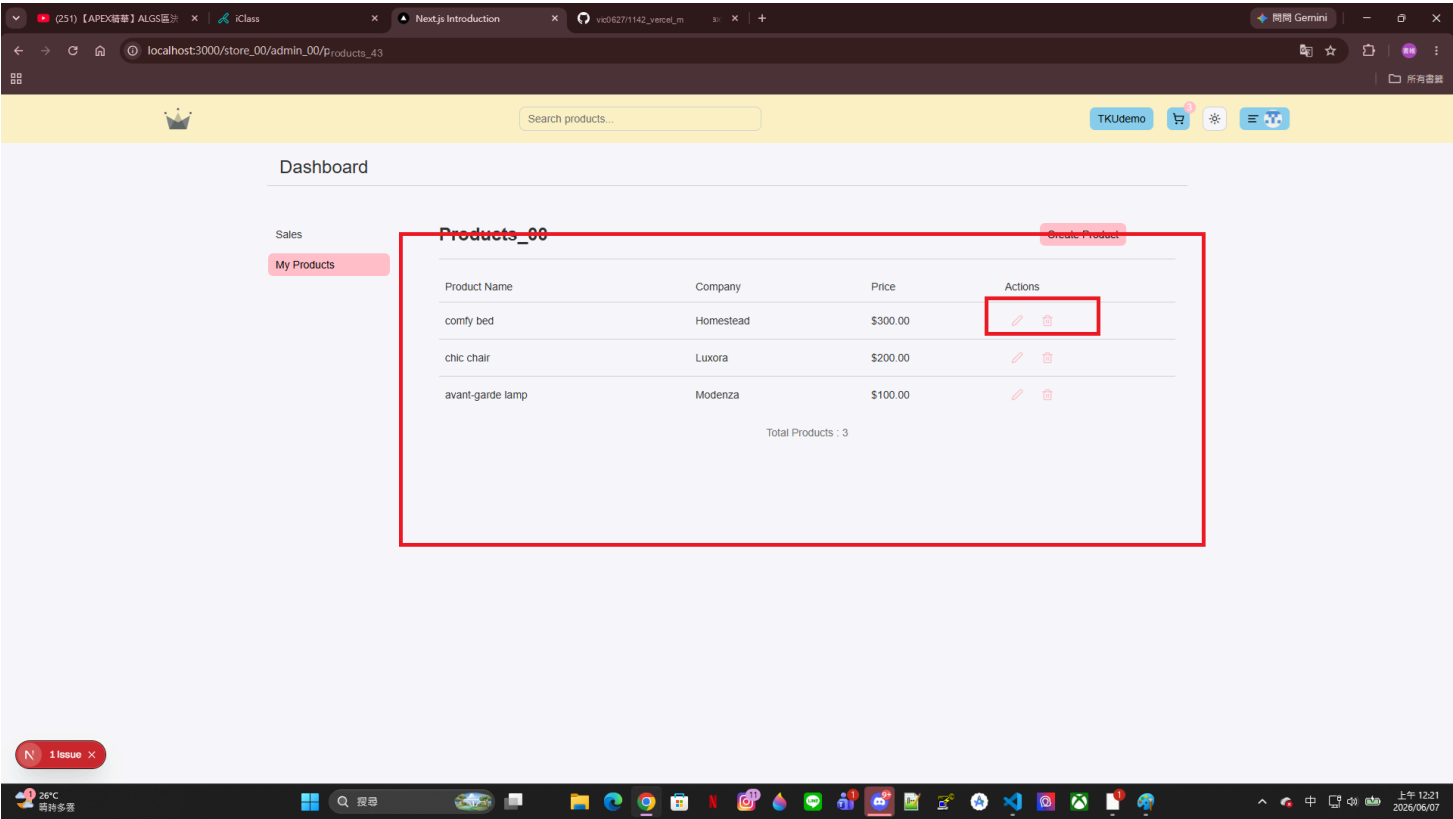

The screenshot shows a VS Code editor with a React application. The file explorer on the left shows the project structure. The main editor displays the code for the table and the delete button. The code for the table is as follows:

```

<Separator className="my-4" />
<Table>
  <TableCaption className="capitalize">total products : {items.length}</TableCaption>
  <TableHeader>
    <TableHead>
      <Product Name</TableHead>
      <TableHead>Company</TableHead>
      <TableHead>Price</TableHead>
      <TableHead>Actions</TableHead>
    </TableHead>
    <TableBody>
      {items.map(item => {
        const {id: productId, name, company, price} = item;
        return (
          <TableRow key={productId}>
            <TableCell>{name}</TableCell>
            <TableCell>{company}</TableCell>
            <TableCell>{formatCurrency(price)}</TableCell>
            <TableCell className="flex items-center gap-4">
              <Link href={...}>
                <IconButton actionType="edit" />
              </Link>
              <DeleteProduct productId={productId} />
            </TableCell>
          </TableRow>
        );
      })}
    </TableBody>
  </Table>
</Section>

```

The code for the delete button is as follows:

```

<FormContainer>
  <IconButton actionType="delete" />
</FormContainer>

```

The code for the delete function is as follows:

```


function DeleteProduct({ productId }: { productId: string }) {
  const deleteProduct = deleteProductAction.bind(null, { productId });
  return (
    <FormContainer>
      <IconButton actionType="delete" />
    </FormContainer>
  );
}

```

W15-P2: Show AdminPro

W15-P3: Create Product and Update Product

=> Chrome, create a product using createProductAction

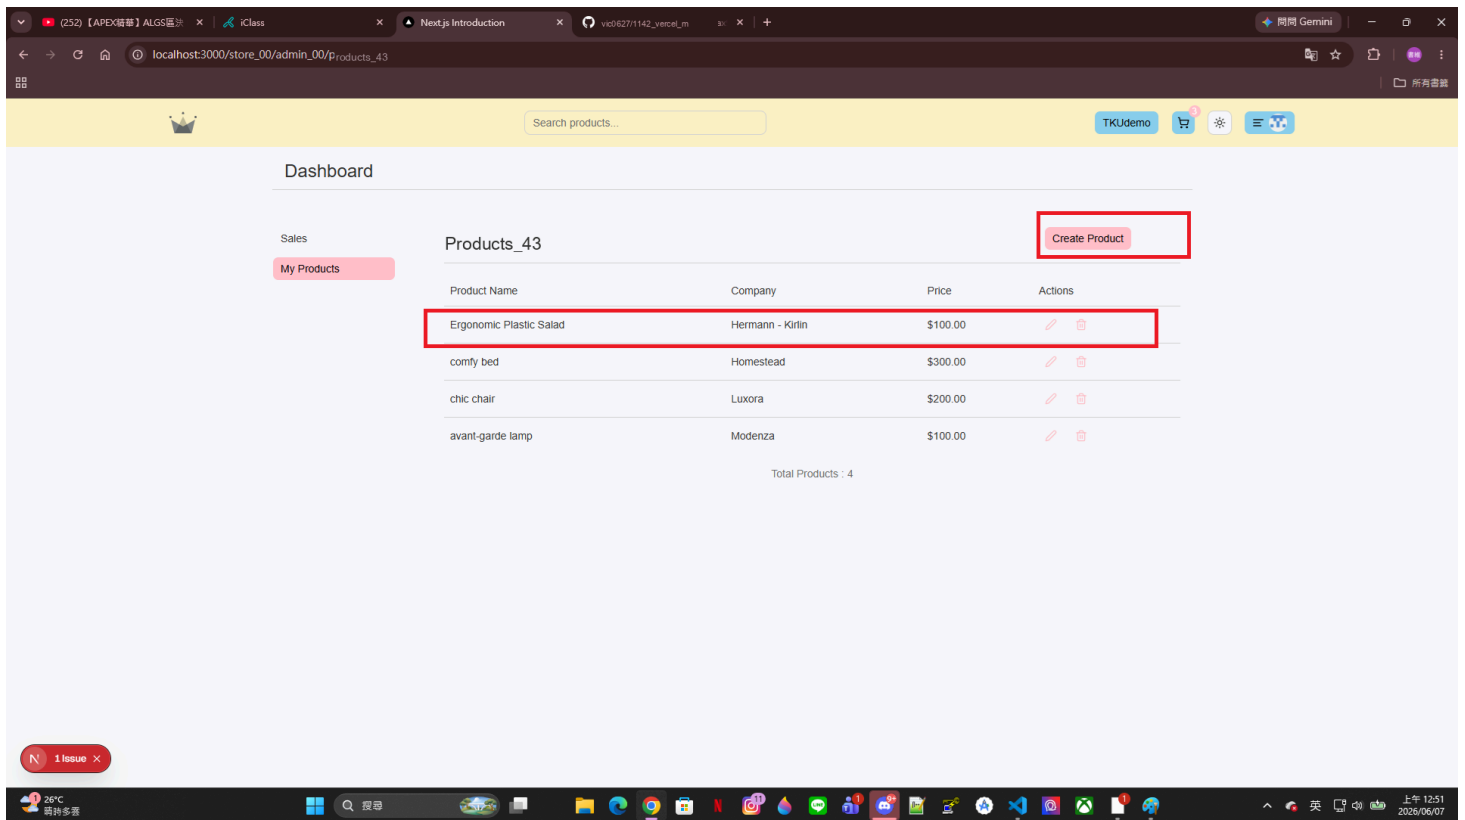

Dashboard

Sales

My Products

Products_43


Create Product

Product Name	Company	Price	Actions
Ergonomic Plastic Salad	Hermann - Kirlin	\$100.00	 
comfy bed	Homestead	\$300.00	 
chic chair	Luxora	\$200.00	 
avant-garde lamp	Modenza	\$100.00	 

Total Products : 4

1 issue

=> Chrome, create a product using createProductAction2

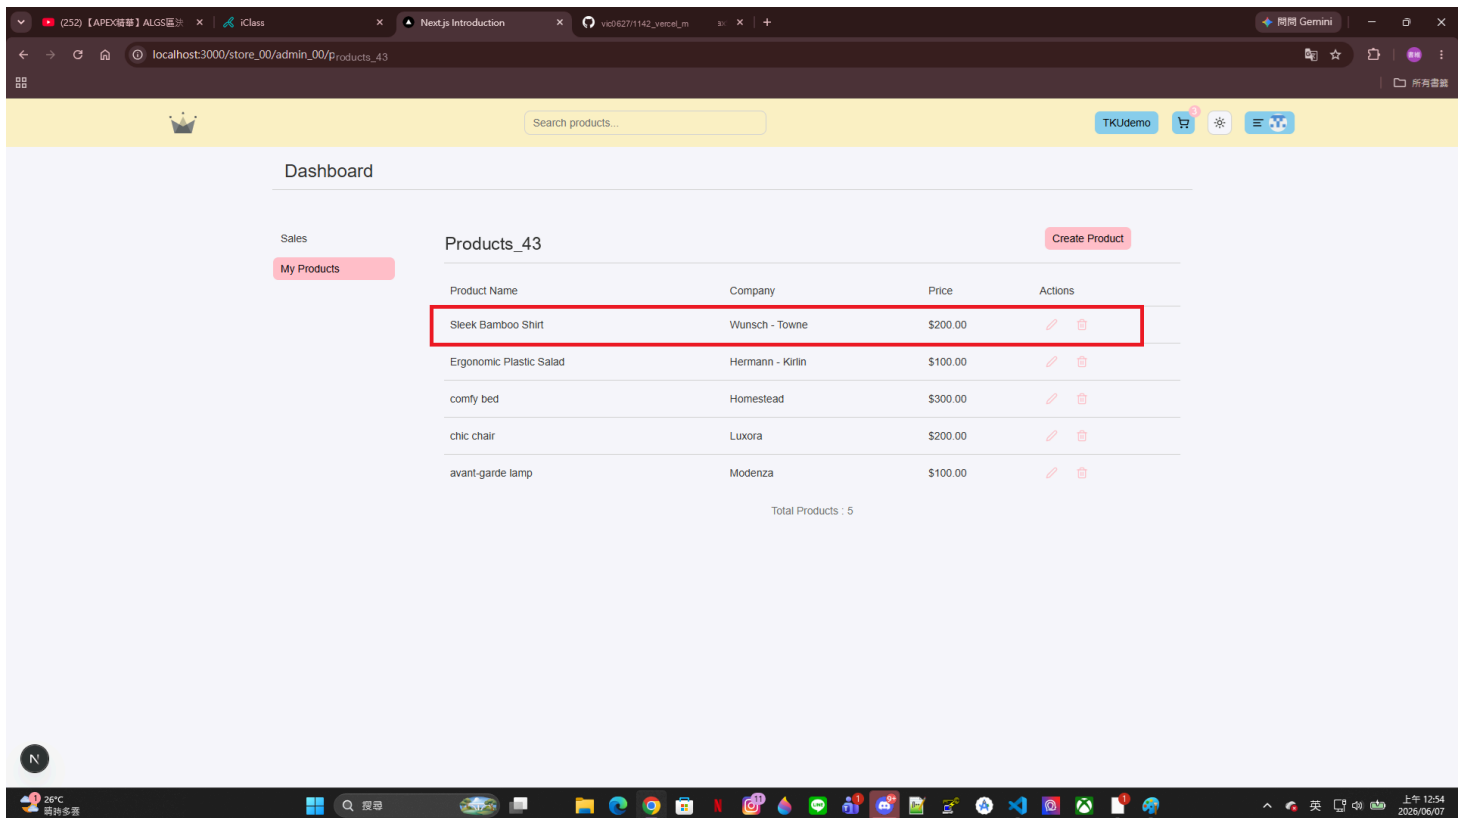

Dashboard

Sales

My Products

Products_43

Create Product


Product Name	Company	Price	Actions
Sleek Bamboo Shirt	Wunsch - Towne	\$200.00	 
Ergonomic Plastic Salad	Hermann - Kirlin	\$100.00	 
comfy bed	Homestead	\$300.00	 
chic chair	Luxora	\$200.00	 
avant-garde lamp	Modenza	\$100.00	 

Total Products : 5


=> relevant code for creating a product using createProductAction2

The screenshot shows a VS Code editor with two files open. The left file, `page1.tsx`, contains a React component `CreateProductPage` that uses `createProductAction2` within a `FormContainer`. The right file, `actions.ts`, defines `createProductAction2` as an async function that takes `prevState` and `formData` as arguments. It uses `prisma.product.create` to create a new product in the database. The `formData` is validated using `productSchema.parse(formData)`. The `createProductAction2` function is also used in the `page1.tsx` file to handle the form submission.

=> Update a featured product

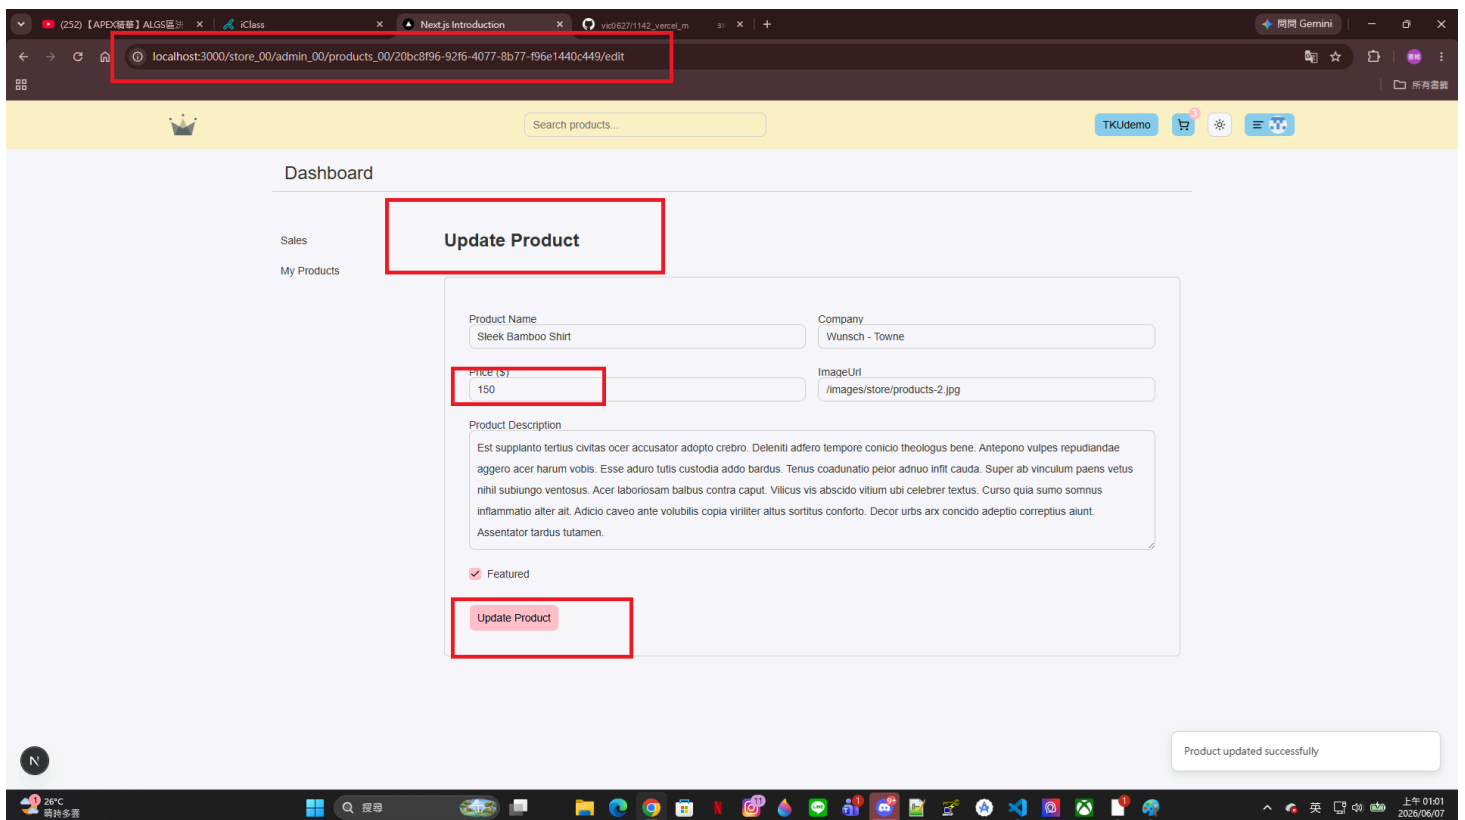

=> Show in featured product

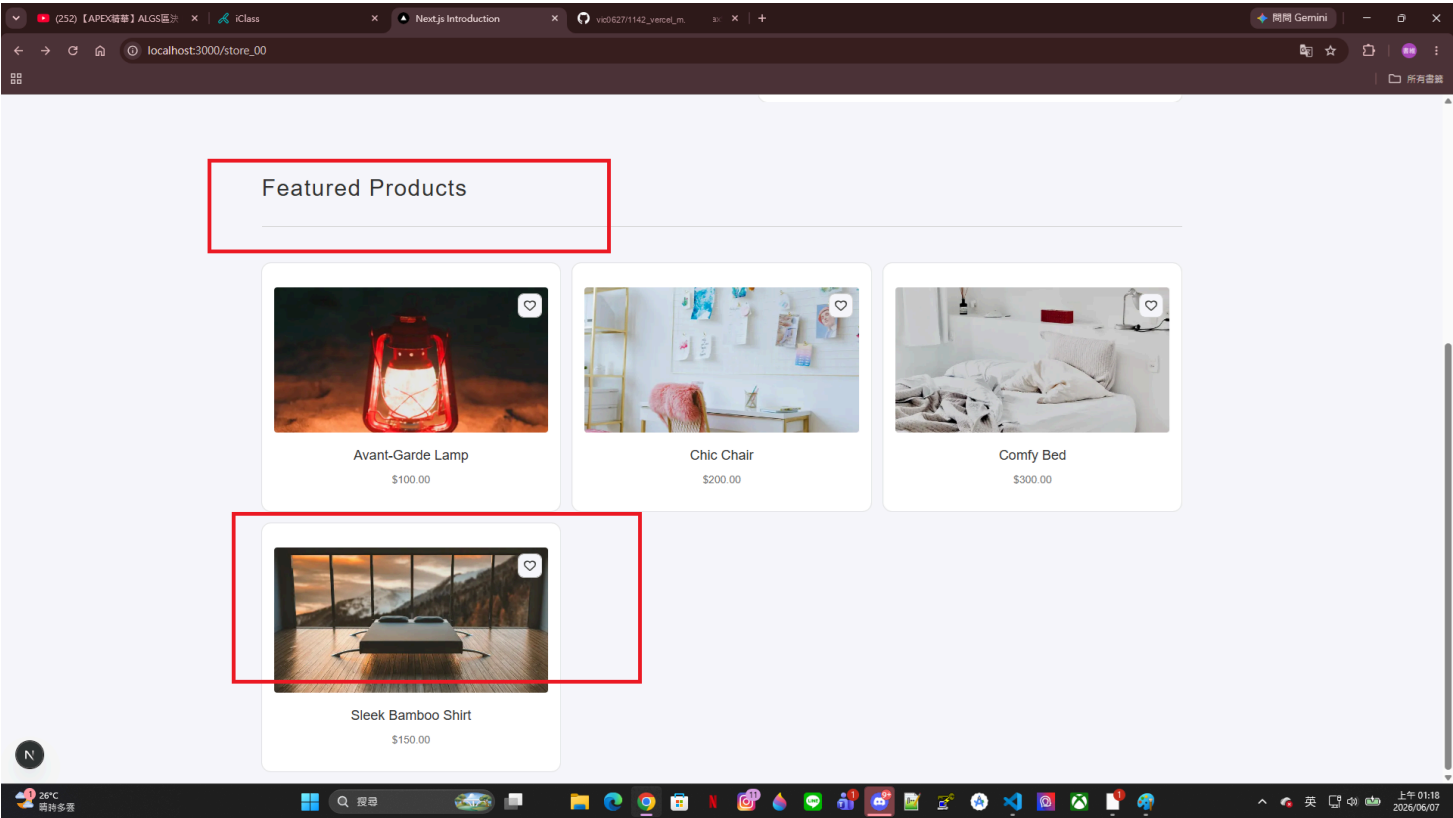

e436f5a victor hsu Sun Jun 7 01:19:31 2026 +0800 W15-P3: Create Product

