REST API / Markdown / Markdown





The REST API is now versioned. For more information, see "About API versioning."

Markdown

GitHub Docs

Use the REST API to render a markdown document as an HTML page or as raw text.

Render a Markdown document &

Works with <u>GitHub Apps</u>

Parameters for "Render a Markdown document"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Body parameters

text string Required

The Markdown text to render in HTML.

mode string

String

The rendering mode.

Default: markdown

Can be one of: markdown , gfm


context string

The repository context to use when creating references in gfm mode. For example, setting context to octo-org/octo-repo will change the text #42 into an HTML link to issue 42 in the octo-org/octo-repo repository.

HTTP response status codes for "Render a Markdown document"


Status code	Description
200	OK
304	Not modified

Code samples for "Render a Markdown document"



curl -L \ -X POST \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28" \ http(s)://HOSTNAME/api/v3/markdown \ -d '{"text":"Hello **world**"}'

Example response

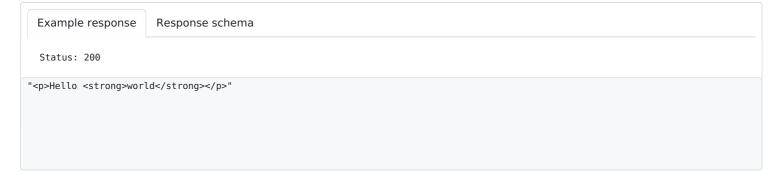

Render a Markdown document in raw mode @

Works with <u>GitHub Apps</u>

You must send Markdown as plain text (using a Content-Type header of text/plain or text/x-markdown) to this endpoint, rather than using JSON format. In raw mode, <u>GitHub Flavored Markdown</u> is not supported and Markdown will be rendered in plain format like a README.md file. Markdown content must be 400 KB or less.

HTTP response status codes for "Render a Markdown document in raw mode"

Status code	Description
200	OK
304	Not modified

Code samples for "Render a Markdown document in raw mode"



Example response

Example response Response schema

Legal

© 2023 GitHub, Inc. <u>Terms</u> <u>Privacy</u> <u>Status</u> <u>Pricing</u> <u>Expert services</u> <u>Blog</u>