



The REST API is now versioned. For more information, see "About API versioning."

Repository webhooks

Use the REST API to create and manage webhooks for your repositories.

About repository webhooks &

Repository webhooks allow your server to receive HTTP POST payloads whenever certain events happen in a repository. For more information, see "Webhooks documentation."

List repository webhooks @

Works with GitHub Apps

Lists webhooks for a repository. Last response may return null if there have not been any deliveries within 30 days.

Parameters for "List repository webhooks"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

Query parameters

per_page integer

The number of results per page (max 100).

Default: 30

page integer

Page number of the results to fetch.

Default: 1

HTTP response status codes for "List repository webhooks"

Status code	Description
200	OK
404	Resource not found

Code samples for "List repository webhooks"



Response

```
Example response Response schema

Status: 200

[ { "type": "Repository", "id": 12345678, "name": "web", "active": true, "events": [ "push", "pull_request" ], "config": { "content_type": "json", "insecure_ssl": "0", "url": "https://example.com/webhook" }, "updated_at": "2019-06-03T00:57:16Z", "created_at": "2019-06-03T00:57:16Z", "url": "https://HOSTNAME/repos/octocat/Hello-World/hooks/12345678", "test_url": "https://HOSTNAME/repos/octocat/Hello-World/hooks/12345678/test", "ping_url": "https://HOSTNAME/repos/octocat/Hello-World/hooks/12345678/deliveries", "last_response": { "code": null, "status": "unused", "message": null } } ]
```

Create a repository webhook &

Works with <u>GitHub Apps</u>

Repositories can have multiple webhooks installed. Each webhook should have a unique <code>config</code> . Multiple webhooks can share the same <code>config</code> as long as those webhooks do not have any <code>events</code> that overlap.

Parameters for "Create a repository webhook"

Headers

```
accept string
Setting to application/vnd.github+json is recommended.
```

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

Body parameters

name string

Use web to create a webhook. Default: web . This parameter only accepts the value web .

The name of the repository without the .git extension. The name is not case sensitive.

config object

Key/value pairs to provide settings for this webhook.

▶ Properties of config

events array of strings

Determines what **events** the hook is triggered for.

Default: ["push"]

active boolean


Determines if notifications are sent when the webhook is triggered. Set to true to send notifications.

Default: true

HTTP response status codes for "Create a repository webhook"

Status code	Description
201	Created
403	Forbidden
404	Resource not found
422	Validation failed, or the endpoint has been spammed.

Code samples for "Create a repository webhook"

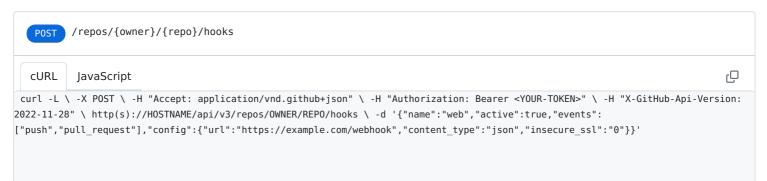

Response

```
Example response Response schema

Status: 201

{ "type": "Repository", "id": 12345678, "name": "web", "active": true, "events": [ "push", "pull_request" ], "config": { "content_type": "json", "insecure_ssl": "0", "url": "https://example.com/webhook" }, "updated_at": "2019-06-03T00:57:16Z", "created_at": "2019-06-03T00:57:16Z", "url": "https://HOSTNAME/repos/octocat/Hello-World/hooks/12345678", "test_url": "https://HOSTNAME/repos/octocat/Hello-World/hooks/12345678/pings", "deliveries_url": "https://HOSTNAME/repos/octocat/Hello-World/hooks/12345678/deliveries",
```

"last_response": { "code": null, "status": "unused", "message": null } }

Get a repository webhook &

Works with <u>GitHub Apps</u>

Returns a webhook configured in a repository. To get only the webhook config properties, see "Get a webhook configuration for a repository."

Parameters for "Get a repository webhook"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

hook_id integer Required

The unique identifier of the hook. You can find this value in the X-GitHub-Hook-ID header of a webhook delivery.

HTTP response status codes for "Get a repository webhook"

Status code	Description
200	ОК
404	Resource not found

Code samples for "Get a repository webhook"



Response

Example response Response schema

```
Status: 200

{ "type": "Repository", "id": 12345678, "name": "web", "active": true, "events": [ "push", "pull_request" ], "config": {
   "content_type": "json", "insecure_ssl": "0", "url": "https://example.com/webhook" }, "updated_at": "2019-06-03T00:57:16Z",
   "created_at": "2019-06-03T00:57:16Z", "url": "https://HOSTNAME/repos/octocat/Hello-World/hooks/12345678", "test_url":
   "https://HOSTNAME/repos/octocat/Hello-World/hooks/12345678/test", "ping_url": "https://HOSTNAME/repos/octocat/Hello-World/hooks/12345678/pings", "deliveries_url": "https://HOSTNAME/repos/octocat/Hello-World/hooks/12345678/deliveries",
   "last_response": { "code": null, "status": "unused", "message": null } }
```

Update a repository webhook &

✓ Works with <u>GitHub Apps</u>

Updates a webhook configured in a repository. If you previously had a secret set, you must provide the same secret or set a new secret or the secret will be removed. If you are only updating individual webhook config properties, use "Update a webhook configuration for a repository."

Parameters for "Update a repository webhook"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

hook id integer Required

The unique identifier of the hook. You can find this value in the X-GitHub-Hook-ID header of a webhook delivery.

Body parameters

config object

Key/value pairs to provide settings for this webhook.

▶ Properties of config

events array of strings

Determines what events the hook is triggered for. This replaces the entire array of events.

Default: ["push"]

add_events array of strings

Determines a list of events to be added to the list of events that the Hook triggers for

percommission has an exemple to be added to the hot of exemplands the mook engine for

remove_events array of strings

Determines a list of events to be removed from the list of events that the Hook triggers for.

active boolean

Determines if notifications are sent when the webhook is triggered. Set to true to send notifications.

Default: true

HTTP response status codes for "Update a repository webhook"

Status code	Description
200	ОК
404	Resource not found
422	Validation failed, or the endpoint has been spammed.

Code samples for "Update a repository webhook"

```
repos/{owner}/{repo}/hooks/{hook_id}

CURL JavaScript GitHub CLI

curl -L \ -X PATCH \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28" \ http(s)://HOSTNAME/api/v3/repos/OWNER/REPO/hooks/HOOK_ID \ -d '{"active":true,"add_events":["pull_request"]}'
```

Response

```
Example response Response schema

Status: 200

{ "type": "Repository", "id": 12345678, "name": "web", "active": true, "events": [ "push", "pull_request" ], "config": { "content_type": "json", "insecure_ssl": "0", "url": "https://example.com/webhook" }, "updated_at": "2019-06-03T00:57:16Z", "created_at": "2019-06-03T00:57:16Z", "url": "https://HOSTNAME/repos/octocat/Hello-World/hooks/12345678", "test_url": "https://HOSTNAME/repos/octocat/Hello-World/hooks/12345678/pings", "deliveries_url": "https://HOSTNAME/repos/octocat/Hello-World/hooks/12345678/deliveries", "last_response": { "code": null, "status": "unused", "message": null } }
```

Delete a repository webhook $\mathscr {P}$

Works with <u>GitHub Apps</u>

Parameters for "Delete a repository webhook"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

hook_id integer Required

The unique identifier of the hook. You can find this value in the X-GitHub-Hook-ID header of a webhook delivery.

HTTP response status codes for "Delete a repository webhook"

Status code	Description
204	No Content
404	Resource not found

Code samples for "Delete a repository webhook"



Response

Status: 204

Get a webhook configuration for a repository &

Works with GitHub Apps

Returns the webhook configuration for a repository. To get more information about the webhook, including the active state and events, use "Get a repository webhook."

Access tokens must have the read:repo_hook or repo scope, and GitHub Apps must have the repository_hooks:read permission.

Parameters for "Get a webhook configuration for a repository"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

hook_id integer Required

The unique identifier of the hook. You can find this value in the X-GitHub-Hook-ID header of a webhook delivery.

HTTP response status codes for "Get a webhook configuration for a repository"

Status code Description

200 OK

Code samples for "Get a webhook configuration for a repository"



Response

```
Example response Response schema

Status: 200

{ "content_type": "json", "insecure_ssl": "0", "secret": "*******", "url": "https://example.com/webhook" }
```

Update a webhook configuration for a repository &

Works with <u>GitHub Apps</u>

Updates the webhook configuration for a repository. To update more information about the webhook, including the

active state and events , use "Update a repository webhook."

Access tokens must have the write:repo_hook or repo scope, and GitHub Apps must have the repository hooks:write permission.

Parameters for "Update a webhook configuration for a repository"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

hook_id integer Required

The unique identifier of the hook. You can find this value in the X-GitHub-Hook-ID header of a webhook delivery.

Body parameters

url string

The URL to which the payloads will be delivered.

content_type string

The media type used to serialize the payloads. Supported values include json and form. The default is form.

secret string

If provided, the secret will be used as the key to generate the HMAC hex digest value for <u>delivery signature headers</u>.

insecure_ssl string or number

Determines whether the SSL certificate of the host for url will be verified when delivering payloads. Supported values include 0 (verification is performed) and 1 (verification is not performed). The default is 0. We strongly recommend not setting this to 1 as you are subject to man-in-the-middle and other attacks.

HTTP response status codes for "Update a webhook configuration for a repository"

Status code Description

200 OK

Code samples for "Update a webhook configuration for a repository"

2022-11-28" \ http(s)://HOSTNAME/api/v3/repos/OWNER/REPO/hooks/HOOK_ID/config \ -d

PATCH /repos/{owner}/{repo}/hooks/{hook_id}/config

CURL JavaScript GitHub CLI

curl -L \ -X PATCH \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version:

```
'{"content_type":"json","url":"https://example.com/webhook"}'
```

Response

```
Example response Response schema

Status: 200

{ "content_type": "json", "insecure_ssl": "0", "secret": "*******", "url": "https://example.com/webhook" }
```

List deliveries for a repository webhook &

Works with <u>GitHub Apps</u>

Returns a list of webhook deliveries for a webhook configured in a repository.

Parameters for "List deliveries for a repository webhook"

Headers

accept string
Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

hook_id integer Required

The unique identifier of the hook. You can find this value in the X-GitHub-Hook-ID header of a webhook delivery.

Query parameters

per_page integer

The number of results per page (max 100).

Default: 30

cursor string

Used for pagination: the starting delivery from which the page of deliveries is fetched. Refer to the link header for the next and previous page cursors.

redelivery boolean

HTTP response status codes for "List deliveries for a repository webhook"

Status code	Description
200	ОК
400	Bad Request
422	Validation failed, or the endpoint has been spammed.

Code samples for "List deliveries for a repository webhook"



Response

```
Example response Response schema

Status: 200

[ { "id": 12345678, "guid": "0b989ba4-242f-11e5-81e1-c7b6966d2516", "delivered_at": "2019-06-03T00:57:16Z", "redelivery": false, "duration": 0.27, "status": "0K", "status_code": 200, "event": "issues", "action": "opened", "installation_id": 123, "repository_id": 456 }, { "id": 123456789, "guid": "0b989ba4-242f-11e5-81e1-c7b6966d2516", "delivered_at": "2019-06-04T00:57:16Z", "redelivery": true, "duration": 0.28, "status": "0K", "status_code": 200, "event": "issues", "action": "opened", "installation_id": 123, "repository_id": 456 } ]
```

Get a delivery for a repository webhook ∂

Works with <u>GitHub Apps</u>

Returns a delivery for a webhook configured in a repository.

Parameters for "Get a delivery for a repository webhook"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

hook_id integer Required

The unique identifier of the hook. You can find this value in the X-GitHub-Hook-ID header of a webhook delivery.

delivery id integer Required

HTTP response status codes for "Get a delivery for a repository webhook"

Status code	Description
200	OK
400	Bad Request
422	Validation failed, or the endpoint has been spammed.

Code samples for "Get a delivery for a repository webhook"

GET /repos/{owner}/{repo}/hooks/{hook_id}/deliveries/{delivery_id}

cURL JavaScript GitHub CLI

curl -L \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28" \ http(s)://HOSTNAME/api/v3/repos/OWNER/REPO/hooks/HOOK ID/deliveries/DELIVERY ID

ф

Response

Example response Response schema

Status: 200

{ "id": 12345678, "guid": "0b989ba4-242f-11e5-81e1-c7b6966d2516", "delivered_at": "2019-06-03T00:57:16Z", "redelivery": false, "duration": 0.27, "status": "0K", "status_code": 200, "event": "issues", "action": "opened", "installation_id": 123, "repository_id": 456, "url": "https://www.example.com", "request": { "headers": { "X-GitHub-Delivery": "0b989ba4-242f-11e5-81e1-c7b6966d2516", "X-Hub-Signature-256": "sha256=6dcb09b5b57875f334f61aebed695e2e4193db5e", "Accept": "*/*", "X-GitHub-Hook-ID": "42", "User-Agent": "GitHub-Hookshot/b8c71d8", "X-GitHub-Event": "issues", "X-GitHub-Hook-Installation-Target-ID": "123", "X-GitHub-Hook-Installation-Target-Type": "repository", "content-type": "application/json", "X-Hub-Signature":

Redeliver a delivery for a repository webhook @

Works with <u>GitHub Apps</u>

Redeliver a webhook delivery for a webhook configured in a repository.

Parameters for "Redeliver a delivery for a repository webhook"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

hook id integer Required

The unique identifier of the hook. You can find this value in the X-GitHub-Hook-ID header of a webhook delivery.

delivery_id integer Required

HTTP response status codes for "Redeliver a delivery for a repository webhook"

Status code	Description
202	Accepted
400	Bad Request
422	Validation failed, or the endpoint has been spammed.

Code samples for "Redeliver a delivery for a repository webhook"

/repos/{owner}/{repo}/hooks/{hook_id}/deliveries/{delivery_id}/attempts cURL JavaScript GitHub CLI Q curl -L \ -X POST \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28" \ http(s)://HOSTNAME/api/v3/repos/OWNER/REPO/hooks/HOOK_ID/deliveries/DELIVERY_ID/attempts

Accepted

Example response Response schema

Status: 202

Ping a repository webhook &

Works with GitHub Apps

This will trigger a ping event to be sent to the hook.

Parameters for "Ping a repository webhook"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

hook_id integer Required

The unique identifier of the hook. You can find this value in the X-GitHub-Hook-ID header of a webhook delivery.

HTTP response status codes for "Ping a repository webhook"

Status code	Description
204	No Content
404	Resource not found

Code samples for "Ping a repository webhook"



Response

Status: 204

Test the push repository webhook ∂

✓ Works with <u>GitHub Apps</u>

This will trigger the hook with the latest push to the current repository if the hook is subscribed to push events. If the hook is not subscribed to push events, the server will respond with 204 but no test POST will be generated.

Note: Previously /repos/:owner/:repo/hooks/:hook id/test

Parameters for "Test the push repository webhook"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

hook id integer Required

The unique identifier of the hook. You can find this value in the X-GitHub-Hook-ID header of a webhook delivery.

HTTP response status codes for "Test the push repository webhook"

Status code	Description
204	No Content
404	Resource not found

Code samples for "Test the push repository webhook"



Response

Status: 204

Legal

© 2023 GitHub, Inc. <u>Terms</u> <u>Privacy</u> <u>Status</u> <u>Pricing</u> <u>Expert services</u> <u>Blog</u>