

Redelivering webhooks

In this article

- About redelivering webhooks
- Redelivering repository webhooks
- Redelivering organization webhooks
- Redelivering GitHub App webhooks
- Redelivering global webhooks

To help recover from failed deliveries, you can redeliver webhook deliveries from the past 7 days.


About redelivering webhooks [↗](#)


You may want to redeliver a webhook to help you test your application or to recover from server downtime. You can redeliver webhook deliveries that occurred in the past 7 days. GitHub does not automatically redeliver failed deliveries.


Redelivering repository webhooks [↗](#)

Only people with admin access to a repository can redeliver webhooks in that repository.

You can use the GitHub web interface or the REST API to redeliver webhooks for a repository. For more information about using the REST API to redeliver webhooks, see "[Repository webhooks](#)."

- 1 On your GitHub Enterprise Server instance, navigate to the main page of the repository.
- 2 Under your repository name, click  **Settings**. If you cannot see the "Settings" tab, select the ... dropdown menu, then click **Settings**.



- 3 In the "Code and automation" section of the sidebar, click  **Webhooks**.
- 4 In the list of webhooks, click the URL of the webhook you'd like to redeliver. If you do not have a webhook configured, no webhooks will be listed.

Webhooks

Add webhook

Webhooks allow external services to be notified when certain events happen. When the specified events happen, we'll send a POST request to each of the URLs you provide. Learn more in our [Webhooks Guide](#).




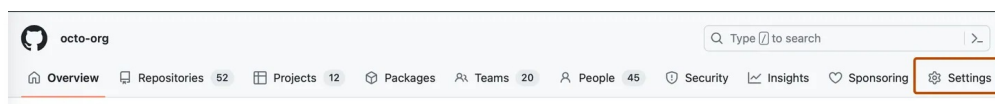
- 5 Click **Recent deliveries**. All deliveries from the past 7 days will be listed. If this webhook has not been delivered within the past 7 days, no deliveries will be listed.
- 6 Click the delivery GUID for the delivery that you want to redeliver.
- 7 Click **Redeliver**.


Redelivering organization webhooks

Only organization owners can redeliver webhooks in that organization.

You can use the GitHub web interface or the REST API to redeliver webhooks for an organization. For more information about using the REST API to redeliver webhooks, see "[Organization webhooks](#)."

- 1 On your GitHub Enterprise Server instance, navigate to the main page of the organization.
- 2 Under your organization name, click  **Settings**. If you cannot see the "Settings" tab, select the ... dropdown menu, then click **Settings**.



- 3 In the "Code and automation" section of the sidebar, click  **Webhooks**.
- 4 In the list of webhooks, click the URL of the webhook you'd like to redeliver. If you do not have a webhook configured, no webhooks will be listed.



- 5 Click **Recent deliveries**. All deliveries from the past 7 days will be listed. If this webhook has not been delivered within the past 7 days, no deliveries will be listed.
- 6 Click the delivery GUID for the delivery that you want to redeliver.
- 7 Click **Redeliver**.

Redelivering GitHub App webhooks

The owner of a GitHub App can redeliver webhooks for the app. If an organization has designated any app managers for a GitHub App owned by the organization, the app managers can also redeliver webhooks.

You can use the GitHub web interface or the REST API to redeliver webhooks for a GitHub App. For more information about using the REST API redeliver, see "[GitHub App webhooks](#)."

- 1 In the upper-right corner of any page on GitHub, click your profile photo.

- 2 Navigate to your account settings.
 - For a GitHub App owned by a personal account, click **Settings**.
 - For a GitHub App owned by an organization:
 - a. Click **Your organizations**.
 - b. To the right of the organization, click **Settings**.
- 3 In the left sidebar, click <> **Developer settings**.
- 4 In the left sidebar, click **GitHub Apps**.
- 5 Next to the GitHub App that you want to redeliver a webhook for, click **Edit**.
- 6 In the sidebar, click **Advanced**.
- 7 Under "Recent deliveries", all deliveries from the past 7 days will be listed. If this webhook has not been delivered within the past 7 days, no deliveries will be listed. If webhooks are not active, the "Recent Deliveries" section will not be present.

Click the delivery GUID for the delivery that you want to redeliver.

Recent Deliveries


✓  402521f0-bd1d-11ed-84c6-3f01c8995382	2023-03-08 05:21:24 ...
✓  053fe920-bd19-11ed-988d-4308f70bf346	2023-03-08 04:51:08 ...

- 8 Click **Redeliver**.

Redelivering global webhooks

Only enterprise owners can redeliver webhooks in that enterprise.

- 1 In the top-right corner of GitHub Enterprise Server, click your profile photo, then click **Enterprise settings**.

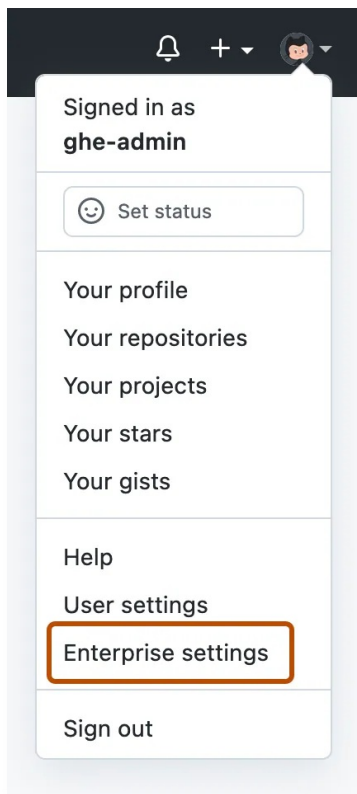

- 2 In the enterprise account sidebar, click ⚙️ **Settings**.
- 3 Under "⚙️ Settings", click **Hooks**.
- 4 In the list of webhooks, click the URL of the webhook you'd like to redeliver. If you do not have a webhook configured, no webhooks will be listed.

Webhooks

[Add webhook](#)

Webhooks allow external services to be notified when certain events happen. When the specified events happen, we'll send a POST request to each of the URLs you provide. Learn more in our [Webhooks Guide](#).

✓ <https://example.com/postreceive> (all events)

[Edit](#) [Delete](#)

- 5 Under "Recent deliveries", all deliveries from the past 7 days will be listed. If this webhook has not been delivered within the past 7 days, no deliveries will be listed. If webhooks are not active, the "Recent Deliveries" section will not be present.

Click the delivery GUID for the delivery that you want to redeliver.

Recent Deliveries

✓ [402521f0-bd1d-11ed-84c6-3f01c8995382](#)

2023-03-08 05:21:24

✓ [053fe920-bd19-11ed-988d-4308f70bf346](#)

2023-03-08 04:51:08

- 6 Click **Redeliver**.

Legal