Q

•••

The REST API is now versioned. For more information, see "About API versioning."

Reactions

Use the REST API to interact with reactions on GitHub.

About reactions @

You can create and manage reactions to comments, issues, pull requests, and discussions on GitHub. When creating a reaction, the allowed values for the content parameter are as follows (with the corresponding emoji for reference):

Content	Emoji
+1	
-1	
laugh	\(\theta\)
confused	②
heart	•
hooray	
rocket	
eyes	

List reactions for a team discussion comment $\mathscr {P}$

Works with <u>GitHub Apps</u>

List the reactions to a <u>team discussion comment</u>. OAuth access tokens require the read:discussion <u>scope</u>.

Note: You can also specify a team by org_id and team_id using the route GET /organizations/:org_id/team/:team_id/discussions/:discussion_number/comments/:comment_number/reactions.

Parameters for "List reactions for a team discussion comment"

Headers

accept string

Setting to application/vnd.github+json is recommended.

org string Required

The organization name. The name is not case sensitive.

team_slug string Required

The slug of the team name.

discussion_number integer Required

The number that identifies the discussion.

comment_number integer Required

The number that identifies the comment.

Query parameters

content string

Returns a single reaction type. Omit this parameter to list all reactions to a team discussion comment.

Can be one of: +1, -1, laugh, confused, heart, hooray, rocket, eyes

per_page integer

The number of results per page (max 100).

Default: 30

page integer

Page number of the results to fetch.

Default: 1

HTTP response status codes for "List reactions for a team discussion comment"

Status code **Description**

OK 200

Code samples for "List reactions for a team discussion comment"

GET /orgs/{org}/teams/{team_slug}/discussions/{discussion_number}/comments/{comment_number}/reactions

cURL JavaScript GitHub CLI

curl -L \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28"

ф

\ http(s)://HOSTNAME/api/v3/orgs/ORG/teams/TEAM_SLUG/discussions/DISCUSSION_NUMBER/comments/COMMENT_NUMBER/reactions

Response

Example response Response schema

Status: 200

[{ "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url":

"https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/followers", "following_url":

"https://HOSTNAME/users/octocat/following{/other_user}", "gists_url": "https://HOSTNAME/users/octocat/gists{/gist_id}",
"starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url":
"https://HOSTNAME/users/octocat/subscriptions", "organizations_url": "https://HOSTNAME/users/octocat/orgs", "repos_url":

Create reaction for a team discussion comment &

Works with <u>GitHub Apps</u>

Create a reaction to a <u>team discussion comment</u>. OAuth access tokens require the <u>write:discussion scope</u>. A response with an HTTP 200 status means that you already added the reaction type to this team discussion comment.

Note: You can also specify a team by org_id and team_id using the route POST /organizations/:org id/team/:team id/discussions/:discussion number/comments/:comment number/reactions.

Parameters for "Create reaction for a team discussion comment"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

org string Required

The organization name. The name is not case sensitive.

team_slug string Required

The slug of the team name.

discussion number integer Required

The number that identifies the discussion.

comment number integer Required

The number that identifies the comment.

Body parameters

201

content string Required

The <u>reaction type</u> to add to the team discussion comment.

Can be one of: +1, -1, laugh, confused, heart, hooray, rocket, eyes

HTTP response status codes for "Create reaction for a team discussion comment"

Status code	Description
200	Response when the reaction type has already been added to this team discussion comment

Created

Code samples for "Create reaction for a team discussion comment"

Example 1: Status Code 200 ♦



Response when the reaction type has already been added to this team discussion comment

```
Example response Response schema

Status: 200

{ "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/following_url": "https://HOSTNAME/users/octocat/following_vrl": "https://HOSTNAME/users/octocat/gists{/gist_id}", "starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url": "https://HOSTNAME/users/octocat/orgs", "repos_url": "https://H
```

Delete team discussion comment reaction @

Works with GitHub Apps

Note: You can also specify a team or organization with team_id and org_id using the route DELETE /organizations/:org_id/team/:team_id/discussions/:discussion_number/comments/:comment_number/reactions/:reaction_id.

Delete a reaction to a team discussion comment. OAuth access tokens require the write:discussion scope.

Parameters for "Delete team discussion comment reaction"

Headers

```
accept string
Setting to application/vnd.github+json is recommended.
```

Path parameters

```
org string Required
```

The organization name. The name is not case sensitive

The organization name: The name is not case sensitive.

team_slug string Required

The slug of the team name.

discussion number integer Required

The number that identifies the discussion.

comment number integer Required

The number that identifies the comment.

reaction id integer Required

The unique identifier of the reaction.

HTTP response status codes for "Delete team discussion comment reaction"

Status code Description

No Content

Code samples for "Delete team discussion comment reaction"

DELETE /orgs/{org}/teams/{team_slug}/discussions/{discussion_number}/comments/{comment_number}/reactions/{reaction_
 id}

cURL JavaScript GitHub CLI

.....

ſĊ

curl -L \ -X DELETE \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28" \

http(s)://HOSTNAME/api/v3/orgs/ORG/teams/TEAM_SLUG/discussions/DISCUSSION_NUMBER/comments/COMMENT_NUMBER/reactions/REACTION_ID

Response

Status: 204

List reactions for a team discussion &

Works with <u>GitHub Apps</u>

List the reactions to a <u>team discussion</u>. OAuth access tokens require the read:discussion <u>scope</u>.

Note: You can also specify a team by org_id and team_id using the route GET /organizations/:org_id/team/:team_id/discussions/:discussion_number/reactions.

Parameters for "List reactions for a team discussion"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

org string Required

The organization name. The name is not case sensitive.

team_slug string Required

The slug of the team name.

discussion_number integer Required

The number that identifies the discussion.

Query parameters

content string

Returns a single <u>reaction type</u>. Omit this parameter to list all reactions to a team discussion.

Can be one of: +1, -1, laugh, confused, heart, hooray, rocket, eyes

per_page integer

The number of results per page (max 100).

Default: 30

page integer

Page number of the results to fetch.

Default: 1

HTTP response status codes for "List reactions for a team discussion"

Status code **Description**

200 OK

Code samples for "List reactions for a team discussion"

/orgs/{org}/teams/{team_slug}/discussions/{discussion_number}/reactions

cURL JavaScript GitHub CLI

curl -L \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28" \ http(s)://HOSTNAME/api/v3/orgs/ORG/teams/TEAM_SLUG/discussions/DISCUSSION_NUMBER/reactions

Q.

Response

Example response Response schema

Status: 200

[{ "id": 1, "node id": "MDq6UmVhY3Rpb24x", "user": { "loqin": "octocat", "id": 1, "node id": "MDQ6VXNlcjE=", "avatar url": "https://qithub.com/images/error/octocat happy.gif", "gravatar id": "", "url": "https://HOSTNAME/users/octocat", "html url":

"https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/followers", "following_url":
"https://HOSTNAME/users/octocat/following{/other_user}", "gists_url": "https://HOSTNAME/users/octocat/gists{/gist_id}",
"starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url":
"https://HOSTNAME/users/octocat/subscriptions", "organizations_url": "https://HOSTNAME/users/octocat/orgs", "repos_url":

Create reaction for a team discussion &

Create a reaction to a <u>team discussion</u>. OAuth access tokens require the <u>write:discussion</u> <u>scope</u>. A response with an HTTP 200 status means that you already added the reaction type to this team discussion.

Note: You can also specify a team by org_id and team_id using the route POST /organizations/:org_id/team/:team_id/discussions/:discussion_number/reactions.

Parameters for "Create reaction for a team discussion"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

org string Required

The organization name. The name is not case sensitive.

team slug string Required

The slug of the team name.

discussion_number integer Required

The number that identifies the discussion.

Body parameters

content string Required

The <u>reaction type</u> to add to the team discussion.

Can be one of: +1, -1, laugh, confused, heart, hooray, rocket, eyes

HTTP response status codes for "Create reaction for a team discussion"

Status code	Description
200	ОК
201	Created

Code samples for "Create reaction for a team discussion"

Example 1: Status Code 200 \$

```
/ Orgs/{org}/teams/{team_slug}/discussions/{discussion_number}/reactions

CURL JavaScript GitHub CLI

curl -L \ -X POST \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28" \ http(s)://HOSTNAME/api/v3/orgs/ORG/teams/TEAM_SLUG/discussions/DISCUSSION_NUMBER/reactions \ -d '{"content":"heart"}'
```

Response

```
Example response Response schema

Status: 200

{ "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/followers", "following_url": "https://HOSTNAME/users/octocat/following{/other_user}", "gists_url": "https://HOSTNAME/users/octocat/gists{/gist_id}", "starred_url": "https://HOSTNAME/users/octocat/subscriptions", "organizations_url": "https://HOSTNAME/users/octocat/orgs", "repos_url": "https://HOSTNAME/users/octocat/orgs
```

Delete team discussion reaction @

Works with <u>GitHub Apps</u>

Note: You can also specify a team or organization with team_id and org_id using the route DELETE /organizations/:org_id/team/:team_id/discussions/:discussion_number/reactions/:reaction_id.

Delete a reaction to a <u>team discussion</u>. OAuth access tokens require the write:discussion <u>scope</u>.

Parameters for "Delete team discussion reaction"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

org string Required

The organization name. The name is not case sensitive.

team_slug string Required

The slug of the team name.

discussion_number integer Required

The number that identifies the discussion.

reaction_id integer Required

The unique identifier of the reaction.

HTTP response status codes for "Delete team discussion reaction"

Status code Description

204 No Content

Code samples for "Delete team discussion reaction"



Response

Status: 204

List reactions for a commit comment &

Works with <u>GitHub Apps</u>

List the reactions to a commit comment.

Parameters for "List reactions for a commit comment"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

comment_id integer Required

The unique identifier of the comment.

Query parameters

content string

Returns a single <u>reaction type</u>. Omit this parameter to list all reactions to a commit comment.

Can be one of: +1 , -1 , laugh , confused , heart , hooray , rocket , eyes

per_page integer

The number of results per page (max 100).

Default: 30

page integer

Page number of the results to fetch.

Default: 1

HTTP response status codes for "List reactions for a commit comment"

Status code	Description
200	OK
404	Resource not found

Code samples for "List reactions for a commit comment"



Response

```
Example response Response schema

Status: 200

[ { "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/followers", "following_url": "https://HOSTNAME/users/octocat/gists{/gist_id}", "starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url": "https://HOSTNAME/users/octocat/orgs", "repos_url": "https://HOSTNAME/users/octocat/orgs", "rep
```

Create reaction for a commit comment &

Works with <u>GitHub Apps</u>

Create a reaction to a <u>commit comment</u>. A response with an HTTP 200 status means that you already added the reaction type to this commit comment.

Parameters for "Create reaction for a commit comment"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

comment id integer Required

The unique identifier of the comment.

Body parameters

content string Required

The <u>reaction type</u> to add to the commit comment.

Can be one of: +1, -1, laugh, confused, heart, hooray, rocket, eyes

HTTP response status codes for "Create reaction for a commit comment"

Status code Description Reaction exists Reaction created Validation failed, or the endpoint has been spammed.

Code samples for "Create reaction for a commit comment"

Example 1: Status Code 200 ♦

POST /repos/{owner}/{repo}/comments/{comment_id}/reactions

cURL JavaScript GitHub CLI

curl -L \ -X POST \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28" \ http(s)://HOSTNAME/api/v3/repos/OWNER/REPO/comments/COMMENT_ID/reactions \ -d '{"content":"heart"}'

ſŪ

Reaction exists

Example response Response schema

Status: 200

f Hidd. 1 Hands idH. HMDsCHm/b/2Dpb24vH Hussell. f HlosiaH. HostostH Hidd. 1 Hands idH. HMDGCV/Mls:F=H Houston welH.

{ "10": 1, "node_10": "MUQOUMNNT3KPD24X", "user": { "login": "octocat", "10": 1, "node_10": "MUQOVANICJE=", "avatar_urt":

"https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url":

"https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/followers", "following_url":

"https://HOSTNAME/users/octocat/following{/other_user}", "gists_url": "https://HOSTNAME/users/octocat/gists{/gist_id}",

"starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url":

"https://HOSTNAME/users/octocat/subscriptions", "organizations_url": "https://HOSTNAME/users/octocat/orgs", "repos_url":

Delete a commit comment reaction &

Works with GitHub Apps

Note: You can also specify a repository by repository_id using the route DELETE /repositories/:repository_id/comments/:comment_id/reactions/:reaction_id.

Delete a reaction to a commit comment.

Parameters for "Delete a commit comment reaction"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

comment_id integer Required

The unique identifier of the comment.

reaction_id integer Required

The unique identifier of the reaction.

HTTP response status codes for "Delete a commit comment reaction"

Status code Description

No Content

Code samples for "Delete a commit comment reaction"

DELETE /repos/{owner}/{repo}/comments/{comment_id}/reactions/{reaction_id}

cURL JavaScript GitHub CLI

Q

curl -L \ -X DELETE \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28" \ http(s)://HOSTNAME/api/v3/repos/OWNER/REPO/comments/COMMENT_ID/reactions/REACTION_ID

Response

Status: 204

List reactions for an issue comment &

Works with GitHub Apps

List the reactions to an issue comment.

Parameters for "List reactions for an issue comment"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

comment_id integer Required

The unique identifier of the comment.

Query parameters

content string

Returns a single reaction type. Omit this parameter to list all reactions to an issue comment.

Can be one of: +1, -1, laugh, confused, heart, hooray, rocket, eyes

per_page integer

The number of results per page (max 100).

Default: 30

page integer

Page number of the results to fetch.

Default: 1

HTTP response status codes for "List reactions for an issue comment"

Status code	Description
200	OK
404	Resource not found

Code samples for "List reactions for an issue comment"



Response

```
Example response Response schema

Status: 200

[ { "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/followers", "following_url": "https://HOSTNAME/users/octocat/following{/other_user}", "gists_url": "https://HOSTNAME/users/octocat/gists{/gist_id}", "starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url": "https://HOSTNAME/users/octocat/orgs", "repos_url": "https://HOSTNAME/users/o
```

Create reaction for an issue comment &

Works with GitHub Apps

Create a reaction to an <u>issue comment</u>. A response with an HTTP 200 status means that you already added the reaction type to this issue comment.

Parameters for "Create reaction for an issue comment"

Headers

accept string
Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive

The account office of the repository, the name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

comment id integer Required

The unique identifier of the comment.

Body parameters

content string Required

The <u>reaction type</u> to add to the issue comment.

Can be one of: +1 , -1 , laugh , confused , heart , hooray , rocket , eyes

HTTP response status codes for "Create reaction for an issue comment"

Status code	Description
200	Reaction exists
201	Reaction created
422	Validation failed, or the endpoint has been spammed.

Code samples for "Create reaction for an issue comment"

Example 1: Status Code 200 ♦

POST /repos/{owner}/{repo}/issues/comments/{comment_id}/reactions

cURL JavaScript GitHub CLI

curl -L \ -X POST \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28" \ http(s)://HOSTNAME/api/v3/repos/OWNER/REPO/issues/comments/COMMENT_ID/reactions \ -d '{"content":"heart"}'

ф

Reaction exists

Example response Response schema

Status: 200

{ "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/followers", "following_url": "https://HOSTNAME/users/octocat/following_vrl": "https://HOSTNAME/users/octocat/gists{/gist_id}", "starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url":

"https://HOSTNAME/users/octocat/subscriptions", "organizations_url": "https://HOSTNAME/users/octocat/orgs", "repos_url":

Delete an issue comment reaction @

Works with <u>GitHub Apps</u>

Note: You can also specify a repository by repository id using the route DELETE delete /repositories/:repository_id/issues/comments/:comment_id/reactions/:reaction_id .

Delete a reaction to an issue comment.

Parameters for "Delete an issue comment reaction"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

comment_id integer Required

The unique identifier of the comment.

reaction_id integer Required

The unique identifier of the reaction.

HTTP response status codes for "Delete an issue comment reaction"

Status code **Description**

204 No Content

Code samples for "Delete an issue comment reaction"

DELETE /repos/{owner}/{repo}/issues/comments/{comment_id}/reactions/{reaction_id}

cURL JavaScript GitHub CLI

curl -L \ -X DELETE \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version:

Q

2022-11-28" \ http(s)://HOSTNAME/api/v3/repos/OWNER/REPO/issues/comments/COMMENT_ID/reactions/REACTION_ID

Response

Status: 204

List reactions for an issue @

Works with GitHub Apps

List the reactions to an issue.

Parameters for "List reactions for an issue"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

issue_number integer Required

The number that identifies the issue.

Query parameters

content string

Returns a single <u>reaction type</u>. Omit this parameter to list all reactions to an issue.

Can be one of: +1, -1, laugh, confused, heart, hooray, rocket, eyes

per_page integer

The number of results per page (max 100).

Default: 30

page integer

Page number of the results to fetch.

Default: 1

HTTP response status codes for "List reactions for an issue"

Status code	Description
200	OK
404	Resource not found
410	Gone

Code samples for "List reactions for an issue"

CURL JavaScript GitHub CLI

curl -L \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28" \ http(s)://HOSTNAME/api/v3/repos/OWNER/REPO/issues/ISSUE_NUMBER/reactions

Response

Example response Response schema

Status: 200

[{ "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/following_url": "https://HOSTNAME/users/octocat/gists{/gist_id}", "starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url": "https://HOSTNAME/users/octocat/orgs", "repos_url": "htt

Create reaction for an issue &

Create a reaction to an <u>issue</u>. A response with an HTTP 200 status means that you already added the reaction type to this issue.

Parameters for "Create reaction for an issue"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the <code>.git</code> extension. The name is not case sensitive.

issue_number integer Required

The number that identifies the issue.

Body parameters

content string Required

The <u>reaction type</u> to add to the issue.


Can be one of: +1, -1, laugh, confused, heart, hooray, rocket, eyes

HTTP response status codes for "Create reaction for an issue"

Status code	Description
200	OK
201	Created
422	Validation failed, or the endpoint has been spammed.

Code samples for "Create reaction for an issue"

Example 1: Status Code 200 ♦

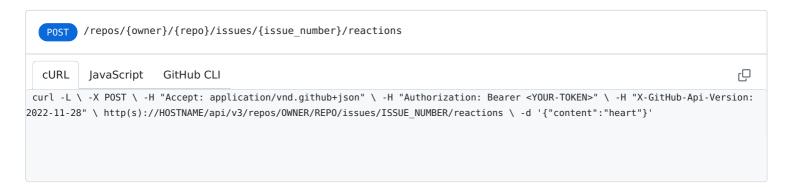

Response

```
Example response Response schema

Status: 200

{ "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/followers", "following_url": "https://HOSTNAME/users/octocat/gists{/gist_id}", "starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url": "https://HOSTNAME/users/octocat/orgs", "repos_url": "https://HOSTNAME/users/octocat/orgs", "repos
```

Delete an issue reaction @

Works with <u>GitHub Apps</u>

Note: You can also specify a repository by repository_id using the route DELETE /repositories/:repository_id/issues/:issue_number/reactions/:reaction_id.

Delete a reaction to an <u>issue</u>.

Parameters for "Delete an issue reaction"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

issue_number integer Required

The number that identifies the issue.


reaction_id integer Required

The unique identifier of the reaction.

HTTP response status codes for "Delete an issue reaction"

Status code Description 204 No Content

Code samples for "Delete an issue reaction"

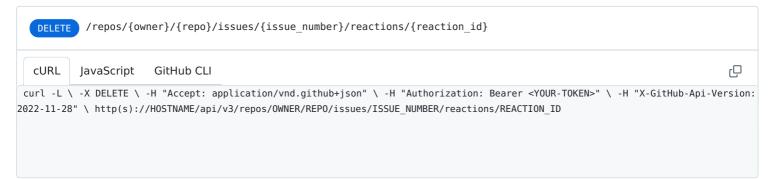

Response

Status: 204

List reactions for a pull request review comment @

Works with <u>GitHub Apps</u>

List the reactions to a <u>pull request review comment</u>.

Parameters for "List reactions for a pull request review comment"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

comment_id integer Required

The unique identifier of the comment.

Query parameters

content string

Returns a single reaction type. Omit this parameter to list all reactions to a pull request review comment.

Can be one of: +1, -1, laugh, confused, heart, hooray, rocket, eyes

per_page integer

The number of results per page (max 100).

Default: 30

page integer

Page number of the results to fetch.

Default: 1

HTTP response status codes for "List reactions for a pull request review comment"

Status code	Description
200	OK
404	Resource not found

Code samples for "List reactions for a pull request review comment"



Response

```
"https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/followers", "following_url": "https://HOSTNAME/users/octocat/following_url": "https://HOSTNAME/users/octocat/following{/other_user}", "gists_url": "https://HOSTNAME/users/octocat/gists{/gist_id}", "starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url": "https://HOSTNAME/users/octocat/orgs", "repos_url": "https://HOSTNAME/users/octocat/orgs", "repos_url":
```

Create reaction for a pull request review comment @

Works with <u>GitHub Apps</u>

Create a reaction to a <u>pull request review comment</u>. A response with an HTTP 200 status means that you already added the reaction type to this pull request review comment.

Parameters for "Create reaction for a pull request review comment"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

comment_id integer Required

The unique identifier of the comment.

Body parameters

content string Required

The <u>reaction type</u> to add to the pull request review comment.

Can be one of: +1, -1, laugh, confused, heart, hooray, rocket, eyes

HTTP response status codes for "Create reaction for a pull request review comment"

Status code	Description
200	Reaction exists
201	Reaction created
422	Validation failed, or the endpoint has been spammed.

Code samples for "Create reaction for a pull request review comment"

```
/repos/{owner}/{repo}/pulls/comments/{comment_id}/reactions

CURL JavaScript GitHub CLI

curl -L \ -X POST \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28" \ http(s)://HOSTNAME/api/v3/repos/OWNER/REPO/pulls/comments/COMMENT_ID/reactions \ -d '{"content":"heart"}'
```

Reaction exists

```
Example response Response schema

Status: 200

{ "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/followers", "following_url": "https://HOSTNAME/users/octocat/following{/other_user}", "gists_url": "https://HOSTNAME/users/octocat/gists{/gist_id}", "starred_url": "https://HOSTNAME/users/octocat/subscriptions", "organizations_url": "https://HOSTNAME/users/octocat/orgs", "repos_url": "https://HOSTNAME/users/octocat/orgs
```

Delete a pull request comment reaction @

Works with <u>GitHub Apps</u>

Note: You can also specify a repository by repository_id using the route DELETE /repositories/:repository_id/pulls/comments/:comment_id/reactions/:reaction_id.

Delete a reaction to a pull request review comment.

Parameters for "Delete a pull request comment reaction"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

comment_id integer Required

The unique identifier of the comment.

The unique identifier of the reaction.

HTTP response status codes for "Delete a pull request comment reaction"

Status code	Description
204	No Content

Code samples for "Delete a pull request comment reaction"



Response

Status: 204

List reactions for a release &

Works with <u>GitHub Apps</u>

List the reactions to a release.

Parameters for "List reactions for a release"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

release_id integer Required

The unique identifier of the release.

Query parameters

content string

Returns a single <u>reaction type</u>. Omit this parameter to list all reactions to a release.

Can be one of: +1 , laugh , heart , hooray , rocket , eyes

per_page integer

The number of results per page (max 100).

Default: 30

page integer

Page number of the results to fetch.

Default: 1

HTTP response status codes for "List reactions for a release"

Status code	Description
200	ОК
404	Resource not found

Code samples for "List reactions for a release"



Response

Example response Response schema

Status: 200

[{ "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/followers", "following_url": "https://HOSTNAME/users/octocat/gists{/gist_id}", "starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url": "https://HOSTNAME/users/octocat/orgs", "repos_url": "https://HOSTNAME/users/octocat/orgs", "rep

Create reaction for a release &

Works with GitHub Apps

this release.

Parameters for "Create reaction for a release"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

release_id integer Required

The unique identifier of the release.

Body parameters

content string Required

The <u>reaction type</u> to add to the release.

Can be one of: +1, laugh, heart, hooray, rocket, eyes

HTTP response status codes for "Create reaction for a release"

Status code	Description
200	Reaction exists
201	Reaction created
422	Validation failed, or the endpoint has been spammed.

Code samples for "Create reaction for a release"

Example 1: Status Code 200 ♦

POST /repos/{owner}/{repo}/releases/{release_id}/reactions

cURL JavaScript GitHub CLI

curl -L \ -X POST \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version:

Q

2022-11-28" \ http(s)://HOSTNAME/api/v3/repos/OWNER/REP0/releases/RELEASE_ID/reactions \ -d '{"content":"heart"}'

Reaction exists

```
Example response Response schema

Status: 200

{ "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/following_url": "https://HOSTNAME/users/octocat/following{/other_user}", "gists_url": "https://HOSTNAME/users/octocat/gists{/gist_id}", "starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url": "https://HOSTNAME/users/octocat/orgs", "repos_url": "https://HOSTNAME/users/octocat/orgs", "
```

Delete a release reaction @

✓ Works with <u>GitHub Apps</u>

Note: You can also specify a repository by repository_id using the route DELETE delete /repositories/:repository_id/releases/:release_id/reactions/:reaction_id.

Delete a reaction to a release.

Parameters for "Delete a release reaction"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

owner string Required

The account owner of the repository. The name is not case sensitive.

repo string Required

The name of the repository without the .git extension. The name is not case sensitive.

release_id integer Required

The unique identifier of the release.

reaction_id integer Required

The unique identifier of the reaction.

HTTP response status codes for "Delete a release reaction"

Status code Description

No Content

Code samples for "Delete a release reaction"

DELETE /repos/{owner}/{repo}/releases/{release_id}/reactions/{reaction_id}

CIPI JavaScript CitHub CII

curl -L \ -X DELETE \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28" \ http(s)://HOSTNAME/api/v3/repos/OWNER/REPO/releases/RELEASE_ID/reactions/REACTION_ID

Response

Status: 204

List reactions for a team discussion comment (Legacy) @

Works with GitHub Apps

Deprecation Notice: This endpoint route is deprecated and will be removed from the Teams API. We recommend migrating your existing code to use the new <u>List reactions for a team discussion comment</u> endpoint.

List the reactions to a <u>team discussion comment</u>. OAuth access tokens require the read:discussion <u>scope</u>.

Parameters for "List reactions for a team discussion comment (Legacy)"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

team id integer Required

The unique identifier of the team.

discussion_number integer Required

The number that identifies the discussion.

comment_number integer Required

The number that identifies the comment.

Query parameters

content string

Returns a single reaction type. Omit this parameter to list all reactions to a team discussion comment.

Can be one of: +1 , -1 , laugh , confused , heart , hooray , rocket , eyes

per_page integer

The number of results per page (max 100)

Default: 30

page integer

Page number of the results to fetch.

Default: 1

HTTP response status codes for "List reactions for a team discussion comment (Legacy)"

Status code Description

200 OK

Code samples for "List reactions for a team discussion comment (Legacy)"



Response

Example response Response schema

Status: 200

[{ "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/followers", "following_url": "https://HOSTNAME/users/octocat/following{/other_user}", "gists_url": "https://HOSTNAME/users/octocat/gists{/gist_id}", "starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url": "https://HOSTNAME/users/octocat/orgs", "repos_url": "https://HOSTNAME/users/o

Create reaction for a team discussion comment (Legacy) @

Works with <u>GitHub Apps</u>

Deprecation Notice: This endpoint route is deprecated and will be removed from the Teams API. We recommend migrating your existing code to use the new "Create reaction for a team discussion comment" endpoint.

Create a reaction to a <u>team discussion comment</u>. OAuth access tokens require the <u>write:discussion scope</u>. A response with an HTTP 200 status means that you already added the reaction type to this team discussion comment.

Parameters for "Create reaction for a team discussion comment (Legacy)"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

team id integer Required

The unique identifier of the team.

discussion_number integer Required

The number that identifies the discussion.

comment_number integer Required

The number that identifies the comment.

Body parameters

content string Required

The <u>reaction type</u> to add to the team discussion comment.

Can be one of: +1, -1, laugh, confused, heart, hooray, rocket, eyes

HTTP response status codes for "Create reaction for a team discussion comment (Legacy)"

Status code Description

201 Created

Code samples for "Create reaction for a team discussion comment (Legacy)"

/teams/{team_id}/discussions/{discussion_number}/comments/{comment_number}/reactions

cURL JavaScript GitHub CLI

curl -L \ -X POST \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28" \ http(s)://HOSTNAME/api/v3/teams/TEAM_ID/discussions/DISCUSSION_NUMBER/comments/COMMENT_NUMBER/reactions \ -d '{"content":"heart"}'

را

Response

Example response Response schema

Status: 201

{ "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/followers", "following_url":

"https://HOSTNAME/users/octocat/following{/other_user}", "gists_url": "https://HOSTNAME/users/octocat/gists{/gist_id}",

"starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url":

"https://HOSTNAME/users/octocat/subscriptions", "organizations_url": "https://HOSTNAME/users/octocat/orgs", "repos_url":

List reactions for a team discussion (Legacy) ₽

Works with <u>GitHub Apps</u>

Deprecation Notice: This endpoint route is deprecated and will be removed from the Teams API. We recommend migrating your existing code to use the new <u>List reactions for a team discussion</u> endpoint.

List the reactions to a <u>team discussion</u>. OAuth access tokens require the read:discussion <u>scope</u>.

Parameters for "List reactions for a team discussion (Legacy)"

Headers

accept string

Setting to application/vnd.github+json is recommended.

Path parameters

team id integer Required

The unique identifier of the team.

discussion_number integer Required

The number that identifies the discussion.

Query parameters

content string

Returns a single reaction type. Omit this parameter to list all reactions to a team discussion.

Can be one of: +1, -1, laugh, confused, heart, hooray, rocket, eyes

per_page integer

The number of results per page (max 100).

Default: 30

page integer

Page number of the results to fetch.

Default: 1

HTTP response status codes for "List reactions for a team discussion (Legacy)"

Status code Description

200 OK

Code samples for "List reactions for a team discussion (Legacy)"

GET /teams/{team_id}/discussions/{discussion_number}/reactions

cURL JavaScript GitHub CLI

curl -L \ -H "Accept: application/vnd.github+json" \ -H "Authorization: Bearer <YOUR-TOKEN>" \ -H "X-GitHub-Api-Version: 2022-11-28"

ſŪ

\ http(s)://HOSTNAME/api/v3/teams/TEAM_ID/discussions/DISCUSSION_NUMBER/reactions

Response

```
Example response Response schema

Status: 200

[ { "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/following_url": "https://HOSTNAME/users/octocat/following{/other_user}", "gists_url": "https://HOSTNAME/users/octocat/gists{/gist_id}", "starred_url": "https://HOSTNAME/users/octocat/starred{/owner}{/repo}", "subscriptions_url": "https://HOSTNAME/users/octocat/orgs", "repos_url": "https://HOSTNAME/users/octocat/orgs",
```

Create reaction for a team discussion (Legacy) @

Deprecation Notice: This endpoint route is deprecated and will be removed from the Teams API. We recommend migrating your existing code to use the new <u>Create reaction for a team discussion</u> endpoint.

Create a reaction to a <u>team discussion</u>. OAuth access tokens require the <u>write:discussion</u> <u>scope</u>. A response with an HTTP 200 status means that you already added the reaction type to this team discussion.

Parameters for "Create reaction for a team discussion (Legacy)"

Headers

accept string
Setting to application/vnd.github+json is recommended.

Path parameters

team_id integer Required

The unique identifier of the team.

discussion number integer Required

The number that identifies the discussion.

Body parameters

content string Required
The reaction type to add to the team discussion.
Can be one of: +1 , -1 , laugh , confused , heart , hooray , rocket , eyes


HTTP response status codes for "Create reaction for a team discussion (Legacy)"

Status code Description

201 Created

ZUI

Code samples for "Create reaction for a team discussion (Legacy)"

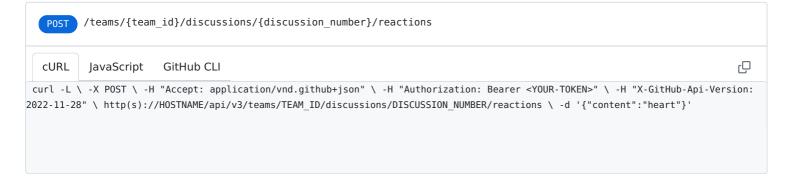

Response

Example response Response schema

Status: 201

{ "id": 1, "node_id": "MDg6UmVhY3Rpb24x", "user": { "login": "octocat", "id": 1, "node_id": "MDQ6VXNlcjE=", "avatar_url": "https://github.com/images/error/octocat_happy.gif", "gravatar_id": "", "url": "https://HOSTNAME/users/octocat", "html_url": "https://github.com/octocat", "followers_url": "https://HOSTNAME/users/octocat/followers", "following_url": "https://HOSTNAME/users/octocat/following{/other_user}", "gists_url": "https://HOSTNAME/users/octocat/gists{/gist_id}", "starred_url": "https://HOSTNAME/users/octocat/subscriptions", "organizations_url": "https://HOSTNAME/users/octocat/orgs", "repos_url": "https://HOSTNAME/users/octocat/orgs

Legal

© 2023 GitHub, Inc. <u>Terms</u> <u>Privacy</u> <u>Status</u> <u>Pricing</u> <u>Expert services</u> <u>Blog</u>