

NTT ↔ CCH ServiceNow Integration — HLD (iHub E-Bond: INC + REQ · Manual CMDB · PRB + CHG Swivel-Chair)

1. Document Control

Date: 2026-06-09
Status: Draft — for team review
Author: Victor Andreev
Design principle: OOTB-first, **per-process integration** over NTT's **iHub** middleware. Automate where volume and 24×7 operation demand it; keep manual where governance and low volume make it acceptable. **CCH ServiceNow ("CCH SNOW") remains the customer-facing system of record; NTT ServiceNow ("GSNOW") is the supplier-internal execution layer.** Incident and Request synchronise **bidirectionally via iHub** (on NTT's Managed Automation Platform + Digital Fabric); **Configuration** is synchronised **manually** per an agreed process (each party owns its own CMDB); **Problem** and **Change** are handled **swivel-chair** by the **ESIF team** into CCH SNOW. CCH retains **CAB authority**; under swivel-chair, ESIF/NTT raises the change in CCH SNOW for CAB approval before executing.

2. Sign-offs

Name	Role
	Service Owner — ServiceNow (CCH)
	Service Owner — GSNOW (NTT)
	Change Manager / CAB Chair (CCH)
	Configuration Manager / CSDM Architect (CCH)
	Problem Manager (CCH)
	Information Security (CCH)
	Service Delivery Manager — NTT
	Service Desk Lead (Wipro, L1)

3. Introduction

This blueprint defines the **ITSM integration** between **CCH's ServiceNow (CCH SNOW)** and **NTT DATA's ServiceNow (GSNOW)** for the NTT managed-service contract covering CCH network, connectivity, and managed-cloud infrastructure (Cisco, Fortinet, Zscaler, Akamai, Claroty xDome / NAC4OT, and the Azure footprint).

NTT operates **through** CCH's existing tooling, not instead of it — a supplemental managed-service overlay. The integration is delivered over NTT's **iHub** middleware (on the **Managed Automation Platform (MAP)** and **Digital Fabric (DF)**), enabling bidirectional ticket e-bonding so incidents and requests created or updated in one system reflect in the other in near real time.

The design is **selective by process**, matching the mechanism to each practice:

Practice	Mechanism	Owner / detail
Incident	iHub e-bond (automated, bidirectional, 24×7)	High volume, time-critical
Request	iHub e-bond (automated, bidirectional)	Standard requests 24×7; rest business-hours
Configuration	Manual CMDB sync (agreed process)	Each party owns its CMDB; CI + Managed Service mandatory on every ticket
Problem	Swivel-chair (manual)	ESIF team manages PRB records in CCH SNOW
Change	Swivel-chair (manual)	ESIF team raises CHG in CCH SNOW; CAB approves before execution

 (TBD — diagram: NTT "Service Operations Model" / overall service model. To be supplied next version.)

4. Scope

4.1 In scope

- Incident** — bidirectional **iHub e-bond** on `incident` (24×7), propagating state, work notes, comments, and attachments
- Request** — bidirectional **iHub e-bond** on `sc_request` / `sc_req_item`; Standard Requests 24×7, the rest business-hours
- Configuration** — **manual CMDB synchronisation** following a process agreed by CCH and NTT service-management representatives; CI + Managed Service mandatory on every ticket; NTT structures CIs as Platform → Service Group → Managed Service (\$8.5)

- **Problem** — **swivel-chair**: the **ESIF team** manages problem records into CCH SNOW (§9.4)
- **Change** — **swivel-chair**: the **ESIF team** raises changes in CCH SNOW for **CAB approval before execution** (§9.4)
- The shared **correlation/cross-reference**, **conflict resolution**, and **loop prevention** the e-bonded channels require (§8, §9.5)
- The **monitoring/event-source split** and de-duplication rules that govern which tool e-bonds which ticket (§7.5)

4.2 Out of scope

- **Dynatrace integration mode** beyond the event/e-bond rules in §7.5 (NTT consuming CCH's tenant per RFP §2.4.1) — separate design
- **Break-glass device-access procedure** (CCH read-only after Service Commencement, SOW §C.9; Attachment H) — context only
- **SOC-level security operations, physical interventions, end-user connectivity, RMA physical receipt** — explicitly NTT-excluded; CCH-retained
- **Automated** Problem and Change synchronisation — deliberately **not** built; ESIF swivel-chair is the agreed model
- **SOM operational content** not part of the integration — backup/continuity, patching, capacity, cloud-account and location inventories — these live in the **Service Operations Manual**, not this HLD

4.3 Scope Boundaries

- **OOTB-first** — OOTB INC/REQ/CHG/PRB tables and states are used as shipped; iHub provides the cross-instance transport; no custom core-table schema beyond the correlation/cross-reference and loop-control fields.
- **CCH SNOW is the customer-facing master; GSNOW is the execution master.**
- **CAB authority is never delegated** — for any change against CCH infrastructure, CCH CAB approves before NTT executes. Under swivel-chair this is a manual raise-and-approve step.
- **CMDB is owned per-instance, synced manually** — neither side writes directly into the other's CMDB; alignment is a manual, agreed process.
- **Platforms remain as-is** — two ServiceNow instances bridged by iHub. No consolidation, no platform displacement.

5. Current State

5.1 Two independent ITSM platforms

Dimension	CCH SNOW	NTT GSNOW
Purpose	Customer-facing ITSM: user tickets, CMDB, business-impact correlation, SLA reporting to CCH leadership	Supplier-internal ops: GIOC service desk, paging, multi-client portfolio, internal SLA, OEM escalation
Ticket origin	User-reported (via Wipro L1); CCH application teams; Dynatrace events	NTT engineers (GIOC/MCN/PDC); LogicMonitor events
Change authority	CCH CAB — authoritative for any change against CCH infra (SOW §C.7)	NTT plans/executes; no independent authority over CCH infra
CMDB	CCH-owned — manual + Cisco DNA + Dynatrace	NTT-owned — LogicMonitor autodiscovery + Managed-Service tagging
Monitoring	Dynatrace (all CIs)	LogicMonitor (contracted CIs, except those not NTT-certified)
Service hours	Business as usual	INC 24×7; PRB business-hours; REQ 24×7 standard / BH rest; CHG 24×7 emergency / BH rest (SOW §C.3, SOM coverage model)
Device access	Read-only after Service Commencement; break-glass (SOW §C.9)	Read-write on in-scope devices, exclusively
Identity	CCH IdP	Client-PAM named accounts — CCH retains identity kill-switch (Attachment H.2)
Integration	None today — no iHub e-bond; no CMDB sync	None today

5.2 Current problems

1. **No cross-instance sync**: the same incident/request is re-keyed by hand; no automated propagation — unsustainable for 24×7 volume. The iHub e-bond addresses this.
2. **No CMDB alignment process**: CCH and NTT each hold a CMDB with no agreed manual sync; CI + Managed Service are not consistently present on tickets.
3. **CAB blind-spot risk**: without a defined procedure, a change NTT plans against CCH infra could execute without surfacing in CCH SNOW for CAB (SOW §C.7).
4. **No common identifier**: nothing links the same ticket across instances; reconciliation is manual.
5. **Status divergence & auto-close mismatch**: the 3-Strike-Rule auto-close timings differ (CCH SNOW 5 days vs GSNOW 7 days) — a ticket can close on one side while open on the other (§8.4).
6. **Duplicate-ticket risk from dual monitoring**: Dynatrace and LogicMonitor can both alert on the same condition; without a de-duplication rule the e-bond would create duplicate incidents (§7.5).
7. **Service-hour asymmetry unmodelled**: INC is 24×7 but PRB/parts of REQ/CHG are business-hours.

6. Future State

- **Incident** and **Request** exist in **both** instances; state, work notes, comments, and attachments propagate via **iHub**, matched on a correlation/cross-reference key.
- **Incident** flows both ways, 24x7; **Request** flows both ways (Standard 24x7).
- **Configuration**: each party maintains its own CMDB; an agreed **manual synchronisation** keeps in-scope CIs aligned; **CI + Managed Service are mandatory** on every ticket in either platform.
- **Problem** and **Change** are handled **swivel-chair by ESIF** into CCH SNOW; for Change, ESIF raises the record for **CAB approval before execution** — governance preserved by the manual step.
- **Monitoring is split and de-duplicated**: NTT LogicMonitor and CCH Dynatrace each generate tickets; defined rules prevent double-e-bonding the same condition; CCH Dynatrace tickets for NTT-managed CIs that NTT cannot monitor are e-bonded to NTT, who raise to the vendor where needed.
- The **service-hour model** is explicit per the coverage table (§8.3).


7. Solution Design

7.1 Two Masters

Domain	Master	Why
Customer-facing record, business-impact correlation, CCH-facing SLA	CCH SNOW	System of record for CCH's view and customer reporting
Change approval (CAB)	CCH SNOW	CCH retains CAB authority (SOW §C.7); preserved via the ESIF manual raise step
Each instance's CMDB	The owning instance	CCH owns CCH SNOW CMDB; NTT owns GSNOW CMDB; sync is a manual agreed process
Engineering execution, GIOC service desk, OEM (L4) escalation, internal SLA	GSNOW	Where NTT engineers work, across a multi-client portfolio

7.2 Architecture

Solid lines = automated (iHub e-bond); dashed lines = manual (CMDB sync, ESIF swivel-chair).

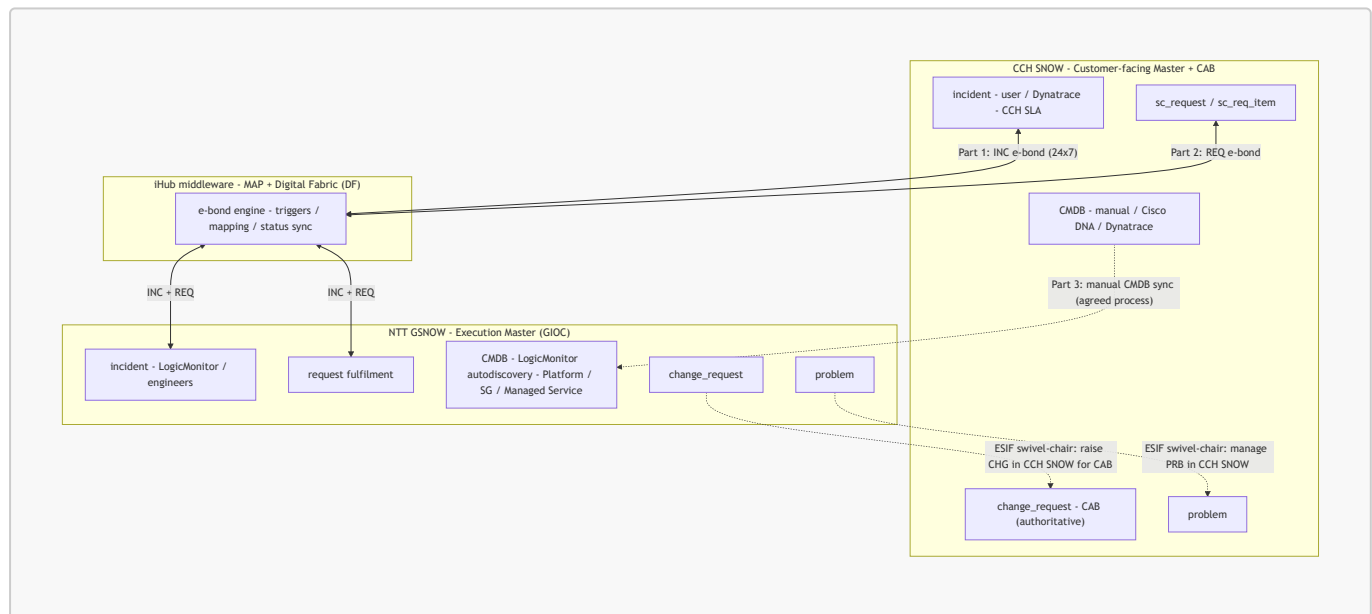

7.3 Integration mechanism per process

Part	Practice	Direction	Mechanism	Trigger / control
1	Incident	Bidirectional	iHub e-bond on incident , 24x7	NTT→CCH: Company=Coca-Cola HBC + Publish=Public . CCH→NTT: NTT Assignment Group selected (§11.1)
2	Request	Bidirectional	iHub e-bond on sc_request/sc_req_item	Same trigger model as Incident
3	Configuration	Manual	Agreed CMDB sync process; CI + MS mandatory on tickets	Each party owns its CMDB; manual alignment (§8.5)
SC-A	Problem	Manual	ESIF swivel-chair into CCH SNOW	Low volume; business-hours


Part	Practice	Direction	Mechanism	Trigger / control
SC-B	Change	Manual	ESIF swivel-chair into CCH SNOW	CAB approves before execution — authority retained

On terminology: iHub is NTT's middleware that performs the cross-instance **e-bond** (on the **Managed Automation Platform** and **Digital Fabric**). **Swivel-chair** means a person (the **ESIF team**) manually re-keys a record into the other instance. The e-bond is **field-scoped** — each side maps a defined field set; neither instance exposes its full schema.


7.4 Sync Flow

(TBD — diagram: NTT "Ticket Flow" (Service Model §3.1). To be supplied next version.)


Incident (Part 1) — bidirectional, 24×7, via iHub:

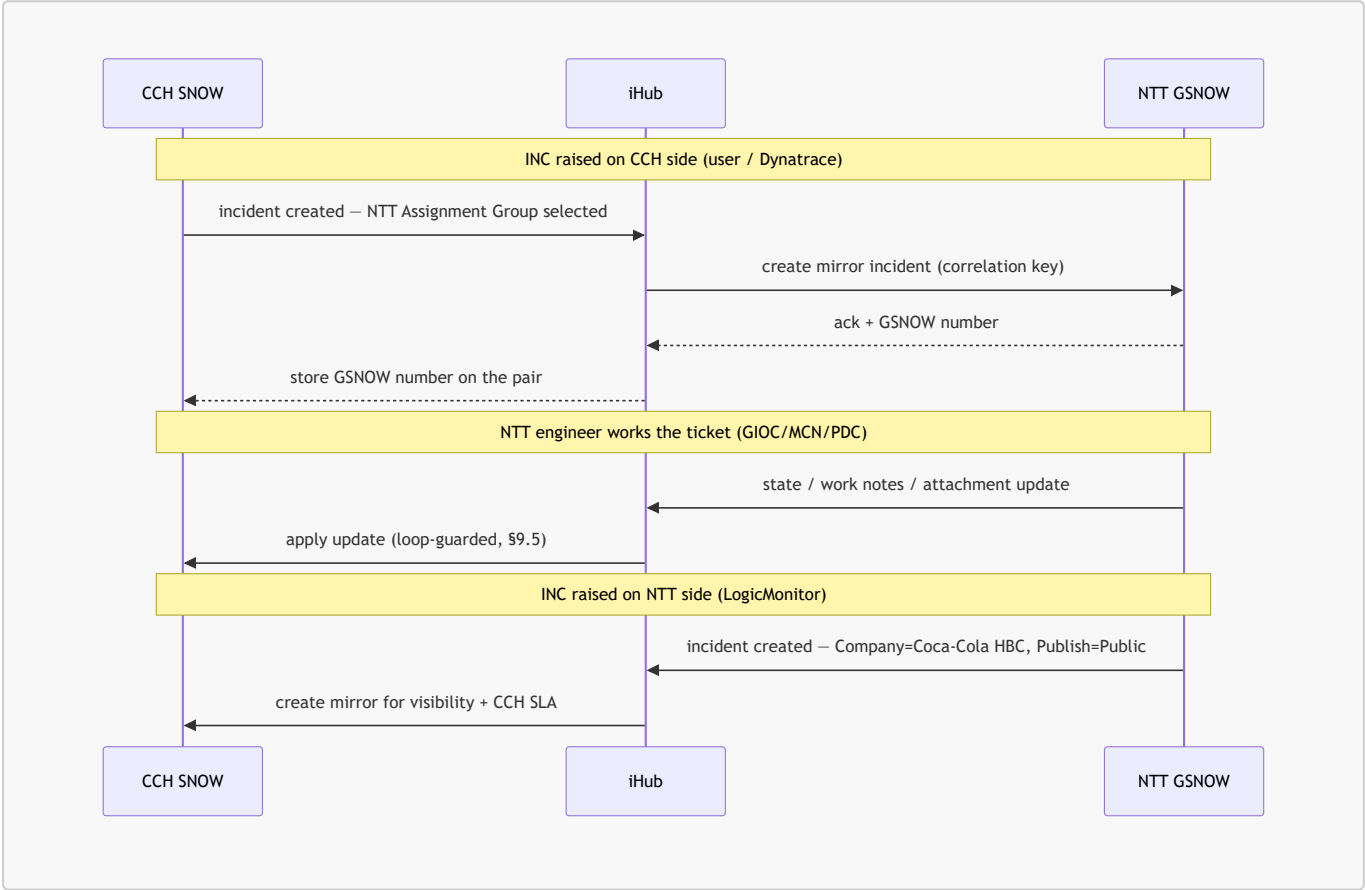

Request (Part 2) — bidirectional, via iHub:

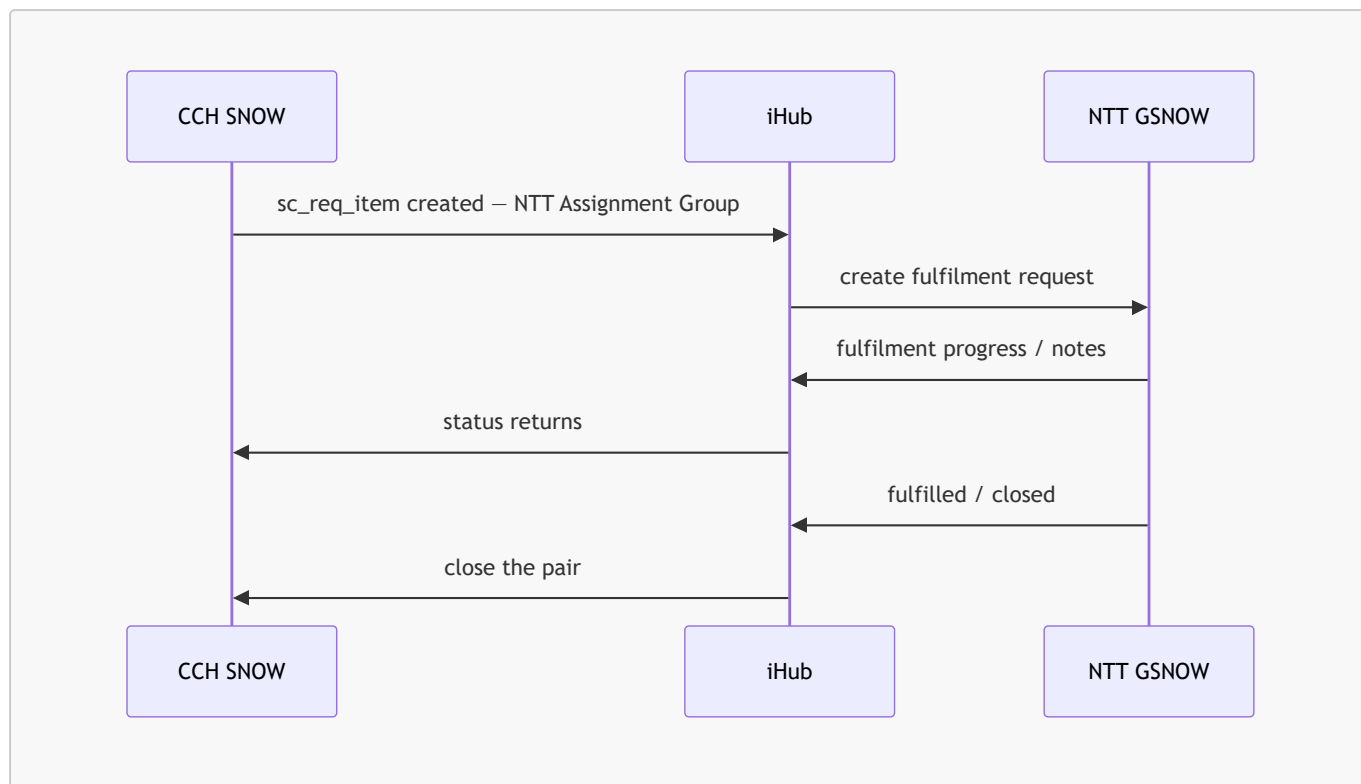

Change (swivel-chair) — ESIF raises in CCH SNOW, CAB retained:

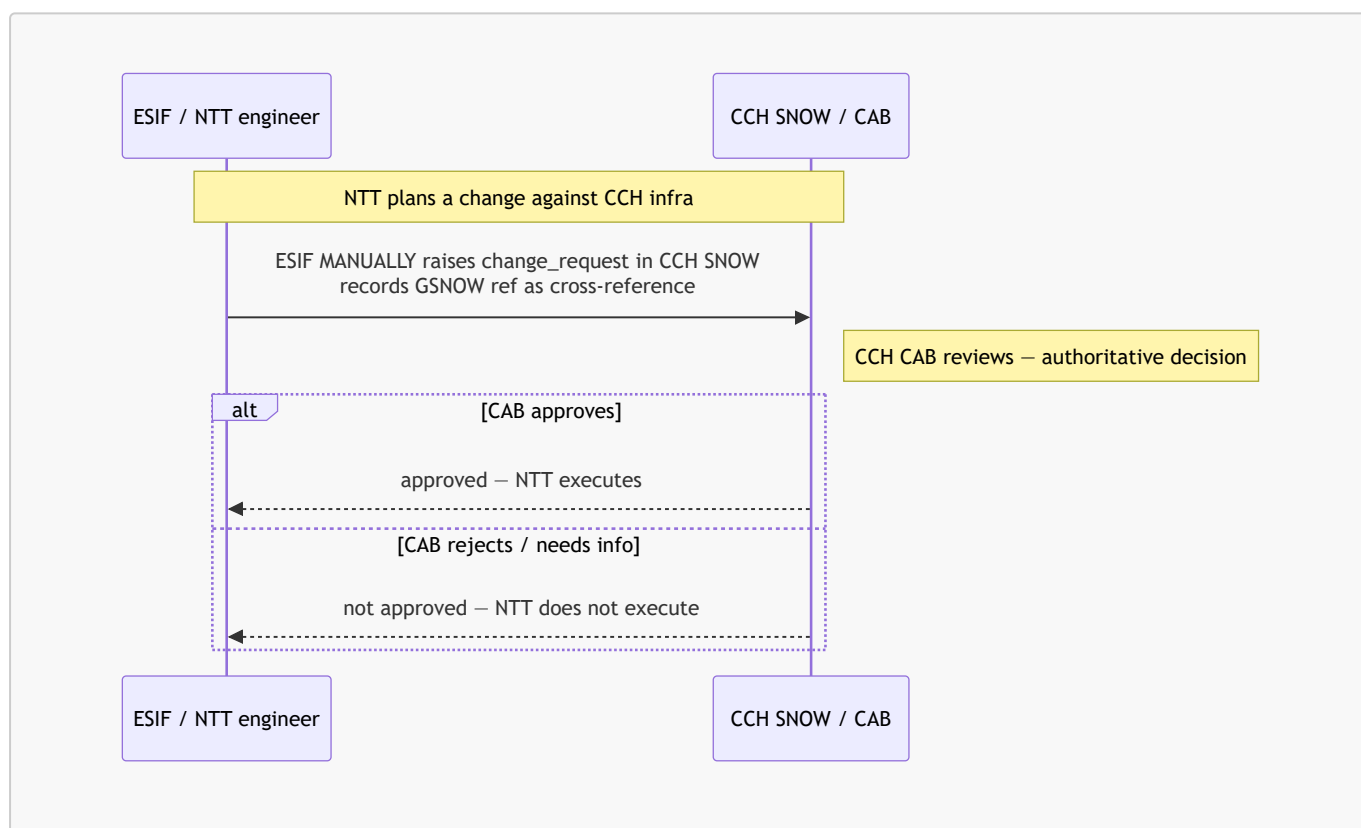

7.5 Monitoring & event sources

Two monitoring tools feed the two instances; the e-bond rules prevent duplication:

- **NTT — LogicMonitor (LM):** monitors all contracted CIs (except those not certified to NTT standards); LM-generated tickets in GSNOW e-bond to CCH SNOW.
- **CCH — Dynatrace:** monitors all CIs; e-bonds tickets to NTT **only** for in-scope CIs that NTT's tools (LM) cannot monitor.
- **De-duplication rule:** CCH does **not** e-bond Dynatrace-generated tickets that relate to NTT's existing monitors — preventing the same condition raising an incident on both sides.
- **Third-party / vendor flow:** for a CI monitored by CCH (e.g. routers), Dynatrace creates a ticket in CCH SNOW → e-bonded to NTT → NTT raises a ticket to the OEM/vendor on CCH's behalf.

(TBD — diagram: Event/monitoring flow (LogicMonitor ↔ Dynatrace e-bond + vendor path). To be supplied next version.)

7.6 Why selective integration

The split follows volume × time-criticality × governance:

- **Automate Incident & Request over iHub** — high volume / 24×7; manual re-keying would lose tickets and break SLA.
- **Manual CMDB sync** — each organisation must own and govern its own CMDB; an agreed manual alignment is the contracted approach, with CI + Managed Service mandatory on tickets to keep the two reconcilable.
- **Swivel-chair Problem & Change via ESIF** — low volume, business-hours; for Change the manual raise into CCH SNOW is itself a clean CAB control point, stronger and cheaper than an automated gate. "That is enough."

The trade-off is that CMDB, Problem, and Change carry manual steps with a small risk of human omission — mitigated by the CI/MS mandatory rule, the cross-reference fields, and reconciliation reporting (§10.2).

8. Requirements

8.1 Functional Requirements

ID	Requirement
FR-1	An incident raised in CCH SNOW with the NTT Assignment Group selected e-bonds to GSNOW via iHub within the Part 1 latency target (§8.2), 24×7
FR-2	An incident raised in GSNOW with Company=Coca-Cola HBC and Publish=Public e-bonds to CCH SNOW for visibility and CCH-facing SLA
FR-3	State, work notes, comments, and attachments propagate across each incident/request pair, subject to the field-ownership matrix (§9.5)
FR-4	A CCH-originated service request e-bonds to NTT for fulfilment; status and notes return to CCH
FR-5	CI and Managed Service are mandatory on any ticket created in either platform
FR-6	CMDB synchronisation between CCH SNOW and GSNOW follows the agreed manual process (§8.5); neither side writes directly into the other's CMDB
FR-7	Each e-bonded ticket pair carries a stable correlation/cross-reference key; create/update is matched on it — no duplicate records
FR-8	A Problem is managed swivel-chair by ESIF into CCH SNOW, carrying a cross-reference to the GSNOW record
FR-9	A Change against CCH infrastructure is raised by ESIF in CCH SNOW and must receive CCH CAB approval before NTT executes ; the GSNOW change carries the CCH change number as cross-reference
FR-10	The monitoring de-duplication rule (§7.5) prevents the same condition e-bonding an incident on both sides
FR-11	The service-hour model (§8.3) is honoured: INC 24×7; Standard Requests 24×7; Emergency Changes 24×7; PRB and the remainder business-hours
FR-12	CCH SNOW is the authoritative source for the CCH-facing SLA clock; NTT internal SLA is tracked separately and not overwritten

8.2 Non-Functional Requirements

ID	Requirement
NFR-1	Latency — INC/REQ: near-real-time via iHub, target ≤ 5 minutes per propagation; INC 24×7. P1 major-incident bridging is time-critical (Decision #8)
NFR-2	3-Strike-Rule / auto-close alignment: the auto-close asymmetry (CCH SNOW 5 days vs GSNOW 7 days; Pending-Customer re-activates in GSNOW after 7 days) must not orphan a pair — the e-bond reconciles closure across the seam (§8.4)
NFR-3	Volume: multi-thousand-CI estate; INC volume dominated by LM/Dynatrace events; sized against the de-duplicated event rate
NFR-4	Idempotency: re-send of the same record produces no duplicate; pairs match on the correlation/cross-reference key
NFR-5	Audit: every iHub write is traceable in each instance's sys_audit ; swivel-chair and manual-CMDB actions carry the cross-reference on both sides
NFR-6	Error handling: retries with backoff; remediation queue; store-and-forward over an iHub outage; reconciliation job (§9.6)
NFR-7	Loop prevention: each iHub write is tagged with its originating instance; the receiver suppresses echo updates

ID	Requirement
NFR-8	Security: mutual authentication, scoped integration accounts, IP allow-listing; CCH retains the PAM identity kill-switch over NTT access (Attachment H.2)

8.3 Service Coverage, Hours & Escalation

Coverage / service-hour model (Full Coverage 24×7; DR Coverage; Non-production as a pricing option under Full Coverage):

Process	Hours
Monitoring / Event Management	24×7
Incident Management	24×7
Problem Management	Business-hours
Service Request Fulfilment	24×7 for Standard Requests ; business-hours for the rest
Change Management	24×7 for Emergency Changes (incident-related); business-hours for the rest
Capacity & Availability	Business-hours (usage/performance monitoring 24×7)
Patch Management	24×7

Tiered support & escalation:

Level	Owner	Notes
L1 (CCH intake)	Wipro (CCH service desk)	User-facing intake on the CCH side
L1 (NTT)	GIOC (Global Integrated Operations Center, 24×7)	NTT service desk / SPOC
L2	NTT Service Delivery Manager (business-hours)	
L3	NTT MCN (network), NTT PDC (security), MEA POD6	MNS network ops; PDC security ops
L4	OEMs (Cisco, Fortinet, Zscaler, Claroty, Akamai)	NTT acts on behalf of CCH for OEM ticketing

(TBD — diagram: Escalation hierarchy (CCH + NTT). To be supplied next version.)

NTT GIOC service-desk SPOC: phone **+41 43 210 7366**, mailbox **CCHBC@support.global.ntt.ms**. Individual named escalation contacts and the hierarchical-escalation timeline (0–1h / 1–3h / 3–4h) are maintained in the **SOM / ServiceNow customer contacts** — **(TBD: live contact details — see ServiceNow customer contacts)**.

8.4 State Model Mapping & 3-Strike-Rule Behaviour

The two instances run their own state values; iHub maps both onto a shared lifecycle. Exact per-instance values confirmed during build (Decision #5):

Canonical stage	CCH SNOW	GSNOW	Notes
New / Logged	New	New / Registered	Created either side; correlation key minted
In Progress	In Progress	Assigned / WIP	
Pending / On Hold	On Hold (reason code)	Pending (mapped)	Reason codes mapped, not free-text
Resolved / Fulfilled	Resolved / Closed Complete	Resolved / Fulfilled	Propagates both ways
Closed	Closed	Closed	SLA clocks stopped per side

3-Strike-Rule (3 SR) / auto-close — the 3 SR auto-close button is disabled on GSNOW INC and RITM (two standard notices).

Pending-Customer in GSNOW re-activates the ticket after **7 days**. **CCH SNOW auto-closes after 5 days** (3 SR); **GSNOW auto-closes after 7 days** (configured in **Digital Fabric**). The e-bond must reconcile this **5-vs-7-day asymmetry** so a pair does not close on one side while open on the other (NFR-2).

8.5 CMDB Ownership & Manual Synchronisation (Configuration)

Each party **owns and manages its own CMDB**; cross-instance synchronisation is **manual**, following a process agreed by CCH and NTT service-management representatives. **CI + Managed Service are mandatory** on every ticket in either platform, which keeps the two CMDBs reconcilable.

NTT GSNOW CMDB structure — CIs are organised as **Platform (PL) → Service Group (SG) → Managed Service (MS)**, with **Cloud Accounts (CLA)** assigned to platforms. Population is via **LogicMonitor autodiscovery + Managed-Service tagging**: a CI tagged

with the correct Managed Service appears in GSNOW with **Status=Discovered**, in the correct Platform/Service Group, with managed services configured. Illustrative platforms:

Platform (PL)	Contents
Sitepod	NTT tooling (LogicMonitor, XTAM, Salt, Ansible)
CCHBC Network Enhanced Production	NW Appliances + PaaS (CLA: Azure)
CCHBC OT Network	NW Appliances + PaaS (OT)
CCHBC Network	NW Appliances + PaaS
CCHBC SRA 2021 Production	NW Appliances + PaaS
Networking	On-prem NW appliances and consoles

CCH SNOW CMDB — populated via CCH's existing pipes (manual + Cisco DNA + Dynatrace). The manual sync aligns the in-scope CIs across the two instances.

(TBD — diagram: CMDB structure (Platform → Service Group → Managed Service → CLA) and CI↔Managed-Service tagging. To be supplied next version.)

8.6 Open Design Decisions

#	Question	Status
1	E-bond transport	RESOLVED — NTT iHub middleware (MAP + Digital Fabric)
2	CMDB manual-sync process — cadence, ownership-per-class, reconciliation cycle	OPEN — agree with CCH + NTT service management
3	Attachment propagation — full binary vs link-back?	PROPOSED — link-back with size threshold; binary for evidence under N MB
4	Field-ownership matrix for INC/REQ (§9.5)	PROPOSED — draft in §11.1; ratify with both SN owners
5	State map — confirm against real per-instance state values	PROPOSED — §8.4
6	Swivel-chair traceability — mandatory cross-reference + reconciliation report for PRB/CHG	PROPOSED — yes; manual omission is the main swivel-chair risk (§10.2)
7	Out-of-hours handling for the business-hours processes	OPEN — derive from the agreed business-hours calendar
8	Major-incident (P1) bridging across instances	OPEN — time-critical; affects NFR-1/NFR-3
9	Cross-instance CI reference for business impact (NTT CI ↔ CCH application, e.g. SAP)	OPEN — via the manual CMDB alignment (§8.5)

9. Implementation

9.1 Part 1 — Incident E-Bond (iHub)

1. Confirm iHub connectivity (PRE and PRO) per the transition plan (§10.1)
2. Provision scoped integration accounts; establish mutual auth and IP allow-listing (§11.4)
3. Add correlation/cross-reference and source-tag fields to **incident** on both instances
4. Configure the triggers — CCH→NTT on NTT Assignment Group; NTT→CCH on **Company=Coca-Cola HBC + Publish=Public**
5. Implement the state map (§8.4) and the field-ownership matrix (§9.5)
6. Configure attachment/work-note propagation (Decision #3)
7. End-to-end test in PRE: raise on CCH → mirror in GSNOW → NTT updates → CCH reflects; raise on NTT (LM) → CCH mirror with CCH SLA; verify no duplicates, no loop, correct 3 SR / auto-close behaviour

9.2 Part 2 — Request E-Bond (iHub)

1. Add correlation/cross-reference and source-tag fields to **sc_request/sc_req_item**
2. Implement the REQ state map and the Standard-Request 24×7 vs business-hours distinction
3. Wire bidirectional create + status return via iHub
4. End-to-end test in PRE: raise request on CCH → GSNOW fulfilment → progress returns → close pair

9.3 Part 3 — Manual CMDB Synchronisation

1. Agree the manual sync process, cadence, and per-class ownership with CCH + NTT service management (Decision #2)
2. Enforce **CI + Managed Service mandatory** on tickets in both platforms
3. NTT: confirm LogicMonitor autodiscovery + Managed-Service tagging populates GSNOW (Platform/SG/MS) correctly

4. CCH: maintain CCH SNOW CMDB via existing pipes; align in-scope CIs to GSNOW at the agreed cadence
5. Periodic manual review/alignment of the in-scope CI set across the two instances

9.4 Problem & Change — ESIF Swivel-Chair

Problem: the **ESIF team** manages problem records into CCH SNOW, recording a cross-reference to the GSNOW record (and vice-versa).

Change: the **ESIF team manually raises a `change_request` in CCH SNOW** for CAB, recording the GSNOW change number as cross-reference. **NTT executes only after CCH CAB approval.** A periodic reconciliation report (Decision #6) flags GSNOW changes lacking a CCH cross-reference — the guard against the manual step being skipped. NTT stakeholders represented at CAB include the NTT SDM and NTT Support-Engineer TL; **change-freeze periods** (e.g. Christmas, Dec 15–Jan 6) are honoured.

9.5 Conflict Resolution & Loop Prevention (e-bonded channels)

Field-ownership matrix — each field has one authoritative writer; the non-owner's edits are not propagated:

Field group	Authoritative writer
Customer-facing description, caller, business service, CCH-facing priority	CCH SNOW
Engineering work notes, resolution detail, OEM case refs, NTT internal assignment	GSNOW
State / resolution state	Shared per the state map (§8.4); transitions validated, not blind-copied
CI + Managed Service	Mandatory; aligned via the manual CMDB process

Loop prevention — every iHub write carries a source-instance tag; the receiver applies it but does not re-emit, breaking the echo. Update ordering per ticket is preserved.

9.6 Error Handling

Class	Response	Notes
429 / 5xx	Retry with exponential backoff; cap at N; alert if cap reached	Surface to remediation queue
4xx (other)	No retry — log and route to manual remediation	Payload/auth/mapping issue
iHub outage	Store-and-forward; replay on recovery (idempotent)	No ticket lost; ordering preserved
Auto-close mismatch (3 SR)	Reconciliation aligns closure across the 5-vs-7-day seam	NFR-2
Drift (pairs diverge)	Periodic reconciliation by correlation/cross-reference key	Catches missed updates + skipped manual steps
All errors	Log with correlation/cross-reference key	Match both instances' <code>sys_audit</code>

10. Planning and Risk Management

10.1 Planning — Transition (PRE → PRO)

Preparation:

- Define the ticket flows (CCH→NTT and NTT→CCH) and complete the **mapping files** — ticket status and the INC/REQ field set
- **CMDB:** manual review, discussion, and alignment
- **PRE environments:** CCH creates its test environment; NTT uses its defined PRE; iHub PRE stood up

Connectivity:

- CCH PRE ↔ NTT iHub PRE
- CCH PRO ↔ NTT iHub PRE

Code generation (PRE): CCH generates the e-bond code in CCH SNOW; NTT generates the e-bond code in iHub.

Testing (PRE): run the defined flows; fix and re-test until the integration supports them.

Go-Live: move code to PRO; agree date/time; go-live verification testing.

Phasing: Phase 1 — Incident e-bond; Phase 2 — Request e-bond; Configuration manual sync and ESIF swivel-chair live from Service Commencement. Aligns with the contractual transition (e.g. Guardicore onboarding 1 Nov 2026; **parallel run Jan 2027, no SLA** — the window to prove the e-bond).

Pre-go-live gates:

1. iHub PRE/PRO connectivity established
2. Mapping files (status + fields) complete and tested
3. CMDB manual-sync process agreed (Decision #2)
4. Swivel-chair procedure documented with cross-reference + reconciliation report (Decision #6)
5. Loop prevention, idempotency, and 3 SR auto-close behaviour tested
6. Scoped integration accounts provisioned; PAM kill-switch confirmed (§11.4)

10.2 Risk Register

Risk	Impact	Mitigation
Swivel-chair Change skipped — NTT executes without raising in CCH SNOW	Change without CAB approval — governance breach (SOW §C.7)	Mandatory cross-reference + reconciliation report flagging GSNOW changes with no CCH match (Decision #6)
Duplicate incidents from dual monitoring (LM + Dynatrace)	Noise, double SLA	De-duplication rule (§7.5) — CCH does not e-bond Dynatrace tickets tied to NTT monitors
3 SR auto-close asymmetry (5 vs 7 days)	Pair closes on one side, open on the other	Reconciliation aligns closure across the seam (NFR-2, §8.4)
CMDB drift (manual sync)	In-scope CIs diverge across instances	CI + MS mandatory on tickets; agreed cadence + periodic manual review (Decision #2)
Update loop (ping-pong)	Infinite updates, audit noise	Source-instance tagging; receiver suppresses echo (NFR-7)
Simultaneous-edit conflict	Silent last-writer-wins loss	Field-ownership matrix (§9.5)
iHub outage	Tickets stop syncing	Store-and-forward + idempotent replay + reconciliation (§9.6)
Attachment loss / size limits	Evidence missing on one side	Link-back + size policy (Decision #3)
SLA-clock conflation	Wrong CCH-facing SLA under soft SLA regime	CCH SNOW owns CCH-facing clock (FR-12)
Major-incident (P1) bridge undefined	Slow coordination on the most time-critical tickets	Decision #8 — design the ESIF/GIOC bridge
Cross-org credential / tenant exposure	Security incident spanning both platforms	Mutual auth, scoped accounts, IP allow-list, PAM kill-switch (Attachment H.2)

11. Appendix**11.1 Data mapping****11.1.1 Incident field map (Part 1) — illustrative**

Confirmed against real per-instance fields during build; mapping files completed in transition (§10.1). Authoritative writer per §9.5.

#	Logical field	CCH SNOW <i>incident</i>	GSNOW <i>incident</i>	Authoritative writer
1	Correlation / cross-reference	<i>correlation_id</i>	<i>correlation_id</i>	iHub (minted once)
2	Trigger — CCH→NTT	<i>assignment_group</i> (NTT group)	—	CCH SNOW
3	Trigger — NTT→CCH	—	<i>company=Coca-Cola HBC</i> + <i>publish=Public</i>	GSNOW
4	Short description	<i>short_description</i>	<i>short_description</i>	Origin at create
5	Caller / customer	<i>caller_id</i>	mapped contact	CCH SNOW
6	Priority (CCH-facing)	<i>priority</i>	mapped	CCH SNOW
7	State	<i>state</i> (mapped, §8.4)	<i>state</i> (mapped)	Shared — validated
8	CI	<i>cmdb_ci</i> (mandatory)	CI (mandatory)	Aligned via manual CMDB sync
9	Managed Service	mapped (mandatory)	Managed Service (mandatory)	NTT structure (§8.5)

#	Logical field	CCH SNOW <i>incident</i>	GSNOW <i>incident</i>	Authoritative writer
10	Work notes	<i>work_notes</i>	<i>work_notes</i>	Both — appended, source-tagged
11	Attachments / OEM refs	<i>sys_attachment</i>	<i>sys_attachment</i>	Both — per Decision #3
12	Resolution	<i>close_notes</i> / <i>close_code</i>	mapped	NTT authors; propagates
13	Source-instance tag	<i>x_ebond_source</i>	<i>x_ebond_source</i>	Writing side (loop control)

11.1.2 Request field map (Part 2) — illustrative

Mirrors the Incident map; *sc_req_item* ↔ GSNOW request; CI + Managed Service mandatory; Standard Requests 24×7.

11.1.3 Swivel-chair cross-reference (Problem & Change)

Practice	CCH SNOW field	GSNOW field	Purpose
Problem	foreign PRB number	foreign PRB number	Manual link (ESIF)
Change	foreign CHG number	foreign CHG number	Manual link; reconciliation flags missing CCH match (Decision #6)

11.2 NTT GSNOW CMDB structure (reference)

Platform → Service Group → Managed Service; CLAs assigned to platforms; autodiscovery via Managed-Service tagging (§8.5). Cloud accounts are Azure (West EU / North EU). Detailed Platform/SG/MS/CLA inventory is maintained in the **SOM** — **(TBD: full CMDB inventory — see SOM Appendix.)**

11.3 Escalation (reference)

Structure in §8.3; GIOC SPOC: **+41 43 210 7366, CCHBC@support.global.ntt.ms**. Hierarchical-escalation timeline (0–1h GIOC out-of-hours; 1–3h Line/Ops Manager; 3–4h Ops Director / COO) and named contacts — **(TBD: see SOM / ServiceNow customer contacts.)**

11.4 Security components

Purpose	Scope	Authentication
CCH-side e-bond account	Read/write on <i>incident</i> , <i>sc_request/sc_req_item</i> (mapped fields)	OAuth 2.0 / mTLS
NTT iHub account	Read/write on GSNOW INC/REQ (mapped fields)	OAuth 2.0 / mTLS

Distinct accounts so cross-instance writes are attributable; IP allow-listing between CCH SNOW, iHub, and GSNOW. CCH retains the **PAM identity kill-switch** over NTT access (Attachment H.2). Loop guard: a business rule on each side rejects re-emission of a write carrying the foreign source-instance tag.

11.5 Plugins

OOTB-leaning on the CCH side: OOTB *incident*, *sc_request/sc_req_item*, *change_request*, *problem* tables and states; OOTB *sys_audit*; correlation/cross-reference and source-tag fields (the only added fields). Transport is NTT **iHub** (MAP + Digital Fabric) — NTT-side platform, no CCH plugin.

11.6 References

- NTT DATA Statement of Work v2.0 (28 April 2026) — §C.3 (service hours), §C.7 (CAB authority), §C.9 (co-management), §2.6.4 (CMDB), Attachment H.2 (PAM), Attachment I (SLA)
- CCH Network Management & Connectivity Services RFP v1.1 (Sept 2025) — §2.4.1 (Dynatrace), §2.6.4 (CMDB)
- NTT **Service Operations Manual** (Coca-Cola HBC) — source for the iHub integration, monitoring split, CMDB structure, escalation, coverage model, and transition method
- ServiceNow Docs — *incident*, *sc_request/sc_req_item*, *change_request*, *problem* tables and states
- Referenced SOM diagrams not yet supplied — **(TBD: Ticket Flow, Service Operations Model, Escalation hierarchy, CMDB structure, Monitoring/event flow.)**