

CI/CD with Jenkins

Workshop lab setup

Aug 2026

1 Assigned Linux username and port range assignment

No.	Participant name	Assigned username / PW	Public port range
1.	Arfan Danial Zainal Abidin	user01	7100 – 7199
2.	Cheryl Lim Chiew Min	user02	7200 – 7299
3.	Choor Ying Kat	user03	7300 – 7399
4.	Christine Gee Kar Ling	user04	7400 – 7499
5.	Edward Yong Weng Kit	user05	7500 – 7599
6.	Elyssia Tung Kim	user06	7600 – 7699
7.	Gan Wan Ning	user07	7700 – 7799
8.	Goh Ie Vonne	user08	7800 – 7899
9.	Hoe Bee Ching	user09	7900 – 7999
10.	Khoo Fang Xin	user10	8000 – 8099
11.	Khoo Wei Lin	user11	8100 – 8199
12.	Lai Wen Ying	user12	8200 – 8299
13.	Lim Bee Wen	user13	8300 – 8399
14.	Lim Chia Fong	user14	8400 – 8499
15.	Loh Hwei Shien	user15	8500 – 8599
16.	Muhammad Arif Jalani	user16	8600 – 8699
17.	Neoh Chu Ken	user17	8700 – 8799
18.	Nur Ainun Nabila Pakhruddin	user18	8800 – 8899
19.	Nur Amira Farhanii Abdul Wahab	user19	8900 – 8999
20.	Nur Izzati Mohamed Ismail	user20	9000 – 9099
21.	Siti Nur Afiqah Ibrahim	user21	9100 – 9199
22.	Tan Chin Thin	user22	9200 – 9299
23.	Teoh Jia Wei	user23	9300 – 9399
24.	Woo Kai Hui	user24	9400 – 9499
25.	Yeap Eik Chin	user25	9500 – 9599
26.		user26	9600 – 9699
27.		user27	9700 – 9799
28.		user28	9800 – 9899
29.		user29	9900 – 9999
30.		user30	10000 – 10100

NOTE: Port **8080** is the default port for the Jenkins controller/server, so user10 should avoid using this port.

2 Configuration and Connection

Main Jenkins Server IP:
56.68.71.41

Jenkins Server URL: **http://56.68.71.41:8080**

Login for Jenkins server: Username and passwd: **admin**

Main Jenkins Server IP: **56.68.38.193**

The Jenkins Controller/Server is running on an AWS EC2 instance with Ubuntu 24

To access the various application projects that we will use to demonstrate CI/CD workflows on Jenkins, we will need to connect using SSH to the EC2 server that is running the Jenkins controller, which has the user accounts on which these projects are placed on.


The SSH connection is typically established either by:

- a) using a SSH client like MobaXTerm
- b) connecting directly from Windows Powershell


The first approach is the easiest to work with due to the various UI functionalities offered by MobaXTerm to facilitate remote interaction with the EC2 server.

Configure MobaXTerm as a SSH client to connect using the username / password combination assigned to you (password will be the same as username).


Configure a new SSH connection with the IP address of the Jenkins Server, your assigned user account and the port 22 (default port for SSH). Also set browser type to SCP (enhanced speed).

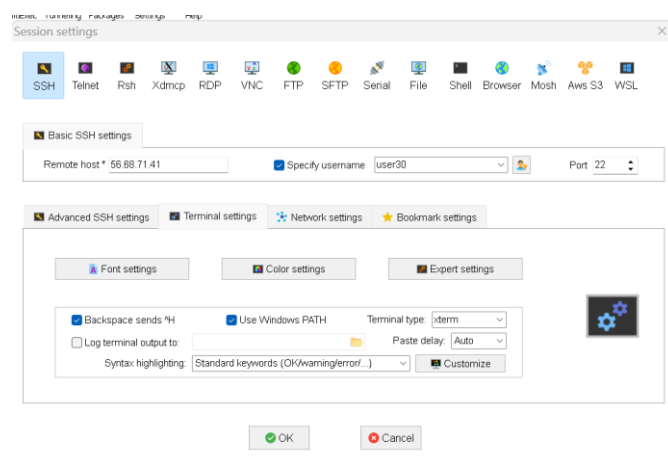

You can also set terminal font settings to get a larger font (for e.g. 16) for the shell font size when you successfully login:

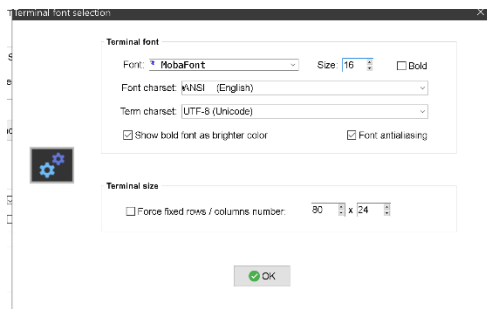

Click Ok to connect and select Accept.

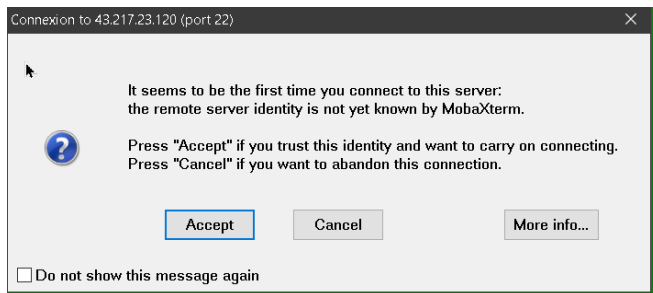

Type the password when prompted. Select Yes to the prompt to save the password.



With the connection established, you will have a navigation pane on your left. You can manipulate the contents of the home directory of your assigned username - similar to the functionality of File Explorer in Windows. This includes

- Transferring files / directories between the EC2 server and your local host file system
- Creating and deleting new files / directories



You can transfer project folders and files from your local machine to your assigned folders by just dragging and dropping them into the file navigation UI in the left pane of MobaXTerm.

As a quick workaround if you cannot use MobaXTerm (or an equivalent GUI SSH client), you can also connect to a Bash Shell in the main Jenkins Server through a PowerShell terminal:

ssh *userxx*@56.68.71.41

Type Yes to any prompts related to `continue connecting (yes/no/[fingerprint])?`

Enter the password related to your assigned user account.

password: ***userxx***

3 Set up folders on local machine

Create an empty directory on your local machine (Windows) to hold all the lab material for this workshop, for e.g: `C:\jenkinsworkshop`

Copy over all the content of `labcode` from the extracted zip that you downloaded for this workshop and transfer it into this directory

If you are running a Windows machine and have installed the optional software for this workshop, you can also execute some parts of the lab sessions in this folder.

4 Working with Docker on the server

When creating Docker custom images, prefix them with your DockerHub account name, to distinguish them from images created by other participants.

When creating Docker containers, networks, volumes and other resources, prefix the names of these resources with your assigned username or your actual name to distinguish them from resources used by other participants.

5 Common issues

The primary problem you are likely to encounter during your exercise are port conflicts between the local ports your applications are listening on or that your Docker container are published to; with ports utilized by other processes that are running or ports that have already been used by other workshop participants.

To check which ports are occupied, type:

```
ss -tupln
```

and select a random port which is not in use.

If you wish to see the name of the process using all the ports listed, type:

```
sudo ss -tupln
```

There might be many containers / images available when everyone is working with Docker at the same time. You can narrow down the listing from a `docker ps` or `docker images` by piping the output to the Linux `grep` tool to search for a particular entry, for e.g.

```
docker ps | grep userX
```

```
docker images | grep userX
```