

Git Lab 1

Creating and tracking changes

1	COMMANDS COVERED	1
2	LAB SETUP	2
3	BASIC CONFIGURATION	3
4	CREATING INITIAL DIRECTORY CONTENT	5
5	INITIALIZING A LOCAL GIT REPOSITORY	6
6	STAGING AND COMMITTING CHANGES	6
7	TRACKING CHANGES.....	8
8	DELETING AND RENAMING TRACKED FILES	11

1 Commands covered

Configuration	Initializing a repo
<pre>git config --global user.name git config --global user.email git config --global color.ui auto git config --list --show-origin git config --global core.editor</pre> <p>Atlassian config command</p> <p>TheServerSide</p>	<pre>git init</pre> <p>Atlassian git command</p> <p>Atlassian repo tutorial</p>

Saving changes	Tracking changes
<pre>git add git add --all</pre> <p>Atlassian saving changes tutorial</p> <p>CareerKarma</p>	<pre>git status</pre> <p>Atlassian inspecting repository</p> <p>git status tutorial</p>
<pre>git commit -m git commit -a git commit -am</pre>	<pre>git log</pre> <p>FreecodeCamp git log command</p>

Atlassian git commit command BitDegree git commit command	Atlassian git log command
git rm git mv Atlassian git rm tutorial GitTower git rm tutorial GitHowTo moving files More details on git mv	

2 Lab setup

Make sure you have a suitable text editor installed for your OS.


Create a new empty directory with any name of your choice (for e.g. `G:\labs`) in a location that you have read/write access to (for e.g. if you are using a company desktop / laptop for this workshop, you probably only have read/write access within your home directory while you are logged into your account).

This directory will serve as the main directory to hold the various Git project folders that we will be working with in the upcoming labs. Create a subdirectory within this main directory with a suitable name (for e.g. `G:\labs\firstlab`). We will be initializing our first Git project in this subdirectory. If you create a subdirectory with a different name, substitute that name into all the commands that use the directory name `firstlab` in this lab session.

If you are working with Windows, we will be typing in the commands via Git Bash. To open the Git Bash shell in the `firstlab` subfolder, there are 2 approaches:

Approach 1:

With the File Explorer open in the `firstlab` subfolder, type `C:\Program Files\Git\git-bash.exe` into the File Explorer address bar, and press Enter

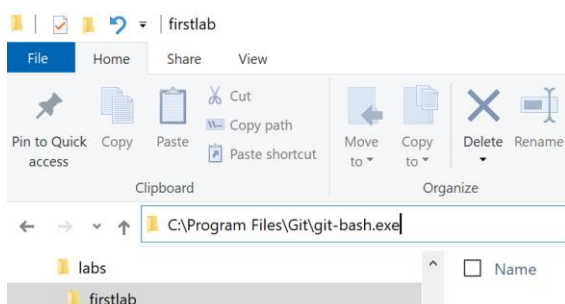


If Git Bash is installed properly at the default location indicated above, it should start up at that given location.




Approach 2:

Right click on the directory and select `Git Bash Here` from the context menu to open the Bash shell.

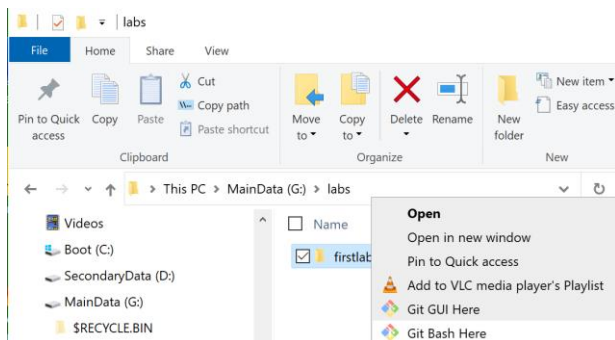

If you are working with Linux / MacOS, you will type your Git commands into the standard shell that you typically use for your Linux distro / MacOS. You will need to use the `cd` command to change to the designated folder that you wish to initialize the Git repository in.

If you are using Windows, make sure that you have checked the File name extensions and Hidden items checkboxes in your File Explorer in order for us to be able to directly manipulate the file extensions as well as view the hidden `.git` folder that will be created in a later lab session.

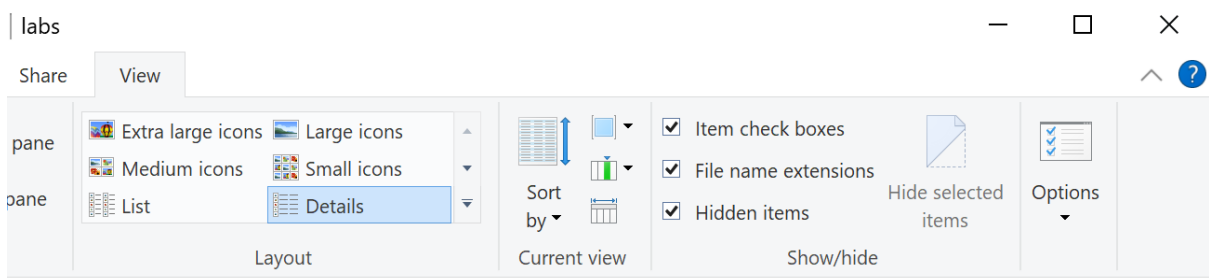

In the lab sessions to follow, the Git commands to type are listed after the `$` prompt and their output (or relevant parts of their output) will be shown as well.

3 Basic Configuration

Git has a wide variety of configuration options that allow us to customize how it performs specific commands and operations. The configuration can be done at 3 different levels and the configuration

information for these 3 levels are stored in different corresponding configuration files in different locations:

Level	Scope of application	Location
System (--system)	To every user in the system and their repos	Windows: C:\Program Files\Git\etc\gitconfig Linux: ~/etc/gitconfig
Global (--global)	To the current logged in user	Windows: C:\Users\username\.gitconfig Linux: ~/home/username/.gitconfig
Local (--local)	To a single specific repo	Windows and Linux: .git\config in the working directory

For the majority of cases, we will typically set configuration values at the global level. If a particular configuration variable is set with different values at two or more different levels, the value at the most specific level takes effect. For e.g. local is more specific than global which is in turn more specific than system.

There some basic values that need to be set before we start working on a Git project.

We will need to set the username and email address because every Git commit that you create will include this information. In addition, we will enable coloring to make the command outputs easier to view and interpret:

```
$ git config --global user.name "Peter Parker"
$ git config --global user.email "spiderman@gmail.com"
$ git config --global color.ui auto
```

After you have done this open the corresponding configuration file at the global level to verify that the values have been set correctly.

To obtain the values for a particular configuration variable, use `git config` followed by the configuration variable, for e.g.

```
$ git config user.name
Peter Parker
```

```
$ git config user.email
spiderman@gmail.com
```

In addition to user name and email, you may also wish to configure the default editor that Git uses in order to create commit messages when these are not explicitly specified. To check on the current configured editor, type:

```
$ git config core.editor
```

On Windows, if you have already installed Visual Studio Code, this is most likely to be the default configured editor, in which case you will see a setting similar to this:

```
'C:\Users\User\AppData\Local\Programs\Microsoft VS Code\Code.exe' --wait
```

If you do not see this, or if you see another editor configured and you wish to use VS Code instead, you can configure it in a similar way with the user name and email (make sure that the entire command below is entered on a single line):

```
$ git config --global core.editor  
"'C:\Users\User\AppData\Local\Programs\Microsoft VS Code\Code.exe'  
--wait"
```

If you wish to use NotePad++ instead as the default editor, then type (make sure that the entire command below is entered on a single line):

```
$ git config --global core.editor  
"'C:/Program Files/Notepad++/notepad++.exe' -multiInst -notabbar  
-nosession -noPlugin"
```

On Linux/MacOS, you should see either Vim or Emacs as the default configured editor. If you wish to use another editor (for e.g. Nano), then type:

```
$ git config --global core.editor "nano"
```

To view the complete list of all configuration variables, their values as well as the config files that they are found in, type:

```
$ git config --list --show-origin
```

A long list will appear. You can use the arrow keys to scroll up and down through the list and press Q to exit the list scrolling. This will be the case as well for any other Git command that produces a long list of output that cannot be displayed on a single screen.

Alternatively, you can redirect the console output to a file for later viewing/editing.

```
$ git config --list --show-origin > configuration.txt
```

Open `configuration.txt` to verify and delete it when done.

4 Creating initial directory content

We will assume that this directory (`G:\labs\firstlab`) is the root folder of your project. In a real software project, this will contain source code files along and other relevant build artifacts. In this and the subsequent labs, we will use simple text files to make it easier to illustrate the operation of the various Git commands but keep in mind that Git is typically used to perform version control for a software project which involves source code files in standard programming languages like C#, Java, Python, C++, etc.

Create 3 files named as below and populate them with a single line each as shown using a text editor. Make sure you include a new line after the end of the single line

1: developer

humans.txt

```
1: cat
                                animals.txt
```

```
1: honda
                                cars.txt
```

5 Initializing a local Git repository

There are two ways to create a Git repo:


- a) Initialize a local repo in the root folder of your project. This root folder and its contents now become the working directory or working tree for the Git project.
- b) Clone a local repo from the contents of a remote repo

We will proceed with the first method

```
$ git init
Initialized empty Git repository in G:/labs/firstlab/.git/

User@computer MINGW64 /g/labs/firstlab (master)
```

The Git repo is stored in the `.git` folder. This is a hidden folder by default to protect it from accidental manipulation. To able to view and access this folder in Windows, you will need to check the hidden items check box in the View tab of the File Explorer.

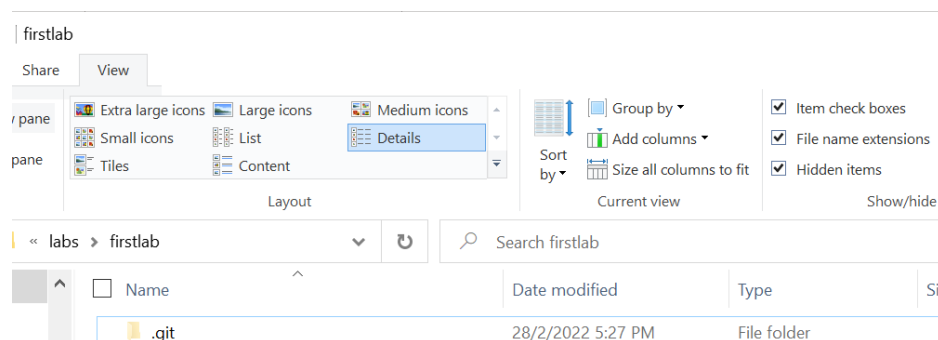

You should not manually manipulate the contents of this folder by yourself unless you are very sure about what you are trying to do: making an error in here could potentially damage your repo.

Notice that the name of the prompt now includes `master` at the end. This is the default branch for every new locally initialized Git project. Remember that a branch is a pointer to a commit. At the moment, we do not have any commits yet in the project.

6 Staging and committing changes

To check the status of the project, type:

```
$ git status
On branch master
```

```
No commits yet
```

```
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    animals.txt
    cars.txt
    humans.txt
```

```
nothing added to commit but untracked files present (use "git add" to
track)
```

The list of your original 3 files are highlighted in red and categorized as untracked files. Remember that all files in your working directory are either tracked or untracked. Newly added files in the working directory are initially considered untracked. To change these files to being tracked, we can stage them. Lets stage one file first:

```
$ git add animals.txt
$ git status
```

```
On branch master
```

```
No commits yet
```

```
Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   animals.txt
```

```
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    cars.txt
    humans.txt
```

Notice now that the specified file has been highlighted in green and listed under changes to be committed.

We can use a wildcard pattern to stage the two other remaining files:

```
$ git add *.txt
$ git status
```

```
On branch master
```

```
No commits yet
```

```
Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   animals.txt
    new file:   cars.txt
    new file:   humans.txt
```

Before we create our first commit in the project to contain all these changes, we will create a `.gitignore` file that lists all the files that we explicitly want Git to ignore during the course of the project. This means Git will explicitly not track these files or any changes that happen in them throughout the duration of the project.

For e.g. if you are working with a Mac, you probably want to ignore all the `.DS_Store` files (these are system files created by the Finder app). For a software project, this could be automatically generated files such as log files or artifacts produced by your build system such as binary executables.

Create a file name `.gitignore` and fill it with a two file listing patterns: the first to match all files that end with the extension `obj` and the second to tell Git to ignore the `.gitignore` file as well.

```
*.obj
.gitignore
```

We can now commit all the staged changes with:

```
$ git commit -m "Yay ! My first commit"
[master (root-commit) 1867882] Yay ! My first commit
3 files changed, 3 insertions(+)
create mode 100644 animals.txt
create mode 100644 cars.txt
create mode 100644 humans.txt
```

All commits must have a message associated with it, and here we specify it after the option `-m`.

The `root-commit` term indicates that this is the first commit in the project. The number sequence 1867882 is the first couple of digits of the 40-character SHA-1 hash of this newly created commit.

The SHA-1 hash value will be different for your example, since it is computed on the commit contents which include metadata such as author, date of creation, etc. Even if you are using the exact same username as me, the date of creation of this commit will be different for you.

The numbers 100644 after `create mode` are Linux file permission sequences, and here they indicate that these 3 files are normal files.

7 Tracking changes

To view the commit history, type:

```
$ git log
commit 18678822f5077682573f2dc04ba558398a4612c1 (HEAD -> master)
Author: Peter Parker <spiderman@gmail.com>
Date:   Wed Jul 7 17:31:13 2021 +0800

    Yay ! My first commit
```

This command shows the commit history starting from the commit pointed to by HEAD all the way back to the root commit. Here, we only have one commit (the root commit) which has a 40-character SHA-1 hash that is used to identify it (1867...2c1). It includes the author and email values that we

configured earlier as well as the time stamp for commit creation and the commit message we specified.

The (HEAD -> master) indicates that the master branch is pointing to this commit and HEAD is pointing to master. Typically, a branch pointer will always point to the most recent commit in sequence of commits, while the HEAD pointer will always point to a branch pointer. Right now, we only have one branch pointer so HEAD will always point to it.

Let's add in two more files in the working directory with the following contents:

```
some stuff here
```

program.obj

```
just some changes
```

useless.txt

```
$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    useless.txt
```

nothing added to commit but untracked files present (use "git add" to track)

Notice now that program.obj does not appear in the list of untracked files even though it is a newly created file. This is because it matches the *.obj file listing in .gitignore, as mentioned earlier.

Make some random changes to useless.txt and type:

```
$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    useless.txt
```

nothing added to commit but untracked files present (use "git add" to track)

Notice that no matter how many changes are made and saved to useless.txt it still shows up as untracked in the status output. We can stage all the changes to this file and commit it:

```
$ git add useless.txt
$ git commit -m "Added the useless file"

[master 4d6b121] Added the useless file
1 file changed, 8 insertions(+)
create mode 100644 useless.txt
```

We check the commit history again with:

```
$ git log
commit 4d6b121d17ed96d134a40adf7f682c70e86df299 (HEAD -> master)
Author: Peter Parker <spiderman@gmail.com>
Date:   Wed Jul 7 19:53:29 2021 +0800
```

Added the useless file

```
commit 18678822f5077682573f2dc04ba558398a4612c1
Author: Peter Parker <spiderman@gmail.com>
Date:   Wed Jul 7 17:31:13 2021 +0800
```

Yay ! My first commit

Notice we now have two commits and both `HEAD` and `master` have been advanced to point to the latest commit. The commit history is listed in reverse chronological order with the most recent commit first followed by the ancestor commits all the way back to the root commit. Again, each commit is shown with its SHA-1 hash, the author's name and email, the date / time of its creation and the commit message

Add these additional lines to the end of the following 3 files and save, ensuring that you include a new line at the end:

2: project manager

humans.txt

2: dog

animals.txt

2: mercedes

cars.txt

As usual, we verify that the files have been modified but not yet staged with:

```
$ git status
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working
directory)
        modified:   animals.txt
        modified:   cars.txt
        modified:   humans.txt
```

no changes added to commit (use "git add" and/or "git commit -a")

So far, we have staged the files with `git add` and committed the staged changes with `git commit`. We can use a shortcut to both stage and commit changes in the modified files with a single command:

```
$ git commit -am "Added a second line to animals, cars and humans"
[master 60aea14] Added a second line to animals, cars and humans
3 files changed, 5 insertions(+)
```

We check the status again with:

```
$ git status
On branch master
nothing to commit, working tree clean
```

The term `working tree clean` indicates that there is neither staged or unstaged changes at this current point in the working directory.

8 Deleting and renaming tracked files

We can delete a file that has already been staged and committed if we wish to. However, it has to be done via a Git command instead of just directly deleting the file using the file manager utility of the OS. Let's do that now for `useless.txt`

```
$ git rm useless.txt
rm 'useless.txt'
```

If you check the project directory or the text editor where `useless.txt` is open in or, you will notice that it is now deleted.

```
$ git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        deleted:    useless.txt
```

Notice as well that `useless.txt` has been staged for deletion. The deletion of a tracked file is considered a change that needs to be committed, just like addition of new files or modification of existing files.

We will remove it with a suitable commit message:

```
$ git commit -m "Removed useless"
[master b26f5b5] Removed useless
1 file changed, 6 deletions(-)
delete mode 100644 useless.txt
```

We can check the commit history again with:

```
$ git log
commit b26f5b5ef121a1f2f52b89b42383fc62ed836341 (HEAD -> master)
Author: Peter Parker <spiderman@gmail.com>
Date:   Sun Feb 27 21:32:35 2022 +0800
```

Removed useless

```
commit 60aea14b44e0c92b57e3cacb3f5ace9de8d5e404
Author: Peter Parker <spiderman@gmail.com>
Date:   Sun Feb 27 21:11:03 2022 +0800
```

```
    Added a second line to animals, cars and humans
...
...
...
```

If the listing of commits does not fit within the display area of the Git bash terminal, you can use the up and down arrow keys to scroll through the listing and also press the Q key to escape and return to the shell.

Occasionally during a development workflow, you may need to rename existing files. This operation will also need to be staged and committed in the same manner as a removal.

Let's rename `humans.txt` to `people.txt` with:

```
$ git mv humans.txt people.txt
```

Then check the status in the usual manner with:

```
$ git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    renamed:   humans.txt -> people.txt
```

Finally, commit these changes with a message:

```
$ git commit -m "Renamed humans to people"
[master 438a38c] Renamed humans to people
 1 file changed, 0 insertions(+), 0 deletions(-)
 rename humans.txt => people.txt (100%)
```

Lets restore back the file name to `humans.txt` and at the same time also add in a new line to the 3 text files. First, we will add in the new line to the 3 existing files, making sure to include a newline at the end:

3: CEO
people.txt

3: elephant
animals.txt

3: proton
cars.txt

Next, we rename the file `people.txt` back to the original name of `humans.txt`

```
$ git mv people.txt humans.txt
```

Then check the status in the usual manner with:

```
$ git status
On branch master
Changes to be committed:
```

```
(use "git restore --staged <file>..." to unstage)
renamed:    people.txt -> humans.txt
```

Changes not staged for commit:

```
(use "git add <file>..." to update what will be committed)
(use "git restore <file>..." to discard changes in working
directory)
    modified:   animals.txt
    modified:   cars.txt
    modified:   humans.txt
```

Here, the file modifications are listed as unstaged changes, while the file renaming operation is already staged. You can make as many types of modifications as you want before creating a proper commit: this includes adding new files, modifying, renaming or deleting existing files. It is not necessary to commit the modifications in stages: i.e. perform modification changes then commit, perform deletion changes then commit, etc, etc. The key point is that the commit should represent a meaningful milestone in the evolution of the code base.

Let's create a new commit again that includes all our recent changes with:

```
$ git commit -am "Renamed people to humans and added 3rd line to all
files"
[master a8fe9ef] Renamed people to humans and added 3rd line to all
files
3 files changed, 4 insertions(+)
rename people.txt => humans.txt (82%)
```