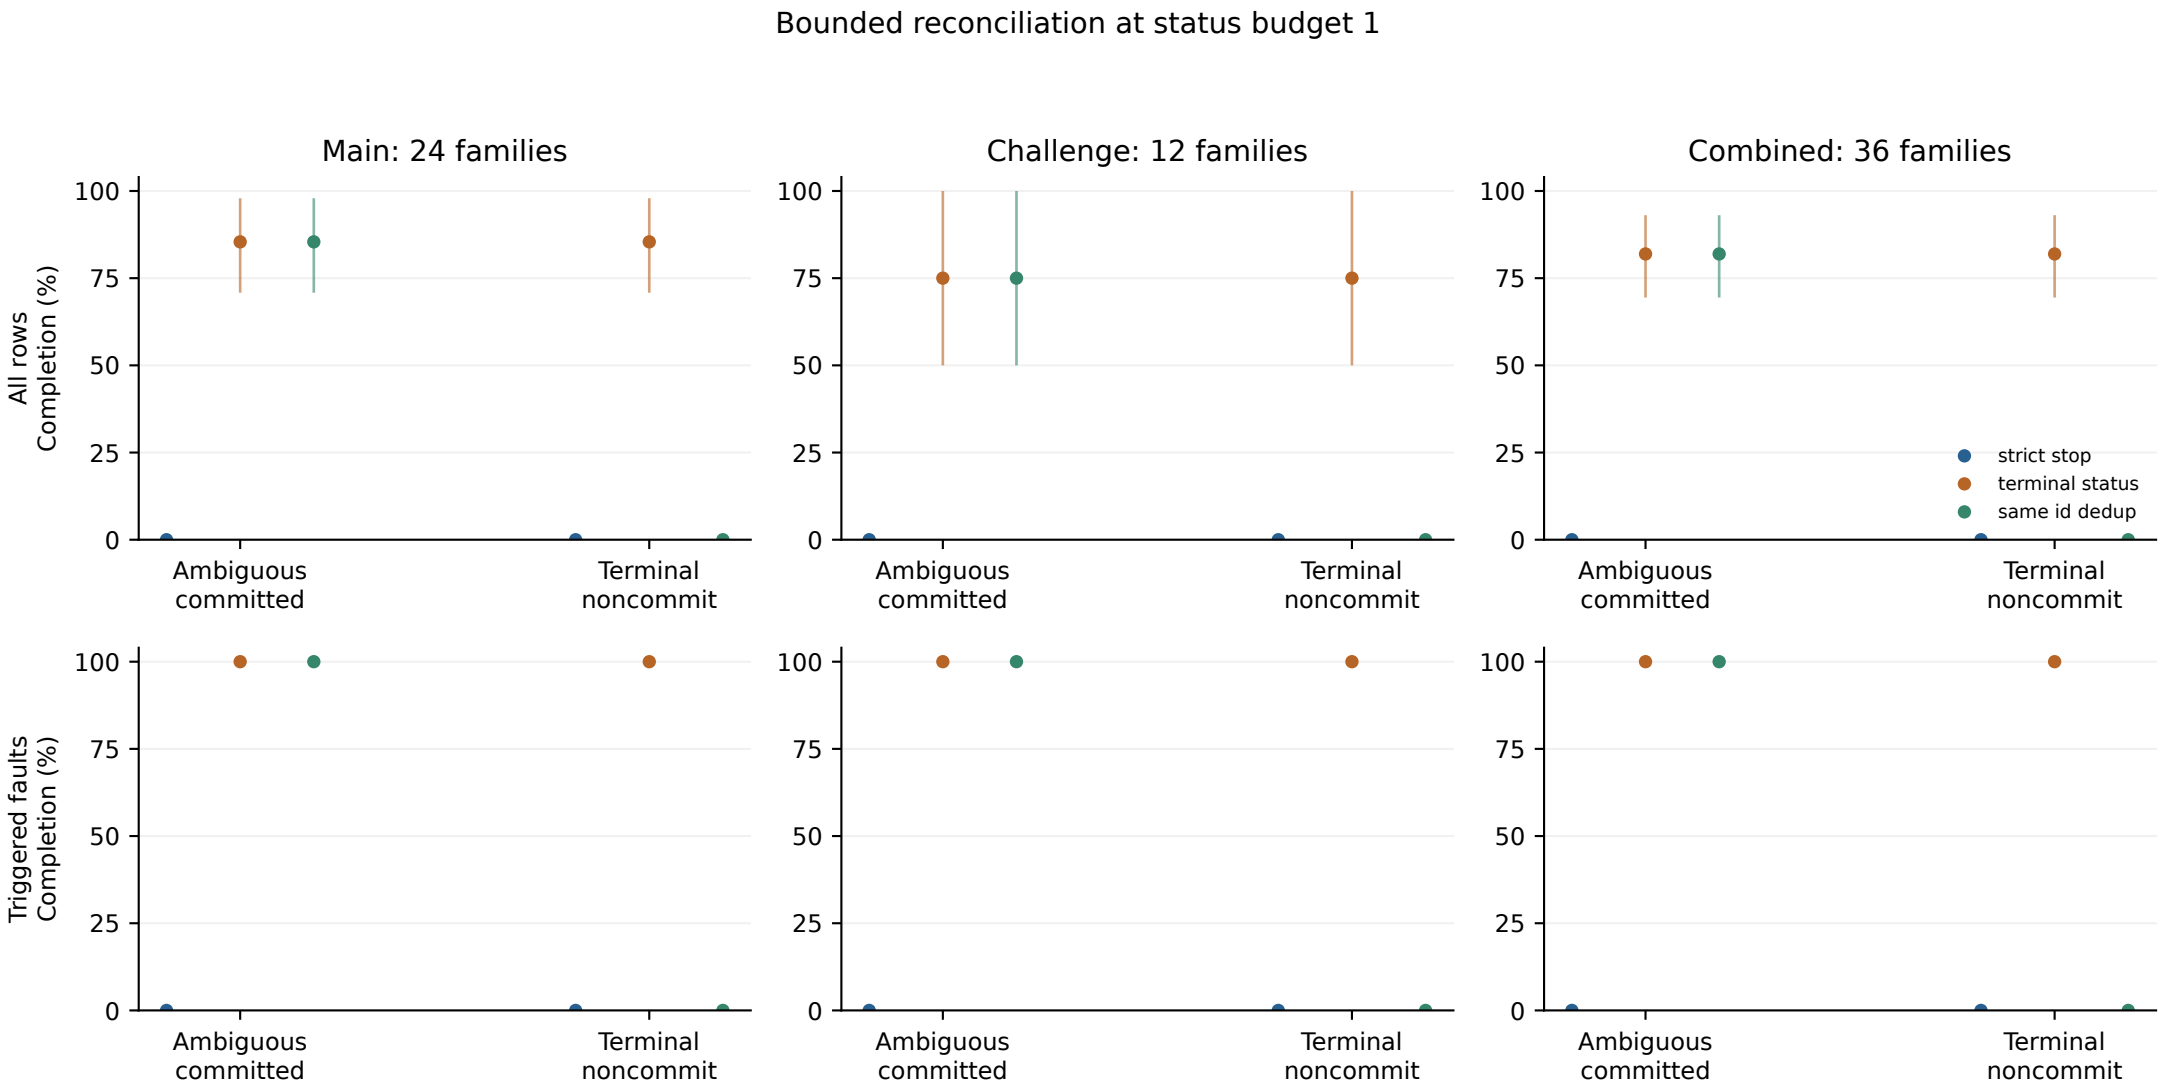

Same-ID dedup requires a stronger atomic durable backend. All-row denominators retain missing certificates and untriggered faults.