


Comparing model001 vs Finite Differences

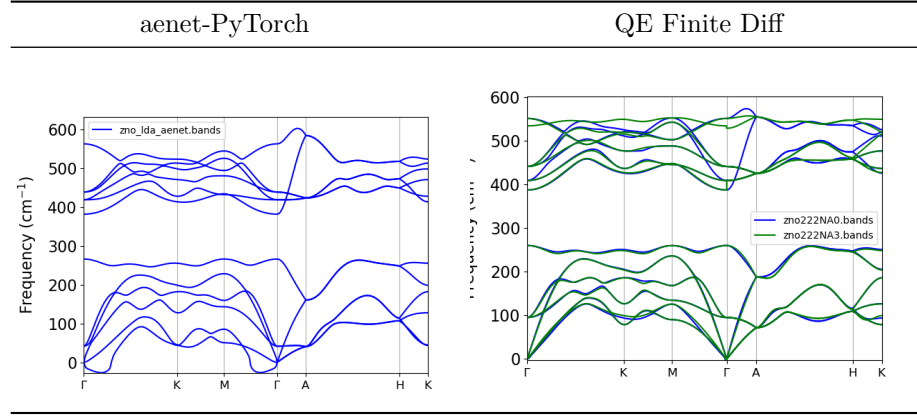

model001 had the following initial setup: - Structures which the sigma value was superior than the $\max(F_\sigma)$ with $\sigma = 0.06$ were removed from the dataset - generate.x used 15% of the forces of the dataset - train.in used: - hyperbolic tangent activation - two hidden layers with 10 nodes each - $\alpha = 0.2$ in the evaluation of $\mathcal{L} = \mathcal{L}_E(1 - \alpha) + \alpha\mathcal{L}_F$