



Technical Service Bulletin

Technical Service Bulletin: tsb101677

Released Date: 13-Jul-2005

New Straight Thread Plug

New Straight Thread Plug

Warranty Statement

The information in this document has no effect on present warranty coverage or repair practices, nor does it authorize TRP or Campaign actions.


Contents

This Service/Parts Topic introduces a new straight thread plug that will be used on all MidRange engines.

Note : This is a product improvement and not subject to campaign.

The new straight thread plug (2) has a pre-applied sealant. The previous straight thread plug (1) had a removable/replaceable o-ring.

©Cummins Inc

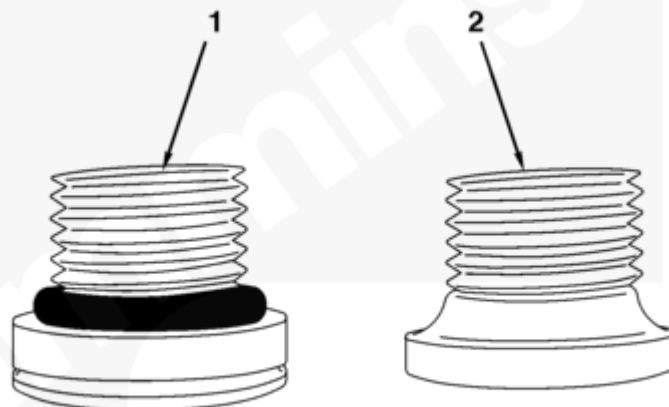

17900065

The two plugs are interchangeable and reusable. The **only** difference between them is the installation torque value.

Straight Thread Plug with O-Ring

Size	Part Number*	O-ring Part Number	Torque
M10	3678923	3678925	10 N•m [89 in-lb]

Straight Thread Plug with O-Ring			
Size	Part Number*	O-ring Part Number	Torque
M12	3678910	3678603	20 N•m [177 in-lb]
M14	3678921	3678912	25 N•m [221 in-lb]
M16	3089567	3679139	35 N•m [25 ft-lb]
M18	3678873	3678786	45 N•m [33 ft-lb]

* Part number includes o-ring.

Straight Thread Plug with Formed Pre-Applied Sealant		
Size	Part Number	Torque
M10	3977851	18 N•m [160 in-lb]
M12	3977852	25 N•m [221 in-lb]
M14	3977853	30 N•m [22 ft-lb]
M16	3977854	40 N•m [30 ft-lb]
M18	3977855	50 N•m [37 ft-lb]

Both styles of plugs, and o-rings for straight thread plugs with o-rings, are available for service. Either plug can be used when a replacement plug is needed. The correct installation torque **must** be used.

The straight thread plug with pre-applied sealant can be reinstalled until the pre-applied sealant becomes damaged. Once damaged, the plug **must** be replaced. New sealant can **not** be applied.

Procedure 017-011, Straight Thread Plug, has been updated to include this new service information.

Related Procedures

100-017-011 (/qs3/pubsys2/xml/en/procedures/100/100-017-011.html)	Straight Thread Plug (/qs3/pubsys2/xml/en/procedures/100/100-017-011.html)
--	---