1. Pseudo Code: Infix to Postfix

```
FUNCTION infixToPostfix(expression):
    Initialize empty String result
    Initialize empty Stack S

    FOR each character 'c' in expression:
        IF 'c' is an operand (letter or digit):
            Append 'c' to result

        ELSE IF 'c' is '(':
            Push 'c' to S

        ELSE IF 'c' is ')':
            WHILE S is not empty AND S.top is not '(':
                result.append(S.pop())
            S.pop() // Remove '('

        ELSE (c is an operator):
            WHILE S is not empty AND precedence(S.top) >= precedence('c'):
                result.append(S.pop())
            Push 'c' to S

    WHILE S is not empty:
        result.append(S.pop())

    RETURN result
```

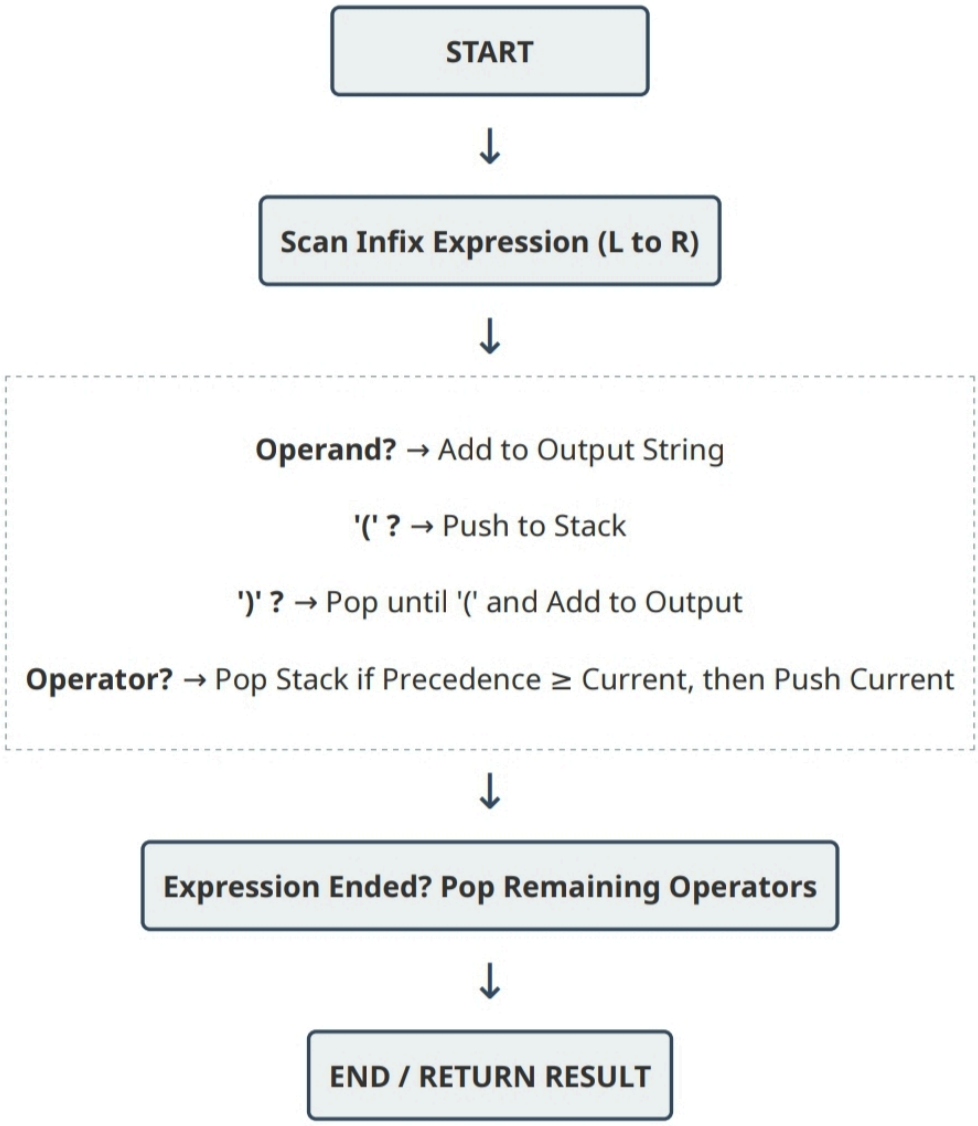
START
Scan Infix Expression (L to R)
Operand? → Add to Output String
'(' ? → Push to Stack
')' ? → Pop until '(' and Add to Output
Operator? → Pop Stack if Precedence ≥ Current, then Push Current
Expression Ended? Pop Remaining Operators
END / RETURN RESULT