Adding toroidal flow in GEM for adiabatic electron model

汤炜康

June 29, 2021

Contents

1	Guiding center drift due to toroidal flow	3
2	Parallel acceleration due to toroidal flow	6
3	Changes in weight equation	8
4	Verification of the model	13

"You don't have to be the chosen one. The secret is to build the resolve and spirit to enjoy the plateaus, the times when it doesn't feel like you're improving and you question why you're doing this. If you're patient, the plateaus will become springboards."

— Steve Nash

1 Guiding center drift due to toroidal flow

There are three terms needed to be added in the drift velocity of the guiding center V_G , according to Eq. 21 in [1], i. e.

$$\frac{cm_a}{e_a B} \hat{b} \times (\mathbf{U} \cdot \nabla \mathbf{U}),\tag{1}$$

$$\frac{cm_a v'_{\parallel}}{e_a B} \hat{b} \times (\hat{b} \cdot \nabla \mathbf{U}), \tag{2}$$

$$\frac{cm_a v'_{\parallel}}{e_a B} \hat{b} \times (\mathbf{U} \cdot \nabla \hat{b}). \tag{3}$$

In the right-handed coordinate system (R,Z, ζ), considering the toroidal flow with the form of $\mathbf{U}(\mathbf{R}) = -\omega_0(\psi_p)R^2\nabla\zeta$,

$$\mathbf{U} \cdot \nabla \mathbf{U} = -\frac{U^2}{R} \hat{R} \tag{4}$$

$$\hat{b} \times (\mathbf{U} \cdot \nabla \mathbf{U}) = \frac{U^2}{R} \hat{R} \times \hat{b}$$

$$= \frac{U^2}{RB} \hat{R} \times (\frac{f}{R} \hat{\zeta} + \frac{\psi_p'(r)}{R} (\frac{\partial r}{\partial R} \hat{Z} - \frac{\partial r}{\partial Z} \hat{R}))$$

$$= \frac{U^2}{RB} (-\frac{f}{R} \hat{Z} + \frac{\psi_p'(r)}{R} \frac{\partial r}{\partial R} \hat{\zeta})$$
(5)

Then Eq. 1 becomes

$$\frac{cm_a U^2}{e_a B^2 R^2} \left(-f\hat{Z} + \psi_p'(r) \frac{\partial r}{\partial R} \hat{\zeta}\right). \tag{6}$$

Eq. $6 \cdot \nabla x$ is

$$\frac{cm_a U^2}{e_a B^2 R^2} \cdot (-f) \frac{\partial r}{\partial Z}.$$
 (7)

To implement this term, a new variable ut needed to be declared, representing the equilibrium toroidal flow. Actually, we only need to declare a new variable omg, then ut=-omg*radius, see **Appendix**.

For Eq. $6 \cdot \nabla y$,

$$y = \frac{r_0}{q_0} \int_0^{\theta} \hat{q}(r, \theta') d\theta' - \zeta) = \frac{r_0}{q_0} (q\theta_f - \zeta)$$
 (8)

$$\nabla y = \frac{\partial y}{\partial r} \nabla r + \frac{r_0}{q_0} \hat{q} \nabla \theta - \frac{r_0}{q_0} \nabla \zeta, \tag{9}$$

where $\hat{q} = q \frac{\partial \theta_f}{\partial \theta}$.

Eq.
$$6 \cdot \nabla y = \frac{cm_a U^2}{e_a B^2 R^2} (-f\hat{Z} + \psi_p'(r) \frac{\partial r}{\partial R} \hat{\zeta}) \cdot \nabla y$$

$$= \frac{cm_a U^2}{e_a B^2 R^2} (-f \frac{\partial y}{\partial r} \frac{\partial r}{\partial Z} - \frac{r_0}{q_0} \hat{q} f \frac{\partial \theta}{\partial Z} - \frac{r_0}{q_0 R} \psi_p'(r) \frac{\partial r}{\partial R}),$$

$$\frac{cm_a U^2}{e_a B^2 R^2} (-f \hat{Z} \cdot \nabla y + \psi_p'(r) \frac{\partial r}{\partial R} \hat{\zeta} \cdot \nabla y)$$
(10)

So far, all the terms about Eq. 1 is finished. Let's start with Eqs. 2 and 3. Still in the (R, Z, ζ) coordinate, one could find Eq. 2 is identical to Eq. 3 as

$$\mathbf{U} \cdot \nabla \hat{b} = \hat{b} \cdot \nabla \mathbf{U} = -\frac{Uf}{R^2 B} \hat{R} - \frac{U}{R^2 B} \psi_p'(r) \frac{\partial r}{\partial Z} \hat{\zeta}. \tag{11}$$

To derive Eq. 2 or Eq. 3,

$$\frac{cm_{a}v'_{\parallel}}{e_{a}B}\hat{b} \times (\mathbf{U} \cdot \nabla \hat{b})$$

$$= \frac{cm_{a}v'_{\parallel}}{e_{a}B} \left[-\frac{Uf^{2}}{B^{2}R^{3}}\hat{Z} + \frac{Uf\psi'_{p}(r)}{B^{2}R^{3}}\frac{\partial r}{\partial R}\hat{\zeta} - \frac{U}{B^{2}R^{3}}\psi'_{p}^{2}(r)\frac{\partial r}{\partial R}\frac{\partial r}{\partial Z}\hat{R} - \frac{U}{B^{2}R^{3}}\psi'_{p}^{2}(r)(\frac{\partial r}{\partial Z})^{2}\hat{Z} \right]$$

$$= \frac{cm_{a}v_{\parallel}'U}{e_{a}B^{3}R^{3}} \left[-\psi'_{p}^{2}(r)\frac{\partial r}{\partial R}\frac{\partial r}{\partial Z}\hat{R} - (f^{2} + \psi'_{p}^{2}(r)(\frac{\partial r}{\partial Z})^{2})\hat{Z} + f\psi'_{p}(r)\frac{\partial r}{\partial R}\hat{\zeta} \right].$$
(12)

Then,

Eq.
$$12 \cdot \nabla x = -\frac{cm_a v_{\parallel}' U}{e_a B^3 R^3} [\psi_p'^2(r) (\frac{\partial r}{\partial R})^2 \frac{\partial r}{\partial Z} + (f^2 + \psi_p'^2(r) (\frac{\partial r}{\partial Z})^2) \frac{\partial r}{\partial Z}]$$

$$= -\frac{cm_a v_{\parallel}' U}{e_a B^3 R^3} [\psi_p'^2(r) (\frac{\partial r}{\partial R})^2 + f^2 + \psi_p'^2(r) (\frac{\partial r}{\partial Z})^2] \frac{\partial r}{\partial Z}.$$
(13)

Using Eq. 9,

Eq. 12 ·
$$\nabla y = -\frac{cm_a v_{\parallel}' U}{e_a B^3 R^3} [\psi_p'^2(r) \frac{\partial r}{\partial R} \frac{\partial r}{\partial Z} (\frac{\partial y}{\partial r} \frac{\partial r}{\partial R} + \frac{r_0}{q_0} \hat{q} \frac{\partial \theta}{\partial R})$$

$$+ (f^2 + \psi_p'^2(r) (\frac{\partial r}{\partial Z})^2) (\frac{\partial y}{\partial r} \frac{\partial r}{\partial Z} + \frac{r_0}{q_0} \hat{q} \frac{\partial \theta}{\partial Z})$$

$$+ \frac{r_0}{q_0 R} f \psi_p'(r) \frac{\partial r}{\partial R}].$$

$$\frac{cm_a v_{\parallel}' U}{e_a B^3 R^3} \left[-\psi_p'^2(r) \frac{\partial r}{\partial R} \frac{\partial r}{\partial Z} \hat{R} \cdot \nabla y - \left(f^2 + \psi_p'^2(r) (\frac{\partial r}{\partial Z})^2 \right) \hat{Z} \cdot \nabla y \right]$$

$$+ f \psi_p'(r) \frac{\partial r}{\partial R} \hat{\zeta} \cdot \nabla y$$

2 Parallel acceleration due to toroidal flow

An auxiliary guiding center variable v_{\parallel}'' is defined according to

$$\varepsilon = \mu \mathbf{B}_0(\mathbf{R}) + \frac{1}{2} m v_{\parallel}^{"2} - \frac{1}{2} m U^2(\mathbf{R}) + q \Phi_1(\mathbf{R})$$
 (15)

Notice that v_{\parallel}'' depends on $(\mathbf{R}, \varepsilon, \mu)$ but not γ , and $v_{\parallel}'' = v_{\parallel}' + \mathcal{O}(\delta)$. The new parallel velocity is defined with ε^{μ} . Since $d\varepsilon^{\mu}/dt = \mathcal{O}(\delta^2)$,

$$mv''_{\parallel} \frac{dv''_{\parallel}}{dt} = -\mu \frac{dB(\mathbf{R})}{dt} + m \frac{dU^2}{dt} - q \frac{d\Phi_1}{dt}$$

$$= -\mu v''_{\parallel} \mathbf{b} \cdot \nabla B + mv''_{\parallel} \mathbf{b} \cdot \nabla U^2 - qv''_{\parallel} \mathbf{b} \cdot \nabla \Phi_1 + \mathcal{O}(\delta^2)$$
(16)

We will neglect the $\mathcal{O}(\delta^2)$ terms, which include the parallel nonlinearity.

$$\frac{dv_{\parallel}''}{dt} = -\frac{\mu}{m} \mathbf{b} \cdot \nabla B + \mathbf{b} \cdot \nabla U^2 - \frac{q}{m} \mathbf{b} \cdot \nabla \Phi_1 + \mathcal{O}(\delta^2)$$
 (17)

Term 1 of the r.h.s. of the above equation is the mirror force, which has been implemented in GEM.

For any scalar $s(r, \theta, \zeta)$,

$$\mathbf{b} \cdot \nabla s = \frac{1}{B} \frac{\psi_p'}{R} \frac{\partial s}{\partial \theta} \hat{\zeta} \cdot \nabla r \times \nabla \theta + \frac{f}{BR^2} \frac{\partial s}{\partial \zeta}.$$
 (18)

$$\mathbf{b} \cdot \nabla s = \frac{1}{B} (\nabla \zeta \times \nabla \psi_p + \frac{f}{R} \hat{\zeta}) \cdot (\frac{\partial s}{\partial r} \nabla r + \frac{\partial s}{\partial \theta} \nabla \theta + \frac{\partial s}{\partial \zeta} \nabla \zeta)$$

$$= \frac{\psi_p'}{B} (\nabla \zeta \times \nabla r) \cdot (\frac{\partial s}{\partial r} \nabla r + \frac{\partial s}{\partial \theta} \nabla \theta + \frac{\partial s}{\partial \zeta} \nabla \zeta) + \frac{f}{BR^2} \frac{\partial s}{\partial \zeta}$$

$$= \frac{1}{B} \frac{\psi_p'}{R} \frac{\partial s}{\partial \theta} \hat{\zeta} \cdot \nabla r \times \nabla \theta + \frac{f}{BR^2} \frac{\partial s}{\partial \zeta}$$

So,

$$\mathbf{b} \cdot \nabla B = \frac{1}{B} \frac{\psi_p'}{R} \frac{\partial B}{\partial \theta} \hat{\zeta} \cdot \nabla r \times \nabla \theta \tag{19}$$

$$\mathbf{b} \cdot \nabla U^2 = \frac{2U}{B} \frac{\psi_p'}{R} \frac{\partial U}{\partial \theta} \hat{\zeta} \cdot \nabla r \times \nabla \theta, \tag{20}$$

$$\mathbf{b} \cdot \nabla \Phi_1 = \frac{1}{B} \frac{\psi_p'}{R} \frac{\partial \Phi_1}{\partial \theta} \hat{\zeta} \cdot \nabla r \times \nabla \theta \tag{21}$$

with

$$\hat{\zeta} \cdot \nabla r \times \nabla \theta = |\nabla r \times \nabla \theta|. \tag{22}$$

The $\partial U/\partial \theta$ and $\partial \Phi_1/\partial \theta$ will be calculated in the gem_equil.f90. Others are all existing variables in GEM. Φ_1 is the electric potential determined by the charge-neutrality, with $\mathbf{E_n} = -\nabla \Phi_1$. For a plasma with a single ion species with ion temperature T_i and electron temperature T_e ,

$$e\Phi_1 = \frac{m_i \omega_0^2}{2(1 + T_i/T_e)} (R^2 - \langle R^2 \rangle).$$
 (23)

Attention, here the bracket $\langle \cdots \rangle$ stands for the flux surface average.

$$\langle R^2 \rangle = \frac{1}{2\pi} \int_{-\pi}^{\pi} R^2(r,\theta) d\theta \tag{24}$$

Thus,

$$\partial_{\theta}(R^2 - \langle R^2 \rangle) = 2R\partial_{\theta}R - \frac{R^2}{2\pi} \tag{25}$$

3 Changes in weight equation

Let $f = f_0 + \delta f$, the perturbed part of distribution function

$$\delta f = -q(\phi - \mathbf{U} \cdot \mathbf{A}) \frac{f_0}{T} + h \tag{26}$$

Here, h is the non-adiabatic part of δf .

Write $h = h + h_1 + h_2 \cdots$

$$h_{2} = \delta f + \frac{q}{T} f_{0} [(\phi - \mathbf{U} \cdot \mathbf{A}) - \langle (\phi - \mathbf{U} \cdot \mathbf{A}) \rangle + \langle \mathbf{v}' \cdot \mathbf{A} \rangle]$$

$$\frac{\partial h_{2}}{\partial t} + \langle \dot{\mathbf{R}} \rangle \cdot \nabla h_{2} + \langle \dot{\varepsilon}^{u} \rangle \frac{\partial h_{1}}{\partial \varepsilon^{u}} - \langle \dot{\varepsilon}^{u} \rangle \frac{\partial}{\partial \varepsilon^{u}} \langle \frac{q}{T} f_{0} \mathbf{v}' \cdot \mathbf{A} \rangle$$

$$= -\left\langle \frac{d\mathbf{R}}{dt} \right|_{1} \right\rangle \cdot \frac{\partial f_{0}}{\partial \mathbf{R}}$$

$$- q \mathbf{v}_{g} \cdot \nabla \langle \Psi \rangle \frac{f_{0}}{T}$$

$$+ q [\mathbf{U}(\mathbf{R}) \cdot \nabla \langle \Psi \rangle - \langle \mathbf{U} \cdot \nabla \Psi \rangle] \frac{f_{0}}{T}$$

$$- \frac{q}{\Omega} \left\langle (\nabla \Psi \times \mathbf{b}) \cdot \nabla \psi_{p} \, \omega'_{0} R \left(\frac{B_{t}}{B_{0}} v'_{\parallel} + U \right) \right\rangle \frac{f_{0}}{T}$$

$$(28)$$

There are two terms to be added in the weight equation. For electrostatic model, $\Psi = \phi$.

The first term,

$$q[\mathbf{U}(\mathbf{R}) \cdot \nabla \langle \phi \rangle - \langle \mathbf{U} \cdot \nabla \phi \rangle] \frac{f_0}{T}$$
 (29)

All right, let's proceed a further step. Write

 $+S_1+S_2+S_3$

$$\mathbf{U}(\mathbf{x}) = \mathbf{U}(\mathbf{R}) + \boldsymbol{\rho} \cdot \nabla \mathbf{U},\tag{30}$$

then

$$\mathbf{U}(\mathbf{R}) \cdot \nabla \langle \phi \rangle - \langle \mathbf{U} \cdot \nabla \phi \rangle = -\langle \boldsymbol{\rho} \cdot \nabla \mathbf{U} \cdot \nabla \phi \rangle. \tag{31}$$

Remember,

$$\hat{\zeta} \cdot \nabla \hat{R} = \frac{1}{R} \hat{\zeta}$$
 and $\hat{\zeta} \cdot \nabla \hat{\zeta} = -\frac{1}{R} \hat{R}$.

These two terms results from the reconverting from the Cartesian coordinate to the cylindrical coordinate in deriving the material derivative, see Eq. 7.106 in [2].

$$\rho = \rho(\mathbf{e_1}\sin\gamma + \mathbf{e_2}\cos\gamma),$$

where $\rho = v'_{\perp}/\Omega = \sqrt{2\mu B/m}/(qB/m)$, $\mathbf{e_1} = \nabla r/|\nabla r|$, $\mathbf{e_2} = \mathbf{b} \times \mathbf{e_1}$ and γ is the gyro angle.

Let

$$\mathbf{e_1} = e_{1R}(r,\theta)\hat{R} + e_{1Z}(r,\theta)\hat{Z}$$

$$\mathbf{e_2} = e_{2R}(r,\theta)\hat{R} + e_{2Z}(r,\theta)\hat{Z} + e_{2\zeta}(r,\theta)\hat{\zeta},$$

then we have

$$\boldsymbol{\rho} = \rho \left((e_{1R} \sin \gamma + e_{2R} \cos \gamma) \hat{R} + (e_{1Z} \sin \gamma + e_{2Z} \cos \gamma) \hat{Z} + (e_{2\zeta} \cos \gamma) \hat{\zeta} \right)$$

$$\rho \cdot \nabla \mathbf{U} = \rho \cdot \nabla (U\hat{\zeta})$$

$$= \rho \cdot \nabla U\hat{\zeta} + U\rho \cdot \nabla \hat{\zeta}$$

$$= \rho \cdot \left(\frac{U}{R}\hat{R} - \omega'R\frac{\partial r}{\partial R}\hat{R} - \omega'R\frac{\partial r}{\partial Z}\hat{Z}\right)\hat{\zeta} - \frac{U\rho_{\zeta}}{R}\hat{R}$$

$$= \left(\frac{U\rho_{R}}{R} - \omega'R\frac{\partial r}{\partial R}\rho_{R} - \omega'R\frac{\partial r}{\partial Z}\rho_{Z}\right)\hat{\zeta} - \frac{U\rho_{\zeta}}{R}\hat{R}$$
(32)

$$\left(\frac{U\rho_R}{R} - \omega' R \frac{\partial r}{\partial R} \rho_R - \omega' R \frac{\partial r}{\partial Z} \rho_Z\right) \hat{\zeta} \cdot \nabla \phi$$

$$= \left(\frac{U\rho_R}{R} - \omega' R \frac{\partial r}{\partial R} \rho_R - \omega' R \frac{\partial r}{\partial Z} \rho_Z\right) \hat{\zeta} \cdot \frac{\partial \phi}{\partial y} \nabla y$$

$$= \left(-\frac{U\rho_R}{R} + \omega' R \frac{\partial r}{\partial R} \rho_R + \omega' R \frac{\partial r}{\partial Z} \rho_Z\right) \frac{r_0}{q_0 R} \frac{\partial \phi}{\partial y}$$
(33)

$$-\frac{U\rho_{\zeta}}{R}\hat{R}\cdot\nabla\phi = -\frac{U\rho_{\zeta}}{R}\hat{R}\cdot\left(\frac{\partial\phi}{\partial x}\nabla x + \frac{\partial\phi}{\partial y}\nabla y + \frac{\partial\phi}{\partial z}\nabla z\right)$$

$$= -\frac{U\rho_{\zeta}}{R}\left(\frac{\partial\phi}{\partial x}\frac{\partial r}{\partial R} + \frac{\partial\phi}{\partial y}\left(\frac{\partial y}{\partial r}\frac{\partial r}{\partial R} + \frac{r_{0}}{q_{0}}\hat{q}\frac{\partial\theta}{\partial R}\right) + \frac{\partial\phi}{\partial z}q_{0}R_{0}\frac{\partial\theta}{\partial R}\right)$$
(34)

$$-\langle \boldsymbol{\rho} \cdot \nabla \mathbf{U} \cdot \nabla \phi \rangle = \left(\frac{U}{R} \left\langle \rho_R \frac{\partial \phi}{\partial y} \right\rangle - \omega' R \frac{\partial r}{\partial R} \left\langle \rho_R \frac{\partial \phi}{\partial y} \right\rangle - \omega' R \frac{\partial r}{\partial Z} \left\langle \rho_Z \frac{\partial \phi}{\partial y} \right\rangle \right) \frac{r_0}{q_0 R} + \frac{U}{R} \left(\left\langle \rho_\zeta \frac{\partial \phi}{\partial x} \right\rangle \frac{\partial r}{\partial R} + \left\langle \rho_\zeta \frac{\partial \phi}{\partial y} \right\rangle \left(\frac{\partial y}{\partial r} \frac{\partial r}{\partial R} + \frac{r_0}{q_0} \hat{q} \frac{\partial \theta}{\partial R} \right) + \left\langle \rho_\zeta \frac{\partial \phi}{\partial z} \right\rangle q_0 R_0 \frac{\partial \theta}{\partial R} \right)$$

$$(35)$$

$$\begin{split} & \left[\left(\omega' R \frac{\partial r}{\partial R} - \frac{U}{R} \right) \left\langle \rho_R \frac{\partial \phi}{\partial y} \right\rangle + \omega' R \frac{\partial r}{\partial Z} \left\langle \rho_Z \frac{\partial \phi}{\partial y} \right\rangle \right] \hat{\zeta} \cdot \nabla y \\ & + \frac{U}{R} \left(\left\langle \rho_\zeta \frac{\partial \phi}{\partial x} \right\rangle \frac{\partial r}{\partial R} + \left\langle \rho_\zeta \frac{\partial \phi}{\partial y} \right\rangle \hat{R} \cdot \nabla y + \left\langle \rho_\zeta \frac{\partial \phi}{\partial z} \right\rangle \hat{R} \cdot \nabla z \right) \end{split}$$

$$\begin{split} \rho_R &= \rho(\mathrm{e_{1R}sin}\gamma + \mathrm{e_{2R}cos}\gamma) \\ \rho_Z &= \rho(\mathrm{e_{1Z}sin}\gamma + \mathrm{e_{2Z}cos}\gamma) \\ \rho_\zeta &= \rho\mathrm{e_{2\zeta}cos}\gamma \\ \mathrm{e_{1R}} &= \frac{\partial r}{\partial R} \bigg/ |\nabla r| = \mathrm{srbr/gr} \\ \mathrm{e_{1Z}} &= \frac{\partial r}{\partial Z} \bigg/ |\nabla r| = \mathrm{srbz/gr} \\ \mathrm{e_{2Z}} &= -\frac{f}{RB}\mathrm{e_{1Z}} \\ \mathrm{e_{2Z}} &= \frac{f}{RB}\mathrm{e_{1R}} \end{split}$$

$$e_{2\zeta} = \frac{\psi_p'}{RB} \left[-e_{1R} \frac{\partial r}{\partial R} - e_{1Z} \frac{\partial r}{\partial Z} \right]$$

The gyro average of ρ_R , ρ_Z and ρ_{ζ} could be obtained by the 4-point averaging method. The 4 points are at $\gamma = \pi/2, 3\pi/2, 0$ and π , respectively.

The second term,

$$-\frac{q}{\Omega} \left\langle (\nabla \phi \times \mathbf{b}) \cdot \nabla \psi_p \ \omega_0' R \left(\frac{B_t}{B_0} v_{\parallel}' + U \right) \right\rangle \frac{f_0}{T}$$

$$= -\frac{q}{\Omega} \left\langle (\nabla \phi \times \mathbf{b}) \cdot \nabla \psi_p \right\rangle \omega_0' R \left(\frac{B_t}{B_0} v_{\parallel}' + U \right) \frac{f_0}{T}$$
(36)

Considering

$$\mathbf{B} = \nabla \psi \times \nabla (q\theta_f - \zeta)$$

$$= \frac{q_0}{r_0} \frac{d\psi}{dx} \nabla x \times \nabla y$$

$$= C(x) \nabla x \times \nabla y$$
(37)

then

$$\mathbf{b} = \frac{\nabla x \times \nabla y}{|\nabla x \times \nabla y|}.\tag{38}$$

So we have

$$\nabla \phi \times \mathbf{b} \cdot \nabla \psi_{p} = \nabla \psi_{p} \times \nabla \phi \cdot \mathbf{b}$$

$$= \psi_{p}' \nabla x \times \nabla \phi \cdot \frac{\nabla x \times \nabla y}{|\nabla x \times \nabla y|}$$

$$= \frac{\psi_{p}'}{|\nabla x \times \nabla y|} \left(\frac{\partial \phi}{\partial y} \nabla x \times \nabla y + \frac{\partial \phi}{\partial z} \nabla x \times \nabla z \right) \cdot \nabla x \times \nabla y$$

$$= \psi_{p}' |\nabla x \times \nabla y| \frac{\partial \phi}{\partial y} + \frac{\psi_{p}'}{|\nabla x \times \nabla y|} \frac{\partial \phi}{\partial z} (\nabla x \times \nabla z) \cdot (\nabla x \times \nabla y)$$
(39)

$$(\nabla x \times \nabla z) \cdot (\nabla x \times \nabla y) = (\nabla x \times \nabla y) \times \nabla x \cdot \nabla z$$

$$= (|\nabla x|^2 \nabla y - |\nabla x \cdot \nabla y| \nabla x) \cdot \nabla z$$

$$= |\nabla x|^2 \nabla y \cdot \nabla z - |\nabla x \cdot \nabla y| \nabla x \cdot \nabla z$$

$$= |\nabla x|^2 \nabla y \cdot \nabla z - q_0 R_0 |\nabla x \cdot \nabla y| |\nabla r \cdot \nabla \theta|$$

$$(40)$$

$$\nabla y \cdot \nabla z = \left(\frac{\partial y}{\partial r} \nabla r + \frac{r_0}{q_0} \hat{q} \nabla \theta - \frac{r_0}{q_0} \nabla \zeta\right) \cdot q_0 R_0 \nabla \theta$$

$$= q_0 R_0 \frac{\partial y}{\partial r} |\nabla r \cdot \nabla \theta| + r_0 R_0 \hat{q} |\nabla \theta|^2$$
(41)

According to Eq. 39 - 41, Eq. 36 can be coded using existing variables. The blue parts above are small ordering terms that are NOT implemented for now.

4 Verification of the model

Above are all the changes for adiabatic electron model. Let's start to test the code. We'll start with the well-known Cyclone Base Case (CBC), those parameters could be found in Ref. [3].

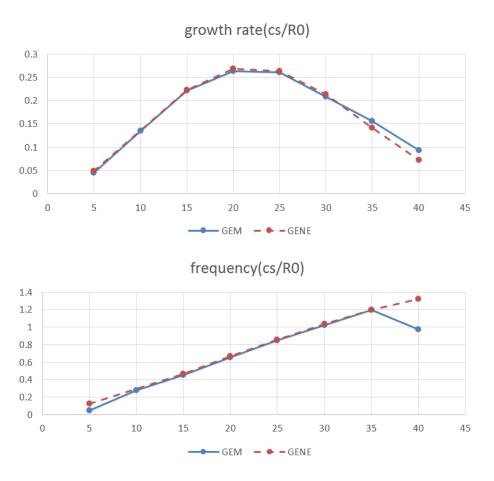


Figure 1: hi

First of all, results of ion temperature gradient (ITG) mode with adiabatic electron response are compared as a baseline case. As illustrated in figure 1, results obtained by the two codes (GENE and GEM) show a good consistency and conformity for both ITG growth rate and frequency, from a scanning over toroidal mode number over $n_0 \in [5,40]$. The GENE results correspond to table III and figure 3 in Ref. [3].

Appendix

We may need the following operator to simplify the coding process.

$$\hat{R} \cdot \nabla y = \frac{\partial y}{\partial r} \frac{\partial r}{\partial R} + \frac{r_0}{q_0} \hat{q} \frac{\partial \theta}{\partial R}$$

$$\hat{Z} \cdot \nabla y = \frac{\partial y}{\partial r} \frac{\partial r}{\partial Z} + \frac{r_0}{q_0} \hat{q} \frac{\partial \theta}{\partial Z}$$

$$\hat{R} \cdot \nabla z = q_0 R_0 \frac{\partial \theta}{\partial R}$$

$$\hat{Z} \cdot \nabla z = q_0 R_0 \frac{\partial \theta}{\partial Z}$$

$$\hat{\zeta} \cdot \nabla y = -\frac{r_0}{q_0 R}$$

New variables declared in GEM: omg(nr)— ω , angular frequency of toroidal flow domg(nr)— $d\omega/dr$ ut(nr,ntheta)—U, toroidal flow phi1(nr,ntheta)— Φ_1 bdgut,bdgbfld,bdgphi1::(nr,ntheta)— $\mathbf{b} \cdot \nabla \mathbf{U}, \ \mathbf{b} \cdot \nabla \mathbf{B}, \ \mathbf{b} \cdot \nabla \Phi_1$ hrdgy(nr,ntheta)— $\hat{R} \cdot \nabla y$ hzdgy(nr,ntheta)— $\hat{R} \cdot \nabla z$ hzdgz(nr,ntheta)— $\hat{R} \cdot \nabla z$ hzdgz(nr,ntheta)— $\hat{Z} \cdot \nabla z$ hztdgy(nr,ntheta)— $\hat{Z} \cdot \nabla y$ radius2(nr,ntheta)— $\hat{Z} \cdot \nabla y$ radius2(nr,ntheta)— R^2 rhozeyp— $\langle \rho_R \frac{\partial \phi}{\partial y} \rangle$ rhozeyp— $\langle \rho_R \frac{\partial \phi}{\partial x} \rangle$ rhoztexp— $\langle \rho_\zeta \frac{\partial \phi}{\partial x} \rangle$ rhoztezp— $\langle \rho_\zeta \frac{\partial \phi}{\partial x} \rangle$

References

- [1] H. Sugama and W. Horton. Nonlinear electromagnetic gyrokinetic equation for plasmas with large mean flows. *Physics of Plasmas*, 5(7):2560–2573, 1998.
- [2] Bastian E. Rapp. Chapter 7 vector calculus. In Bastian E. Rapp, editor, *Microfluidics: Modelling, Mechanics and Mathematics*, Micro and Nano Technologies, pages 137 188. Elsevier, Oxford, 2017.
- [3] T. Görler, N. Tronko, W. A. Hornsby, A. Bottino, R. Kleiber, C. Norscini, V. Grandgirard, F. Jenko, and E. Sonnendr ü cker. Intercode comparison of gyrokinetic global electromagnetic modes. *Physics of Plasmas*, 23(7):072503, 2016.