



SNS

SCE11 Integration Guide – REST



Table of Content

1. Purpose	4
2. REST API Request Types	4
2.1 POST	4
2.2 GET	4
2.3 DELETE.....	4
3. Overview of REST API.....	4
4. REST API using SoapUI	6
5. REST API swagger Documentation	Error! Bookmark not defined.

Chapter 1

SCE11 Integration Guide - REST

1. Purpose

This document explains how to send REST API requests in SCE11 using SoapUI.

2. REST API Request Types

2.1 POST

POST is the request used to update or insert a new entry.

2.2 GET

GET is the request used to obtain an entry or list of entries.

2.3 DELETE

DELETE is the request used to delete an entry.

3. Overview of REST API

Currently, SCE11 supports both Web Services: SOAP and REST API, where the latter is still under development and will eventually replace the SOAP API. For the REST, we will be specifying the Method, Endpoint, Resource, Parameters (if any), Headers and Body. It is important to note that the body of the REST API will be in JSON format (array based structure). The **Store** actions that were used in SOAP XML structure is now performed through the **POST** requests in REST, **List** actions through **GET** requests and **Delete** actions through **DELETE** requests.

To make things clearer, the following is a translation of the ShipmentOrderAPI structure from SOAP XML to REST POST request:

SOAP API Link:

http://[Server_Name]:8080/wmweb service_ejb/MobilityBean?wsdl

SOAP API XML Message Structure:

```
<Message>
  <Head>
    <MessageID></MessageID>
    <MessageType>ShipmentOrderAPI</MessageType>
    <Action>store</Action>
    <Sender>
      <User>sceadmin</User>
      <Password>sceadmin</Password>
      <SystemID>MIFRD_vmwhsel</SystemID>
      <TenantID>INFOR</TenantID>
    </Sender>
    <Recipient>
      <SystemID>MIFRD_vmwhsel</SystemID>
    </Recipient>
  </Head>
  <Body>
    <ShipmentOrder>
      <ShipmentOrderHeader>
        <ExternOrderKey>TESTREST01</ExternOrderKey>
        <StorerKey>SNS</StorerKey>
        <Status>04</Status>
        <ShipmentOrderDetail>
          <ExternOrderKey>TESTREST01</ExternOrderKey>
          <ExternLineNo>LINE001</ExternLineNo>
          <StorerKey>SNS</StorerKey>
          <Sku>111222333</Sku>
          <UOM>EA</UOM>
          <OpenQty>10</OpenQty>
        </ShipmentOrderDetail>
      </ShipmentOrderHeader>
    </ShipmentOrder>
  </Body>
</Message>
```

REST API Link:

http://[Server_Name]:8080/wmweb service_rest/INFOR_[Database_Name]_wmwhse1/shipments

Raw POST call:

```
POST
http://sce11:8080/wmweb service_rest/INFOR_MIPRD_wmwhse1/shipments/ HTTP/1.1
Accept-Encoding: gzip,deflate
Username: sceadmin
Password: sceadmin
Tenant: INFOR
Content-Type: application/json
{
  "externorderkey": "TESTREST01",
  "status": "04",
  "storerkey": "SNS",
  "orderdetails": [ {
    "externlineno": "LINE001",
    "externorderkey": "TESTREST01",
    "openqty": 10,
    "sku": "111222333",
    "storerkey": "SNS",
    "uom": "EA",
    "uomopenqty": 10
  } ]
}
```

The following is the generic structure of the link to be called:
server:port/wmweb service_rest/{warehouse}/{type}

Examples:

To create a shipment order
/wmweb service_rest/INFOR_[Database_Name]_wmwhse1/shipments

To allocate a shipment order
/wmweb service_rest/INFOR_[Database_Name]_wmwhse1/shipments/0000000101/all
ocate

As we can see the Recipient Schema is now specified as part of the URL, INFOR_[Database_Name]_wmwhse1, whereas the Username and Password are defined as part of the Header field of the REST message. Another required fields to be specified is the Tenant, which can be defaulted to INFOR.


The three header parameters Tenant, Username and Password are used for authentication and must be set with every request being sent.

To know further about the different types of POST, GET and DELETE requests supported by Infor SCE11, please run the following [http://\[Server_Name\]:8080/wmwebsevice_rest/swagger.json](http://[Server_Name]:8080/wmwebsevice_rest/swagger.json), obtain the output and paste it in the swagger editor of the following link <http://editor.swagger.io/#/> to get the Header, Body & Paths that must be set for the requests to work.

4. REST API using SoapUI

1. POST request for Shipment Order creation:

[http://\[Server_Name\]:8080/wmwebsevice_rest/INFOR_\[Database_Name\]_wmwhse1/shipments](http://[Server_Name]:8080/wmwebsevice_rest/INFOR_[Database_Name]_wmwhse1/shipments)

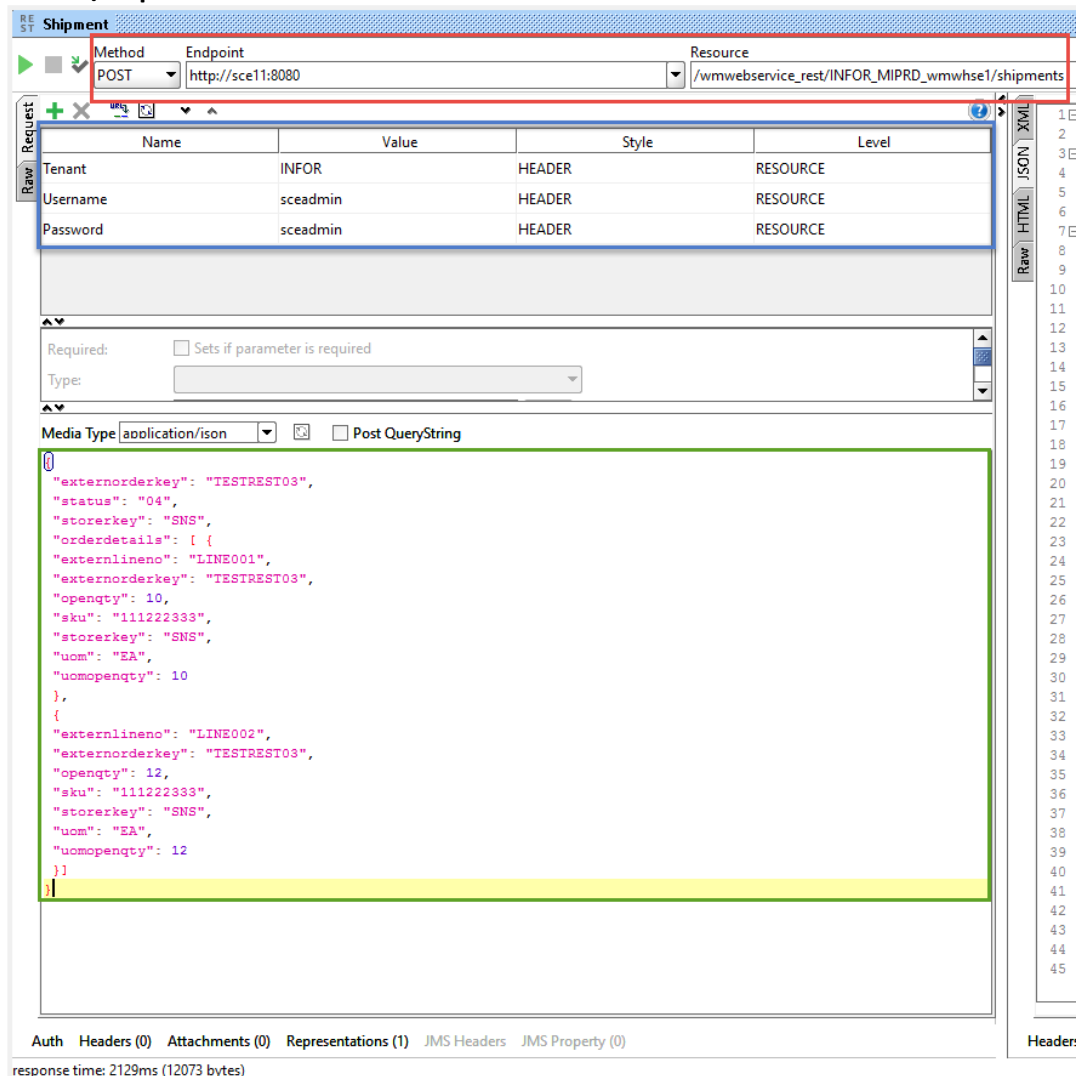

The part that is bordered in red represents the link to be called which includes the schema and the action to be performed i.e. shipments, shipments/{orderkey}/allocate advancedshipmentnotice ...

The part that is bordered in **blue** represents the Header part of the POST request.

The part bordered in **green** represents the body, the information or entry, to be inserted or updated or the action to be performed.

The following is the response that is returned which contains information about the created Shipment Order:

```

1 {
2   "hrefs": [
3     {
4       "ref": "this",
5       "url": "http://sce11:8080/wmweb service_rest/INFOR_MIPRD_wmwhse1/shipments/0000000101"
6     },
7     {
8       "ref": "storekey",
9       "url": "http://sce11:8080/wmweb service_rest/INFOR_MIPRD_wmwhse1/storers/SNS/types/1"
10    }
11  ],
12  "orderkey": "0000000101",
13  "actualarrivaldate": null,
14  "actualdelvdate": null,
15  "actualshipdate": null,
16  "adddate": "2017-12-08T14:33:27.000+0000",
17  "addwho": "wmwhse1",
18  "allocatedonerp": "0",
19  "allowoverpick": 0,
20  "appointmentkey": null,
21  "apportion": "0",
22  "apptstatus": null,
23  "autodockassignedhow": null,
24  "autodockassignedset": null,
25  "autodockassignedstep": 0,
26  "autodockassigntime": null,
27  "autodoorassigned": null,
28  "autopackassigned": null,
29  "autostageassigned": null,
30  "baddress1": null,
31  "baddress2": null,
32  "baddress3": null,
33  "baddress4": null,
34  "baddress5": null,
35  "baddress6": null,
36  "bcity": null,
37  "bcompany": null,
38  "bcontact1": null,
39  "bcontact2": null,
40  "bcountry": null,
41  "bfax1": null,
42  "bfax2": null,
43  "bisocntrycode": null,
44  "bphone1": null,
45  "bphone2": null,

```

2. POST request for shipment order allocation (does not contain any body)

http://[Server_Name]:8080/wmweb service_rest/INFOR_[Database_Name]_wmwhse1/shipments/0000000101/allocate

Method: POST Endpoint: http://sce11:8080 Resource: /wmwebservice_rest/INFOR_MIPRD_wmwhse1/shipments/000000101/allocate Parameters:

Name	Value	Style	Level
Tenant	INFOR	HEADER	RESOURCE
Username	sceadmin	HEADER	RESOURCE
Password	sceadmin	HEADER	RESOURCE

Required: ☐ Sets if parameter is required
 Type:
 Options: Add
 Media Type: application/json ☒ ☐ Post QueryString

1 Allocation result status: 14 - Part Allocated

3. GET request for shipment

http://[Server_Name]:8080/wmwebservice_rest/INFOR_[Database_Name]_wmwhse1/shipments/000000101

Method: GET Endpoint: http://sce11:8080 Resource: /wmwebservice_rest/INFOR_MIPRD_wmwhse1/shipments/000000101 Parameters:

Name	Value	Style	Level
Tenant	INFOR	HEADER	RESOURCE
Username	sceadmin	HEADER	RESOURCE
Password	sceadmin	HEADER	RESOURCE

1 {
 2 "href": {
 3 "ref": "this",
 4 "url": "http://sce11:8080/wmwebservice_rest/INFOR_MIPRD_wmwhse1/shipments/000000101"
 5 },
 6 {
 7 "ref": "storerkey",
 8 "url": "http://sce11:8080/wmwebservice_rest/INFOR_MIPRD_wmwhse1/stores/SNS/types/1"
 9 },
 10 }
 11 },
 12 "orderid": "0000000101",
 13 "actualarrivaldate": null,
 14 "actualdelvdate": null,
 15 "actualshipdate": null,
 16 "adddate": "2017-12-08T14:33:27.000+0000",
 17 "addwh": "wmwhse1",
 18 "allocatedonarp": "0",
 19 "allowoverpick": 0,
 20 "appointmentkey": null,
 21 "apportion": "0",
 22 "appstatus": null,
 23 "autodockassignednow": null,
 24 "autodockassignedest": null,
 25 "autodockassignedetp": 0,
 26 "autodockassignedtime": null,
 27 "autodockassigned": null,
 28 "autopackassigned": null,
 29 "autostageassigned": null,
 30 "baddress1": null,
 31 "baddress2": null,
 32 "baddress3": null,
 33 "baddress4": null,
 34 "baddress5": null

5. REST API Swagger documentation

GET	/enterprise/carrier/{name}	Find a carrier by name
GET	/enterprise/consignee/{name}	Find a ship to customer by name
GET	/enterprise/facilities	Return a list of facilities authorized for this user
GET	/enterprise/facilityname/{name}	Find a facility record by name
POST	/eventlog	post an event
POST	/inventorybalance/showinventorycount	Inventory count across all schemas
POST	/warehouse/adjustments	Create or replace an existing adjustment.
GET	/warehouse/adjustments/{adjustmentkey}	Find a single adjustment by key
PUT	/warehouse/adjustments/{adjustmentkey}	Create or replace an existing adjustment.
POST	/warehouse/adjustments/{adjustmentkey}/lines	Create or replace an existing adjustment line.
GET	/warehouse/adjustments/{adjustmentkey}/lines/{adjustmentlinenumber}	Find a single adjustment detail by key and line
PUT	/warehouse/adjustments/{adjustmentkey}/lines/{adjustmentlinenumber}	Create or replace an existing adjustment.
POST	/warehouse/adjustments/{receiptkey}/productiondirectedadjustment	Allow adjustment of inventory directed by the production process
POST	/warehouse/advancedshipnotice	Create or replace an existing receipt.
POST	/warehouse/advancedshipnotice/rfidreceivebycaseid	Receive by case ID

POST	<code>/warehouse/advancedshipnotice/rfidreceivebypalletid</code>	Receive by pallet ID
POST	<code>/warehouse/advancedshipnotice/rfidreceiving/objecttype</code>	Receive by case or pallet
POST	<code>/warehouse/advancedshipnotice/storeserialnumbers</code>	Add serial numbers to receipt
GET	<code>/warehouse/advancedshipnotice/receiptkey</code>	Find a single advanced ship notice (receipt) by key
DELETE	<code>/warehouse/advancedshipnotice/receiptkey</code>	Delete single receipt by key
POST	<code>/warehouse/advancedshipnotice/receiptkey/findevents</code>	Find receipt events for a single receipt by key
POST	<code>/warehouse/advancedshipnotice/receiptkey/lines</code>	Create or replace an existing order line.
POST	<code>/warehouse/altskus</code>	Create or replace an existing altsku.
GET	<code>/warehouse/altskus/storerkey/altsku</code>	Find a single alt sku by key
DELETE	<code>/warehouse/altskus/storerkey/altsku</code>	Delete single alt sku by key and type
POST	<code>/warehouse/appointment_services</code>	Create or replace an existing appointment service.
GET	<code>/warehouse/appointment_services/appointmentkey/serviceslotname</code>	Find a single appointment service by appointment key and service slot name
DELETE	<code>/warehouse/appointment_services/appointmentkey/serviceslotname</code>	Delete single appointment by appointment key and service slot name
POST	<code>/warehouse/appointments</code>	Create or replace an existing appointment.
POST	<code>/warehouse/appointments/validate</code>	Validate an appointment.

GET	<code>/warehouse/appointments/{appointmentkey}</code>	Find a single appointment by key
DELETE	<code>/warehouse/appointments/{appointmentkey}</code>	Delete single appointment by key
POST	<code>/warehouse/bodlist/inspectdeliverylist</code>	Get the inspect delivery details
POST	<code>/warehouse/bodlist/inventoryadjustmentlist</code>	Get the inventory adjustment details
POST	<code>/warehouse/bodlist/inventoryholdlist</code>	Get the inventory hold details
POST	<code>/warehouse/bodlist/receivedeliverylist</code>	Get the receive delivery details
POST	<code>/warehouse/bodlist/showadvanceshipnoticelist</code>	Get the advance ship notice details
POST	<code>/warehouse/bodlist/showshipmentorderlist</code>	Get the shipment order details
POST	<code>/warehouse/bodlist/showshowpicklist</code>	Get the pick list details
POST	<code>/warehouse/carriers</code>	Create or replace an existing carrier.
GET	<code>/warehouse/carriers/{storerkey}</code>	Find a single carrier by key
PUT	<code>/warehouse/carriers/{storerkey}</code>	Create or replace an existing carrier
DELETE	<code>/warehouse/carriers/{storerkey}</code>	Delete single carrier by key
POST	<code>/warehouse/codelists</code>	Create or replace an existing code list.
GET	<code>/warehouse/codelists/{listname}</code>	Find a single code list by name

PUT	<code>/warehouse/codelists/{listname}</code>	Create or replace an existing code list.
POST	<code>/warehouse/codelists/{listname}/codes</code>	Create or replace an existing code list code.
GET	<code>/warehouse/codelists/{listname}/codes/{code}</code>	Find a single code by list name and code
PUT	<code>/warehouse/codelists/{listname}/codes/{code}</code>	Create or replace an existing code list code.
POST	<code>/warehouse/customers</code>	Create or replace an existing customer.
GET	<code>/warehouse/customers/{storerkey}</code>	Find a single customer by key
PUT	<code>/warehouse/customers/{storerkey}</code>	Create or replace an existing customer
DELETE	<code>/warehouse/customers/{storerkey}</code>	Delete single customer by key
GET	<code>/warehouse/ejbreports/{rpt_id}</code>	Call to TransactionService for respective EJB report
POST	<code>/warehouse/erplots/geterplot</code>	Get the ERP lot for a given transaction
POST	<code>/warehouse/erplots/getstoragetype</code>	Get the storage type of a given lot
GET	<code>/warehouse/exports</code>	Gets a list of events ready for export using query parameters
POST	<code>/warehouse/exports</code>	Gets a list of events ready for export using a request DTO
PUT	<code>/warehouse/exports/{serialkey}</code>	Update the status of a record.
GET	<code>/warehouse/inventory/id/{id}</code>	Find a single id by key

POST	<code>/warehouse/inventory/id/{id}/hold</code>	hold inventory
GET	<code>/warehouse/inventory/id/{id}/putawaylocation</code>	Get a location to putaway an LPN(id)
POST	<code>/warehouse/inventory/id/{id}/releasehold</code>	release inventory hold
GET	<code>/warehouse/inventory/loc/{loc}</code>	Find a single item by key
POST	<code>/warehouse/inventory/location/{loc}/hold</code>	hold loc
POST	<code>/warehouse/inventory/location/{loc}/releasehold</code>	release inventory hold
GET	<code>/warehouse/inventory/lot/{lot}</code>	Find a single item by key
POST	<code>/warehouse/inventory/lot/{lot}/hold</code>	hold inventory
POST	<code>/warehouse/inventory/lot/{lot}/releasehold</code>	release inventory hold
POST	<code>/warehouse/inventory/{fromloc}/{fromid}/{toloc}/move</code>	moves inventory
GET	<code>/warehouse/inventory/{lot}/{loc}/{id}</code>	return a lotxlocid record
POST	<code>/warehouse/inventorybalance/generateinventorycount</code>	Adds InventoryCountPosted event for item
POST	<code>/warehouse/inventorybalance/showinventorybalancelist</code>	Get inventorybalance details
POST	<code>/warehouse/inventorybalance/showinventorycount</code>	Inventory count
POST	<code>/warehouse/items</code>	Create or replace an existing item.

GET	<code>/warehouse/items/{item}/{owner}</code> Find a single item by key
PUT	<code>/warehouse/items/{item}/{owner}</code> Create or replace an existing item.
DELETE	<code>/warehouse/items/{item}/{owner}</code> Find a single item by key
GET	<code>/warehouse/loads/loadhdr/{loadid}</code> Find a single load by key
GET	<code>/warehouse/loads/loadstops/{loadstopid}</code> Find a single stop
GET	<code>/warehouse/loads/orderdetails/{loadorderdetailid}</code> Find a single load order detail by key
POST	<code>/warehouse/loads/{loadid}/cancel</code> Cancels an existing load.
PUT	<code>/warehouse/loads/{loadid}</code> Create or replace an existing loadhdr.
POST	<code>/warehouse/lots/hold</code> put a lot on hold
POST	<code>/warehouse/lots/lotrequest</code> put lots on or off hold based on quantity
POST	<code>/warehouse/lots/releasehold</code> release a lot on hold
GET	<code>/warehouse/lots/{lot}</code> Find a single item by key
POST	<code>/warehouse/lots/{lot}</code> get hold reasons
POST	<code>/warehouse/lots/{lot}/{externallot}</code> update lot with external lot
POST	<code>/warehouse/lotxiddetails</code> Create or replace an existing lotxiddetail.

GET	<code>/warehouse/lotxiddetails/{lotxidkey}/{lotxidlinenumber}</code>	Find a single lotxiddetail by key
DELETE	<code>/warehouse/lotxiddetails/{sourcekey}/{sourcelinenumber}</code>	Delete lotxiddetails by sourcekey and sourcelinenumber
POST	<code>/warehouse/owners</code>	Create or replace an existing owner.
POST	<code>/warehouse/owners/listapportionrule</code>	List codes for apportion rules
POST	<code>/warehouse/owners/listcreateputawaytaskonrfReceipt</code>	List codes for creating Putaway Task During RF Receipt
GET	<code>/warehouse/owners/{storerkey}</code>	Find a single owner by key
PUT	<code>/warehouse/owners/{storerkey}</code>	Create or replace an existing owner
DELETE	<code>/warehouse/owners/{storerkey}</code>	Delete single owner by key
POST	<code>/warehouse/packs</code>	Create or replace an existing pack.
GET	<code>/warehouse/packs/{pack}</code>	Find a single pack by key
PUT	<code>/warehouse/packs/{pack}</code>	Create or replace an existing pack.
DELETE	<code>/warehouse/packs/{pack}</code>	Delete a single pack by key
POST	<code>/warehouse/pickdetails/{caseid}/pickbycaseid</code>	picks a pickdetail by caseid
POST	<code>/warehouse/pickdetails/{caseid}/shipbycaseid</code>	ships a pickdetail by caseid
POST	<code>/warehouse/pickdetails/{dropid}/shipbydropid</code>	ships a pickdetail by dropid

GET	<code>/warehouse/pickdetails/{pickdetailkey}</code>	Find a single pickdetail by key
POST	<code>/warehouse/purchaseorders</code>	Create or replace an existing po.
POST	<code>/warehouse/purchaseorders/{poKey}/cancel</code>	Cancels an existing po.
POST	<code>/warehouse/purchaseorders/{poKey}/close</code>	Closes an existing po.
GET	<code>/warehouse/purchaseorders/{pokey}</code>	Find a single po by key
PUT	<code>/warehouse/purchaseorders/{pokey}</code>	Create or replace an existing po.
POST	<code>/warehouse/purchaseorders/{pokey}/lines</code>	Create or replace an existing po line.
GET	<code>/warehouse/purchaseorders/{pokey}/lines/{polinenum}</code>	Find a single po detail by key and line
PUT	<code>/warehouse/purchaseorders/{pokey}/lines/{polinenum}</code>	Create or replace an existing po.
POST	<code>/warehouse/putawaystrategies</code>	Create or replace an existing putaway strategy.
GET	<code>/warehouse/putawaystrategies/{putawaystrategykey}</code>	Find a single putaway strategy by key
DELETE	<code>/warehouse/putawaystrategies/{putawaystrategykey}</code>	Delete single putaway strategy by key
GET	<code>/warehouse/putawaystrategies/{putawaystrategykey}/details/{putawaystrategylinenum}</code>	Find a single putaway strategy detail line by key and line number
DELETE	<code>/warehouse/putawaystrategies/{putawaystrategykey}/details/{putawaystrategylinenum}</code>	Delete a single putaway strategy detail line by key and line number

POST	<code>/warehouse/putawaystrategies/{putawaystrategykey}/lines</code>	Create or replace an existing putaway strategy detail line
POST	<code>/warehouse/receipts</code>	Create or replace an existing receipt.
POST	<code>/warehouse/receipts/hostdirectedreceipt</code>	Allow receipt of inventory directed by the host
POST	<code>/warehouse/receipts/receiptreversal</code>	Execute Receipt Reversal on a single receipt by key
GET	<code>/warehouse/receipts/{receiptkey}</code>	Find a single receipt by key
DELETE	<code>/warehouse/receipts/{receiptkey}</code>	Delete single receipt by key
POST	<code>/warehouse/receipts/{receiptkey}/findevents</code>	Find receipt events for a single receipt by key
POST	<code>/warehouse/receipts/{receiptkey}/receiveall</code>	Execute Receipt All on a single receipt by key
GET	<code>/warehouse/reports/reportbyrequest/{request_id}</code>	Find a report request by ID
DELETE	<code>/warehouse/reports/reportbyrequest/{request_id}</code>	Delete a report request by ID
GET	<code>/warehouse/reports/{rpt_id}</code>	Find a single report by Id
GET	<code>/warehouse/reports/{rpt_id}/reportparams/{param_name}</code>	Find a single report parameter by Report ID and parameter name
POST	<code>/warehouse/sections</code>	Create or replace an existing section.
POST	<code>/warehouse/sections/search</code>	Find one or more sections by constraint
GET	<code>/warehouse/sections/{sectionkey}</code>	Find a single section by key

DELETE	<code>/warehouse/sections/{sectionkey}</code>	Delete an existing section.
POST	<code>/warehouse/securityusers</code>	Create or update a user.
GET	<code>/warehouse/securityusers/{userid}</code>	Find a single user by key
GET	<code>/warehouse/serialnumbers</code>	Find the serial number storage type for an owner and sku
GET	<code>/warehouse/serialnumbers/storageType</code>	Find the serial number storage type for an owner and sku
POST	<code>/warehouse/service_windows</code>	Create or replace an existing service window.
GET	<code>/warehouse/service_windows/{serviceslotname}</code>	Find a single service window by service slot name
DELETE	<code>/warehouse/service_windows/{serviceslotname}</code>	Delete single service window by service slot name
POST	<code>/warehouse/shipments</code>	Create or replace an existing order.
GET	<code>/warehouse/shipments/externorderkey/{externorderkey}</code>	Find a single order by external key
GET	<code>/warehouse/shipments/lines/status</code>	Retrieve overall line status for today
GET	<code>/warehouse/shipments/lines/status/{consignee}</code>	Retrieve line status for a specific consignee
POST	<code>/warehouse/shipments/postDelivery</code>	Update delivery information on a shipped order.
POST	<code>/warehouse/shipments/postShipping</code>	Update shipping information on a shipped order.
POST	<code>/warehouse/shipments/shipComponents</code>	Update shipping information on a shipped order.

GET	<code>/warehouse/shipments/{orderkey}</code> Find a single order by key
POST	<code>/warehouse/shipments/{orderkey}/allocate</code> Allocate an existing order.
POST	<code>/warehouse/shipments/{orderkey}/cancel</code> Cancel an existing order.
POST	<code>/warehouse/shipments/{orderkey}/hold</code> Put an existing order on hold.
POST	<code>/warehouse/shipments/{orderkey}/lines</code> Create or replace an existing order line.
GET	<code>/warehouse/shipments/{orderkey}/lines/{orderlinenumber}</code> Find a single order detail by key and line
POST	<code>/warehouse/shipments/{orderkey}/release</code> Release an existing order.
POST	<code>/warehouse/shipments/{orderkey}/ship</code> Ship an existing order.
POST	<code>/warehouse/shipments/{orderkey}/unallocate</code> Unallocate an existing order.
POST	<code>/warehouse/skuxlocs</code> Create or replace an existing skuxloc.
GET	<code>/warehouse/skuxlocs/{storerkey}/{sku}/{loc}</code> Find a single skuxloc by key
DELETE	<code>/warehouse/skuxlocs/{storerkey}/{sku}/{loc}</code> Delete single storer by key and type
POST	<code>/warehouse/sortationstation</code> Create or replace an existing sortationstation.
GET	<code>/warehouse/sortationstation/{sortationStationkey}</code> Find a single sortationStation by key
POST	<code>/warehouse/sortationstationdepartment</code> Create or replace an existing sortationstationdepartment.

PUT	<code>/warehouse/storers/{storerkey}</code>	Create or replace an existing storer (type defaulted to 1)
DELETE	<code>/warehouse/storers/{storerkey}</code>	Delete single storer by key (type 1)
GET	<code>/warehouse/storers/{storerkey}/{type}</code>	Find a single storer by key and type
PUT	<code>/warehouse/storers/{storerkey}/{type}</code>	Create or replace an existing storer.
DELETE	<code>/warehouse/storers/{storerkey}/{type}</code>	Delete single storer by key and type
POST	<code>/warehouse/storers/{storerkey}/{type}/generateStorerExport</code>	Generate Storer Export storer by key and type
POST	<code>/warehouse/substituteskus</code>	Create or replace an existing substitutesku.
GET	<code>/warehouse/substituteskus/{storerkey}/{sku}/substitutesku</code>	Find a single substitutesku by key
DELETE	<code>/warehouse/substituteskus/{storerkey}/{sku}/substitutesku</code>	Delete single storer by key and type
POST	<code>/warehouse/suppliers</code>	Create or replace an existing supplier.
GET	<code>/warehouse/suppliers/{storerkey}</code>	Find a single supplier by key
PUT	<code>/warehouse/suppliers/{storerkey}</code>	Create or replace an existing supplier
DELETE	<code>/warehouse/suppliers/{storerkey}</code>	Delete single supplier by key
GET	<code>/warehouse/tasks</code>	Find taskdetails that match the passed constraints
POST	<code>/warehouse/tasks</code>	Create or replace an existing taskdetail.

GET	<code>/warehouse/tasks/{taskdetailkey}</code>	Find a single task detail by key
DELETE	<code>/warehouse/tasks/{taskdetailkey}</code>	Delete single task by key
POST	<code>/warehouse/tasks/{taskdetailkey}/change</code>	Change priority and / or status for a single task detail by key
POST	<code>/warehouse/tasks/{taskdetailkey}/printlabel</code>	Print a label for a single task detail by key
POST	<code>/warehouse/tasks/{taskdetailkey}/reassign</code>	Reassign a single task detail by key to a new user
POST	<code>/warehouse/trailer_move_tasks</code>	Create or replace an existing Trailer Move Task.
GET	<code>/warehouse/trailer_move_tasks/{trailermovekey}</code>	Find a single trailer move task by key
DELETE	<code>/warehouse/trailer_move_tasks/{trailermovekey}</code>	Delete single trailer move task by key
POST	<code>/warehouse/trailers</code>	Create or replace an existing trailer.
GET	<code>/warehouse/trailers/{trailerkey}</code>	Find a single trailer by key
DELETE	<code>/warehouse/trailers/{trailerkey}</code>	Delete single trailer by key
POST	<code>/warehouse/trailerstatuses</code>	Create or replace an existing trailer status.
GET	<code>/warehouse/trailerstatuses/{trailerkey}/{trailerstatus}</code>	Find a single trailer status by key
POST	<code>/warehouse/transfers</code>	Create or replace an existing transfer.
GET	<code>/warehouse/transfers/{transferkey}</code>	Find a single transfer by key
POST	<code>/warehouse/transfers/{transferkey}/finalize</code>	Finalizes a transfer
POST	<code>/warehouse/translations</code>	Create or replace an User Data Translation.
DELETE	<code>/warehouse/translations/{serialkey}</code>	Delete single user data translation by key
GET	<code>/warehouse/translations/{tablename}/{columnname}/{locale}</code> <code>/joinkey1/joinkey2/joinkey3/joinkey4/joinkey5</code>	Find a single user data translation by key
GET	<code>/warehouse/yard/status</code>	Retrieve status for trailers in yard
GET	<code>/warehouse/yard/status/{carrier}</code>	Retrieve status for trailers in yard for a carrier
POST	<code>/warehouse/zonestds</code>	Create or replace an existing zone standard.