




shot on moto g

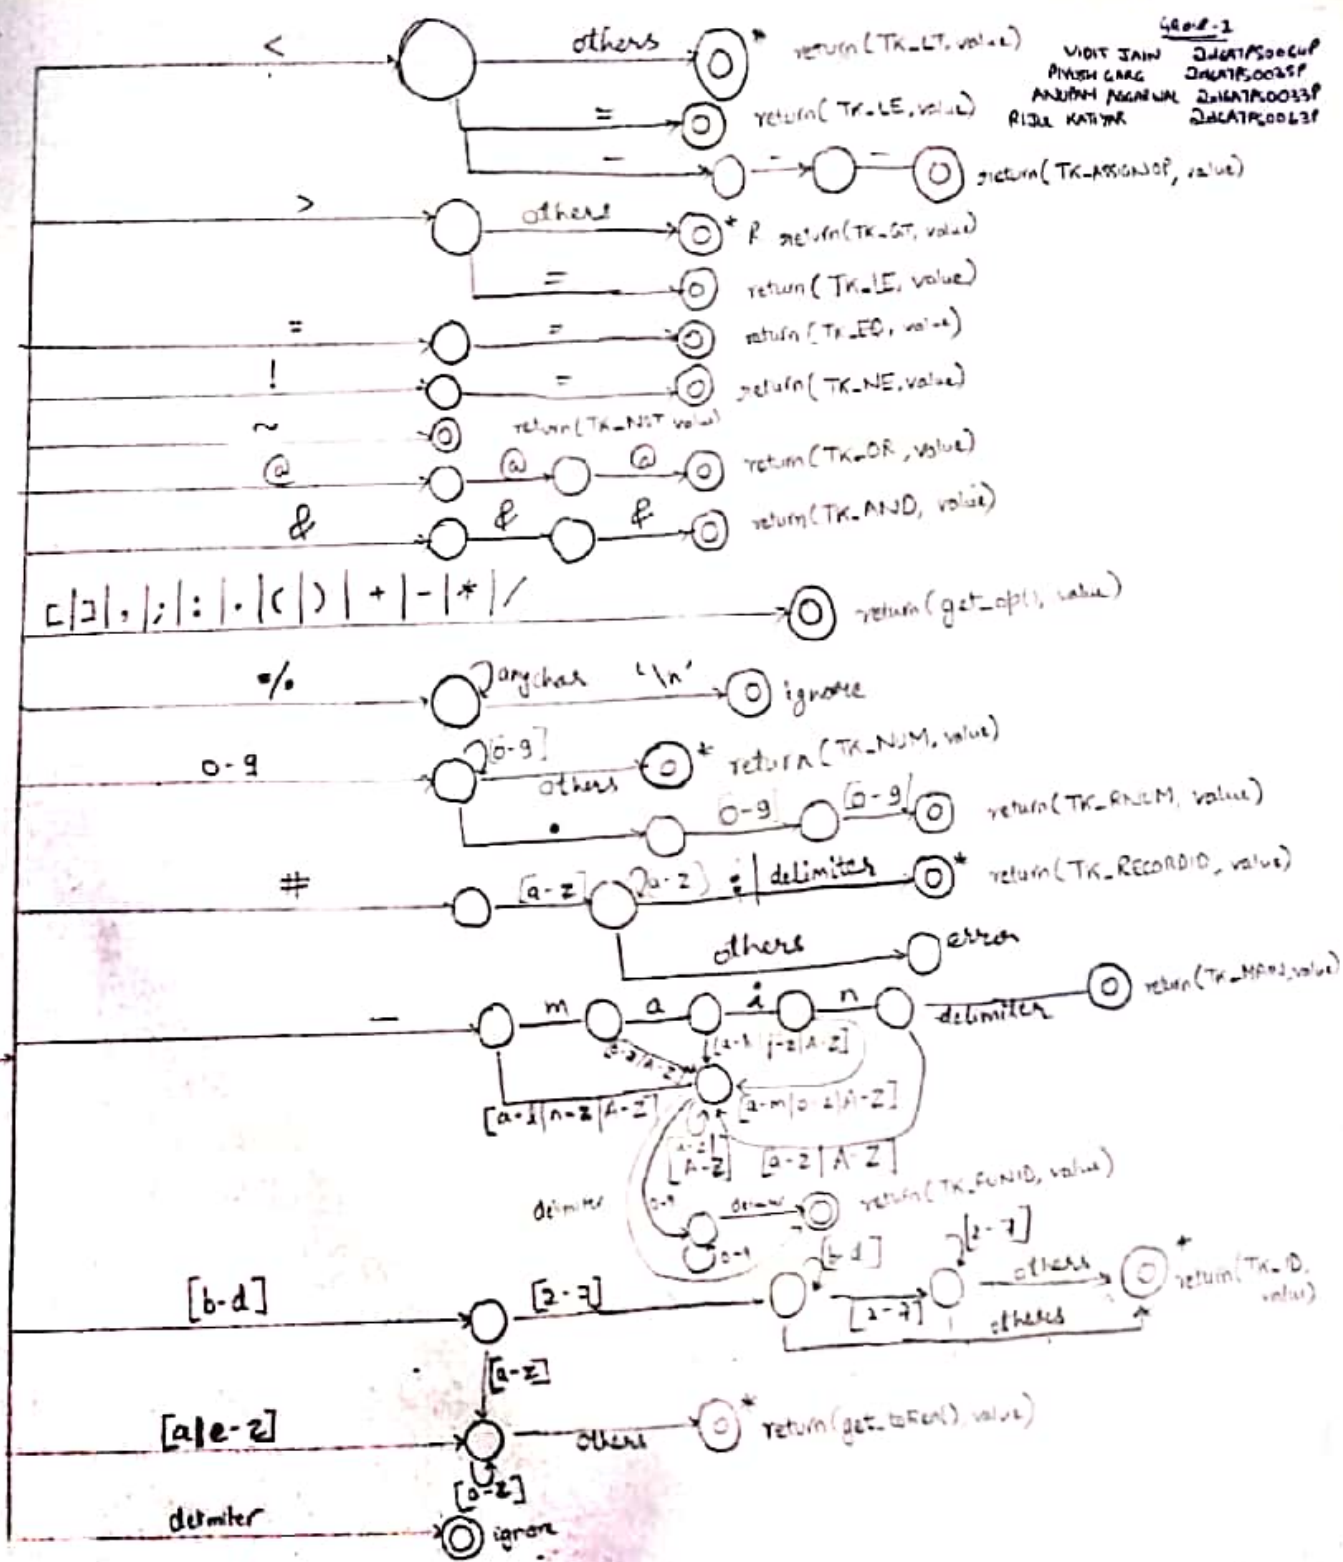

get-token() looks up in the symbol table and if a keyword is found, returns its corresponding token, else returns TK\_ERROR

get-op() returns the token corresponding to the input

[	TK_LSQ
]	TK_RSQ
,	TK_COMMA
;	TK_SEM
:	TK_COLON
.	TK_DOT
(	TK_LP
)	TK_RP
+	TK_PLUS
-	TK_MINUS
*	TK_MULT
/	TK_DIV