


Yarn Resource Allocations and optimizations


yarn properties

optimisations


revisting SQL questions

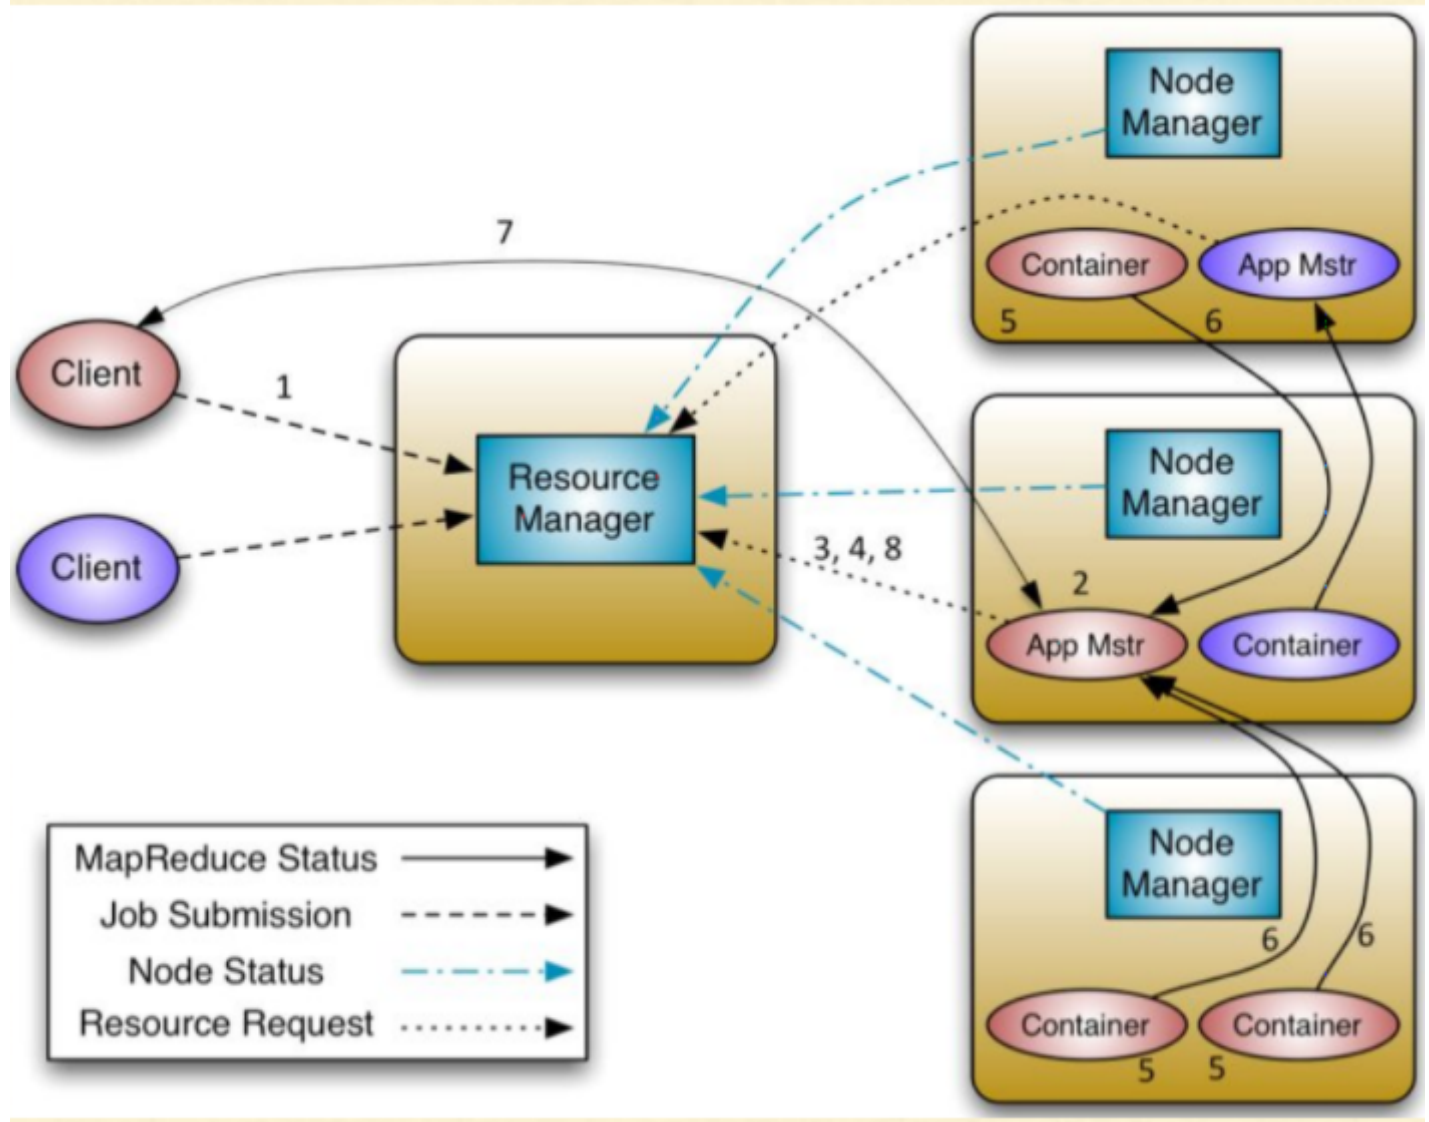

2. Fail-over if the Active RM fails
(fail-over can be done by auto/manual)

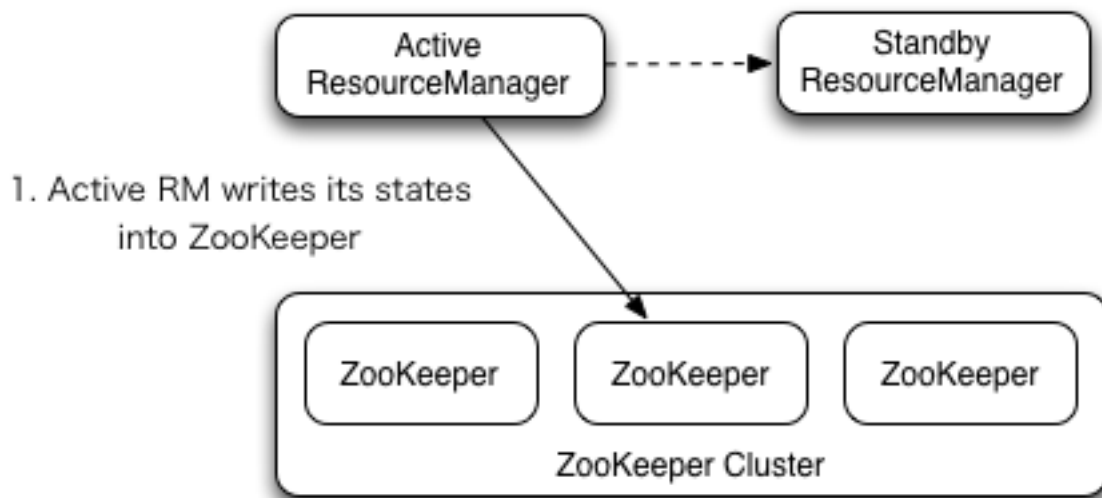



YARN

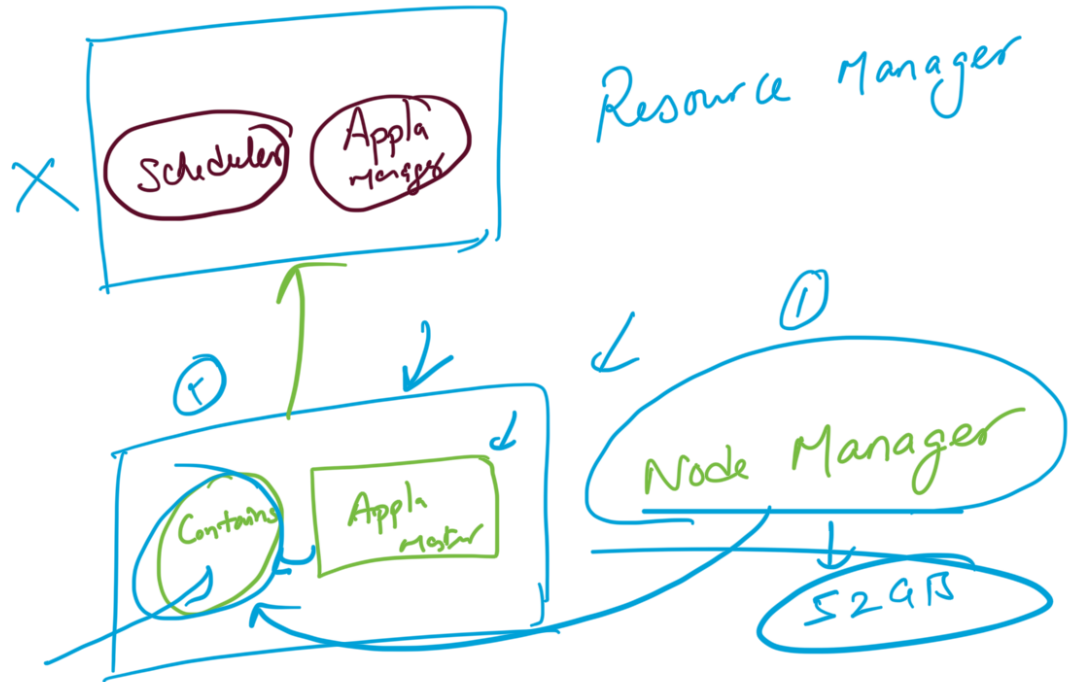


HDFS = hdfs-site.xml and
 MapReduce = map-red-site.xml
 Yarn = yarn-site.xml

Memory (RAM)

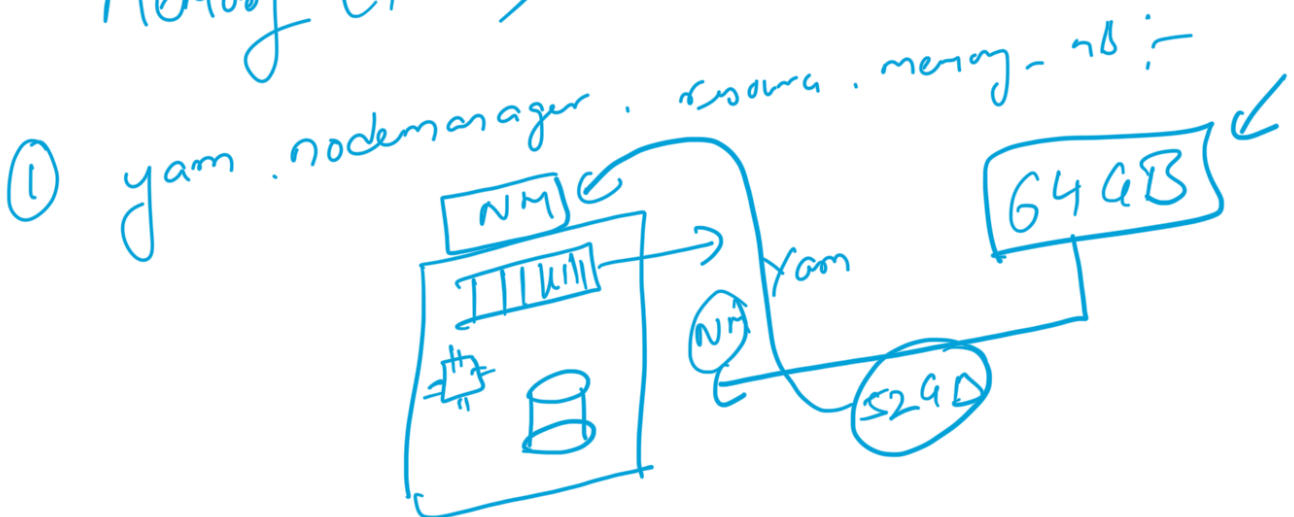

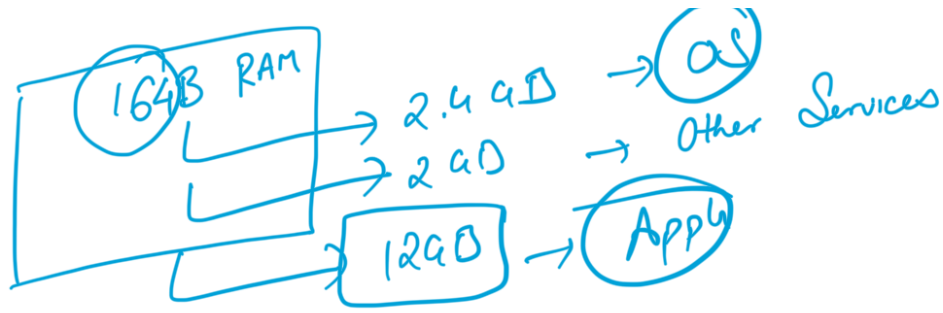


② yarn. Scheduler. maximum - allocation - mb :-
 ↳ maximum amount of memory any single container can request.

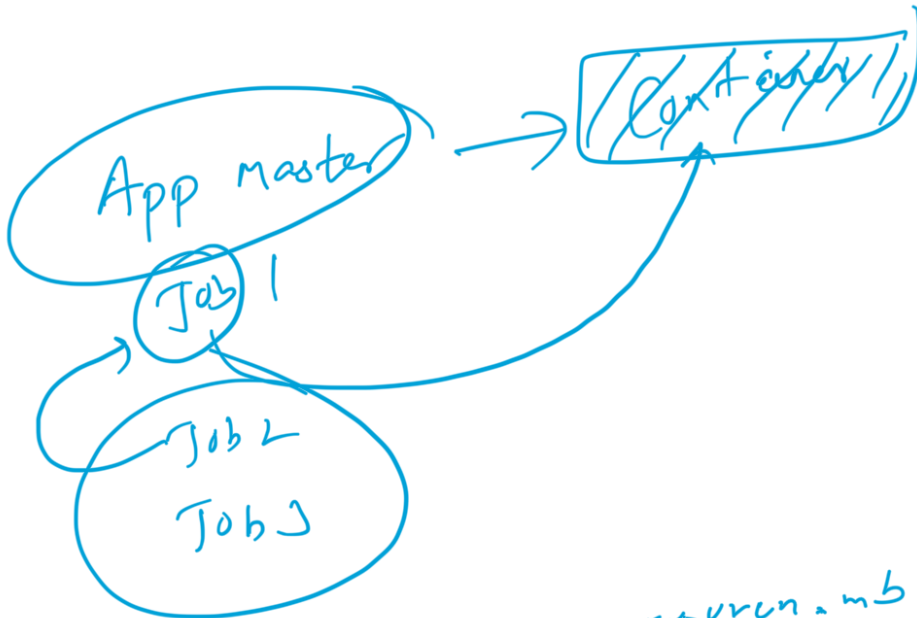

② * yarn. app. mapreduce. AM - resources - mb



V Cores


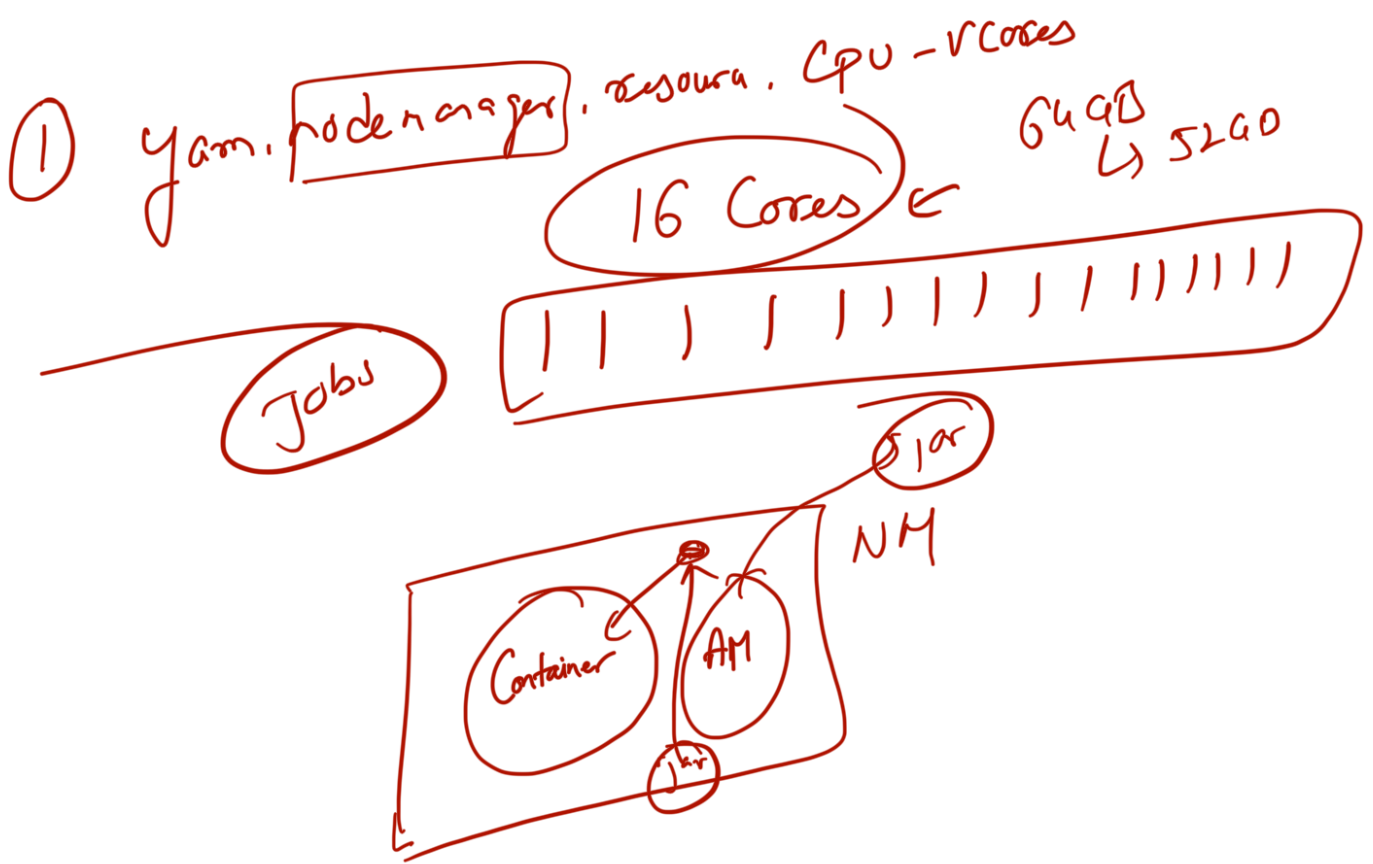


Terminologies

- ① Cores — Processing unit within a CPU.
[P5, P7, P9]
- ② Threads : X
- ③ Nodes : Virtual Machine in a cluster
- ④ Containers : Resource units (CPU, Memory) allocated by Yarn (RM) to run tasks.



240 2C 240 2C 240 2C 240 2C

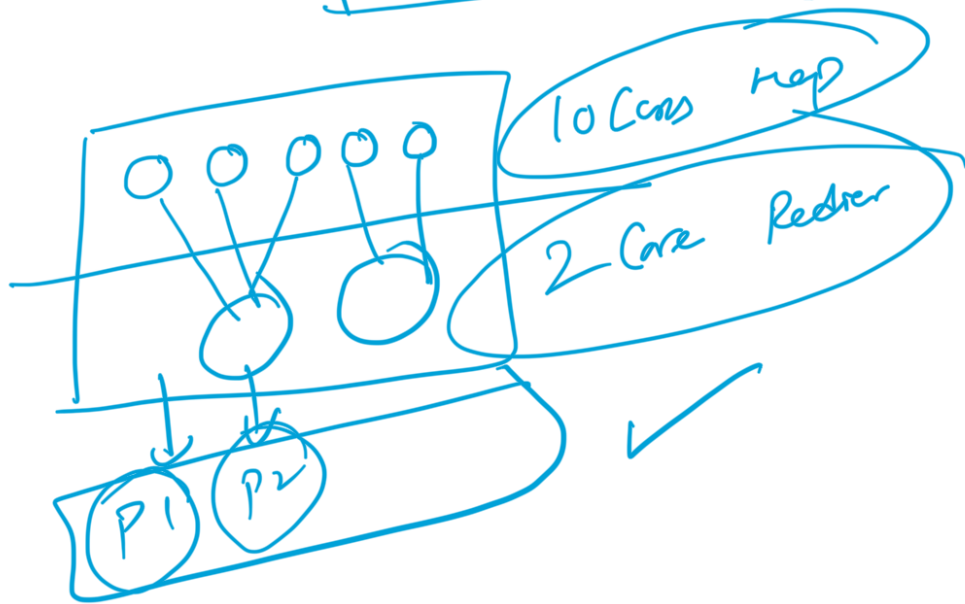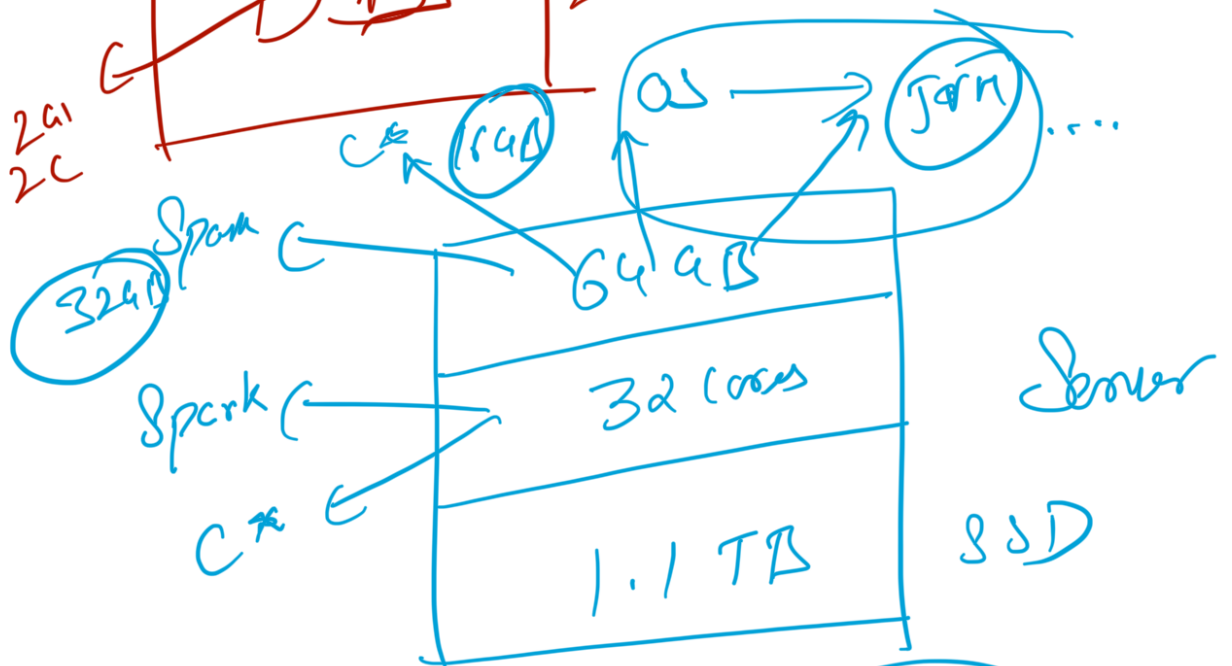

What we know → each player, Concurrency was
 where we want to reach longest winning
 strategy
 ✓ select player 1, 2

✓ order by player_id

player_id	match_day	result	2	2
1	2022/07/13	Win	1	1
1	2022/07/14	Win	2	2
1	2022/07/16	Win	3	3
1	2022/07/18	Draw	4	1
1	2022/07/20	Win	5	4
2	2022/07/18	Lose	1	1
2	2022/07/19	Lose	2	2
3	2022/07/18	Win	1	1
3	2022/07/21	Win	2	2
3	2022/07/22	Lose	3	1
3	2022/07/23	Lose	4	2

Handwritten notes:

- dense_rank()*
- over (partition*
- by player_id*
- order by*
- match_day)*

$1 - \underline{w, w, w}, DW$
 $2 - \underline{L, L}$
 $3 - \underline{w, w}, L, L$

$\Rightarrow \begin{array}{l} 1 - 3 \\ 2 - 0 \\ 3 - 2 \end{array}$