


Which questions help an operation transfer?


Exact finite Boolean prototype · All five acquisition budgets · Lower error is better

—●— Output entropy
 -■- Random queries
 -▼- True-table reference
-◆- Operator information
 -▲- Local program search


Shared operator · 2 support labels

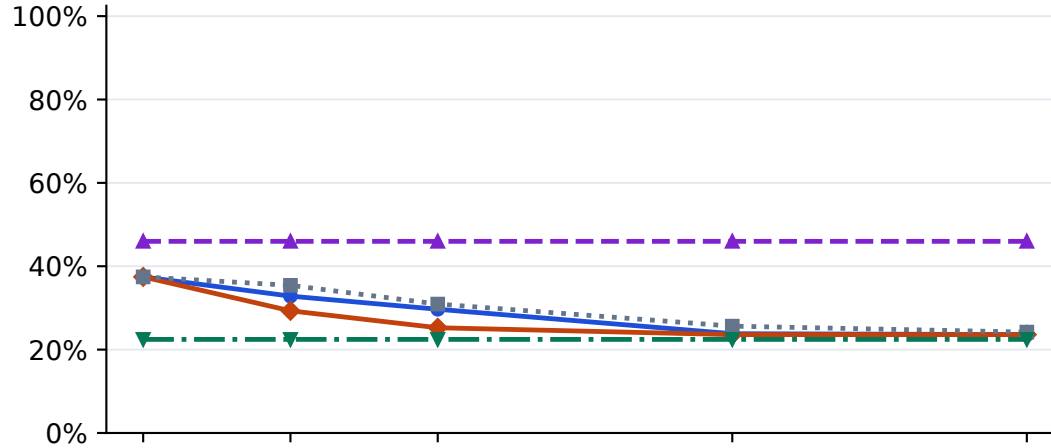


Shared operator · 4 support labels

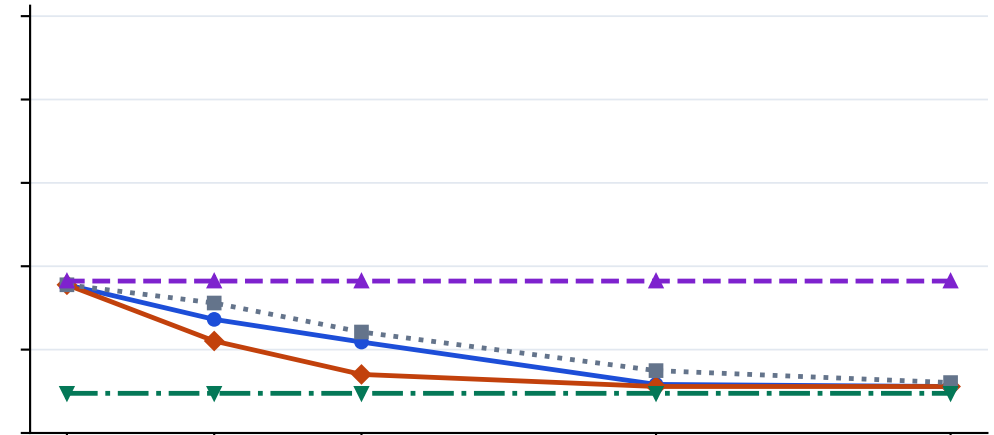

No shared operator · 2 support labels

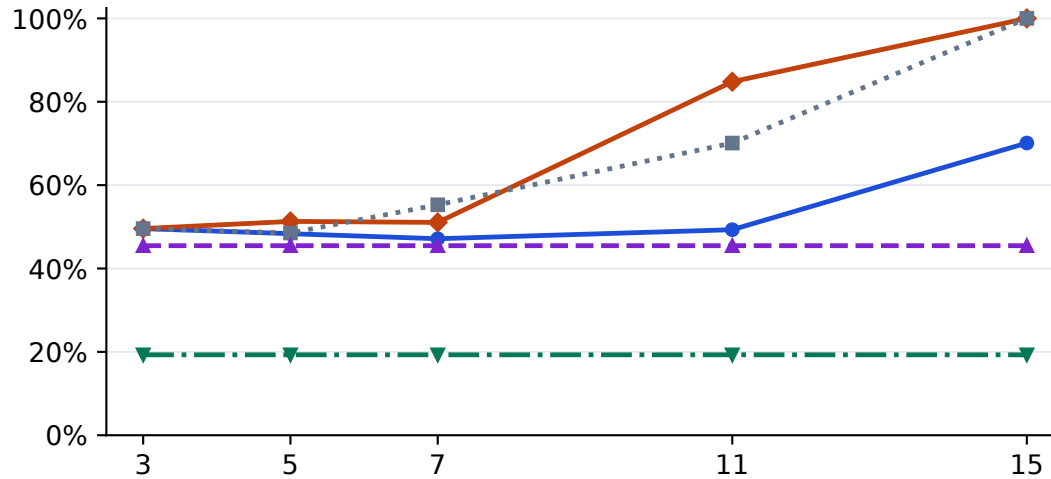

No shared operator · 4 support labels

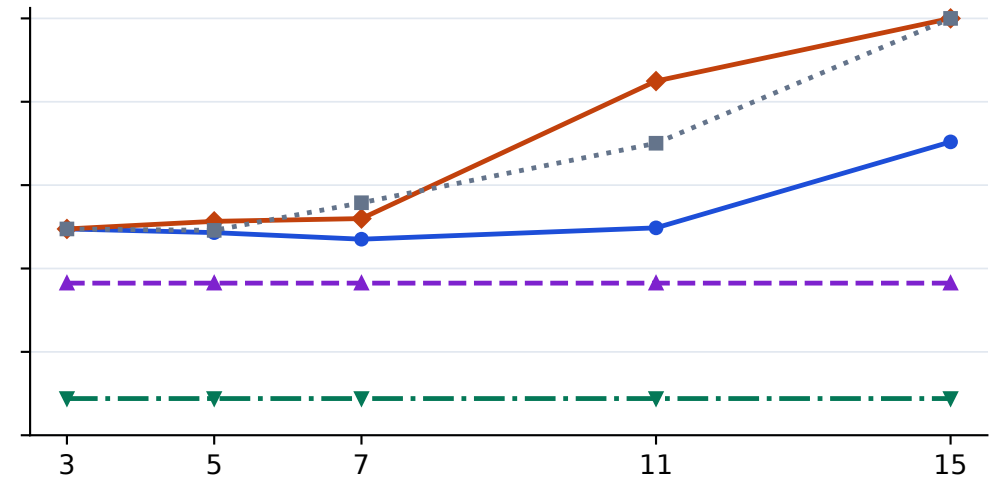

Training oracle calls = 3 initial + acquired queries (support labels are additional)

Means: support subsets → unique unseen functions → available seeds per true table → equal tables.

Empty transfer universes are N/A. No-sharing cells reuse 10 training worlds. No confidence bands.

A rise can reflect earlier detection of an inconsistent sharing assumption and abstention, not more confident errors.

Oracle calls are matched; computation is measured separately. True-table reference has privileged information.