




github



① Type github and
press enter

Customize Chrome



github



AI Mode All Videos Images News Short videos Shopping More Tools



GitHub
https://github.com



GitHub · Build and ship software on a single, collaborative platform ...
Join the world's most widely adopted, AI-powered developer platform where millions of developers, businesses, and the largest open source community build ...

① click here

- Sign in to GitHub
GitHub is where people build software. More than 150 million ...
- Sign up for GitHub
Create your free account · Access to GitHub Copilot Increase your ...
- Download GitHub Desktop
Focus on what matters instead of fighting with Git. Whether you're ...
- Explore GitHub
GitHub Breakout. Turn your GitHub contributions graph into a ...
- Copilot
Delegate like a boss · Deals with your issues. When assigned ...

More results from github.com »

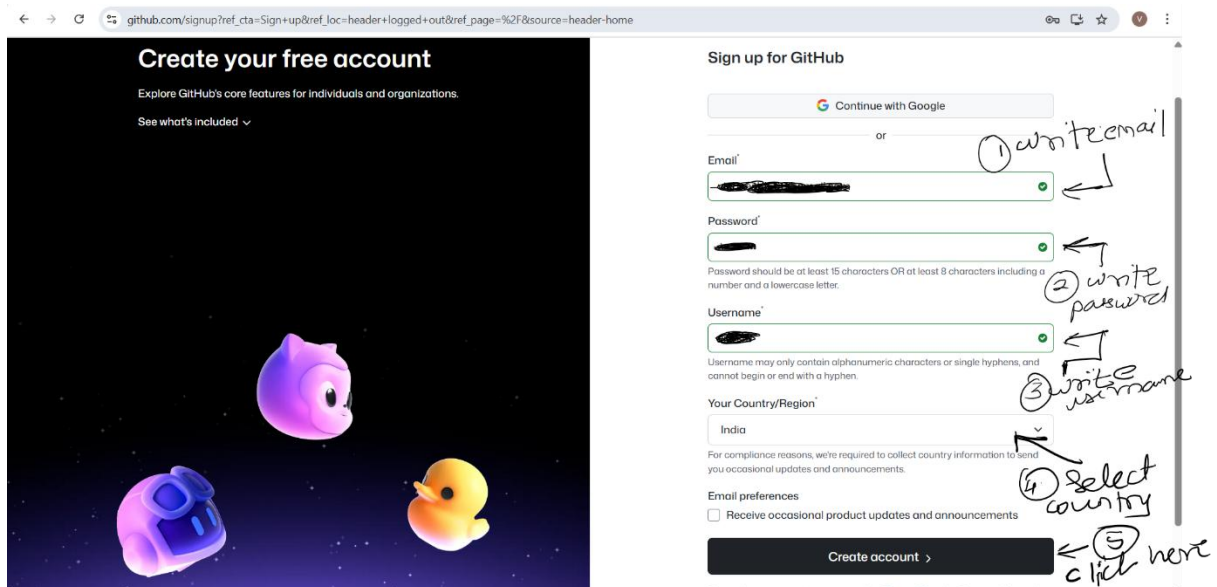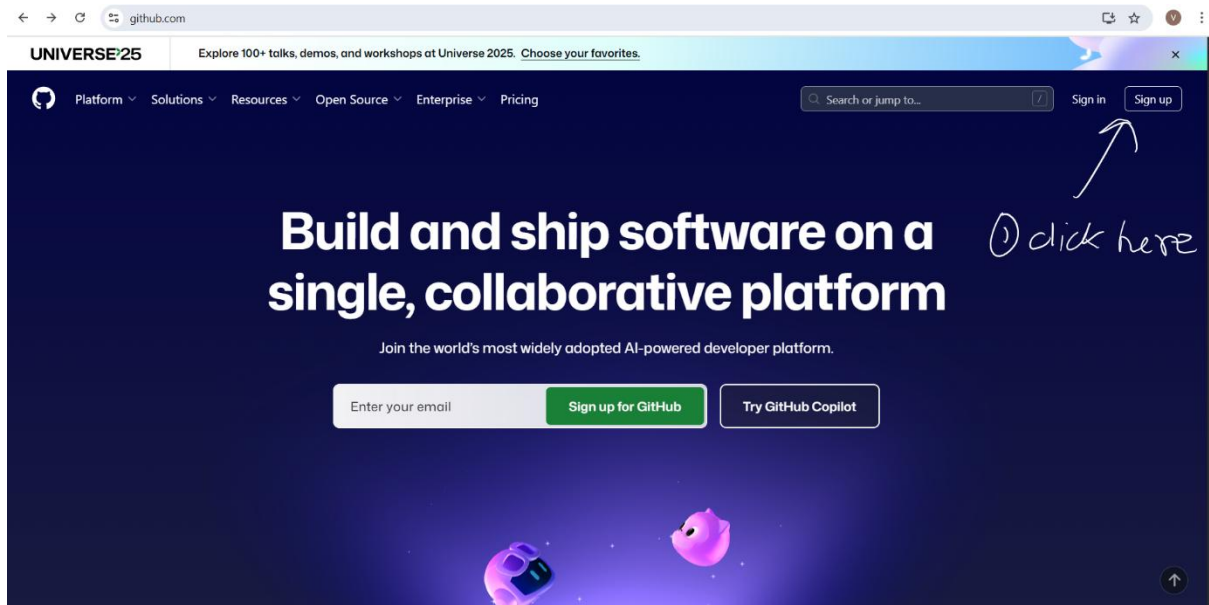


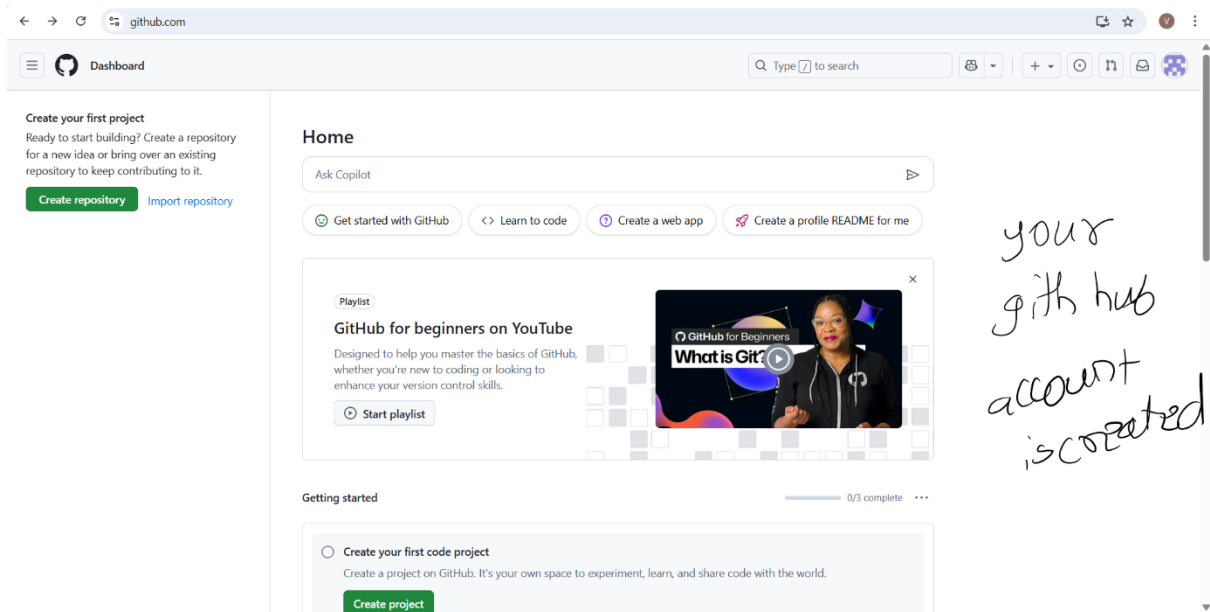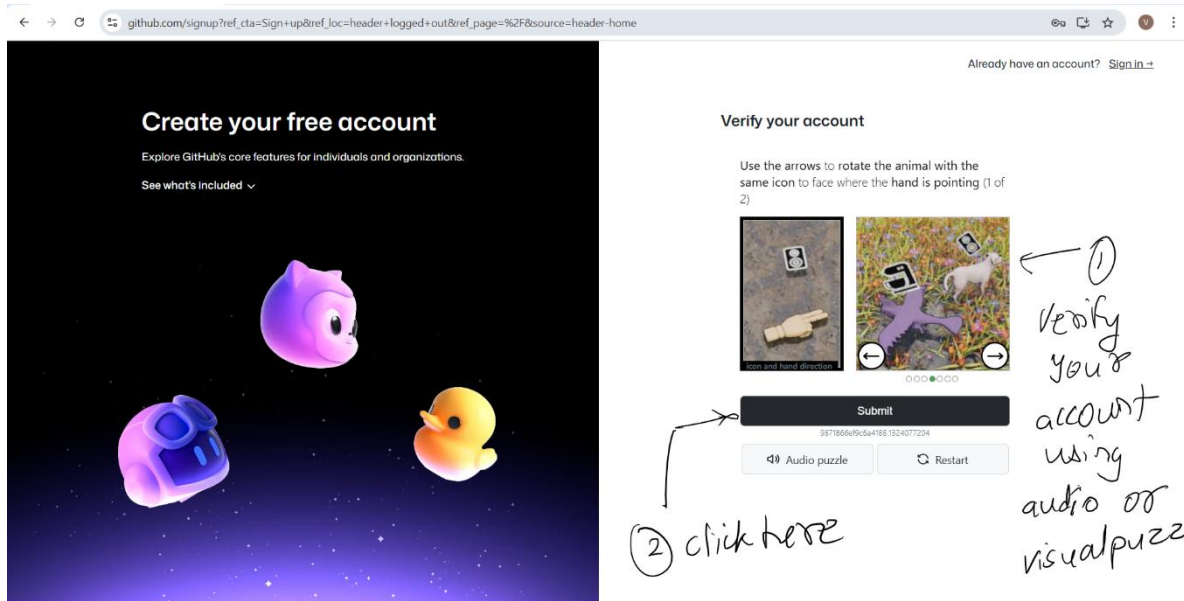

① write this and press enter



🔍 Search Google or type a URL



 Customize Chrome



aws.amazon.console



AI Mode All Images Shopping Videos Short videos Forums More Tools



 Amazon Web Services
<https://aws.amazon.com/console>



AWS Management Console

Manage your AWS cloud resources easily through a web-based interface using the AWS Management Console.

① click here

- [AWS Console](#) >
- [AWS account](#) >
- [Console](#) >
- [The Amazon EC2 Dashboard](#) >
- [AWS Management](#) >
- [Getting Started Guide](#) >
From AWS Console Home, you can manage your AWS ...

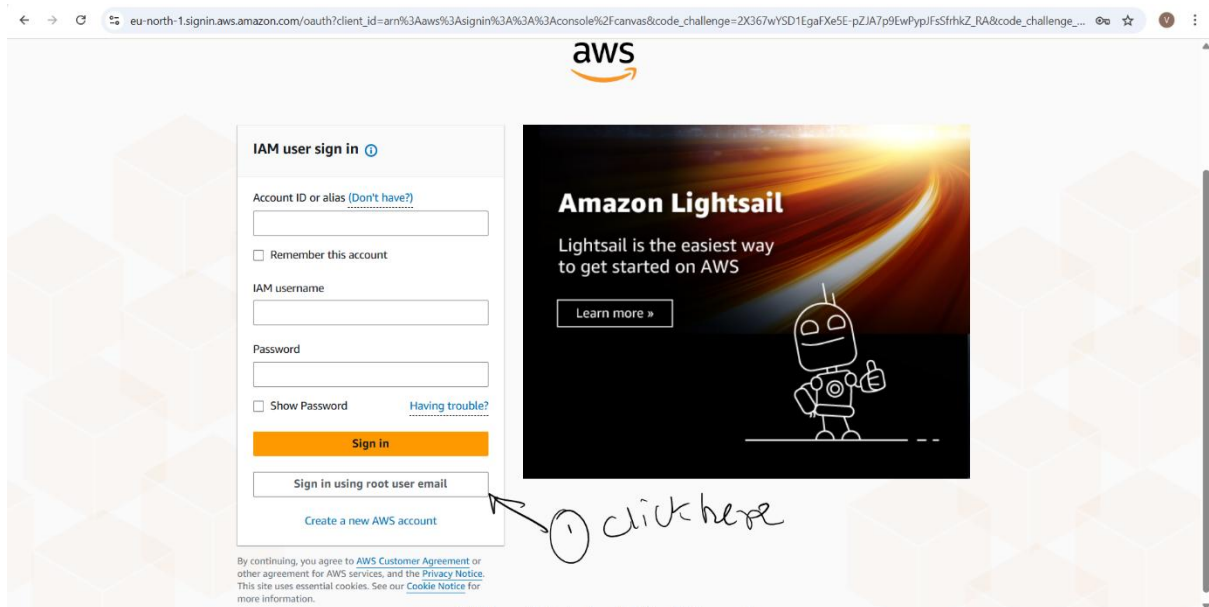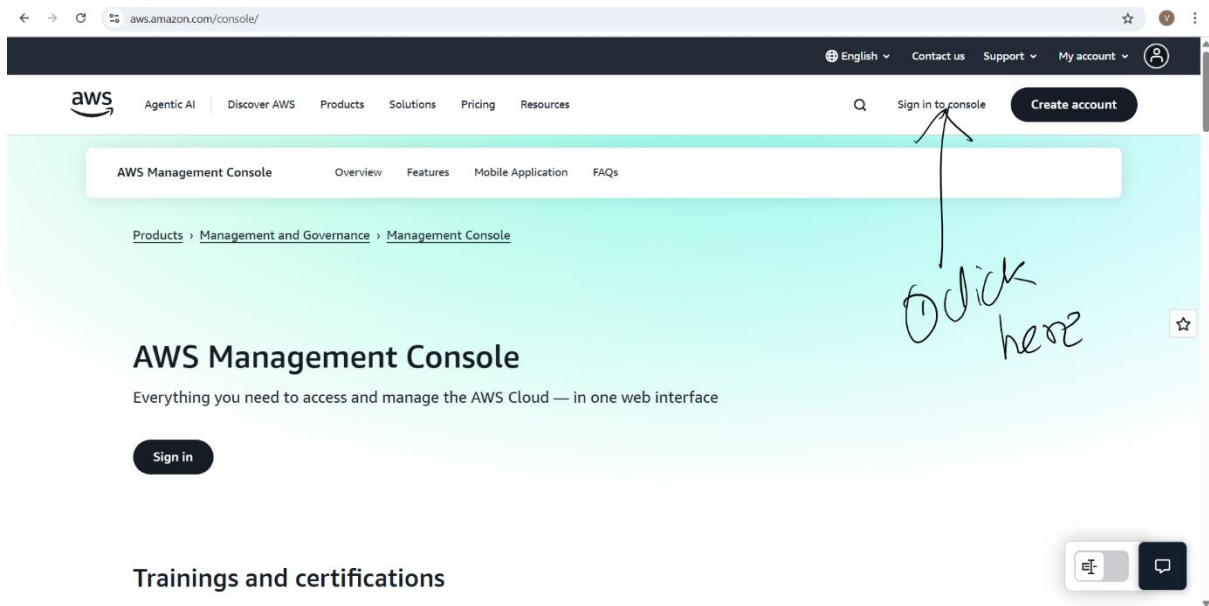

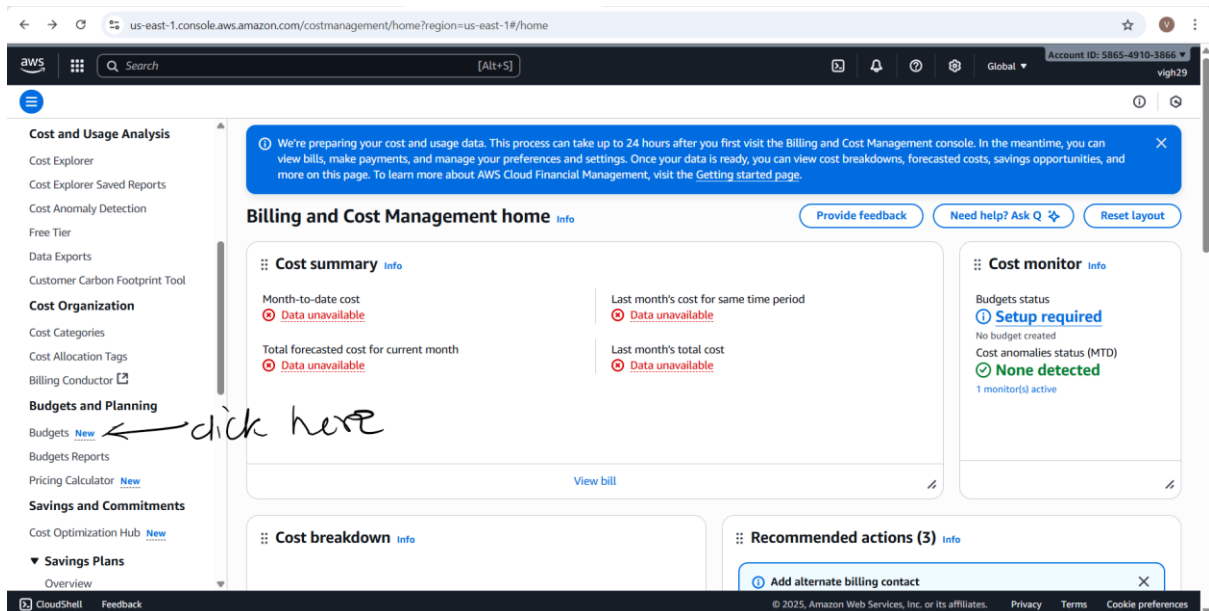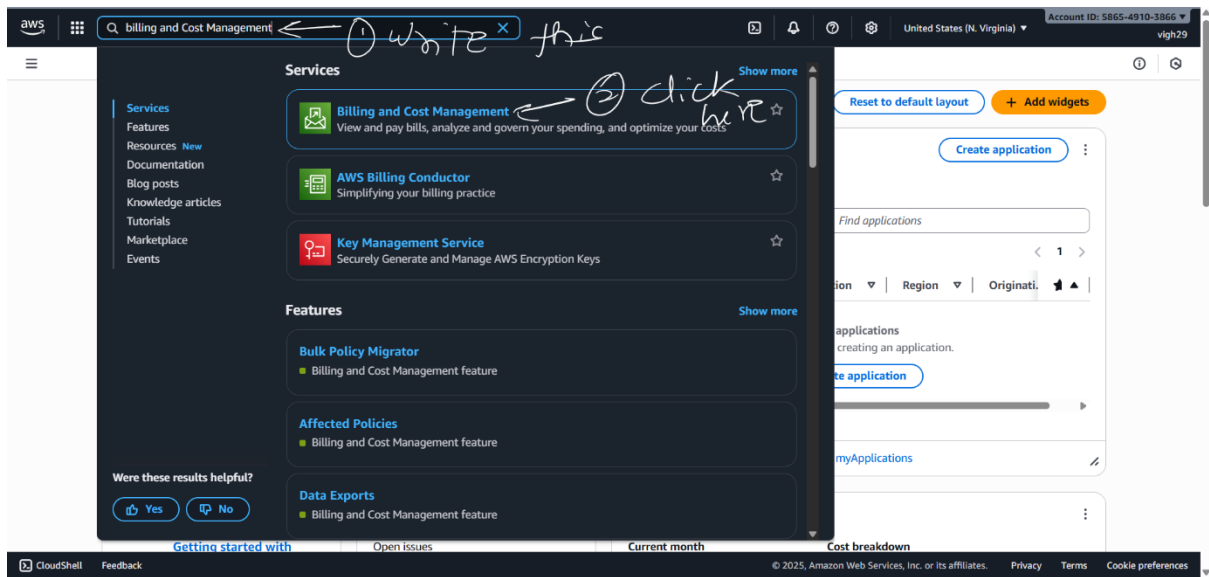

us-east-1.console.aws.amazon.com/costmanagement/home?region=us-east-1#/budgets

Billing and Cost Management > Budgets

AWS Budgets

Set custom budgets that alert you when you exceed your budgeted thresholds

AWS Budgets is your hub for creating, tracking, and inspecting your budgets.

Start tracking your AWS costs and usage

Once you have a budget created, AWS Budgets allows you to create budgets, forecast spend, and take action on your costs and usage from a single location.

[Create a budget](#) ← *click here*

Pricing (US)

There is no additional charge for using AWS Budgets. You only pay for configured actions that go beyond the free tier offer of 62 action-enabled budget days.

[View pricing details](#)

Getting started

How it works

Billing and Cost Management

Choose billing view [New](#)

Primary view

Home

Getting Started

Dashboards [New](#)

Billing and Payments

Bills

Payments

Credits

Purchase Orders

Cost and Usage Analysis

Cost Explorer

Cost Explorer Saved Reports

Cost Anomaly Detection

Free Tier

us-east-1.console.aws.amazon.com/costmanagement/home?region=us-east-1#/budgets/create?validationTrigger=true&stepIndex=0&budgetAmount=1&budgetPeriod=Monthly&budgetPlannerType=...

Billing and Cost Management > Budgets > Create budget

Budget setup

☒ Use a template (simplified)
Use the recommended configurations. You can change some configuration options after the budget is created.

☐ Customize (advanced)
Customize a budget to set parameters specific to your use case. You can customize the time period, the start month, and specific accounts.

Billing View
Based on selected billing view.

Templates - new

Choose a template that best matches your use case.

☒ Zero spend budget
Create a budget that notifies you once your spending exceeds \$0.01.

☐ Monthly cost budget
Create a monthly budget that notifies you if you exceed, or are forecasted to exceed, the budget amount.

☐ Daily Savings Plans coverage budget
Create a coverage budget for your Savings Plans that notifies you when you fall below the defined target.

☐ Daily reservation utilization budget
Create a utilization budget for your reservations that notifies you when you fall below the defined target.

Zero spend budget - Template

Budget name

① select this

② select this

else you can select this as per your budget

then scroll down

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

us-east-1.console.aws.amazon.com/costmanagement/home?region=us-east-1#/budgets/create?validationTrigger=true&stepIndex=0&budgetAmount=1&budgetPeriod=Monthly&budgetPlannerType...

Billing and Cost Management > Budgets > Create budget

Billing and Cost Management

Choose billing view [New](#)

Primary view

Home

Getting Started

Dashboards [New](#)

Billing and Payments

Bills

Payments

Credits

Purchase Orders

Cost and Usage Analysis

Cost Explorer

Cost Explorer Saved Reports

Cost Anomaly Detection

Free Tier

Zero spend budget - Template

Budget name
Provide a descriptive name for this budget.

My Zero-Spend Budget

Names must be between 1-100 characters.

Email recipients
Specify the email recipients you want to notify when the threshold has exceeded.

vighnesh1696@gmail.com

Maximum number of email recipients is 10.

Scope
All AWS services are in scope in this budget.

You will be notified via email when any spend above \$0.01 is incurred.

Template settings
This template has default configurations that can be changed later. To change any of these settings, see [Custom](#). You can also download this template in [JSON](#).

Cancel Create budget

① choose name we per your choice

② enter recipients to get notify

③ click here

aws ec

Billing and Cost Management > Budgets > Overview



Your budget My Zero-Spend Budget has been created successfully. After creating a budget, it can take up to 24 hours to populate all of your spend data. [Submit feedback](#)

Budgets (1) [Info](#) [Download CSV](#) [Actions](#) [Create budget](#)

Find a budget Type - Show all budgets

☐	Name	Thresholds	Health status	Billing View	Budget	Amount ...	Forecast...
☐	My Zero-Spend Budget	OK	Healthy	Primary View	\$1.00	-	-

Successfully created budgets

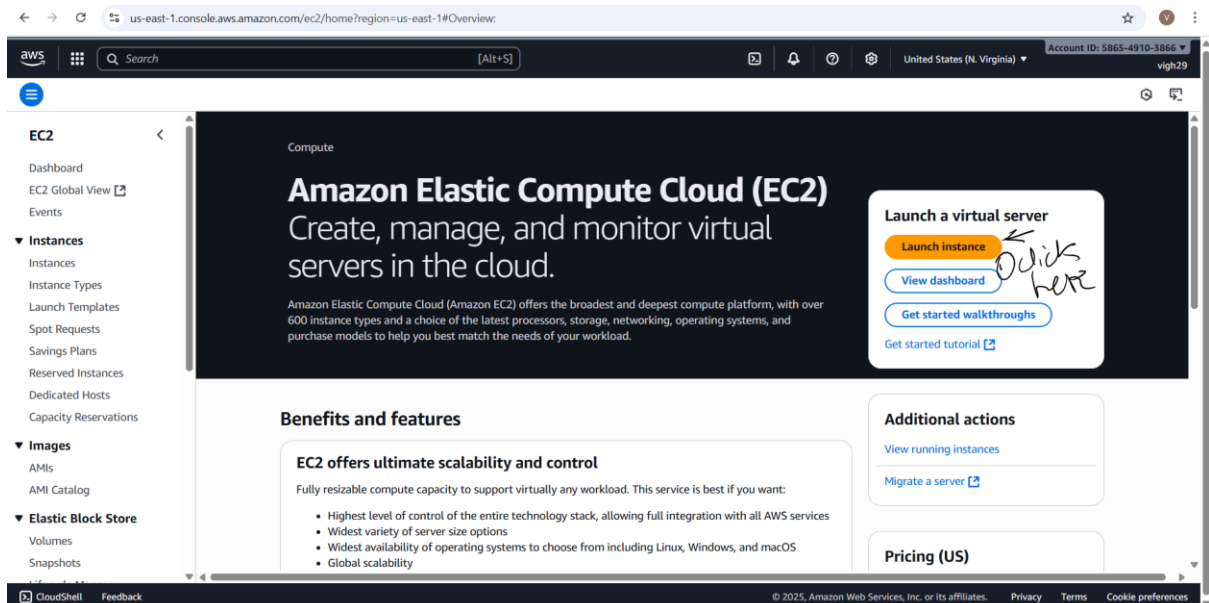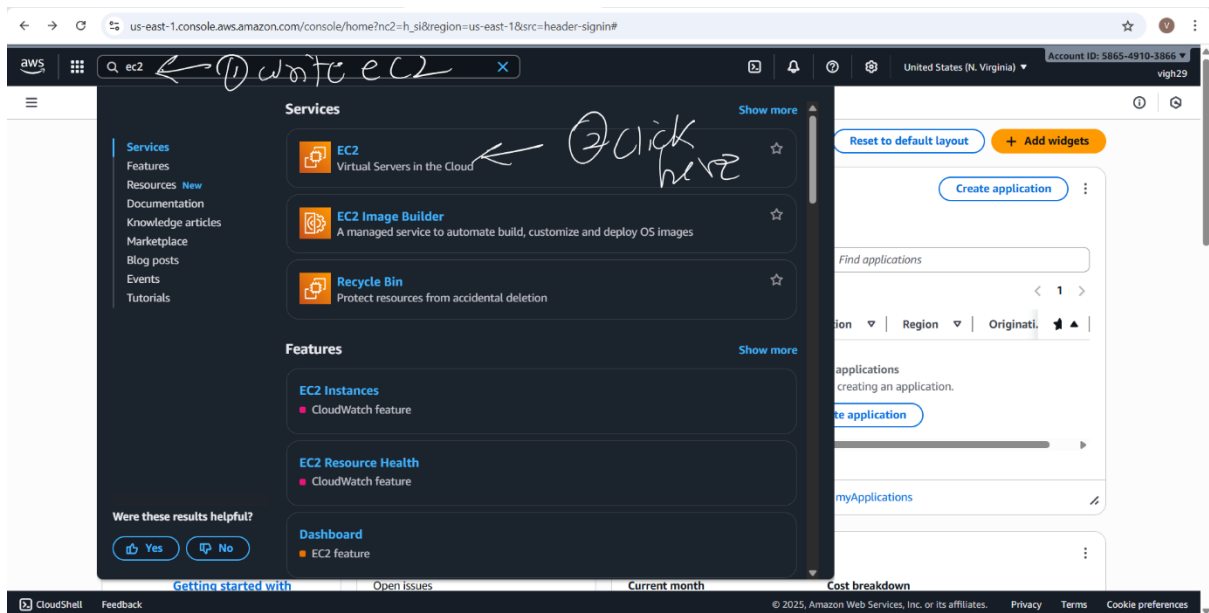

aws Search [Alt+S] United States (N. Virginia) Account ID: 5865-4910-3866 vigh29

EC2 > Instances > Launch an instance

It seems like you may be new to launching instances in EC2. Take a walkthrough to learn about EC2, how to launch instances and about best practices. [Take a walkthrough](#) [Do not show me this message again.](#)

Launch an instance Info

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags Info

Name [Add additional tags](#)

① Write name of your choice and scroll down

Application and OS Images (Amazon Machine Image) Info

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose [Browse more AMIs](#).

Search our full catalog including 1000s of application and OS images

Quick Start

Amazon Linux

macOS

Ubuntu

Windows

Red Hat

SUSE Linux

Debian

[Browse more AMIs](#)

Summary

Number of instances Info

[Software Image \(AMI\)](#)
Amazon Linux 2023 AMI 2023.8.2...[read more](#)
ami-08982f1c5bf93d976

[Virtual server type \(instance type\)](#)
t3.micro

[Firewall \(security group\)](#)
New security group

[Storage \(volumes\)](#)
1 volume(s) - 8 GiB

[Cancel](#) [Launch instance](#) [Preview code](#)

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#LaunchInstances:

aws Search [Alt+S] United States (N. Virginia) Account ID: 5865-4910-3866 vigh29

EC2 > Instances > Launch an instance

Application and OS Images (Amazon Machine Image) Info

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose [Browse more AMIs](#).

Search our full catalog including 1000s of application and OS images

Quick Start

Amazon Linux

macOS

Ubuntu

Windows

Red Hat

SUSE Linux

Debian

[Browse more AMIs](#)

Amazon Machine Image (AMI)

Ubuntu Server 24.04 LTS (HVM), SSD Volume Type
ami-0360c520857e3138f (64-bit (x86)) / ami-026fccd88446aa0bf (64-bit (Arm))
Virtualization: hvm ENA enabled: true Root device type: ebs

② select this

then scroll down

Description
Ubuntu Server 24.04 LTS (HVM), EBS General Purpose (SSD) Volume Type. Support available from Canonical (<http://www.ubuntu.com/cloud/services>).

Summary

Number of instances Info

[Software Image \(AMI\)](#)
Canonical, Ubuntu, 24.04, amd64...[read more](#)
ami-0360c520857e3138f

[Virtual server type \(instance type\)](#)
t3.micro

[Firewall \(security group\)](#)
New security group

[Storage \(volumes\)](#)
1 volume(s) - 8 GiB

[Cancel](#) [Launch instance](#) [Preview code](#)

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#LaunchInstances:

aws Search [Alt+S] United States (N. Virginia) Account ID: 5865-4910-3866 vigh29

EC2 > Instances > Launch an instance

Description
Ubuntu Server 24.04 LTS (HVM), EBS General Purpose (SSD) Volume Type. Support available from Canonical (<http://www.ubuntu.com/cloud/services>).
Canonical, Ubuntu, 24.04, amd64 noble image

Architecture 64-bit (x86) **AMI ID** ami-0360c520857e3138f **Publish Date** 2025-08-21 **Username** ubuntu **Verified provider**

Instance type **Info** | **Get advice**
Instance type
t3.micro
Family: t3 2 vCPU 1 GiB Memory Current generation: true
On-Demand Ubuntu Pro base pricing: 0.0139 USD per Hour
On-Demand SUSE base pricing: 0.0104 USD per Hour On-Demand Linux base pricing: 0.0104 USD per Hour
On-Demand RHEL base pricing: 0.0392 USD per Hour On-Demand Windows base pricing: 0.0196 USD per Hour
Additional costs apply for AMIs with pre-installed software
All generations **Compare instance types**

Key pair (login) **Info**
You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Summary
Number of instances **Info**
1
Software Image (AMI)
Canonical, Ubuntu, 24.04, amd64...read more
ami-0360c520857e3138f
Virtual server type (instance type)
t3.micro
Firewall (security group)
New security group
Storage (volumes)
1 volume(s) - 8 GiB
Cancel **Launch instance** **Preview code**

IT will be automatically select aws
select this
the scroll down

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#LaunchInstances:

aws Search [Alt+S] United States (N. Virginia) Account ID: 5865-4910-3866 vigh29

EC2 > Instances > Launch an instance



Key pair (login) **Info**
You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.
Key pair name - required
Select **Create new key pair**

Network settings **Info**
Network **Info**
vpc-05608efacf282d54b
Subnet **Info**
No preference (Default subnet in any availability zone)
Auto-assign public IP **Info**
Enable
Firewall (security groups) **Info**
A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.
☒ Create security group ☐ Select existing security group
We'll create a new security group called 'launch-wizard-1' with the following rules:
☒ Allow SSH traffic from **Anywhere**
Helps you connect to your instance 0.0.0.0/0

Summary
Number of instances **Info**
1
Software Image (AMI)
Canonical, Ubuntu, 24.04, amd64...read more
ami-0360c520857e3138f
Virtual server type (instance type)
t3.micro
Firewall (security group)
New security group
Storage (volumes)
1 volume(s) - 8 GiB
Cancel **Launch instance** **Preview code**

click here

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

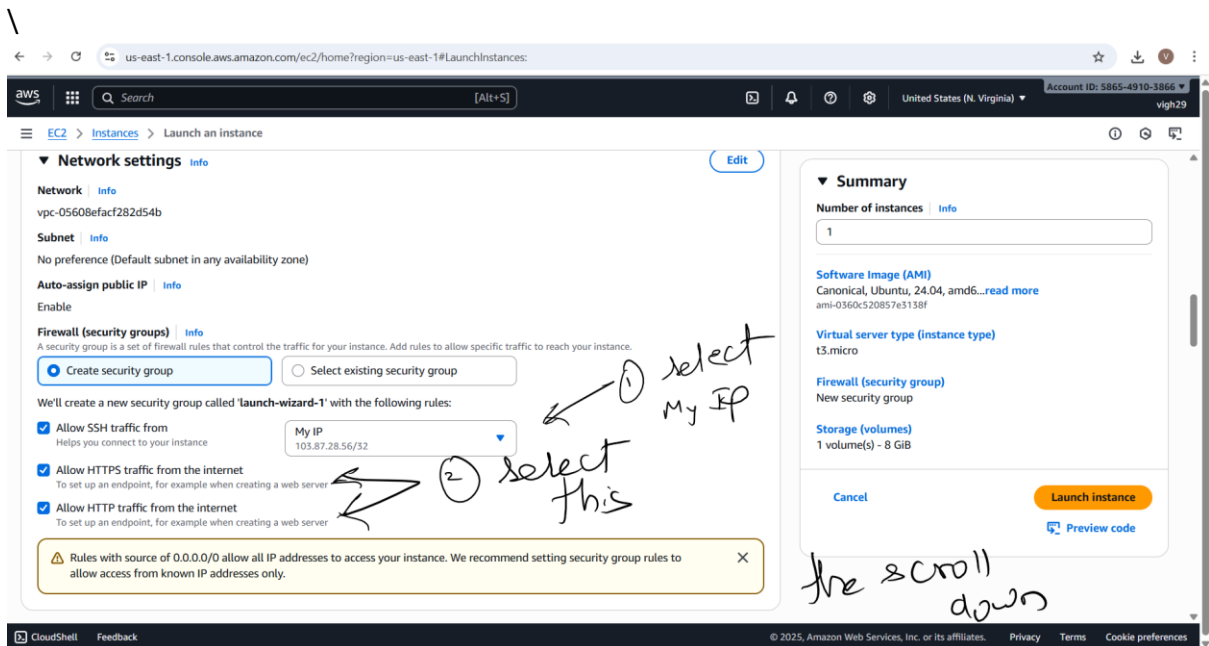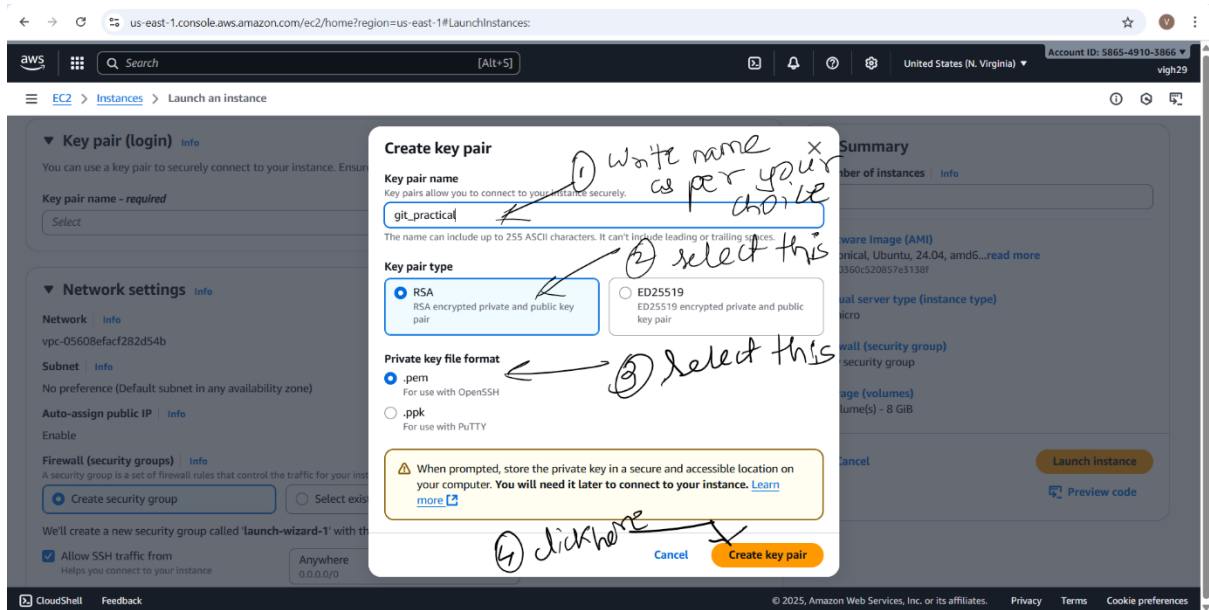

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#LaunchInstances:

EC2 > Instances > Launch an instance

Enable

Firewall (security groups) [Info](#)

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☒ Create security group ☐ Select existing security group

We'll create a new security group called 'launch-wizard-1' with the following rules:

- ☒ Allow SSH traffic from Helps you connect to your instance My IP 103.87.28.56/32
- ☒ Allow HTTPS traffic from the internet To set up an endpoint, for example when creating a web server
- ☒ Allow HTTP traffic from the internet To set up an endpoint, for example when creating a web server

Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

► **Configure storage** [Info](#) [Advanced](#)

► **Advanced details** [Info](#)

Summary

Number of instances [Info](#)

1

Software Image (AMI)

Canonical, Ubuntu, 24.04, amd64...[read more](#)
ami-0360c520857e3138f

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

[Cancel](#) [Launch instance](#) [Preview code](#)

① keep as it is

② click here

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#LaunchInstances:

EC2 > Instances > Launch an instance

Success

Successfully initiated launch of instance (i-0f3da69bc0f27888c)

► **Launch log**

Next Steps

What would you like to do next with this instance, for example "create alarm" or "create backup"

Create billing usage alerts

To manage costs and avoid surprise bills, set up email notifications for billing usage thresholds.

[Create billing alerts](#)

Connect to your instance

Once your instance is running, log into it from your local computer.

[Connect to instance](#)

[Learn more](#)

Connect an RDS database

Configure the connection between an EC2 instance and a database to allow traffic flow between them.

[Connect an RDS database](#)

[Create a new RDS database](#)

[Learn more](#)

Create EBS snapshot policy

Create a policy that automates the creation, retention, and deletion of EBS snapshots

[Create EBS snapshot policy](#)

[Manage detailed monitoring](#) [Create Load Balancer](#) [Create AWS budget](#) [Manage CloudWatch alarms](#)

Instance created

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#Instances:

EC2 > Instances

Instances (1) info

Find Instance by attribute or tag (case-sensitive)

All states

Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IP
git_practical	i-0f3da69bc0f27888c	Running	t3.micro	Initializing	View alarms +	us-east-1d	ec2-54-9

Select an instance

up on clicking on instance from previous page at top you will come to this page

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#Instances:

EC2 > Instances

Instances (1/1) info

Last updated less than a minute ago

Connect Instance state Actions Launch instances

Find Instance by attribute or tag (case-sensitive)

All states

Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone	Public IP
git_practical	i-0f3da69bc0f27888c	Running	t3.micro	Initializing	View alarms +	us-east-1d	ec2-54-9

i-0f3da69bc0f27888c (git_practical)

Details Status and alarms Monitoring Security Networking Storage Tags

Instance summary info

Instance ID i-0f3da69bc0f27888c

Public IPv4 address 54.91.24.123 | open address

Private IPv4 addresses 172.31.27.178

Public DNS ec2-54-91-24-123.compute-1.amazonaws.com | open address

Instance state Running

IPv6 address -

select this

click on connect to take the remote access

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#ConnectToInstance:instanceId=i-0f3da69bc0f27888c

aws Search [Alt+S] United States (N. Virginia) Account ID: 5865-4910-3866 vigh29

EC2 > Instances > i-0f3da69bc0f27888c > Connect to instance

Connect Info

Connect to an instance using the browser-based client.

EC2 Instance Connect Session Manager **SSH client** EC2 serial console

Instance ID
i-0f3da69bc0f27888c (git_practical)

1. Open an SSH client.
2. Locate your private key file. The key used to launch this instance is git_practical.pem
3. Run this command, if necessary, to ensure your key is not publicly viewable.
`chmod 400 "git_practical.pem"`
4. Connect to your instance using its Public DNS:
`ec2-54-91-24-123.compute-1.amazonaws.com`

Example:
`ssh -i "git_practical.pem" ubuntu@ec2-54-91-24-123.compute-1.amazonaws.com`

Note: In most cases, the guessed username is correct. However, read your AMI usage instructions to check if the AMI owner has changed the default AMI username.

Cancel

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

① select this

② copy this command to the terminal.

Windows PowerShell

Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Install the latest PowerShell for new features and improvements! <https://aka.ms/PSWindows>

PS C:\Users\vigne> |

open this terminal
by typing terminal
in the search
at the bottom


```
ubuntu@ip-172-31-27-178: ~  
Windows PowerShell  
Copyright (C) Microsoft Corporation. All rights reserved.  
  
Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows  
PS C:\Users\vigne> cd downloads  
PS C:\Users\vigne\downloads> ssh -i "git_practical.pem" ubuntu@ec2-54-91-24-123.compute-1.amazonaws.com  
The authenticity of host 'ec2-54-91-24-123.compute-1.amazonaws.com (54.91.24.123)' can't be established.  
ED25519 key fingerprint is SHA256:LU/YZKqSBhAFxIX1e6NRG7RoeUWMfeGDd8wvH06e4e8.  
This key is not known by any other names.  
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes  
Warning: Permanently added 'ec2-54-91-24-123.compute-1.amazonaws.com' (ED25519) to the list of known hosts.  
Welcome to Ubuntu 24.04.3 LTS (GNU/Linux 6.14.0-1011-aws x86_64)  
  
* Documentation:  https://help.ubuntu.com  
* Management:    https://landscape.canonical.com  
* Support:       https://ubuntu.com/pro  
  
System information as of Sat Sep 20 09:24:58 UTC 2025  
  
System load:  0.0      Temperature:   -273.1 C  
Usage of /:   25.6% of 6.71GB  Processes:    109  
Memory usage: 23%      Users logged in: 0  
Swap usage:  0%      IPv4 address for ens5: 172.31.27.178  
  
Expanded Security Maintenance for Applications is not enabled.  
  
0 updates can be applied immediately.  
  
Enable ESM Apps to receive additional future security updates.
```

located
Change the directory where the key is
(2) paste from your ssh client

```
ubuntu@ip-172-31-27-178: ~  
System information as of Sat Sep 20 09:24:58 UTC 2025  
  
System load:  0.0      Temperature:   -273.1 C  
Usage of /:   25.6% of 6.71GB  Processes:    109  
Memory usage: 23%      Users logged in: 0  
Swap usage:  0%      IPv4 address for ens5: 172.31.27.178  
  
Expanded Security Maintenance for Applications is not enabled.  
  
0 updates can be applied immediately.  
  
Enable ESM Apps to receive additional future security updates.  
See https://ubuntu.com/esm or run: sudo pro status  
  
The list of available updates is more than a week old.  
To check for new updates run: sudo apt update  
  
The programs included with the Ubuntu system are free software;  
the exact distribution terms for each program are described in the  
individual files in /usr/share/doc/*/copyright.  
  
Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by  
applicable law.  
  
To run a command as administrator (user "root"), use "sudo <command>".  
See "man sudo_root" for details.  
ubuntu@ip-172-31-27-178:~$ clear
```

write clear
(2) to have space for new commands

(1) connected to ubuntu

```
ubuntu@ip-172-31-27-178: ~$ git --version
-bash: /usr/bin/git: No such file or directory
ubuntu@ip-172-31-27-178:~$ sudo apt install git
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
Suggested packages:
  git-daemon-run | git-daemon-sysvinit git-doc git-email git-gui gitk gitweb git-cvs git-mediawiki git-svn
The following NEW packages will be installed:
  git
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 3680 kB of archives.
After this operation, 22.2 MB of additional disk space will be used.
Get:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates/main amd64 git amd64 1:2.43.0-1ubuntu7.3 [3680 kB]
Fetched 3680 kB in 0s (51.2 MB/s)
Selecting previously unselected package git.
(Reading database ... 70840 files and directories currently installed.)
Preparing to unpack .../git_1%3a2.43.0-1ubuntu7.3_amd64.deb ...
Unpacking git (1:2.43.0-1ubuntu7.3) ...
Setting up git (1:2.43.0-1ubuntu7.3) ...
Scanning processes...
Scanning linux images...

Running kernel seems to be up-to-date.

No services need to be restarted.

No containers need to be restarted.

No user sessions are running outdated binaries.
```

```
ubuntu@ip-172-31-27-178: ~$ git --version
git version 2.43.0
ubuntu@ip-172-31-27-178:~$ clear
```

```
ubuntu@ip-172-31-27-178: ~/$ mkdir projects
ubuntu@ip-172-31-27-178: ~/$ ls
projects
ubuntu@ip-172-31-27-178: ~/$ cd projects
ubuntu@ip-172-31-27-178: ~/projects$ git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: is subject to change. To configure the initial branch name to use in all
hint: of your new repositories, which will suppress this warning, call:
hint:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint:   git branch -m <name>
Initialized empty Git repository in /home/ubuntu/projects/.git/
ubuntu@ip-172-31-27-178: ~/projects$
ubuntu@ip-172-31-27-178: ~/projects$
```

① This command creates the directory
② This command names the list of files and directories
③ command to change directory
④ use to create new git repository
⑤ Empty repository created

```
ubuntu@ip-172-31-27-178: ~/projects$ echo "print('Hello World!')" > app.py
ubuntu@ip-172-31-27-178: ~/projects$ ls
app.py
ubuntu@ip-172-31-27-178: ~/projects$ git add .
ubuntu@ip-172-31-27-178: ~/projects$ git commit -m "First Commit"
[master (root-commit) 68b2489] First Commit
Committer: Ubuntu <ubuntu@ip-172-31-27-178.ec2.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit



After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

1 file changed, 1 insertion(+)
create mode 100644 app.py
ubuntu@ip-172-31-27-178: ~/projects$ git log
commit 68b248907510046ab0097a8ceca2de4b8b1bd3d6 (HEAD -> master)
Author: Ubuntu <ubuntu@ip-172-31-27-178.ec2.internal>
Date: Sat Sep 20 09:48:40 2025 +0000

    First Commit
ubuntu@ip-172-31-27-178: ~/projects$
```

① This command is used to create file name app.py
② This command lists the name of the files
③ stages all changes within current directory
④ creates the commit
This command displays the commit history

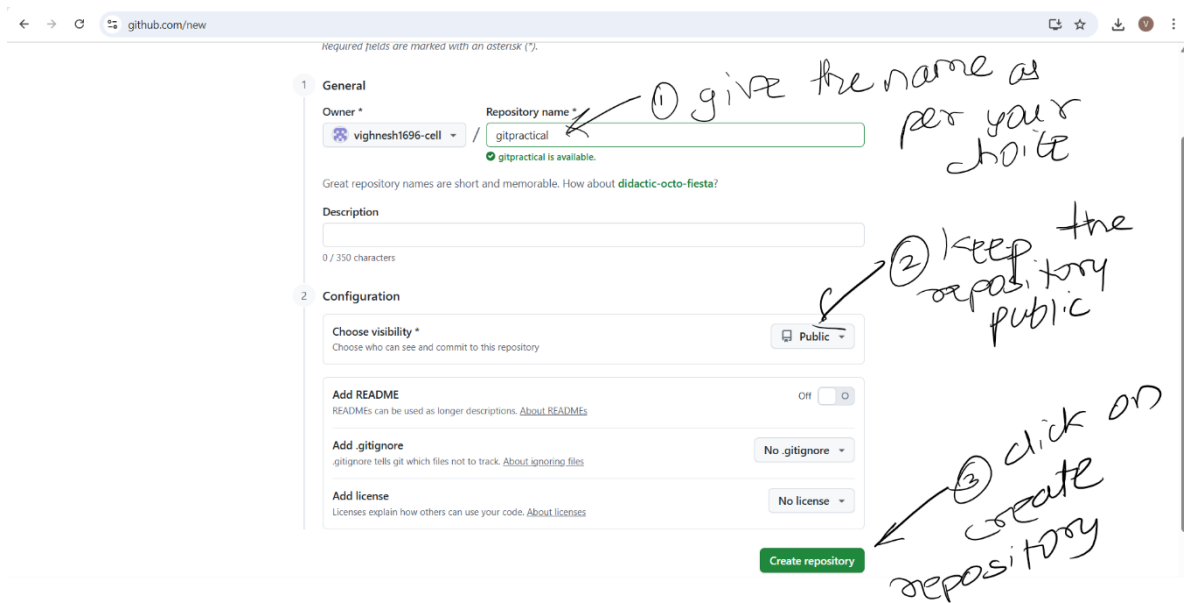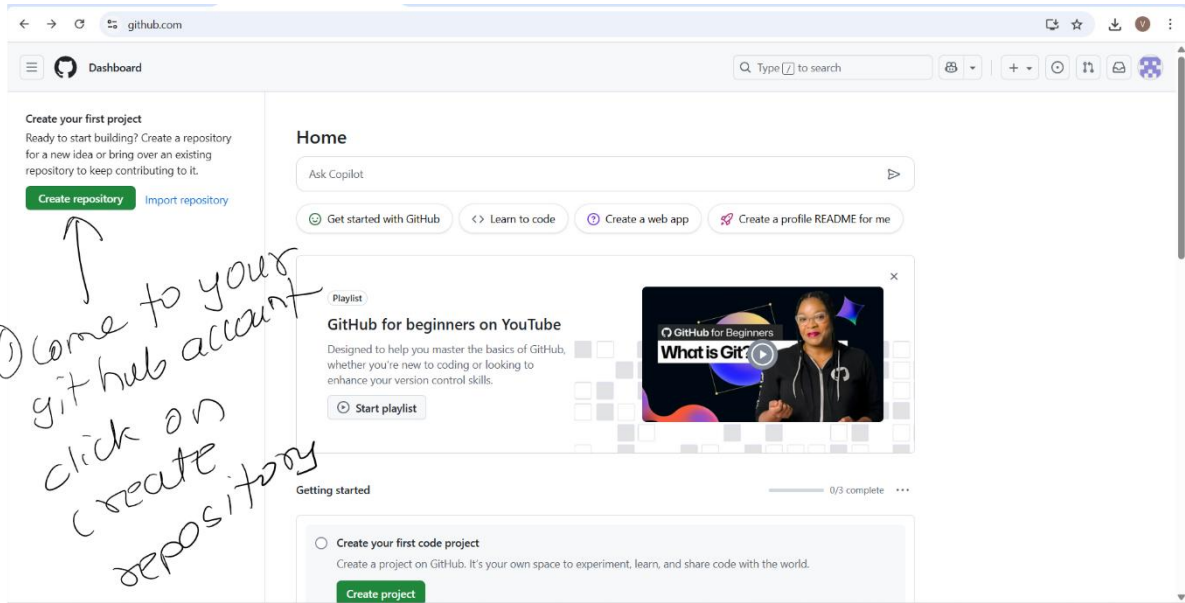

```
ubuntu@ip-172-31-27-178: ~/ x + v
ubuntu@ip-172-31-27-178:~/projects$ git clone https://github.com/vighnesh1696-cell/gitpractical.git
Cloning into 'gitpractical'...
warning: You appear to have cloned an empty repository.
ubuntu@ip-172-31-27-178:~/projects$ ls
app.py  gitpractical
ubuntu@ip-172-31-27-178:~/projects$ cd gitpractical
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ clear
```

① This command is used to clone the file

② This command lists the names of the file

③ This command is used to change the directory

④ wrote this command to make some space for other commands

```
ubuntu@ip-172-31-27-178: ~/ x + v
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ echo "print('Hello from Github')" > app.py
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ ls
app.py
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ cat app.py
print('Hello from Github')
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ git add .
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ git commit -m "Push to Github"
[main (root-commit) dd9141e] Push to Github
Committer: Ubuntu <ubuntu@ip-172-31-27-178.ec2.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

1 file changed, 1 insertion(+)
create mode 100644 app.py
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ git push origin
Username for 'https://github.com': vighnesh1696-cell
Password for 'https://vighnesh1696-cell@github.com':
```

① This command is used to create file name - app.py

② This command lists the names of the file

③ This command displays the content

④ stages all the changes recursively.

⑤ commit the changes to github repository

⑥ This command pushes the current branch commits to corresponding branch

github.com/vighnesh1696-cell/gitpractical

vighnesh1696-cell / gitpractical

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

gitpractical Public

Set up GitHub Copilot
Use GitHub's AI pair programmer to autocomplete suggestions as you code.
Get started with GitHub Copilot

Add collaborators to this repository
Search for people using their GitHub username or email address.
Invite collaborators

Quick setup — if you've done this kind of thing before

Set up in Desktop or HTTPS SSH <https://github.com/vighnesh1696-cell/gitpractical.git>

Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#).

...or create a new repository on the command line

```
echo "# gitpractical" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/vighnesh1696-cell/gitpractical.git
git push -u origin main
```

Click here

Click on settings

vighnesh1696-cell

- Set status
- Profile
- Repositories
- Stars
- Gists
- Organizations
- Enterprises
- Sponsors
- Settings
- Copilot settings
- Feature preview (New)
- Appearance
- Accessibility
- Try Enterprise (Free)
- Sign out

github.com/settings/profile

Copilot Pages Saved replies

Security Code security

Integrations Applications Scheduled reminders

Archives Security log Sponsorship log

Developer settings

Link to social profile 3

Link to social profile 4

Company

You can @mention your company's GitHub organization to link it.

Location

☐ Display current local time
Other users will see the time difference from their local time.

ORCID iD

ORCID provides a persistent identifier - an ORCID iD - that distinguishes you from other researchers. Learn more at [ORCID.org](https://orcid.org).

[Connect your ORCID iD](#)

All of the fields on this page are optional and can be deleted at any time, and by filling them out, you're giving us consent to share this data wherever your user profile appears. Please see our [privacy statement](#) to learn more about how we use this information.

[Update profile](#)

Contributions & activity

☐ Make profile private and hide activity
Enabling this will hide your contributions and activity from your GitHub profile and from social features like followers, stars, feeds, leaderboards and releases.

☐ Include private contributions on my profile

Click on developer settings

github.com/settings/apps

Settings / Developer Settings

GitHub Apps

- OAuth Apps
- Personal access tokens
- Fine-grained tokens
- Tokens (classic)

GitHub Apps

No GitHub Apps

Want to build something that integrates with and extends GitHub? Register a new GitHub App to get started developing on the GitHub API.

New GitHub App

View documentation

© 2025 GitHub, Inc. Terms Privacy Security Status Community Docs Contact Manage cookies Do not share my personal information

github.com/settings/tokens

Settings / Developer Settings

GitHub Apps

- OAuth Apps
- Personal access tokens
- Fine-grained tokens
- Tokens (classic)

Personal access tokens (classic)

No personal access token created

Need an API token for scripts or testing? Generate a personal access token for quick access to the GitHub API.

Generate new token

Generate new token

Fine-grained, repo-scoped

Generate new token (classic)

For general use

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

© 2025 GitHub, Inc. Terms Privacy Security Status Community Docs Contact Manage cookies Do not share my personal information

github.com/settings/tokens/new

Settings / Developer Settings

Personal access tokens (classic)

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

Note

gitpractical

What's this token for?

Expiration

7 days (Sep 27, 2025)

The token will expire on the selected date

Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes](#).

☐ repo	Full control of private repositories
☐ repo:status	Access commit status
☐ repo_deployment	Access deployment status
☐ public_repo	Access public repositories
☐ repo:invite	Access repository invitations
☐ security_events	Read and write security events
☐ workflow	Update GitHub Action workflows
☒ write:packages	Upload packages to GitHub Package Registry
☐ read:packages	Download packages from GitHub Package Registry

then scroll down

① write the name

② select seven days

③ select this

④ select this



github.com/settings/tokens/new

☐ delete:packages	Delete packages from GitHub Package Registry
☒ admin:org	Full control of orgs and teams, read and write org projects
☐ write:org	Read and write org and team membership, read and write org projects
☐ read:org	Read org and team membership, read org projects
☐ manage_runners:org	Manage org runners and runner groups
☒ admin:public_key	Full control of user public keys
☐ write:public_key	Write user public keys
☐ read:public_key	Read user public keys
☐ admin:repo_hook	Full control of repository hooks
☐ write:repo_hook	Write repository hooks
☐ read:repo_hook	Read repository hooks
☐ admin:org_hook	Full control of organization hooks
☐ gist	Create gists
☐ notifications	Access notifications
☒ user	Update ALL user data
☐ read:user	Read ALL user profile data
☐ user:email	Access user email addresses (read-only)
☐ user:follow	Follow and unfollow users
☐ delete_repo	Delete repositories
☐ write:discussion	Read and write team discussions
☐ read:discussion	Read team discussions
☐ admin:enterprise	Full control of enterprises
☐ manage_runners:enterprise	Manage enterprise runners and runner groups

① select this


② select this



③ select this

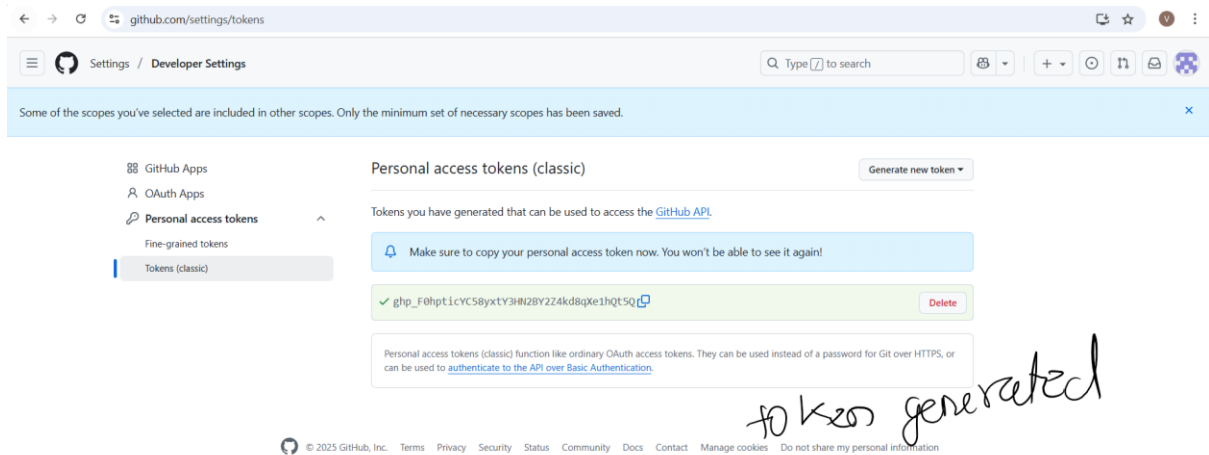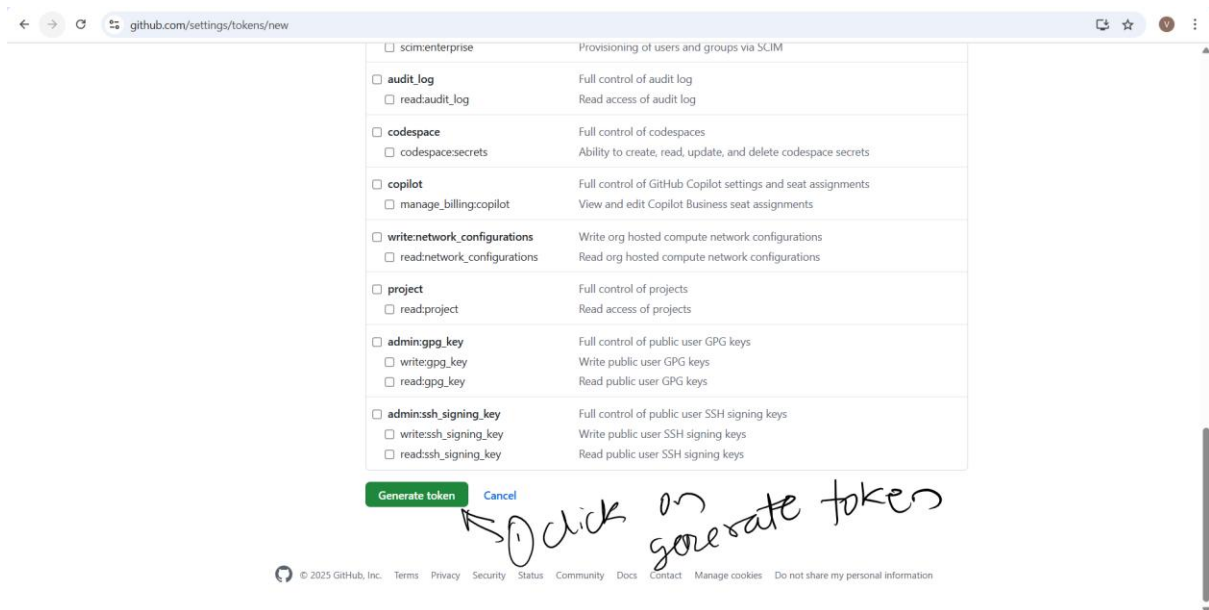

```
ubuntu@ip-172-31-27-178: ~/projects/gitpractical$ git push origin
Username for 'https://github.com': vighnesh1696-cell
Password for 'https://vighnesh1696-cell@github.com':
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 249 bytes | 249.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/vighnesh1696-cell/gitpractical.git
 * [new branch]      main -> main
ubuntu@ip-172-31-27-178:~/projects/gitpractical$
```

Handwritten notes:
- This command pushes the current branch commit to corresponding branch
- Write your username
- Paste the password from token
- three objects have been written to github

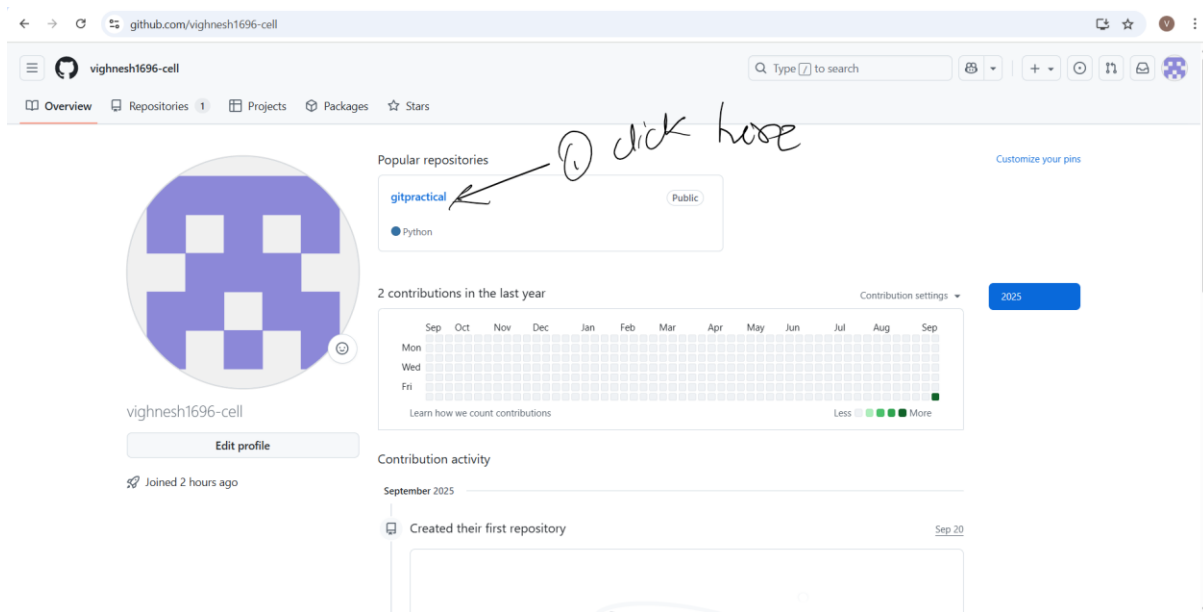

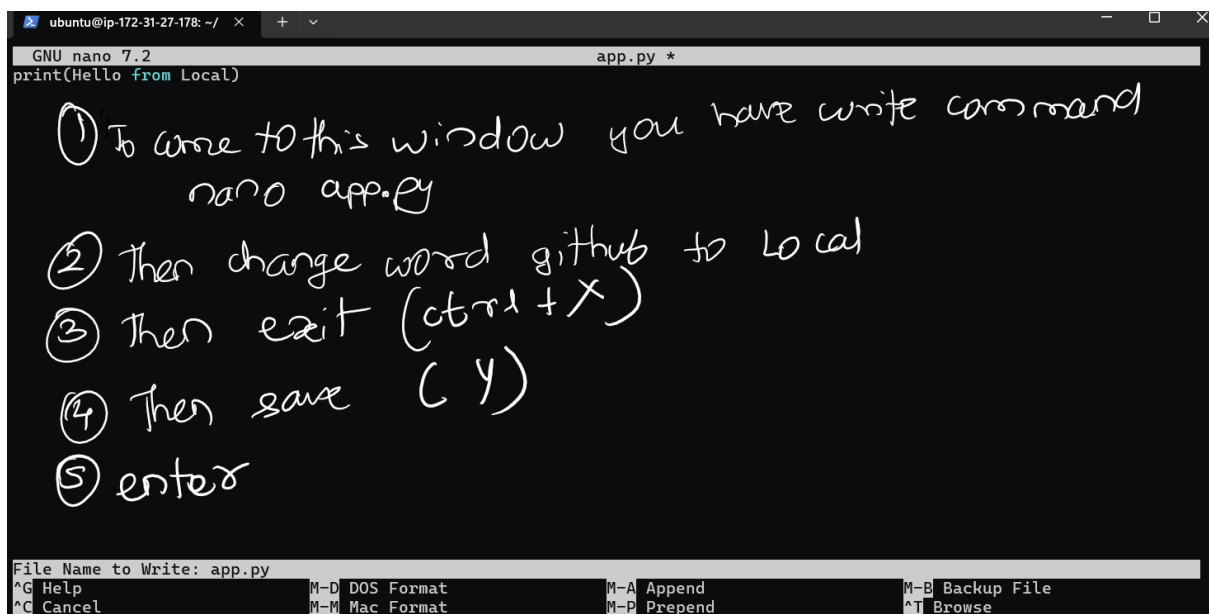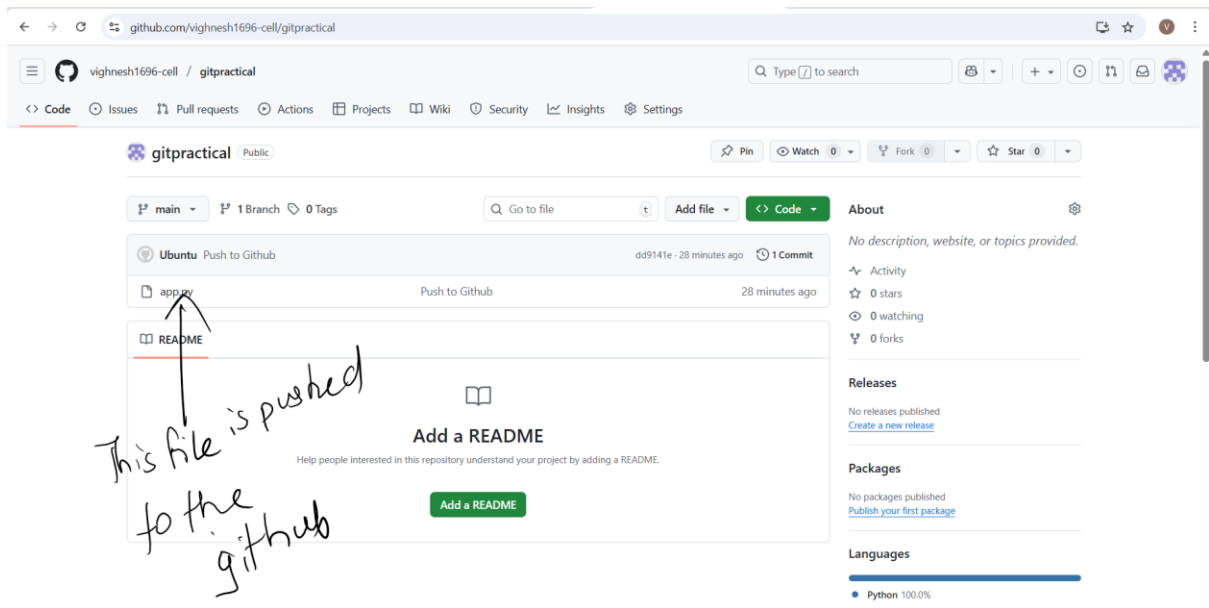

```
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ git add .
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ git commit -m "Second Push"
[main c03dfe3] Second Push
Committer: Ubuntu <ubuntu@ip-172-31-27-178.ec2.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:


    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

1 file changed, 1 insertion(+), 1 deletion(-)
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ git push origin
Username for 'https://github.com': vighnesh1696-cell
Password for 'https://vighnesh1696-cell@github.com':
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Writing objects: 100% (3/3), 275 bytes | 275.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/vighnesh1696-cell/gitpractical.git
   dd9141e..c03dfe3  main -> main
ubuntu@ip-172-31-27-178:~/projects/gitpractical$
```

① stages all changes
② This command push the commit
③ This command pushes the current branch commit to corresponding branch
④ put the token
} = writes done

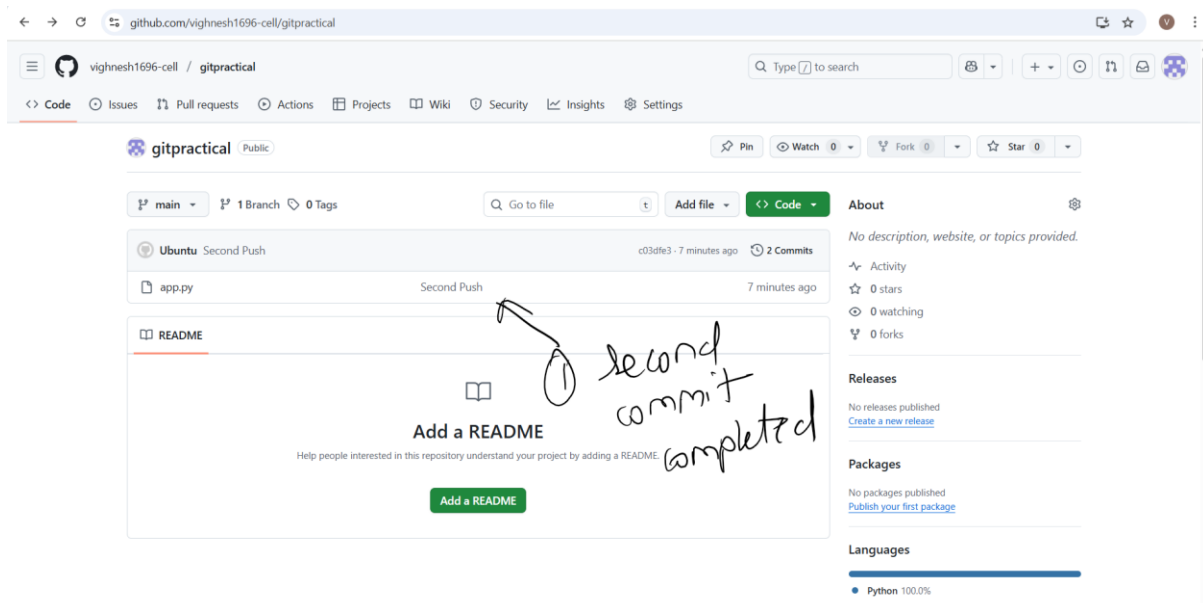

```
ubuntu@ip-172-31-27-178: ~/
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ git reset --hard HEAD~1
HEAD is now at dd9141e Push to Github
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ git log
commit dd9141efc493bcd29e4388d331576ccda6514ff9 (HEAD -> main)
Author: Ubuntu <ubuntu@ip-172-31-27-178.ec2.internal>
Date: Sat Sep 20 10:10:29 2025 +0000

    Push to Github
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ echo "print('hello world!')" > app.py
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ cat app.py
print(hello world)
```

① This command is used to undo the local changes
② This command shows the commit history
③ create or overwrite app.py
④ use to display the content of app.py

```

ubuntu@ip-172-31-27-178:~/projects/gitpractical$ git add .
ubuntu@ip-172-31-27-178:~/projects/gitpractical$ git commit -m "Last Commit"
[main 049bbf3] Last Commit
Committer: Ubuntu <ubuntu@ip-172-31-27-178.ec2.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

1 file changed, 1 insertion(+), 1 deletion(-)

```

① stages the changes
② push the commit
③ one change occurred

```

ubuntu@ip-172-31-27-178:~/projects/gitpractical$ git push origin main --force
Username for 'https://github.com': vighnesh1696-cell
Password for 'https://vighnesh1696-cell@github.com':
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Writing objects: 100% (3/3), 268 bytes | 268.00 KiB/s, done
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com:vighnesh1696-cell/gitpractical.git
+ c03dfe3...049bbf3 main -> main (forced update)
ubuntu@ip-172-31-27-178:~/projects/gitpractical$

```

← put your username
← I overwrites the remote changes with your local branch
← put the token

github.com/vighnesh1696-cell/gitpractical

vighnesh1696-cell / gitpractical

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

gitpractical Public

main 1 Branch 0 Tags

Go to file Add file Code

Ubuntu Last Commit 049bbf3 · 11 minutes ago 2 Commits

app.py Last Commit 11 minutes ago

README

Add a README

Help people interested in this repository understand your project by adding a README.

Add a README

last commit completed

About

No description, website, or topics provided.

Activity

0 stars

0 watching

0 forks

Releases

No releases published

Create a new release

Packages

No packages published

Publish your first package

Languages

Python 100.0%

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#Home

EC2

Dashboard
EC2 Global View
Events

▼ Instances

Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations

▼ Images

AMIs
AMI Catalog

▼ Elastic Block Store

Volumes
Snapshots

Resources

You are using the following Amazon EC2 resources in the United States (N. Virginia) Region:

Resource	Count
Instances (running)	1
Dedicated Hosts	0
Key pairs	1
Security groups	2
Auto Scaling Groups	0
Elastic IPs	0
Load balancers	0
Snapshots	0
Capacity Reservations	0
Instances	1
Placement groups	0
Volumes	1

Launch instance

To get started, launch an Amazon EC2 instance, which is a virtual server in the cloud.

Launch instance
Migrate a server

Note: Your instances will launch in the United States (N. Virginia) Region

Service health

AWS Health Dashboard

Region
United States (N. Virginia)

Status
This service is operating normally.

Zones

Zone name | Zone ID

EC2 cost

Date range: Past 6 months
Region: Global

Costs in your free plan account are covered by credits.

Total cost
Data unavailable

Regions
Data unavailable

Account attributes

Default VPC
vpc-05608efac282d54b

Settings
Data protection and security
Allowed AMIs

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

① Go to EC2 and click on instances

us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#Instances

EC2 > Instances

Instances (1/1) info

Find instance by attribute or tag (case-sensitive)

All states

Name	Instance ID	Instance state	Instance type	Availability Zone	Public IP
git_practical	i-0f3da69bc0f27888c	Running	t3.micro	us-east-1d	ec2-54-91-24-123.compute-1.amazonaws.com

Stop instance
Start instance
Reboot instance
Hibernate instance
Terminate (delete) instance

① click here

② click here

i-0f3da69bc0f27888c (git_practical)

Details | Status and alarms | Monitoring | Security | Networking | Storage | Tags

▼ Instance summary info

Instance ID
i-0f3da69bc0f27888c

IPv6 address
-

Public IPv4 address
54.91.24.123 | open address

Instance state
Running

Private IPv4 addresses
172.31.27.178

Public DNS
ec2-54-91-24-123.compute-1.amazonaws.com | open address

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences