



2520090071_Vignesh Kumar (Skill Week 5)

Code:

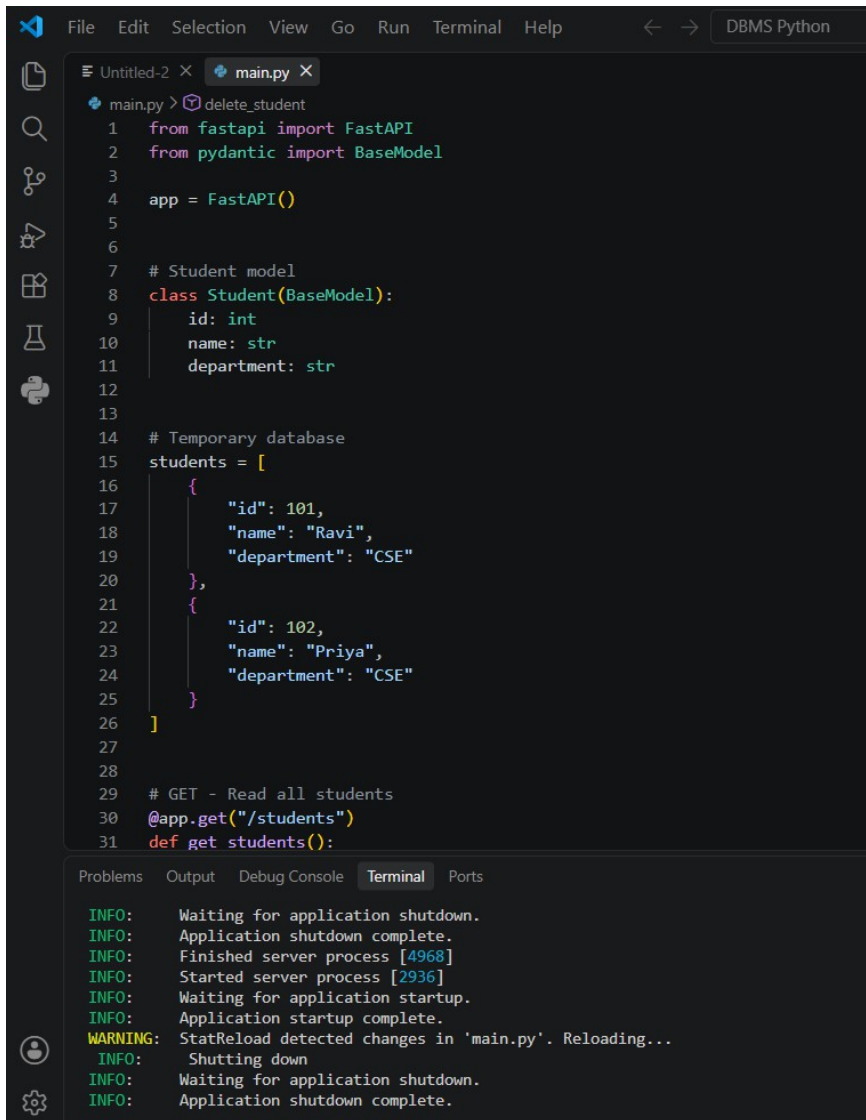

```
File Edit Selection View Go Run Terminal Help
main.py X delete_student
1 from fastapi import FastAPI
2 from pydantic import BaseModel
3
4 app = FastAPI()
5
6
7 # Student model
8 class Student(BaseModel):
9     id: int
10    name: str
11    department: str
12
13
14 # Temporary database
15 students = [
16     {
17         "id": 101,
18         "name": "Ravi",
19         "department": "CSE"
20     },
21     {
22         "id": 102,
23         "name": "Priya",
24         "department": "CSE"
25     }
26 ]
27
28
29 # GET - Read all students
30 @app.get("/students")
31 def get_students():


INFO:     Waiting for application shutdown.
INFO:     Application shutdown complete.
INFO:     Finished server process [4968]
INFO:     Started server process [2936]
INFO:     Waiting for application startup.
INFO:     Application startup complete.
WARNING:  StatReload detected changes in 'main.py'. Reloading...
INFO:     Shutting down
INFO:     Waiting for application shutdown.
INFO:     Application shutdown complete.
```

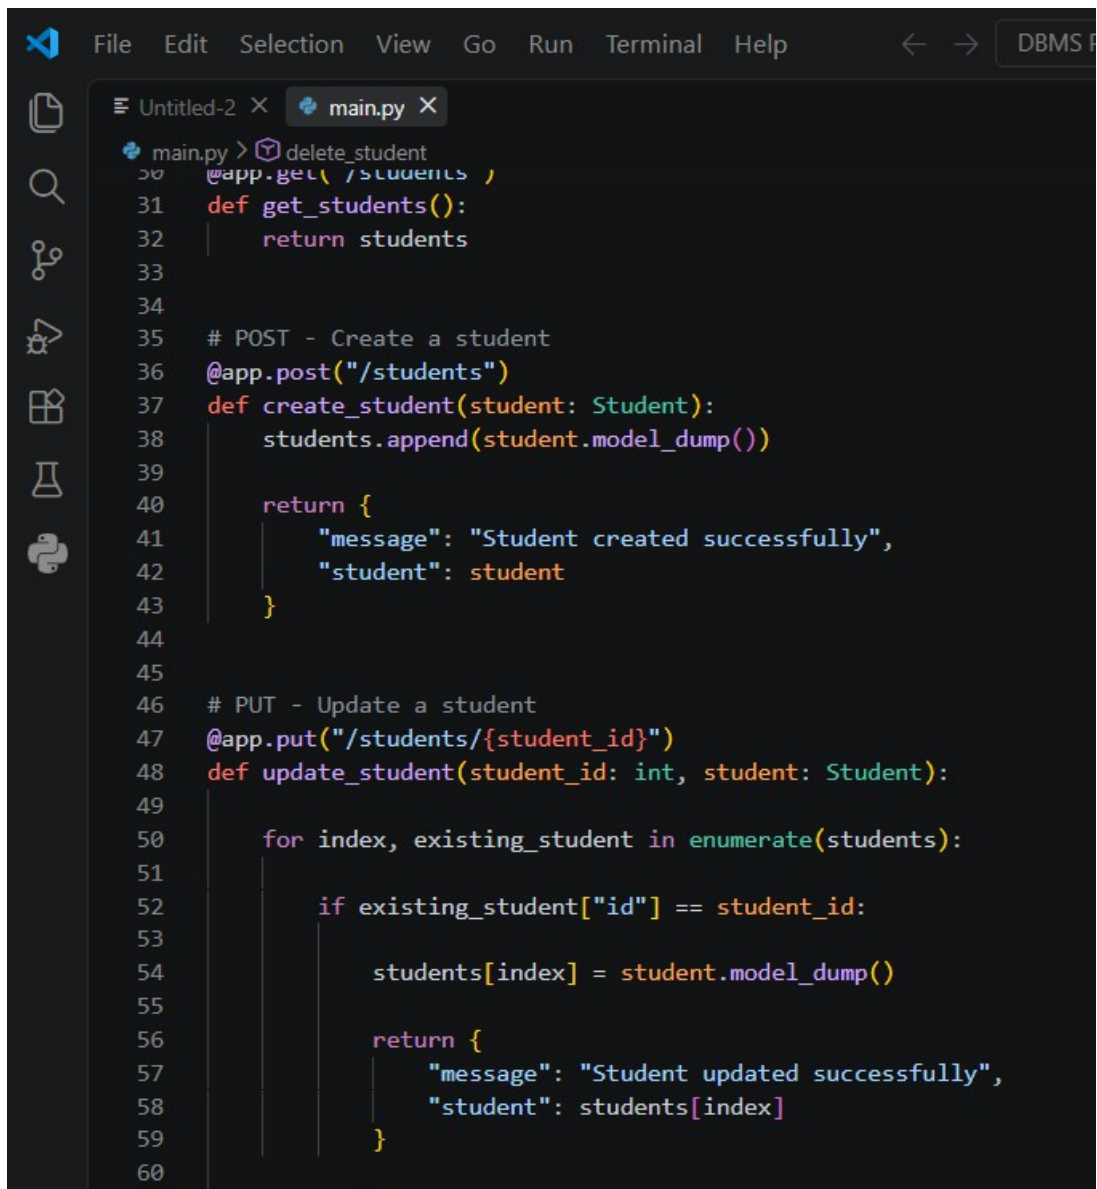

The image shows a Visual Studio Code editor window with a dark theme. The top menu bar includes File, Edit, Selection, View, Go, Run, Terminal, and Help. On the right, there are navigation arrows and a 'DBMS F' button. The left sidebar contains icons for Explorer, Search, Source Control, Run and Debug, Extensions, Testing, and Python. The main editor area has two tabs: 'Untitled-2' and 'main.py'. The 'main.py' tab is active, displaying Python code for a Flask application. The code includes a GET endpoint for listing students, a POST endpoint for creating a new student, and a PUT endpoint for updating an existing student. The code uses a list named 'students' to store student data and the 'model_dump()' method to convert Pydantic models to dictionaries. Line numbers 30 through 60 are visible on the left side of the code editor.

```
30 @app.get("/students")
31 def get_students():
32     return students
33
34
35 # POST - Create a student
36 @app.post("/students")
37 def create_student(student: Student):
38     students.append(student.model_dump())
39
40     return {
41         "message": "Student created successfully",
42         "student": student
43     }
44
45
46 # PUT - Update a student
47 @app.put("/students/{student_id}")
48 def update_student(student_id: int, student: Student):
49
50     for index, existing_student in enumerate(students):
51
52         if existing_student["id"] == student_id:
53
54             students[index] = student.model_dump()
55
56             return {
57                 "message": "Student updated successfully",
58                 "student": students[index]
59             }
60
```

```
File Edit Selection View Go Run Terminal Help
main.py > delete_student
48 def update_student(student_id: int, student: Student):
59     }
60
61     return {
62         "message": "Student not found"
63     }
64
65
66 # DELETE - Delete a student
67 @app.delete("/students/{student_id}")
68 def delete_student(student_id: int):
69
70     for index, student in enumerate(students):
71
72         if student["id"] == student_id:
73
74             deleted_student = students.pop(index)
75
76             return {
77                 "message": "Student deleted successfully",
78                 "student": deleted_student
79             }
80
81     return {
82         "message": "Student not found"
83     }
```

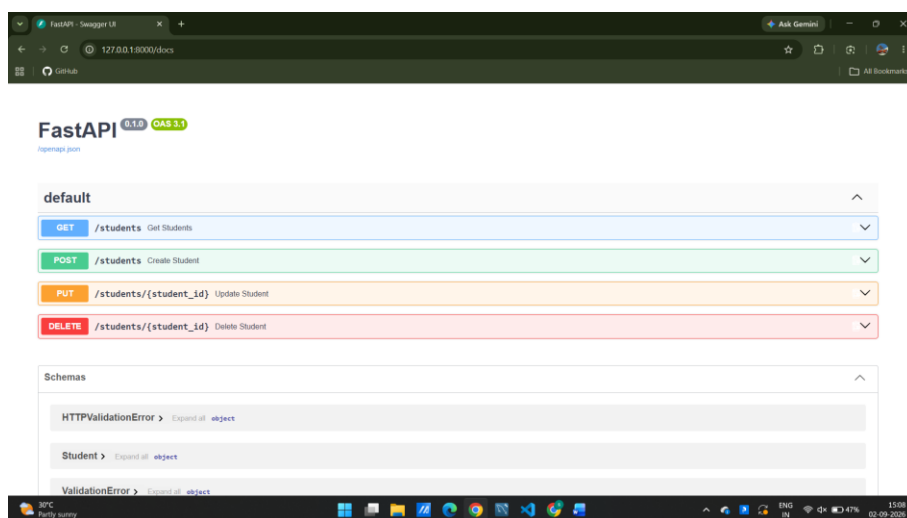

GET:

FastAPI 0.10.0 OA5.1.1
api.openapi.com

default

GET /students Get Students

Parameters

No parameters

Execute Clear

Responses

Curl

```
curl -X GET \
  'http://127.0.0.1:8000/students' \
  -H 'accept: application/json'
```

Request URL

http://127.0.0.1:8000/students

Server response

Code Details

200

Response body

```
{
  "id": 101,
  "name": "Ravi",
  "department": "CSE"
}
```

Request URL

http://127.0.0.1:8000/students

Server response

Code Details

200

Response body

```
{
  "id": 101,
  "name": "Ravi",
  "department": "CSE"
},
{
  "id": 102,
  "name": "Priya",
  "department": "CSE"
}
```

Response headers

```
Content-Length: 90
Content-Type: application/json
Date: Wed, 02 Sep 2020 09:38:46 GMT
Server: uvicorn
```

Responses

Code	Description	Links
200	Successful Response	No links

Media type

application/json

Controls accept header

Example Value Schema

```
"string"
```

POST:

POST /students Create Student

Parameters

No parameters

Request body required

application/json

Edit Value Schema

```
{
  "id": 101,
  "name": "Ravi",
  "department": "CSE"
}
```

Execute Clear

Responses

Curl

```
curl -X 'POST' \
  'http://127.0.0.1:8000/students' \
  -H 'accept: application/json' \
  -H 'content-type: application/json' \
  -d '{
    "id": 101,
    "name": "Ravi",
    "department": "CSE"
  }'
```

Request URL

http://127.0.0.1:8000/students

Server response

Code

Details

200

Response body

```
{
  "message": "Student created successfully",
  "student": {
    "id": 101,
    "name": "Ravi",
    "department": "CSE"
  }
}
```

Response headers

```
content-length: 96
content-type: application/json
date: Wed, 02 Sep 2026 09:44:42 GMT
server: uvicorn
```

Download

PUT:

PUT

/students/{student_id} Update Student

Cancel

Reset

Parameters

Name

Description

student_id

required

integer

(path)

102

Request body

required

application/json

Edit Value

Schema

```
{
  "id": 102,
  "name": "Priya",
  "department": "CSE"
}
```

Execute

Clear

Curl

```
curl -X 'PUT' \
  'http://127.0.0.1:8000/students/102' \
  -H 'accept: application/json' \
  -H 'content-type: application/json' \
  -d '{
    "id": 102,
    "name": "Priya",
    "department": "CSE"
  }'
```

Request URL

http://127.0.0.1:8000/students/102

Server response

Code	Details
200	Response body <pre>{ "message": "Student updated successfully", "student": { "id": 102, "name": "Priya", "department": "CSE" } }</pre> Response headers <pre>content-length: 97 content-type: application/json date: Wed, 02 Sep 2026 09:46:12 GMT server: uvicorn</pre>

Responses

DELETE:

DELETE /students/{student_id} Delete Student

Parameters

Name	Description
student_id * required	
integer	102
(path)	

Execute Clear

Responses

Responses

Curl

```
curl -X 'DELETE' \
  'http://127.0.0.1:8000/students/102' \
  -H 'accept: application/json'
```

Request URL

http://127.0.0.1:8000/students/102

Server response

Code	Details
200	Response body <pre>{ "message": "Student deleted successfully", "student": { "id": 102, "name": "Priya", "department": "CSE" } }</pre> Response headers <pre>content-length: 97 content-type: application/json date: Wed, 02 Sep 2026 09:47:20 GMT server: uvicorn</pre>

Responses