

Application Deployment

(Deploy the given React application to a production ready state)

Application:

Clone the below mentioned repository and deploy the application (Run application in port 3000).

Repo URL : <https://github.com/Vennilavan12/Brain-Tasks-App.git>

Docker:

- Dockerize the application by creating Dockerfile
- Build an application and check output using docker image.

ECR:

- Create an AWS ECR repository for store docker images.

Kubernetes:

- Setup Kubernetes in AWS EKS and Confirm EKS cluster is running.
- Write deployment and service YAML files.
- Deploy using kubectl via Codedeploy.

CodeBuild:

- Create a CodeBuild project:
- Source: Connect to your repository
- Environment: Use managed image (Amazon Linux, Ubuntu)
- Write and define commands in buildspec.yml.

CodeDeploy:

- Create codedeploy application.
- create appspec.yml file to deploy applications in EKS.

Version Control:

- Push the codebase to a Git provider (GitHub).
- Use CLI commands to push code.

CodePipeline:


- Source: GitHub
- Build: AWS CodeBuild project
- Deploy: AWS CodeDeploy or deploy to EKS via Lambda or custom script.

Monitoring:

- Use CloudWatch Logs to track build, deploy, and application logs.

Solution:

✓ 1. Launched an EC2 instance and connected to Ubuntu via SSH

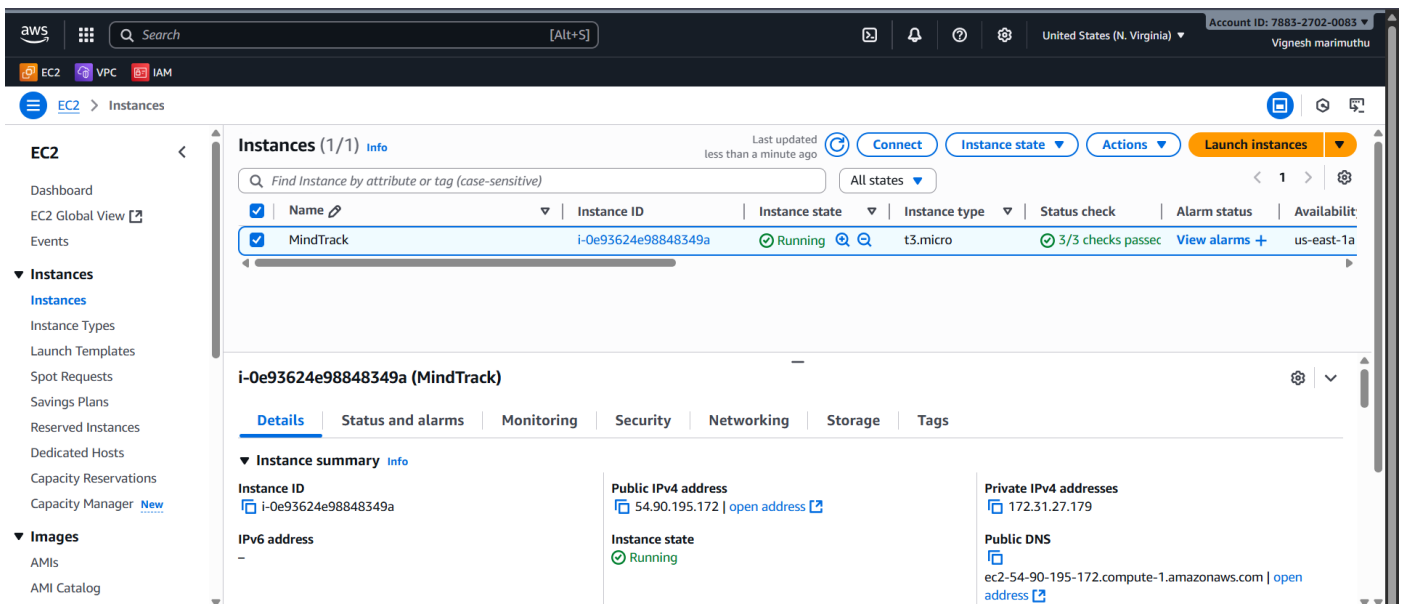

```
ubuntu@ip-172-31-27-179: ~  
vignesh@Vignesh:~$ chmod 400 mykeyy.pem  
vignesh@Vignesh:~$ ssh -i mykeyy.pem ubuntu@54.90.195.172  
The authenticity of host '54.90.195.172 (54.90.195.172)' can't be established.  
ED25519 key fingerprint is SHA256:t0iNAP2Ptqs9EUomEN+1f3UYFQiOswr47hA+5Z2nP7s.  
This key is not known by any other names.  
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes  
Warning: Permanently added '54.90.195.172' (ED25519) to the list of known hosts.  
Welcome to Ubuntu 24.04.3 LTS (GNU/Linux 6.14.0-1011-aws x86_64)  
  
* Documentation:  https://help.ubuntu.com  
* Management:    https://landscape.canonical.com  
* Support:        https://ubuntu.com/pro  
  
System information as of Thu Oct 16 19:43:35 UTC 2025  
  
System load:  0.04          Temperature:    -273.1 C  
Usage of /:   25.9% of 6.71GB Processes:      119  
Memory usage: 24%          Users logged in: 1  
Swap usage:   0%           IPv4 address for ens5: 172.31.27.179
```

- EC2 instance is used by **CodeDeploy** to run deployment scripts (appspec.yml, update-kubeconfig.sh, and deploy-to-eks.sh).
- It also serves as the machine that connects to my **EKS cluster** using kubectl.

✓ 2. Updated and Installed Required Tools

```
ubuntu@ip-172-31-27-179:~$ sudo apt update && sudo apt install -y docker.io git curl unzip jq ruby wget
sudo usermod -aG docker ubuntu
newgrp docker
Hit:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble InRelease
Get:2 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates InRelease [126 kB]
Get:3 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-backports InRelease [126 kB]
Get:4 http://security.ubuntu.com/ubuntu noble-security InRelease [126 kB]
Get:5 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble/universe amd64 Packages [15.0 MB]
Get:6 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble/universe Translation-en [5982 kB]
```

```
ubuntu@ip-172-31-27-179:~$ docker --version
Docker version 28.2.2, build 28.2.2-0ubuntu1~24.04.1
ubuntu@ip-172-31-27-179:~$ █
```

```
ubuntu@ip-172-31-27-179:~$ # Install AWS CLI
curl "https://awscli.amazonaws.com/awscli-exe-linux-x86_64.zip" -o "awscliv2.zip"
unzip awscliv2.zip && sudo ./aws/install
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left   Speed
100 59.3M  100 59.3M    0     0  340M      0  --:--:-- --:--:-- --:--:-- 341M
Archive: awscliv2.zip
  creating: aws/
  creating: aws/dist/
  inflating: aws/README.md
  inflating: aws/install
  inflating: aws/THIRD_PARTY_LICENSES
  creating: aws/dist/awscli/
```

```
ubuntu@ip-172-31-27-179:~$ # Install kubectl
curl -LO "https://dl.k8s.io/release/$(curl -sSL https://dl.k8s.io/release/stable.txt)/bin/linux/amd64/kubectl"
sudo install -o root -g root -m 0755 kubectl /usr/local/bin/kubectl
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left   Speed
100  138  100  138    0     0  2066      0  --:--:-- --:--:-- --:--:-- 2090
100 57.7M  100 57.7M    0     0  209M      0  --:--:-- --:--:-- --:--:-- 209M
ubuntu@ip-172-31-27-179:~$ # Install eksctl
curl -sSL "https://github.com/eksctl-io/eksctl/releases/latest/download/eksctl_$(uname -s)_amd64.tar.gz" | tar xz
sudo mv eksctl /usr/local/bin
ubuntu@ip-172-31-27-179:~$ kubectl version --client && eksctl version && aws --version
Client Version: v1.34.1
Kustomize Version: v5.7.1
0.215.0
aws-cli/2.31.17 Python/3.13.7 Linux/6.14.0-1011-aws exe/x86_64.ubuntu.24
ubuntu@ip-172-31-27-179:~$ █
```

- Installed all necessary tools and dependencies such as **docker**, **awscli**, **kubectl**, and **eksctl**.

✓ 3. Installed CodeDeploy Agent

```
ubuntu@ip-172-31-27-179:~$ cd /tmp
wget https://aws-coddeploy-us-east-1.s3.us-east-1.amazonaws.com/latest/install
chmod +x ./install
sudo ./install auto
sudo systemctl enable coddeploy-agent
sudo systemctl start coddeploy-agent
sudo systemctl status coddeploy-agent
--2025-10-16 19:52:50-- https://aws-coddeploy-us-east-1.s3.us-east-1.amazonaws.com/latest/install
Resolving aws-coddeploy-us-east-1.s3.us-east-1.amazonaws.com (aws-coddeploy-us-east-1.s3.us-east-1.amazonaws.com)...
 16.182.75.10, 16.15.200.158, 3.5.9.155, ...
Connecting to aws-coddeploy-us-east-1.s3.us-east-1.amazonaws.com (aws-coddeploy-us-east-1.s3.us-east-1.amazonaws.com
)|16.182.75.10|:443... connected.
HTTP request sent, awaiting response... 200 OK
█
```

```

Executing: /usr/lib/systemd/systemd-sysv-install enable codedeploy-agent
● codedeploy-agent.service - LSB: AWS CodeDeploy Host Agent
   Loaded: loaded (/etc/init.d/codedeploy-agent; generated)
   Active: active (running) since Thu 2025-10-16 19:53:02 UTC; 1s ago
     Docs: man:systemd-sysv-generator(8)
    Tasks: 3 (limit: 1008)
   Memory: 67.6M (peak: 67.7M)
      CPU: 1.606s
   CGroup: /system.slice/codedeploy-agent.service
           └─3280 "codedeploy-agent: master 3280"
             └─3283 "codedeploy-agent: InstanceAgent::Plugins::CodeDeployPlugin::CommandPoller of master 3280"

Oct 16 19:53:01 ip-172-31-27-179 systemd[1]: Starting codedeploy-agent.service - LSB: AWS CodeDeploy Host Agent...
Oct 16 19:53:02 ip-172-31-27-179 codedeploy-agent[3274]: Starting codedeploy-agent:
Oct 16 19:53:02 ip-172-31-27-179 systemd[1]: Started codedeploy-agent.service - LSB: AWS CodeDeploy Host Agent.
ubuntu@ip-172-31-27-179:/tmp$

```

- The CodeDeploy agent allows AWS CodeDeploy to execute the deployment lifecycle hooks (BeforeInstall, AfterInstall) from the **appspec.yml** file directly on the EC2 instance.

✓ 4. Created Project Files in GitHub Repository

```

ubuntu@ip-172-31-27-179:/tmp$ git clone https://github.com/Vennilavan12/Brain-Tasks-App.git
cd Brain-Tasks-App
Cloning into 'Brain-Tasks-App'...
remote: Enumerating objects: 8, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (3/3), done.
remote: Total 8 (delta 0), reused 0 (delta 0), pack-reused 5 (from 1)
Receiving objects: 100% (8/8), 100.04 KiB | 14.29 MiB/s, done.
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$ ls
dist
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$

```

- My Repository Link - <https://github.com/vigneshmarimuthu/brain-tasks-app-v2>

Dockerfile

- Created a Dockerfile to build a production-ready image of my app.

```

ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$ cat Dockerfile
FROM public.ecr.aws/nginx/nginx:stable-alpine

# Copy the dist folder contents to Nginx HTML directory
COPY dist/ /usr/share/nginx/html

# Expose port 80
EXPOSE 80

# Start Nginx
CMD ["nginx", "-g", "daemon off;"]
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$

```

buildspec.yml

- Created a **buildspec.yml** file for AWS CodeBuild to define build steps.

```
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$ cat buildspec.yml
version: 0.2

phases:
  pre_build:
    commands:
      - echo Logging in to Amazon ECR...
      - aws --version
      - docker --version
      - aws ecr get-login-password --region us-east-1 | docker login --username AWS --password-stdin 788327020083.dkr.ecr.us-east-1.amazonaws.com

  build:
    commands:
      - IMAGE_TAG=latest
      - docker build -t brain-tasks-app:$IMAGE_TAG .
      - docker tag brain-tasks-app:$IMAGE_TAG 788327020083.dkr.ecr.us-east-1.amazonaws.com/brain-tasks-app:$IMAGE_TAG

  post_build:
    commands:
      - docker push 788327020083.dkr.ecr.us-east-1.amazonaws.com/brain-tasks-app:$IMAGE_TAG
      - echo '[{"name":"brain-container","imageUri":"788327020083.dkr.ecr.us-east-1.amazonaws.com/brain-tasks-app:latest"}]' > imagedefinitions.json

artifacts:
  files:
    - appspec.yml
    - scripts/update-kubeconfig.sh
    - scripts/deploy-to-eks.sh
    - imagedefinitions.json
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$
```

appspec.yml

- Created an **appspec.yml** file for CodeDeploy to define lifecycle hooks.

```
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$ cat appspec.yml
version: 0.0
os: linux

hooks:
  BeforeInstall:
    - location: scripts/update-kubeconfig.sh
      timeout: 300
      runas: root
  AfterInstall:
    - location: scripts/deploy-to-eks.sh
      timeout: 600
      runas: root
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$
```

Scripts Folder

```
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App/scripts$ cat update-kubeconfig.sh
#!/bin/bash
set -e
aws eks update-kubeconfig --name brain-cluster --region us-east-1
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App/scripts$
```

- This script connects the EC2 host to the EKS cluster.

```

ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App/scripts$ cat deploy-to-eks.sh
#!/bin/bash
set -e

# Image URI
IMAGE_URI="788327020083.dkr.ecr.us-east-1.amazonaws.com/brain-tasks-app:latest"

# Check if deployment exists
if kubectl get deployment brain-deploy >/dev/null 2>&1; then
    echo "Updating existing deployment..."
    kubectl set image deployment/brain-deploy brain-container=$IMAGE_URI
    kubectl rollout status deployment/brain-deploy
else
    echo "Creating deployment..."
    kubectl apply -f deployment.yaml
fi
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App/scripts$ _

```

- This script updates the Kubernetes deployment with the latest Docker image pushed to ECR.

✓ 5. Created Kubernetes Deployment and Service Files

deployment.yaml

```

ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$ cat deployment.yml
apiVersion: apps/v1
kind: Deployment
metadata:
  name: brain-deploy
spec:
  replicas: 2
  selector:
    matchLabels:
      app: brain
  template:
    metadata:
      labels:
        app: brain
    spec:
      containers:
        - name: brain-container
          image: 788327020083.dkr.ecr.us-east-1.amazonaws.com/brain-tasks-app:latest
          ports:
            - containerPort: 80
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$ _

```

service.yaml

```


ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$ cat service.yml
apiVersion: v1
kind: Service
metadata:
  name: brain-service
spec:
  type: LoadBalancer
  selector:
    app: brain
  ports:
    - port: 80
      targetPort: 80
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$ _

```

- Deployment → Runs containers in pods
- Service → Exposes the app to the internet through a LoadBalancer

✓ 6. Created AWS Resources


```
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$ aws ecr create-repository --repository-name brain-tasks-app --region us-east-1
{
  "repository": {
    "repositoryArn": "arn:aws:ecr:us-east-1:788327020083:repository/brain-tasks-app",
    "registryId": "788327020083",
    "repositoryName": "brain-tasks-app",
    "repositoryUri": "788327020083.dkr.ecr.us-east-1.amazonaws.com/brain-tasks-app",
    "createdAt": "2025-10-16T20:06:16.446000+00:00",
    "imageTagMutability": "MUTABLE",
    "imageScanningConfiguration": {
      "scanOnPush": false
    },
    "encryptionConfiguration": {
      "encryptionType": "AES256"
    }
  }
}
```

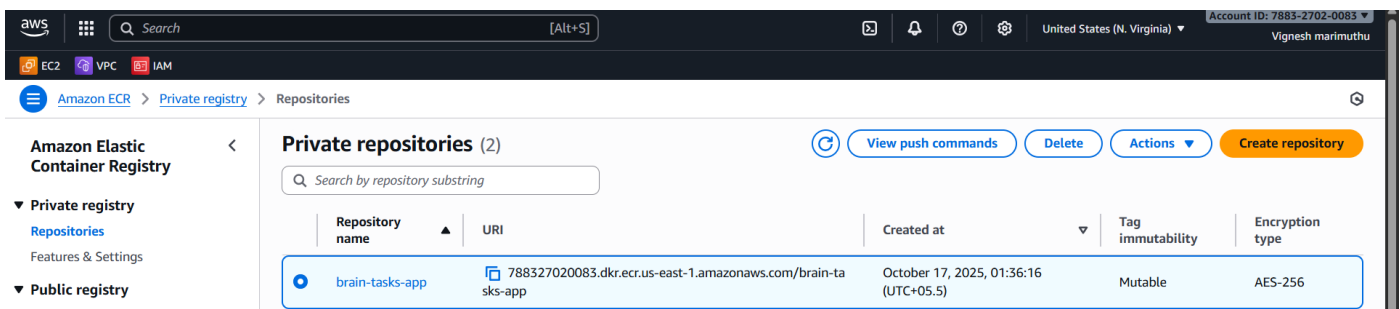

The screenshot shows the AWS Private Registry console. The left sidebar has 'Amazon Elastic Container Registry' selected. The main area is titled 'Private repositories (2)' and contains a table with the following data:

Repository name	URI	Created at	Tag immutability	Encryption type
brain-tasks-app	788327020083.dkr.ecr.us-east-1.amazonaws.com/brain-tasks-app	October 17, 2025, 01:36:16 (UTC+05.5)	Mutable	AES-256

```
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$ eksctl create cluster --name brain-cluster --region us-east-1 --nodes 2
2025-10-16 20:07:11 [i] eksctl version 0.215.0
2025-10-16 20:07:11 [i] using region us-east-1
2025-10-16 20:07:11 [i] setting availability zones to [us-east-1c us-east-1f]
2025-10-16 20:07:11 [i] subnets for us-east-1c - public:192.168.0.0/19 private:192.168.64.0/19
2025-10-16 20:07:11 [i] subnets for us-east-1f - public:192.168.32.0/19 private:192.168.96.0/19
2025-10-16 20:07:11 [i] nodegroup "ng-83519635" will use "" [AmazonLinux2023/1.32]
2025-10-16 20:07:11 [!] Auto Mode will be enabled by default in an upcoming release of eksctl. This means managed node groups and managed networking add-ons will no longer be created by default. To maintain current behavior, explicitly set 'autoModeConfig.enabled: false' in your cluster configuration. Learn more: https://eksctl.io/usage/auto-mode/
2025-10-16 20:07:11 [i] using Kubernetes version 1.32
2025-10-16 20:07:11 [i] creating EKS cluster "brain-cluster" in "us-east-1" region with managed nodes
2025-10-16 20:07:11 [i] will create 2 separate CloudFormation stacks for cluster itself and the initial managed nodegroup
```

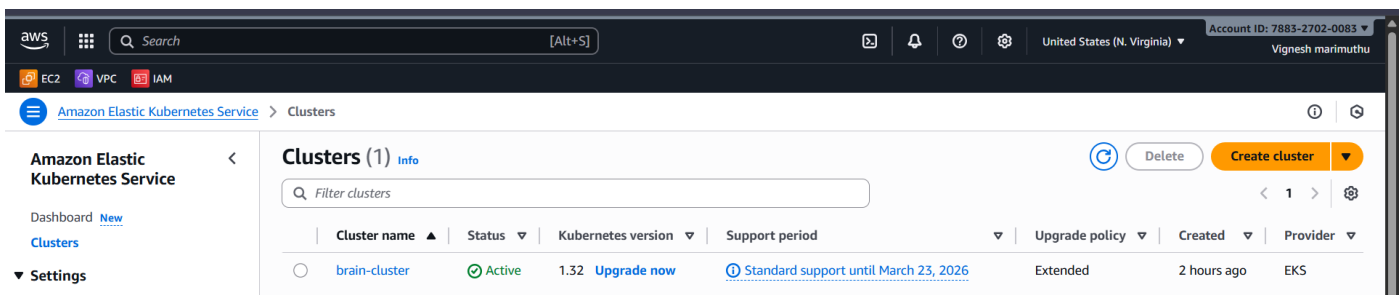

The screenshot shows the AWS Elastic Kubernetes Service console. The left sidebar has 'Amazon Elastic Kubernetes Service' selected. The main area is titled 'Clusters (1)' and contains a table with the following data:

Cluster name	Status	Kubernetes version	Support period	Upgrade policy	Created	Provider
brain-cluster	Active	1.32 Upgrade now	Standard support until March 23, 2026	Extended	2 hours ago	EKS

- ECR stores built Docker images.
- EKS hosts the Kubernetes cluster.

✓ 7. Configured CI/CD Pipeline

Created CodeBuild Project

- Build Docker image and push to ECR.

The screenshot shows the 'Create build project' page in the AWS CodeBuild console. The breadcrumb trail is 'Developer Tools > CodeBuild > Build projects > Create build project'. The page title is 'Create build project'. Under the 'Project configuration' section, the 'Project name' field contains 'brain-app-build'. Below it, a note states: 'A project name must be 2 to 255 characters. It can include the letters A-Z and a-z, the numbers 0-9, and the special characters - and _'. The 'Project type' section has two options: 'Default project' (selected) and 'Runner project'. The 'Default project' description is 'Create a custom CodeBuild project.' The 'Runner project' description is 'Create a CodeBuild managed runner for workflows in GitHub Actions, GitHub Enterprise Actions, GitLab, or Buildkite.' At the bottom, there is an 'Additional configuration' section with a link to 'Description, public build access, build badge, concurrent build limit, tags'.

The screenshot shows the 'Source' configuration page in the AWS CodeBuild console. The breadcrumb trail is 'Developer Tools > CodeBuild > Build projects > Create build project > Source'. The page title is 'Source'. There is an 'Add source' button. Under the 'Source 1 - Primary' section, the 'Source provider' is set to 'GitHub'. The 'Credential' section shows a green checkmark and the text: 'Your account is successfully connected by using an AWS managed GitHub App. Manage account credentials.' There is an option to 'Use override credentials for this project only' which is currently unchecked. The 'Repository' section has three options: 'Repository in my GitHub account' (selected), 'Public repository', and 'GitHub scoped webhook'. The 'Repository' field contains the URL 'https://github.com/vigneshmarimuthu/brain-tasks-app-v2'.

The screenshot shows the 'Queued timeout' configuration page in the AWS CodeBuild console. The breadcrumb trail is 'Developer Tools > CodeBuild > Build projects > Create build project > Source > Queued timeout'. The page title is 'Queued timeout'. The 'Default time in build queue is 8 hours' is noted. The 'Hours' field is set to '8' and the 'Minutes' field is set to '0'. A note states: 'Timeout must be between 5 minutes and 8 hours'. The 'Privileged' section has a checked checkbox and the text: 'Enable this flag if you want to build Docker images or want your builds to get elevated privileges'. The 'Report auto-discover' section has a link to 'Info' and an unchecked checkbox with the text: 'Disable report auto-discover'. The 'Auto-discover directory - optional' field contains the value '**/*'. A note at the bottom states: 'CodeBuild will search for supported report file types in this directory. **/* by default'.

aws

Search

[Alt+S]

EC2

VPC

IAM

United States (N. Virginia)

Account ID: 7883-2702-0083

Vignesh marimuthu

Operating system

Amazon Linux

Runtime(s)

Standard

Image

aws/codebuild/amazonlinux-x86_64-standard:5.0

Image version

Always use the latest image for this runtime version

☐ Use GPU-enhanced compute

Service role

☐ New service role

Create a service role in your account

☒ Existing service role

Choose an existing service role from your account

Role ARN

arn:aws:iam::788327020083:role/CodeBuildRole

☒ Allow AWS CodeBuild to modify this service role so it can be used with this build project.

Buildspec

Build specifications

☐ Insert build commands

Store build commands as build project configuration

☒ Use a buildspec file

Store build commands in a YAML-formatted buildspec file

Buildspec name - optional

By default, CodeBuild looks for a file named buildspec.yml in the source code root directory. If your buildspec file uses a different name or location, enter its path from the source root here (for example, buildspec-two.yml or configuration/buildspec.yml).

buildspec.yml

Batch configuration

You can run a group of builds as a single execution. Batch configuration is also available in advanced option when starting build.

☐ Define batch configuration - optional

You can also define or override batch configuration when starting a build batch.

Additional configuration

Cache, encryption key

Logs

CloudWatch

☒ CloudWatch logs - optional

Checking this option will upload build output logs to CloudWatch.

Group name - optional

aws/codebuild/brain-app-build

The group name of the logs in CloudWatch Logs. The log group name will be /aws/codebuild/<project-name> by default.

Stream name prefix - optional

The prefix of the stream name of the CloudWatch Logs.

aws

Search

[Alt+S]

United States (N. Virginia)

Account ID: 7883-2702-0083

Vignesh marimuthu

EC2VPCIAM

▼ Logs

CloudWatch

☒ CloudWatch logs - optional
Checking this option will upload build output logs to CloudWatch.

Group name - optional

The group name of the logs in CloudWatch Logs. The log group name will be /aws/codebuild/<project-name> by default.

Stream name prefix - optional

The prefix of the stream name of the CloudWatch Logs.

S3

☐ S3 logs - optional
Checking this option will upload build output logs to S3.

Cancel

Create build project

aws

Search

[Alt+S]

United States (N. Virginia)

Account ID: 7883-2702-0083

Vignesh marimuthu

EC2VPCIAM

Developer Tools

CodeBuild

► Source • CodeCommit

► Artifacts • CodeArtifact

▼ Build • CodeBuild

Getting started

Build projects

Build project

Settings

Build history

Report groups

Report history

Compute fleets [New](#)

Account metrics

▼ Related integrations

Developer Tools > CodeBuild > Build projects > brain-app-build > brain-app-build:4a57a100-1d52-4d72-b7ae-75b947a23185

brain-app-build:4a57a100-1d52-4d72-b7ae-75b947a23185

Stop build

Debug build

Retry build

Build status

Status	Initiator	Build ARN	Resolved source version
✓ Succeeded	codepipeline/brain-app-pipeline	arn:aws:codebuild:us-east-1:788327020083:build/brain-app-build:4a57a100-1d52-4d72-b7ae-75b947a23185	790ae02b9422bba546e16e24c712bab6009012ce
Start time	End time	Build number	
Oct 17, 2025 3:08 AM (UTC+5:30)	Oct 17, 2025 3:09 AM (UTC+5:30)	21	

Build logs

Phase details

Reports

Environment variables

Build details

Resource utilization

aws

Search

[Alt+S]

United States (N. Virginia)

Account ID: 7883-2702-0083

Vignesh marimuthu

EC2VPCIAM

Developer Tools

CodeBuild

► Source • CodeCommit

► Artifacts • CodeArtifact

▼ Build • CodeBuild

Getting started

Build projects

Build project

Settings

Build history

Report groups

Report history

Compute fleets [New](#)

Account metrics

▼ Related integrations

Jenkins

Showing the last 159 lines of the build log. [View entire log](#)

Tail logs

No previous logs

```
1 [Container] 2025/10/16 21:38:29.390284 Running on CodeBuild On-demand
2 [Container] 2025/10/16 21:38:29.390297 Waiting for agent ping
3 [Container] 2025/10/16 21:38:32.705333 Waiting for DOWNLOAD_SOURCE
4 [Container] 2025/10/16 21:38:39.781404 Phase is DOWNLOAD_SOURCE
5 [Container] 2025/10/16 21:38:39.784331 CODEBUILD_SRC_DIR=/codebuild/output/src1289541731/src
6 [Container] 2025/10/16 21:38:39.785020 YAML location is /codebuild/output/src1289541731/src/buildspec.yml
7 [Container] 2025/10/16 21:38:39.787237 Setting HTTP client timeout to higher timeout for S3 source
8 [Container] 2025/10/16 21:38:39.787332 Processing environment variables
9 [Container] 2025/10/16 21:38:43.555807 No runtime version selected in buildspec.
10 [Container] 2025/10/16 21:38:43.585087 Moving to directory /codebuild/output/src1289541731/src
11 [Container] 2025/10/16 21:38:43.585139 Cache is not defined in the buildspec
12 [Container] 2025/10/16 21:38:44.826139 Skip cache due to: no paths specified to be cached
13 [Container] 2025/10/16 21:38:44.826533 Registering with agent
14 [Container] 2025/10/16 21:38:46.055434 Phases found in YAML: 3
15 [Container] 2025/10/16 21:38:46.055470 POST_BUILD: 2 commands
16 [Container] 2025/10/16 21:38:46.055477 PRE_BUILD: 4 commands
17 [Container] 2025/10/16 21:38:46.055480 BUILD: 3 commands
18 [Container] 2025/10/16 21:38:46.055909 Phase complete: DOWNLOAD_SOURCE State: SUCCEEDED
19 [Container] 2025/10/16 21:38:46.055935 Phase context status code: Message:
20 [Container] 2025/10/16 21:38:48.629614 Entering phase INSTALL
21 [Container] 2025/10/16 21:38:49.852288 Phase complete: INSTALL State: SUCCEEDED
22 [Container] 2025/10/16 21:38:49.852313 Phase context status code: Message:
23 [Container] 2025/10/16 21:38:49.889974 Entering phase PRE_BUILD
24 [Container] 2025/10/16 21:38:51.123499 Running command echo Logging in to Amazon ECR...
25 Logging in to Amazon ECR...
```

aws

Search

[Alt+S]

United States (N. Virginia)

Account ID: 7883-2702-0083

Vignesh marimuthu

EC2

VPC

IAM

Developer Tools

CodeBuild

Source • CodeCommit

Artifacts • CodeArtifact

Build • CodeBuild

Getting started

Build projects

Build project

Settings

Build history

Report groups

Report history

Compute fleets **New**

Account metrics

Related integrations

Jenkins

```
25 Logging in to Amazon ECR...
26
27 [Container] 2025/10/16 21:38:51.131990 Running command aws --version
28 aws-cli/2.31.1 Python/3.13.7 Linux/4.14.355-280.684.amzn2.x86_64 exec-env/AWS_EC2 exe/x86_64.amzn.2023
29
30 [Container] 2025/10/16 21:39:00.789327 Running command docker --version
31 Docker version 27.5.1, build 9f9e405
32
33 [Container] 2025/10/16 21:39:00.809369 Running command aws ecr get-login-password --region us-east-1 | docker login --username AWS --password-stdin
34 788327020083.dkr.ecr.us-east-1.amazonaws.com
35 WARNING! Your password will be stored unencrypted in /root/.docker/config.json.
36 Configure a credential helper to remove this warning. See
37 https://docs.docker.com/engine/reference/commandline/login/#credential-stores
38 Login Succeeded
39
40 [Container] 2025/10/16 21:39:01.743498 Phase complete: PRE_BUILD State: SUCCEEDED
41 [Container] 2025/10/16 21:39:01.743517 Phase context status code: Message:
42 [Container] 2025/10/16 21:39:01.785940 Entering phase BUILD
43 [Container] 2025/10/16 21:39:01.787278 Running command IMAGE_TAG=latest
44
45 [Container] 2025/10/16 21:39:01.796043 Running command docker build -t brain-tasks-app:$IMAGE_TAG .
46 #0 building with "default" instance using docker driver
47
48 #1 [internal] load build definition from Dockerfile
49 #1 transferring dockerfile: 253B done
50 #1 DONE 0.0s
51
52 #2 [internal] load metadata for public.ecr.aws/nginx/nginx:stable-alpine
53 #2 DONE 0.4s
54
55 #3 [internal] load .dockerignore
56 #3 transferring context: 2B done
```

aws

Search

[Alt+S]

United States (N. Virginia)

Account ID: 7883-2702-0083

Vignesh marimuthu

EC2

VPC

IAM

Developer Tools

CodeBuild

Source • CodeCommit

Artifacts • CodeArtifact

Build • CodeBuild

Getting started

Build projects

Build project

Settings

Build history

Report groups

Report history

Compute fleets **New**

Account metrics

Related integrations

Jenkins

```
53 #2 DONE 0.4s
54
55 #3 [internal] load .dockerignore
56 #3 transferring context: 2B done
57 #3 DONE 0.0s
58
59 #4 [internal] load build context
60 #4 transferring context: 317.98kB done
61 #4 DONE 0.0s
62
63 #1[2] FROM public.ecr.aws/nginx/nginx:stable-alpine@sha256:5b54fc84b643b6f347c2c21a8f72514c96c31ffc356a04f9a8a128a411881f84
64 #5 resolve public.ecr.aws/nginx/nginx:stable-alpine@sha256:5b54fc84b643b6f347c2c21a8f72514c96c31ffc356a04f9a8a128a411881f84 0.0s done
65 #5 sha256:c318e336065b17ff460aaec6d14bce5d0b13e35f25d5cb1843b635359fc00c9a 10.77kB / 10.77kB done
66 #5 sha256:f637881d1138581d892d9eb942c56e0ccc7758fe3bdc0f1e6cd66059fddf8185 3.15MB / 3.64MB 0.1s
67 #5 sha256:8e049f0fd1511eaabb03da73d0582501fd3a012ddb00620ff653b1a13b646310 627B / 627B 0.0s done
68 #5 sha256:e6918dcfd20da0647335265f4647268123ce772646f9dea11cae650f26be0276 0B / 404B 0.1s
69 #5 sha256:5b54fc84b643b6f347c2c21a8f72514c96c31ffc356a04f9a8a128a411881f84 772B / 772B done
70 #5 sha256:46e5aff7b129052a6f3bd5c7a61a484a36f2a56e1fef52c55c44eda0a3ea9e11 1.99kB / 1.99kB done
71 #5 sha256:b8554c5f1ad0265d1dc3a5f23b3b52e93fa1cdda0c6b54618d3f9168e6ed01b 1.79MB / 1.79MB 0.1s done
72 #5 sha256:71a39d0d04b2893246ec57f9cf1b074a63fd0f094098a8b1741d0e625f4009c1 0B / 955B 0.1s
73 #5 sha256:f637881d1138581d892d9eb942c56e0ccc7758fe3bdc0f1e6cd66059fddf8185 3.64MB / 3.64MB 0.1s done
74 #5 sha256:e6918dcfd20da0647335265f4647268123ce772646f9dea11cae650f26be0276 404B / 404B 0.1s done
75 #5 sha256:71a39d0d04b2893246ec57f9cf1b074a63fd0f094098a8b1741d0e625f4009c1 955B / 955B 0.1s done
76 #5 extracting sha256:f637881d1138581d892d9eb942c56e0ccc7758fe3bdc0f1e6cd66059fddf8185 0.1s
77 #5 sha256:c4fca37af7b3b885e76d1a14e76d630444c2868b27ff67848e077142d9771faa 1.21kB / 1.21kB 0.2s done
78 #5 sha256:bc1d7488b05ed88bc5975378fd4ef0f1ea4b6114d13fa5cbeec6a572588e0c00 1.40kB / 1.40kB 0.2s done
79 #5 sha256:3e300a7cb18c79c3ddad1f70ae2c540c8featdf7fcd6cd5d5a3cd229fb0cda 1.05MB / 15.55MB 0.2s
80 #5 extracting sha256:f637881d1138581d892d9eb942c56e0ccc7758fe3bdc0f1e6cd66059fddf8185 0.1s done
81 #5 sha256:3e300a7cb18c79c3ddad1f70ae2c540c8featdf7fcd6cd5d5a3cd229fb0cda 15.55MB / 15.55MB 0.3s
82 #5 extracting sha256:b8554c5f1ad0265d1dc3a5f23b3b52e93fa1cdda0c6b54618d3f9168e6ed01b 0.1s done
83 #5 sha256:3e300a7cb18c79c3ddad1f70ae2c540c8featdf7fcd6cd5d5a3cd229fb0cda 15.55MB / 15.55MB 0.3s done
84 #5 extracting sha256:8e049f0fd1511eaabb03da73d0582501fd3a012ddb00620ff653b1a13b646310 done
85 #5 extracting sha256:71a39d0d04b2893246ec57f9cf1b074a63fd0f094098a8b1741d0e625f4009c1 done
```

aws

Search

[Alt+S]

United States (N. Virginia)

Account ID: 7883-2702-0083

Vignesh marimuthu

EC2

VPC

IAM

Developer Tools

CodeBuild

Source • CodeCommit

Artifacts • CodeArtifact

Build • CodeBuild

Getting started

Build projects

Build project

Settings

Build history

Report groups

Report history

Compute fleets **New**

Account metrics

Related integrations

Jenkins

```
94
95 #6 [2/2] COPY dist/ /usr/share/nginx/html
96 #6 DONE 0.1s
97
98 #7 exporting to image
99 #7 exporting layers 0.0s done
100 #7 writing image sha256:81776d4ad25d67cd0d452a5b4d9da2185c4252492e8fa019aeecd31cb8419b done
101 #7 naming to docker.io/library/brain-tasks-app:latest done
102 #7 DONE 0.0s
103
104 [Container] 2025/10/16 21:39:03.985133 Running command docker tag brain-tasks-app:$IMAGE_TAG 788327020083.dkr.ecr.us-east-1.amazonaws.com/brain-
105 tasks-app:$IMAGE_TAG
106
107 [Container] 2025/10/16 21:39:04.009858 Phase complete: BUILD State: SUCCEEDED
108 [Container] 2025/10/16 21:39:04.059409 Entering phase POST_BUILD
109 [Container] 2025/10/16 21:39:04.060850 Running command docker push 788327020083.dkr.ecr.us-east-1.amazonaws.com/brain-tasks-app:$IMAGE_TAG
110 The push refers to repository [788327020083.dkr.ecr.us-east-1.amazonaws.com/brain-tasks-app]
111 6267932a08f0: Preparing
112 90ec27130398: Preparing
113 a231a657395e: Preparing
114 5f23a9cf34f1: Preparing
115 7d9abb9ab3b7: Preparing
116 34034c523565: Preparing
117 570a1c87f279: Preparing
118 412e147b334c: Preparing
119 922ec217407c: Preparing
120 570a1c87f279: Waiting
121 34034c523565: Waiting
122 412e147b334c: Waiting
123 922ec217407c: Waiting
124 90ec27130398: Layer already exists
125 5f23a9cf34f1: Layer already exists
126 7d9abb9ab3b7: Layer already exists
```

The screenshot shows the AWS CLI interface with the 'Developer Tools' menu open, highlighting 'CodeBuild'. The terminal displays the output of a 'build' command. The logs show that the build is successful, with the 'POST_BUILD' phase completed. The final output is a JSON object representing the build artifact, which is a Docker image named 'brain-container' with a size of 2199 bytes. The logs also show the expansion of the base directory path and the assembly of the file list.

```
128 34034c523565: Layer already exists
129 570a1c87f279: Layer already exists
130 412e147b334c: Layer already exists
131 922ec217407c: Layer already exists
132 6267932ed0f0: Pushed
133 latest: digest: sha256:54bef6b00672744079b718462ac1a31ce03d0119644361bd0ef2980d49ea3aaa size: 2199
134
135 [Container] 2025/10/16 21:39:05.682672 Running command echo '{"name":"brain-container","imageUri":"788327020083.dkr.ecr.us-east-1.amazonaws.com/brain-tasks-app:latest"}' > imagedefinitions.json
136
137 [Container] 2025/10/16 21:39:05.691382 Phase complete: POST_BUILD State: SUCCEEDED
138 [Container] 2025/10/16 21:39:05.691401 Phase context status code: Message:
139 [Container] 2025/10/16 21:39:07.364185 Expanding base directory path: .
140 [Container] 2025/10/16 21:39:07.368417 Assembling file list
141 [Container] 2025/10/16 21:39:07.368433 Expanding .
142 [Container] 2025/10/16 21:39:07.372145 Expanding file paths for base directory .
143 [Container] 2025/10/16 21:39:07.372163 Assembling file list
144 [Container] 2025/10/16 21:39:07.372166 Expanding appspec.yml
145 [Container] 2025/10/16 21:39:07.375689 Expanding scripts/update-kubeconfig.sh
146 [Container] 2025/10/16 21:39:07.380141 Expanding scripts/deploy-to-eks.sh
147 [Container] 2025/10/16 21:39:07.383673 Expanding imagedefinitions.json
148 [Container] 2025/10/16 21:39:07.387177 Found 4 file(s)
149 [Container] 2025/10/16 21:39:07.390339 Set report auto-discover timeout to 5 seconds
150 [Container] 2025/10/16 21:39:07.390397 Expanding base directory path: .
151 [Container] 2025/10/16 21:39:07.394023 Assembling file list
152 [Container] 2025/10/16 21:39:07.394041 Expanding .
153 [Container] 2025/10/16 21:39:07.397730 Expanding file paths for base directory .
154 [Container] 2025/10/16 21:39:07.397747 Assembling file list
155 [Container] 2025/10/16 21:39:07.397751 Expanding **/*
156 [Container] 2025/10/16 21:39:07.401500 No matching auto-discover report paths found
157 [Container] 2025/10/16 21:39:07.401523 Report auto-discover file discovery took 0.011183 seconds
158 [Container] 2025/10/16 21:39:07.401534 Phase complete: UPLOAD_ARTIFACTS State: SUCCEEDED
159 [Container] 2025/10/16 21:39:07.401542 Phase context status code: Message:
```

Created CodeDeploy Application

- Run deployment scripts from **appspec.yml** on EC2 to update EKS.

The screenshot shows the 'Create application' page in the AWS CodeDeploy console. The 'Application configuration' section is visible, with the 'Application name' field set to 'brain-app-deploy'. The 'Compute platform' is set to 'EC2/On-premises'. The 'Tags' section is empty. The 'Create application' button is highlighted in orange.

Developer Tools > CodeDeploy > Applications > Create application

Create application

Application configuration

Application name
Enter an application name
brain-app-deploy
100 character limit

Compute platform
Choose a compute platform
EC2/On-premises

Tags
Add tag

Cancel Create application

The screenshot shows the 'Create deployment group' page in the AWS CodeDeploy console. The 'Application' section is visible, with the 'Application' field set to 'brain-app-deploy' and the 'Compute type' set to 'EC2/On-premises'. The 'Deployment group name' field is set to 'brain-app-deployment-group'. The 'Create deployment group' button is highlighted in orange.

Developer Tools > CodeDeploy > Applications > brain-app-deploy > Create deployment group

Create deployment group

Application

Application
brain-app-deploy
Compute type
EC2/On-premises

Deployment group name

Enter a deployment group name
brain-app-deployment-group
100 character limit

Create deployment group

aws

Search

[Alt+S]

United States (N. Virginia)

Account ID: 7883-2702-0083

Vignesh marimuthu

EC2VPCIAM

Enter a deployment group name

brain-app-deployment-group

100 character limit

Service role

Enter a service role

Enter a service role with CodeDeploy permissions that grants AWS CodeDeploy access to your target instances.

arn:aws:iam::788327020083:role/CodeDeployRole

Developer Tools

CodeDeploy

Source • CodeCommit

Artifacts • CodeArtifact

Build • CodeBuild

Deploy • CodeDeploy

Getting started

Deployments

Applications

Application

Settings

Deployment configurations

On-premises instances

Pipeline • CodePipeline

Settings

Developer Tools > CodeDeploy > Applications > brain-app-deploy

brain-app-deploy

NotifyDelete application

Application details

Name

brain-app-deploy

Compute platform

EC2/On-premises

Deployments

Deployment groups

Revisions

Deployment groups

View details

Edit

Create deployment group

1

	Name	Status	Last attempted deploy...	Last successful deploy...	Trigger count
	brain-app-deployment-...	Succeeded	Oct 17, 2025 3:09 AM (...)	Oct 17, 2025 3:09 AM (...)	0

Developer Tools

CodeDeploy

Source • CodeCommit

Artifacts • CodeArtifact

Build • CodeBuild

Deploy • CodeDeploy

Getting started

Deployments

Deployment

Applications

Deployment configurations

On-premises instances

Pipeline • CodePipeline

Settings

Revision details

Revision location

s3://codepipeline-us-east-1-b9f62b03329d-4456-81f6-dbe1ee1dff5c/brain-app-pipeline/BuildArtif/ZUOdjhl?eTag=34fb3385b42cb5b92d8afce0d474859d

Revision created

1 minute ago

Revision description

Application revision registered by Deployment ID: d-1OY3ABHMF

Event	Duration	Status	Error code	Start time	End time
ApplicationStop	less than one second	Succeeded	-	Oct 17, 2025 3:09 AM (UTC+5:30)	Oct 17, 2025 3:09 AM (UTC+5:30)
DownloadBundle	less than one second	Succeeded	-	Oct 17, 2025 3:09 AM (UTC+5:30)	Oct 17, 2025 3:09 AM (UTC+5:30)
BeforeInstall	1 second	Succeeded	-	Oct 17, 2025 3:09 AM (UTC+5:30)	Oct 17, 2025 3:09 AM (UTC+5:30)
Install	less than one second	Succeeded	-	Oct 17, 2025 3:09 AM (UTC+5:30)	Oct 17, 2025 3:09 AM (UTC+5:30)
AfterInstall	2 seconds	Succeeded	-	Oct 17, 2025 3:09 AM (UTC+5:30)	Oct 17, 2025 3:09 AM (UTC+5:30)
ApplicationStart	less than one second	Succeeded	-	Oct 17, 2025 3:09 AM (UTC+5:30)	Oct 17, 2025 3:09 AM (UTC+5:30)
ValidateService	less than one second	Succeeded	-	Oct 17, 2025 3:09 AM (UTC+5:30)	Oct 17, 2025 3:09 AM (UTC+5:30)

Created CodePipeline

- This pipeline automatically triggers on every Git push, builds the app, and deploys it to EKS without manual steps.

The screenshot shows the AWS CodePipeline console interface. The top navigation bar includes the AWS logo, a search bar, and account information (United States (N. Virginia), Account ID: 7883-2702-0083, Vignesh marimuthu). The breadcrumb trail is: Developer Tools > CodePipeline > Pipelines > Create new pipeline. The left sidebar shows a list of steps: Step 1 (Choose creation option), Step 2 (Choose pipeline settings), Step 3 (Add source stage), Step 4 (Add build stage), Step 5 (Add test stage), and Step 6 (Add deployment stage). The main content area is titled 'Choose creation option' (Step 1 of 7). It features a 'Category' section with three radio buttons: 'Deployment', 'Continuous Integration', and 'Automation'. The 'Build custom pipeline' option is selected and highlighted with a blue border. At the bottom right, there are 'Cancel' and 'Next' buttons.

The screenshot shows the AWS CodePipeline console interface for the 'Choose pipeline settings' step (Step 2 of 7). The left sidebar shows the progression: Step 1 (Choose creation option), Step 2 (Choose pipeline settings), Step 3 (Add source stage), Step 4 (Add build stage), Step 5 (Add test stage), Step 6 (Add deployment stage), and Step 7 (Review). The main content area is titled 'Choose pipeline settings' (Step 2 of 7). It features a 'Pipeline settings' section with the following fields: 'Pipeline name' (brain-app-pipeline), 'Execution mode' (Queued), 'Service role' (Existing service role), and 'Role ARN' (arn:aws:iam::788327020083:role/CodePipelineRole). The 'Existing service role' option is selected and highlighted with a blue border. At the bottom right, there are 'Cancel' and 'Next' buttons.

The screenshot shows the AWS CodePipeline console interface for the 'Add source stage' step (Step 3). The left sidebar shows the progression: Step 1 (Choose creation option), Step 2 (Choose pipeline settings), Step 3 (Add source stage), Step 4 (Add build stage), Step 5 (Add test stage), Step 6 (Add deployment stage), and Step 7 (Review). The main content area is titled 'Add source stage'. It features a 'Source provider' section with a dropdown menu set to 'GitHub (via OAuth app)'. Below this, there is a 'Grant AWS CodePipeline access to your GitHub repository' section with a 'Connected' status. A warning box states: 'The GitHub (via OAuth app) action is not recommended. The selected action uses OAuth apps to access your GitHub repository. This is no longer the recommended method. Instead, choose the GitHub (via GitHub App) action to access your repository by creating a connection. Connections use GitHub Apps to manage authentication and can be shared with other resources. Learn more'. At the bottom, there are 'Repository' (vigneshmarimuthu/brain-tasks-app-v2) and 'Branch' (main) fields. At the bottom right, there are 'Cancel' and 'Next' buttons.

aws

Search

[Alt+S]

EC2

VPC

IAM

United States (N. Virginia)

Account ID: 7883-2702-0083

Vignesh marimuthu

Developer Tools

CodePipeline

Pipelines

Create new pipeline

Step 1

Choose creation option

Step 2

Choose pipeline settings

Step 3

Add source stage

Step 4

Add build stage

Step 5

Add test stage

Step 6

Add deploy stage

Step 7

Review

Add build stage

Info

Step 4 of 7

Build - optional

Build provider

Choose the tool you want to use to run build commands and specify artifacts for your build action.

Commands

Other build providers

AWS CodeBuild

Project name

Choose a build project that you have already created in the AWS CodeBuild console. Or create a build project in the AWS CodeBuild console and then return to this task.

brain-app-build

or

Create project

Define buildspec override - optional

Buildspec file or definition that overrides the latest one defined in the build project, for this build only.

aws

Search

[Alt+S]

EC2

VPC

IAM

United States (N. Virginia)

Account ID: 7883-2702-0083

Vignesh marimuthu

Developer Tools

CodePipeline

Pipelines

Create new pipeline

Step 1

Choose creation option

Step 2

Choose pipeline settings

Step 3

Add source stage

Step 4

Add build stage

Step 5

Add test stage

Step 6

Add deploy stage

Step 7

Review

Add deploy stage

Info

Step 6 of 7

Deploy - optional

Deploy provider

Choose how you want to deploy your application or content. Choose the provider, and then provide the configuration details for that provider.

AWS CodeDeploy

Region

United States (N. Virginia)

Input artifacts

Choose an input artifact for this action. [Learn more](#)

BuildArtifact

Defined by: Build

No more than 100 characters

aws

Search

[Alt+S]

EC2

VPC

IAM

United States (N. Virginia)

Account ID: 7883-2702-0083

Vignesh marimuthu

Developer Tools

CodePipeline

Pipelines

Create new pipeline

Add test stage

Step 6

Add deploy stage

Step 7

Review

Input artifacts

Choose an input artifact for this action. [Learn more](#)

BuildArtifact

Defined by: Build

No more than 100 characters

Application name

Choose an application that you have already created in the AWS CodeDeploy console. Or create an application in the AWS CodeDeploy console and then return to this task.

brain-app-deploy

Deployment group

Choose a deployment group that you have already created in the AWS CodeDeploy console. Or create a deployment group in the AWS CodeDeploy console and then return to this task.

brain-app-deployment-group

Configure automatic rollback on stage failure

Enable automatic retry on stage failure

Cancel

Previous

Skip deploy stage

Next

aws [Search] [Alt+S] United States (N. Virginia) Account ID: 7883-2702-0083 Vignesh marimuthu

EC2 VPC IAM

Developer Tools > CodePipeline > Pipelines > brain-app-pipeline

brain-app-pipeline [Edit] [Stop execution] [Create trigger] [Clone pipeline] [Release change]

Pipeline Executions Triggers Settings Tags Stage

Source Build Deploy

929dfd48-7b1f-4bd5-ae1c-58ca4852e9d5 929dfd48-7b1f-4bd5-ae1c-58ca4852e9d5 929dfd48-7b1f-4bd5-ae1c-58ca4852e9d5

All actions succeeded. All actions succeeded. All actions succeeded.

Source Build Deploy

GitHub (via OAuth app) AWS CodeBuild AWS CodeDeploy

1 minute ago Just now Just now

790ae02b Source: Update app 790ae02b Source: Update app 790ae02b Source: Update app

```
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$ kubectl get pods
NAME                                READY   STATUS    RESTARTS   AGE
brain-deploy-7c76db97cd-4xvms       1/1     Running   0           4m21s
brain-deploy-7c76db97cd-qclgf       1/1     Running   0           4m23s
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$ kubectl get svc brain-service
NAME      TYPE          CLUSTER-IP      EXTERNAL-IP
brain-service  LoadBalancer  10.100.254.10    a66e83be3742f45e3b68359a92b13d4e-2135459235.us-east-1.elb.amazonaws.com
80:30342/TCP  53m
ubuntu@ip-172-31-27-179:/tmp/Brain-Tasks-App$
```

Brain Task

Not secure a66e83be3742f45e3b68359a92b13d4e-2135459235.us-east-1.elb.amazonaws.com

Brain Tasks

Organize your thoughts, simplify your life

+ Create Task


Search tasks...

All Tasks Pending Completed Priority

No tasks found!

Create your first task to get started

✓ 8. Monitoring & Logs

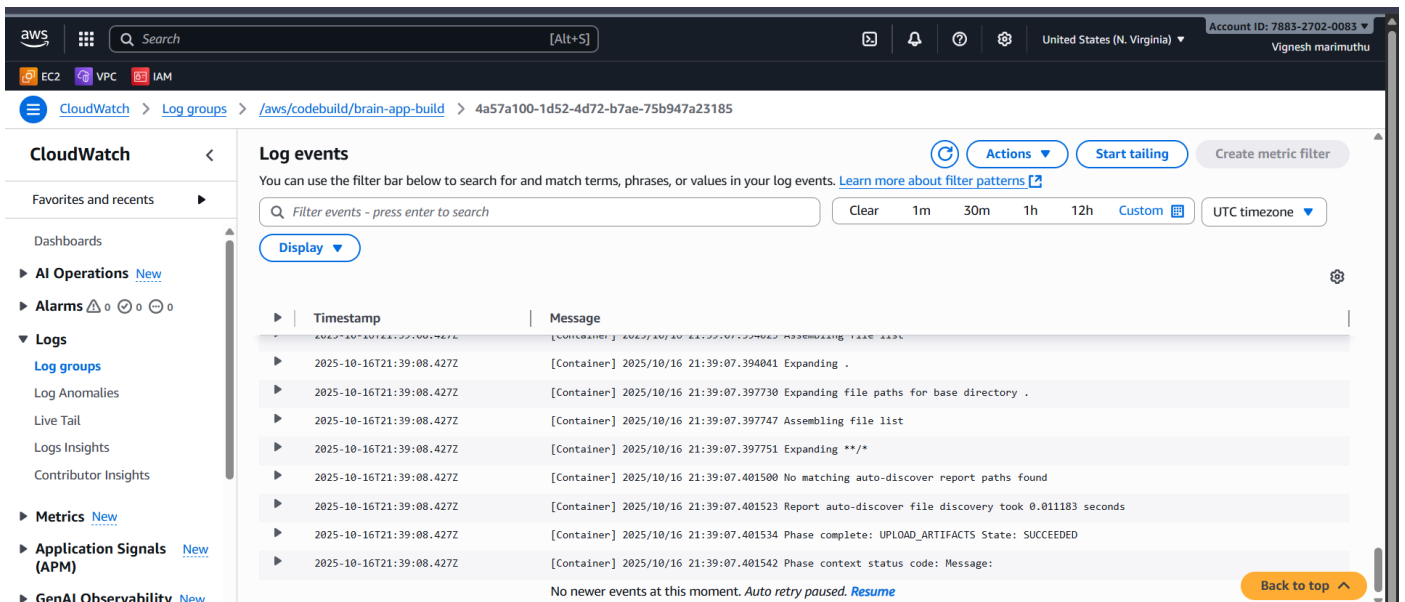

The screenshot displays the AWS CloudWatch console interface. The top navigation bar includes the AWS logo, a search bar, and account information (United States (N. Virginia), Account ID: 7883-2702-0083, Vignesh marimuthu). The left sidebar shows the 'CloudWatch' menu with options like 'Favorites and recents', 'Dashboards', 'AI Operations', 'Alarms', 'Logs', 'Metrics', 'Application Signals (APM)', and 'GenAI Observability'. The main content area is titled 'Log events' and shows a list of log entries for the build '/aws/codebuild/brain-app-build' with ID '4a57a100-1d52-4d72-b7ae-75b947a23185'. The log entries are displayed in a table with columns for 'Timestamp' and 'Message'. The messages show the build process steps: 'Expanding .', 'Expanding file paths for base directory .', 'Assembling file list', 'Expanding **/*', 'No matching auto-discover report paths found', 'Report auto-discover file discovery took 0.011183 seconds', 'Phase complete: UPLOAD_ARTIFACTS State: SUCCEEDED', and 'Phase context status code: Message:'. A 'Back to top' button is visible at the bottom right of the log list.

Timestamp	Message
2025-10-16T21:39:08.427Z	[Container] 2025/10/16 21:39:07.394041 Expanding .
2025-10-16T21:39:08.427Z	[Container] 2025/10/16 21:39:07.397730 Expanding file paths for base directory .
2025-10-16T21:39:08.427Z	[Container] 2025/10/16 21:39:07.397747 Assembling file list
2025-10-16T21:39:08.427Z	[Container] 2025/10/16 21:39:07.397751 Expanding **/*
2025-10-16T21:39:08.427Z	[Container] 2025/10/16 21:39:07.401500 No matching auto-discover report paths found
2025-10-16T21:39:08.427Z	[Container] 2025/10/16 21:39:07.401523 Report auto-discover file discovery took 0.011183 seconds
2025-10-16T21:39:08.427Z	[Container] 2025/10/16 21:39:07.401534 Phase complete: UPLOAD_ARTIFACTS State: SUCCEEDED
2025-10-16T21:39:08.427Z	[Container] 2025/10/16 21:39:07.401542 Phase context status code: Message:

- To ensure that the application deployment is successful, pods are running, and logs are clean.