

# Application Deployment

*(Deploy the given react application to a production ready state)*

## Application:

Clone the below mentioned repo and deploy the application.  
(Run the application in port 80 [HTTP])

**Repo URL:** <https://github.com/sriram-R-krishnan/devops-build>

## Docker:

- Dockerize the application by creating a Dockerfile
- Create a docker-compose file to use the above image

## Bash Scripting:

- Write 2 scripts
  - **build.sh** for building docker images
  - **deploy.sh** for deploying the image to server

## Version Control:

- Push the code to github to **dev branch** (use **dockerignore** & **gitignore** files)
- **Note:** Use only CLI for related git commands

## Docker hub:

- Create 2 repos "**dev**" and "**prod**" to push images.
- "**Prod**" repo must be private and "**dev**" repo can be public

## Jenkins:

- Install and configure jenkins build step as per needs to build, push & deploy the application
- Connect jenkins to the github repo with auto build trigger from both **dev** & **master** branch
- If code pushed to **dev branch**, docker image must build and pushed to **dev repo** in docker hub
- If **dev merged to master**, then docker image must be pushed to **prod repo** in docker hub

## AWS:

- Launch **t2.micro instance** and deploy the create application.
- Configure SG as below:
  - Whoever has the ip address can access the application
  - Login to server can should be made only from your ip address


## Monitoring:

- Setup a monitoring system to check the health status of the application. (Open-source)
- Sending notifications only if the application goes down is highly appreciable

## Solution:

### ✓ 1. Launched an EC2 instance and connected to Ubuntu via SSH

- EC2 will act as the *Jenkins build server and control center* for CI/CD, Docker builds, etc.

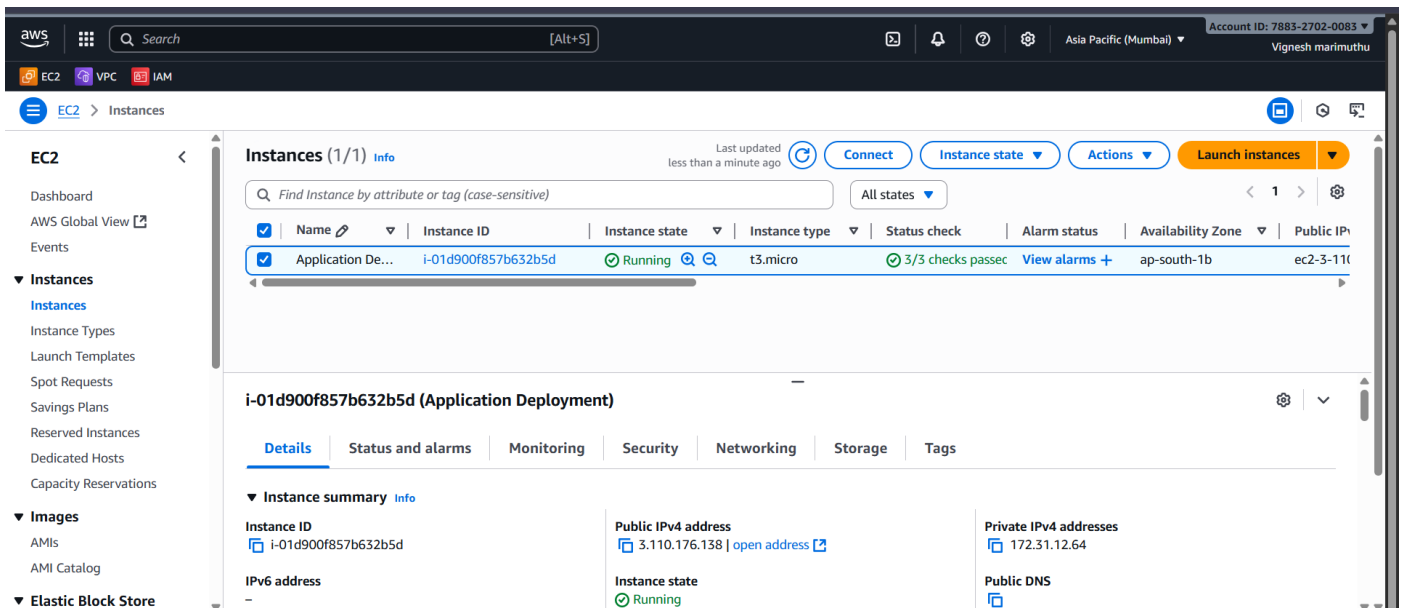

```
vignesh@Vignesh:~/ssh$ ssh -i ~/.ssh/3_10_key.pem ubuntu@3.110.176.138
Welcome to Ubuntu 24.04.3 LTS (GNU/Linux 6.14.0-1011-aws x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

System information as of Sat Oct 11 18:56:14 UTC 2025

System load: 0.03          Temperature: -273.1 C
Usage of /: 9.4% of 18.33GB Processes: 118
Memory usage: 24%         Users logged in: 0
Swap usage: 0%            IPv4 address for ens5: 172.31.12.64
```

### ✓ 2. Prepare the React repository (locally)

```
ubuntu@ip-172-31-12-64:~$ git clone https://github.com/sriram-R-krishnan/devops-build
cd devops-build
Cloning into 'devops-build'...
remote: Enumerating objects: 21, done.
remote: Total 21 (delta 0), reused 0 (delta 0), pack-reused 21 (from 1)
Receiving objects: 100% (21/21), 720.09 KiB | 17.56 MiB/s, done.
ubuntu@ip-172-31-12-64:~/devops-build$
```

## Created .dockerignore & .gitignore

- .gitignore avoids huge or secret files being committed.
- .dockerignore avoids sending unnecessary files to the Docker daemon during build.

```

ubuntu@ip-172-31-12-64:~/devops-build$ nano .dockerignore
ubuntu@ip-172-31-12-64:~/devops-build$ cat .dockerignore
.git
.gitignore
node_modules
Dockerfile
docker-compose.yml
ubuntu@ip-172-31-12-64:~/devops-build$ nano .gitignore
ubuntu@ip-172-31-12-64:~/devops-build$ cat .gitignore
node_modules
build
.env
ubuntu@ip-172-31-12-64:~/devops-build$

```

## Created Dockerfile

- Used a lightweight web server image (Nginx) and copy only the built static files into it.
- This makes our final image very small and secure.

```

ubuntu@ip-172-31-12-64:~/devops-build$ nano Dockerfile
ubuntu@ip-172-31-12-64:~/devops-build$ cat Dockerfile
# Use Nginx to serve the pre-built React app
FROM nginx:1.23-alpine

# Copy existing React build to Nginx web directory
COPY build /usr/share/nginx/html

# Expose port 80
EXPOSE 80

# Start Nginx
CMD ["nginx", "-g", "daemon off;"]
ubuntu@ip-172-31-12-64:~/devops-build$

```

## Created docker-compose.yml

- docker-compose up -d provides convenient local testing

```

ubuntu@ip-172-31-12-64:~/devops-build$ nano docker-compose.yml
ubuntu@ip-172-31-12-64:~/devops-build$ cat docker-compose.yml
version: '3.8'
services:
  web:
    build: .
    container_name: react_app
    ports:
      - "80:80"
    restart: always
ubuntu@ip-172-31-12-64:~/devops-build$

```

```

ubuntu@ip-172-31-12-64:~/devops-build$ docker-compose up -d
Creating network "devops-build_default" with the default driver
Building web
DEPRECATED: The legacy builder is deprecated and will be removed in a future release.
Install the buildx component to build images with BuildKit:
https://docs.docker.com/go/buildx/

Sending build context to Docker daemon 2.621MB
Step 1/9 : FROM node:18-alpine AS builder
18-alpine: Pulling from library/node
f18232174bc9: Pulling fs layer
dd71dde834b5: Pulling fs layer
1e5a4c89cee5: Pulling fs layer
25ff2da83641: Pulling fs layer
25ff2da83641: Waiting
f18232174bc9: Verifying Checksum
f18232174bc9: Download complete
f18232174bc9: Pull complete
1e5a4c89cee5: Verifying Checksum
1e5a4c89cee5: Download complete
25ff2da83641: Verifying Checksum
25ff2da83641: Download complete

```

```

Step 4/4 : CMD ["nginx", "-g", "daemon off;"]
--> Running in 98b9331e2971
--> Removed intermediate container 98b9331e2971
--> 094c0b662020
Successfully built 094c0b662020
Successfully tagged devops-build_web:latest
Creating react_app ... done
ubuntu@ip-172-31-12-64:~/devops-build$ docker ps
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS        PORTS                               NAMES
62ba80fe0ff2   devops-build_web  "/docker-entrypoint.…"   6 seconds ago  Up 6 seconds  0.0.0.0:80->80/tcp, [::]:80->80/tcp  react_app
ubuntu@ip-172-31-12-64:~/devops-build$

```

### ✓ 3. Added build & deploy scripts

- These scripts will be used later by Jenkins.
- Make the scripts executable.

```
ubuntu@ip-172-31-12-64:~/devops-build$ cat build.sh
#!/bin/bash
if [ -z "$1" ]; then
    TAG="latest"
else
    TAG="$1"
fi
docker build -t $TAG .
ubuntu@ip-172-31-12-64:~/devops-build$ nano deploy.sh
ubuntu@ip-172-31-12-64:~/devops-build$ cat deploy.sh
#!/bin/bash
IMAGE="$1"
CONTAINER="react_app"

# stop old container (if running)
docker ps -q -f name=$CONTAINER | grep -q . && docker stop $CONTAINER && docker rm $CONTAINER || echo "no container to stop"

# pull & run
docker pull $IMAGE
docker run -d -p 80:80 --name $CONTAINER $IMAGE
ubuntu@ip-172-31-12-64:~/devops-build$ chmod +x build.sh deploy.sh
ubuntu@ip-172-31-12-64:~/devops-build$
```

### ✓ 4. Git branches: created dev and main (locally) and push to my GitHub repo


- **dev** branch holds work-in-progress; **main** (or master) is production branch. Having both enables the pipeline behavior requested.

```
ubuntu@ip-172-31-12-64:~/devops-build$ git remote -v
origin https://github.com/sriram-R-krishnan/devops-build (fetch)
origin https://github.com/sriram-R-krishnan/devops-build (push)
ubuntu@ip-172-31-12-64:~/devops-build$ git remote remove origin
ubuntu@ip-172-31-12-64:~/devops-build$ git remote add origin https://github.com/vigneshmarimuthu/react-cicd-project.git
ubuntu@ip-172-31-12-64:~/devops-build$ git push -u origin main
git push -u origin dev
Username for 'https://github.com': vigneshmarimuthu
Password for 'https://vigneshmarimuthu@github.com':
Enumerating objects: 30, done.
Counting objects: 100% (30/30), done.
Delta compression using up to 2 threads
Compressing objects: 100% (27/27), done.
Writing objects: 100% (30/30), 721.35 KiB | 120.22 MiB/s, done.
Total 30 (delta 0), reused 21 (delta 0), pack-reused 0
To https://github.com/vigneshmarimuthu/react-cicd-project.git
 * [new branch]    main -> main
branch 'main' set up to track 'origin/main'.
Username for 'https://github.com': vigneshmarimuthu
Password for 'https://vigneshmarimuthu@github.com':
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'dev' on GitHub by visiting:
remote:   https://github.com/vigneshmarimuthu/react-cicd-project/pull/new/dev
remote:
To https://github.com/vigneshmarimuthu/react-cicd-project.git
 * [new branch]    dev -> dev
branch 'dev' set up to track 'origin/dev'.
ubuntu@ip-172-31-12-64:~/devops-build$
```


- My GitHub repository: <https://github.com/vigneshmarimuthu/react-cicd-project>

## ✓ 5. Create Docker Hub repositories

- Dev repo: quick public pulls for testing. Prod repo: private, secure final images.

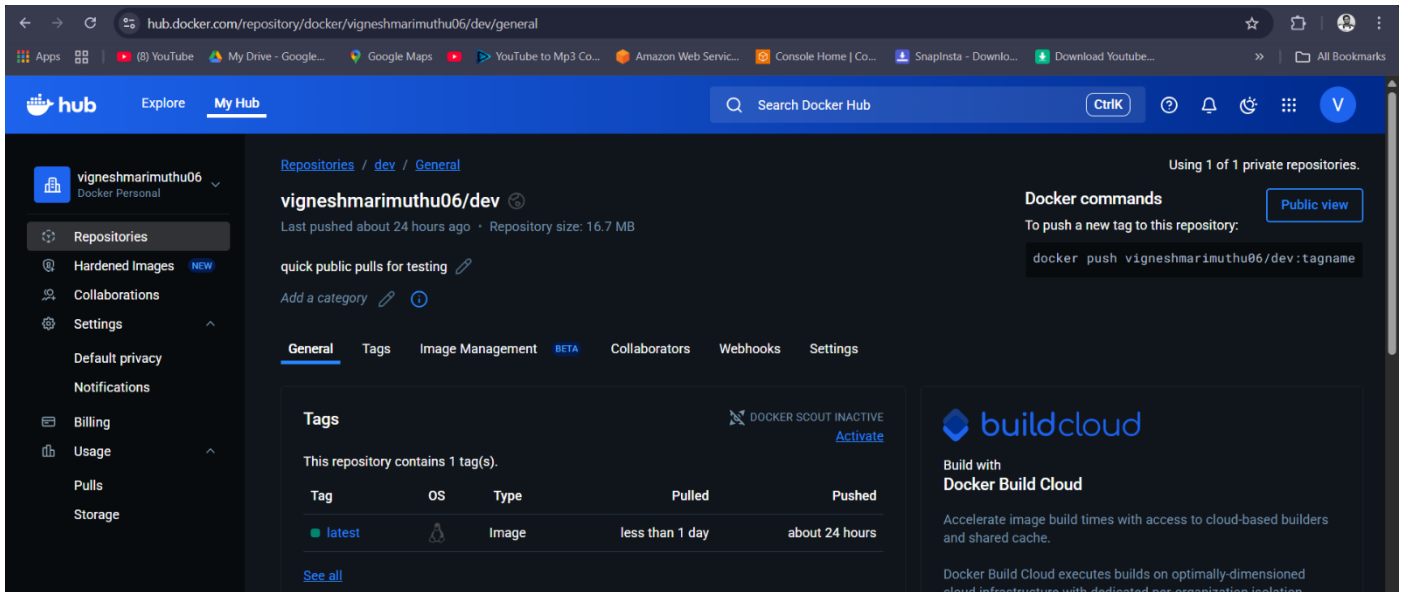

The screenshot shows the Docker Hub interface for a repository named 'vigneshmarimuthu06/dev'. The repository is public and contains one tag, 'latest'. The page includes a sidebar with navigation options like 'Repositories', 'Hardened Images', 'Collaborations', 'Settings', 'Default privacy', 'Notifications', 'Billing', 'Usage', 'Pulls', and 'Storage'. The main content area displays the repository details, including the tag 'latest' with a pull time of 'less than 1 day' and a push time of 'about 24 hours'. A 'Docker commands' section provides the command to push a new tag: 'docker push vigneshmarimuthu06/dev:tagname'. A 'buildcloud' advertisement is also visible on the right.

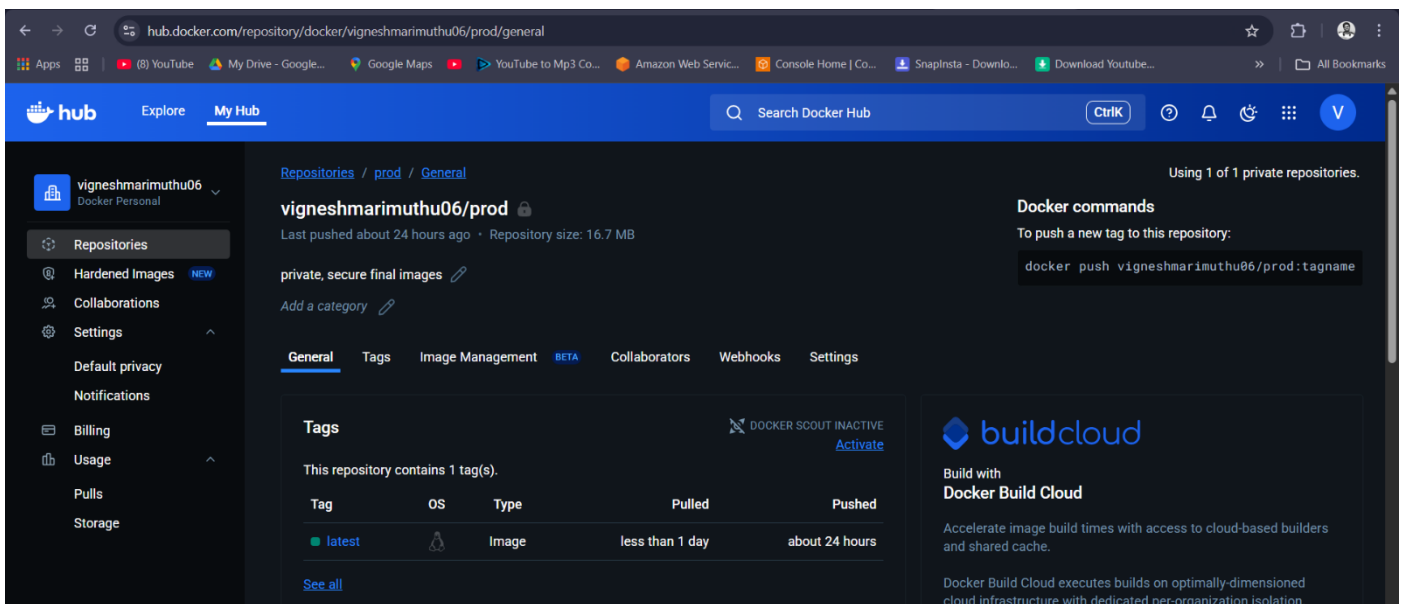

The screenshot shows the Docker Hub interface for a repository named 'vigneshmarimuthu06/prod'. The repository is private and contains one tag, 'latest'. The page includes a sidebar with navigation options like 'Repositories', 'Hardened Images', 'Collaborations', 'Settings', 'Default privacy', 'Notifications', 'Billing', 'Usage', 'Pulls', and 'Storage'. The main content area displays the repository details, including the tag 'latest' with a pull time of 'less than 1 day' and a push time of 'about 24 hours'. A 'Docker commands' section provides the command to push a new tag: 'docker push vigneshmarimuthu06/prod:tagname'. A 'buildcloud' advertisement is also visible on the right.

## ✓ 6. Set up the EC2 Ubuntu server: install Docker and Docker Compose

- Jenkins (running in a container) will use the host Docker socket to build images.

```
ubuntu@ip-172-31-12-64:~/devops-build$ sudo apt-get update -y
sudo apt-get upgrade -y
sudo apt-get install -y ca-certificates curl gnupg lsb-release
Hit:1 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu noble InRelease
Hit:2 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu noble-updates InRelease
Hit:3 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu noble-backports InRelease
Hit:4 http://security.ubuntu.com/ubuntu noble-security InRelease
Reading package lists... Done
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
Calculating upgrade... Done
The following upgrades have been deferred due to phasing:
systemd-hwe-hwdb
```

```
ubuntu@ip-172-31-12-64:~/devops-build$ # add Docker's official GPG key
sudo mkdir -p /etc/apt/keyrings
curl -fsSL https://download.docker.com/linux/ubuntu/gpg | sudo gpg --dearmor -o /etc/apt/keyrings/docker.gpg

# set up repository
echo \
"deb [arch=$(dpkg --print-architecture) signed-by=/etc/apt/keyrings/docker.gpg] https://download.docker.com/linux/ubuntu \
$(lsb_release -cs) stable" | \
sudo tee /etc/apt/sources.list.d/docker.list > /dev/null

sudo apt-get update -y
sudo apt-get install -y docker-ce docker-ce-cli containerd.io docker-buildx-plugin docker-compose-plugin
Hit:1 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu noble InRelease
Hit:2 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu noble-updates InRelease
Hit:3 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu noble-backports InRelease
Get:4 https://download.docker.com/linux/ubuntu noble InRelease [48.5 kB]
Hit:5 http://security.ubuntu.com/ubuntu noble-security InRelease
Get:6 https://download.docker.com/linux/ubuntu noble/stable amd64 Packages [33.0 kB]
```

```
ubuntu@ip-172-31-12-64:~/devops-build$ sudo usermod -aG docker $USER
ubuntu@ip-172-31-12-64:~/devops-build$ exit
logout
Connection to 3.110.176.138 closed.
vignesh@Vignesh:~/.ssh$ ssh -i ~/.ssh/3_10_key.pem ubuntu@3.110.176.138
Welcome to Ubuntu 24.04.3 LTS (GNU/Linux 6.14.0-1011-aws x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

System information as of Sat Oct 11 19:21:51 UTC 2025

System load: 0.39           Temperature: -273.1 C
Usage of /: 19.2% of 18.3GB Processes: 116
Memory usage: 33%          Users logged in: 0
Swap usage: 0%             IPv4 address for ens5: 172.31.12.64
```

## ✓ 7. Installed and run Jenkins (in Docker) on EC2


- `-v /var/run/docker.sock:/var/run/docker.sock` lets Jenkins control the host Docker (build/push images) from inside container.
- This is standard and widely used, but it grants elevated access to Docker on the host — secure the server.

```
ubuntu@ip-172-31-12-64:~$ docker run -d --name jenkins \
-p 8080:8080 -p 50000:50000 \
-v ~/jenkins_home:/var/jenkins_home \
-v /var/run/docker.sock:/var/run/docker.sock \
jenkins/jenkins:lts-jdk11
Unable to find image 'jenkins/jenkins:lts-jdk11' locally
lts-jdk11: Pulling from jenkins/jenkins
cdd62bf39133: Pull complete
21f106ffc421: Pull complete
39df2c5808cf: Pull complete
d9d5ad5daae2: Pull complete
21d9152ebad0: Pull complete
ddc06df74615: Pull complete
bf388b3d4868: Pull complete
1f6fc1ff002b: Pull complete
6201e887d163: Pull complete
a3d60a50862f: Pull complete
282c783b8e01: Pull complete
ddf03cc24103: Pull complete
Digest: sha256:6aa6c6bd7da914bf5333305c8102cb26965ea4b227e37f4269315725a2b0cd81
Status: Downloaded newer image for jenkins/jenkins:lts-jdk11
0dba0b44cb9d9bb188c912d9b3f99cdd27087f6f8fe38d35d7f15ca99daba1eb
ubuntu@ip-172-31-12-64:~$ docker ps
```


| CONTAINER ID | IMAGE                     | COMMAND                  | NAMES     | CREATED        | STATUS        | PORTS                                       |
|--------------|---------------------------|--------------------------|-----------|----------------|---------------|---------------------------------------------|
| 0dba0b44cb9d | jenkins/jenkins:lts-jdk11 | "/usr/bin/tini -- /u..." | jenkins   | 45 seconds ago | Up 44 seconds | 0.0.0.0:8080->8080/tcp, [::]:8080->8080/tcp |
| 62ba80fe0ff2 | devops-build_web          | "/docker-entrypoint..."  | react_app | 17 minutes ago | Up 2 minutes  | 0.0.0.0:80->80/tcp, [::]:80->80/tcp         |

```
ubuntu@ip-172-31-12-64:~$
```


## ✓ 8. Opened Jenkins UI

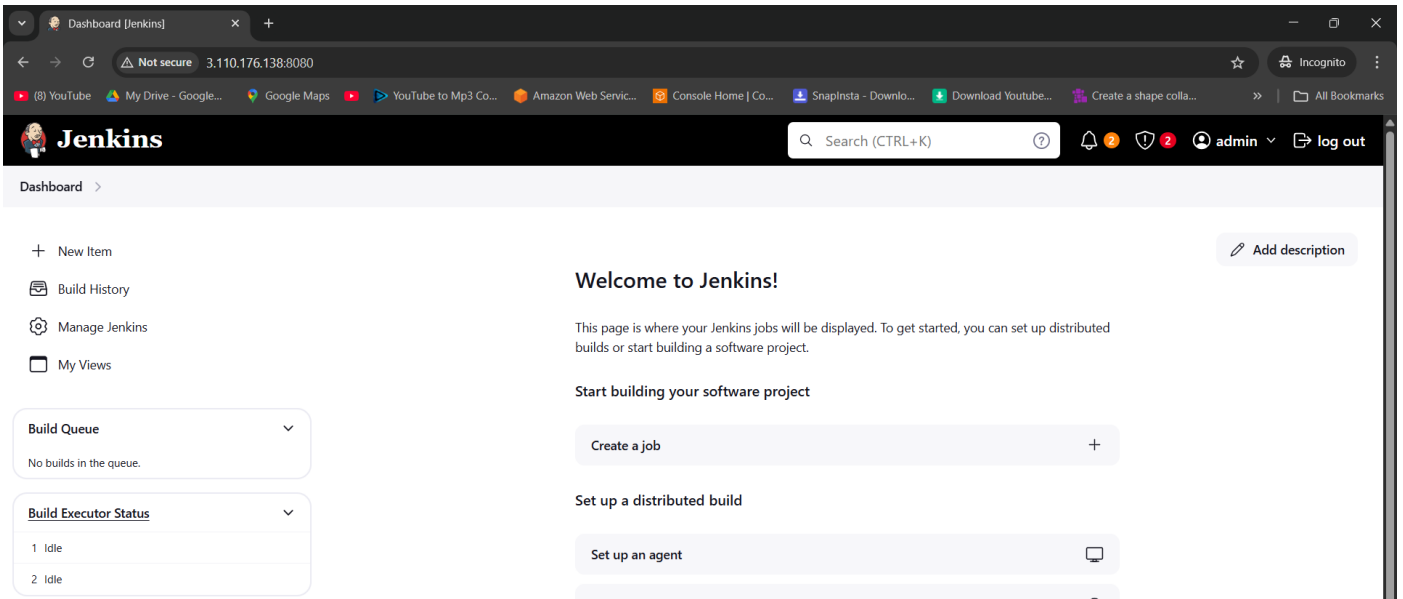

## Jenkins: added credentials (Docker Hub)

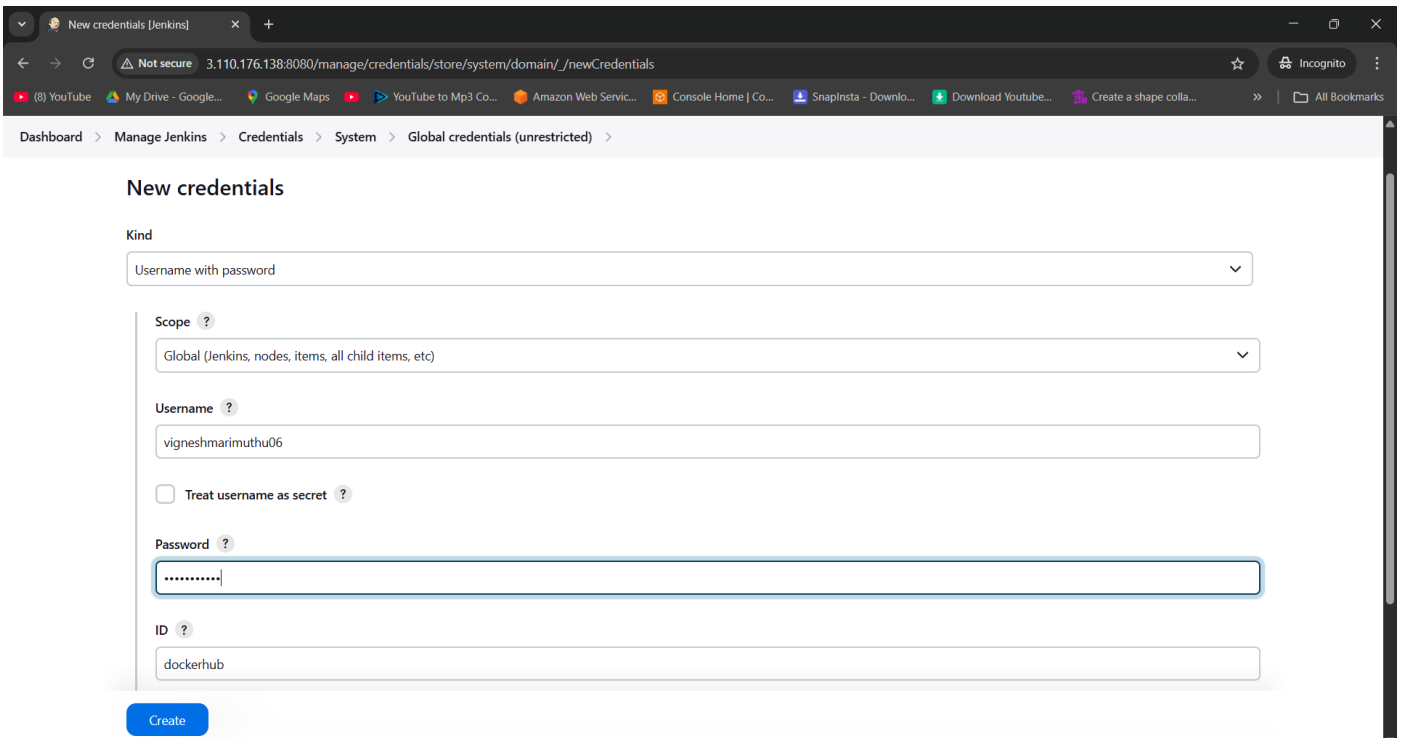


## Configure GitHub webhook → Jenkins

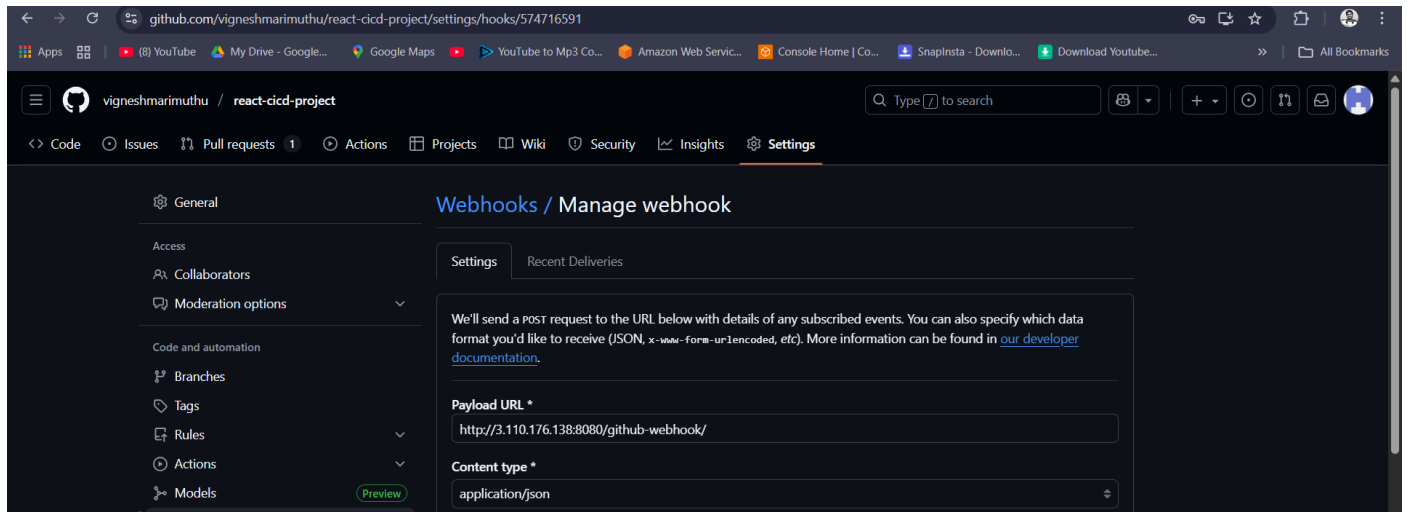




## ✅ 9. Created Jenkins Jobs (Freestyle)

### 1.dev-build (triggered on pushes to dev branch)

- Build the image from dev branch and push to vigneshmarimuthu06/dev (public). Used for testing.

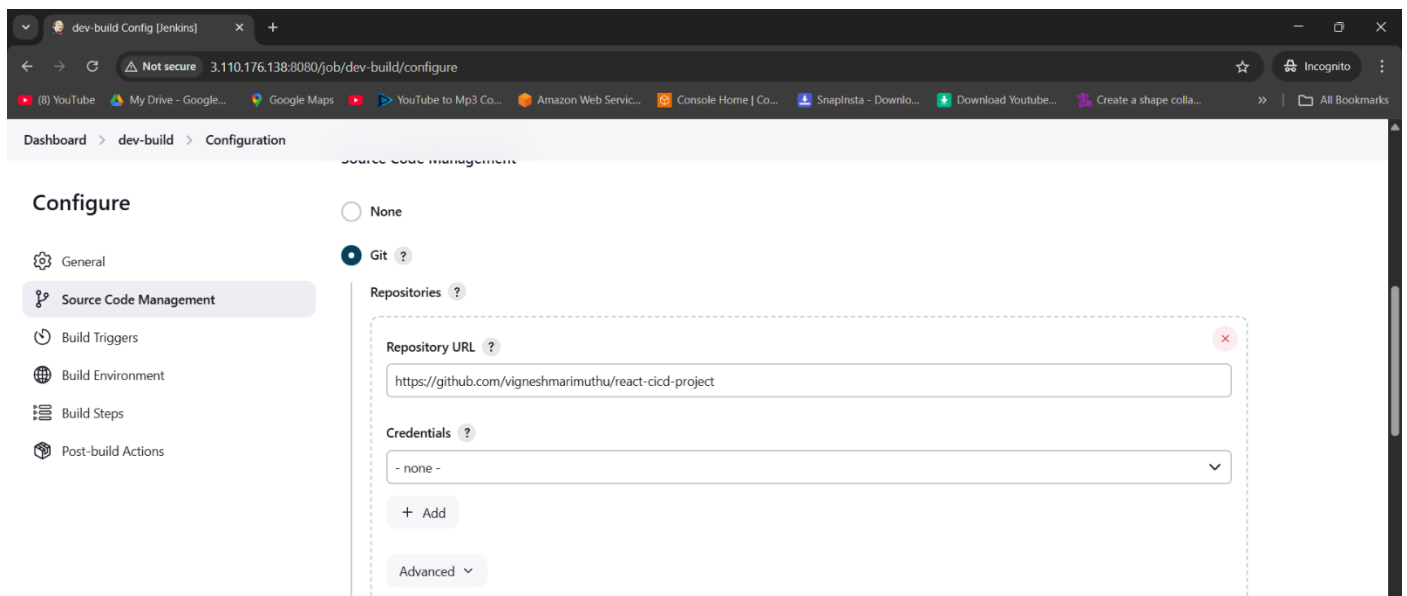



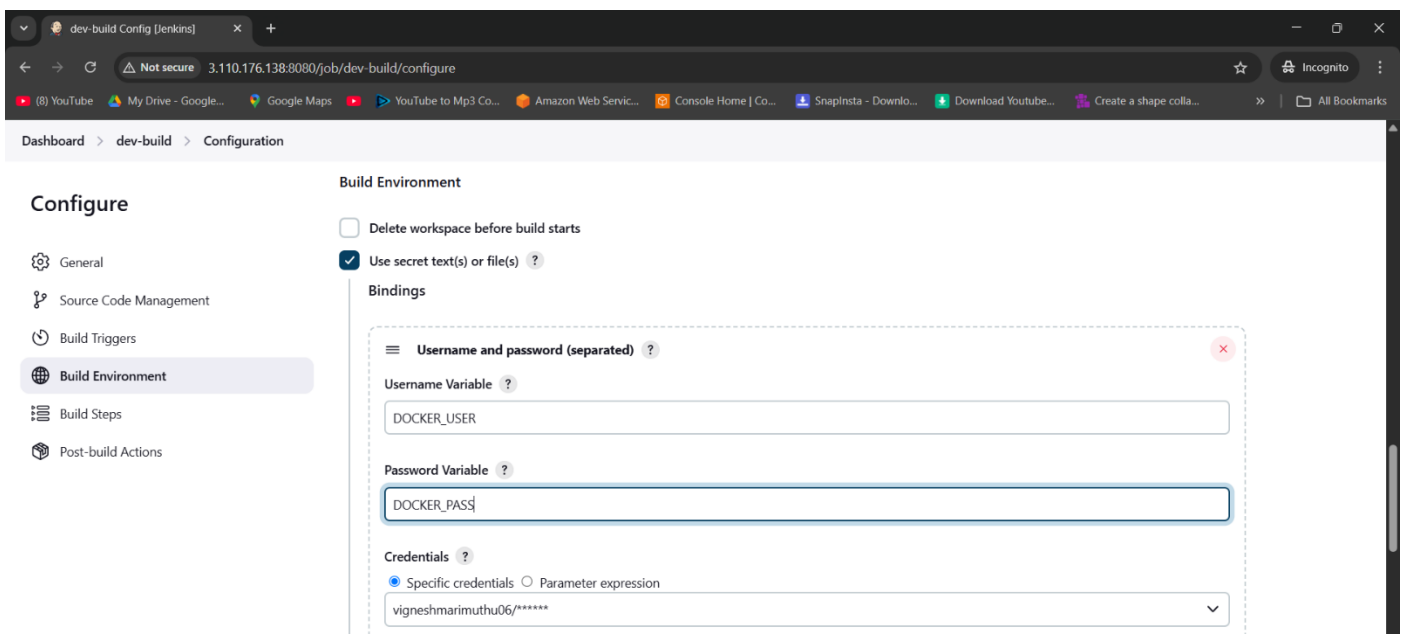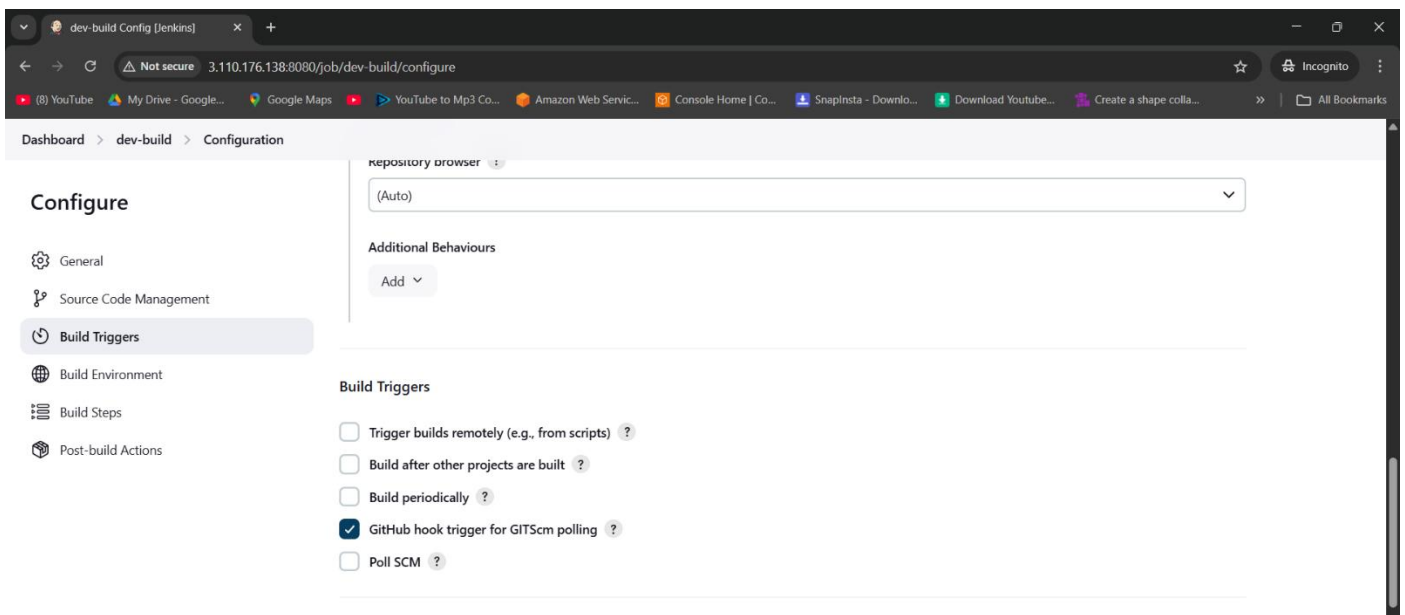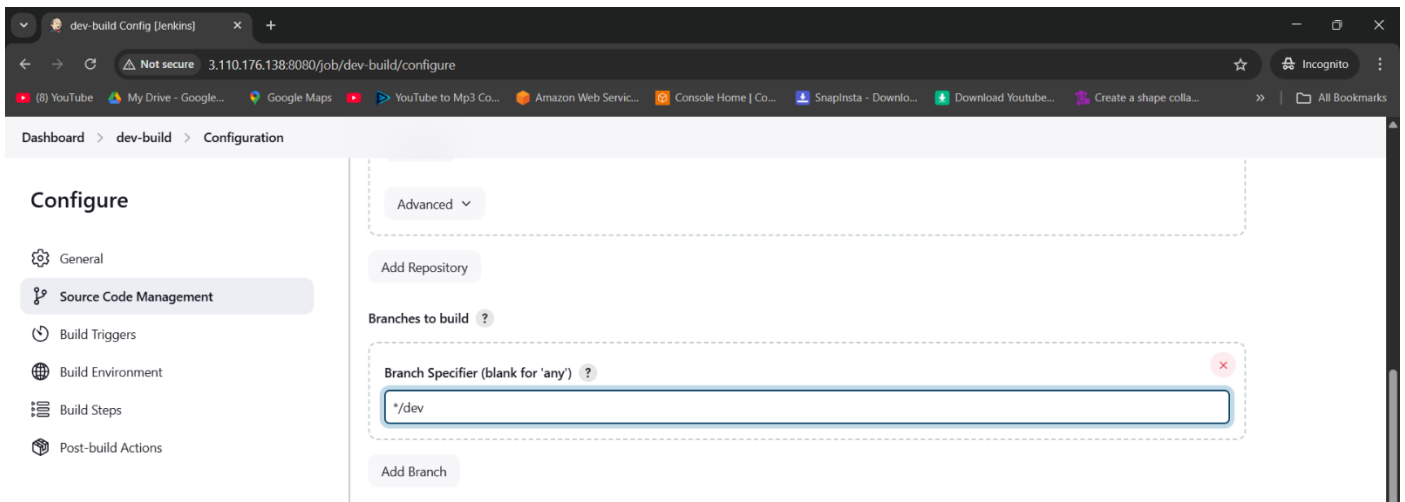

dev-build Config [Jenkins]

Not secure 3.110.176.138:8080/job/dev-build/configure

Incognito

Dashboard > dev-build > Configuration

Configure

General

Source Code Management

Build Triggers

Build Environment

Build Steps

Post-build Actions

Execute shell ?

Command

See [the list of available environment variables](#)

```
#!/bin/bash
set -e

echo "Login to Docker Hub"
echo "$DOCKER_PASS" | docker login -u "$DOCKER_USER" --password-stdin

echo "Build Docker image"
docker build -t "$DOCKER_USER/dev:latest" .

echo "Push to Docker Hub (dev)"
docker push "$DOCKER_USER/dev:latest"

echo "✅ Build and push completed successfully!"
```

Advanced ▾

Save

Apply

dev-build #3 [Jenkins]

Not secure 3.110.176.138:8080/job/dev-build/3/

Incognito

Jenkins

Search (CTRL+K)

admin

log out

Dashboard > dev-build > #3

Status

Changes

Console Output

Edit Build Information

Delete build '#3'

Timings

Git Build Data

Previous Build

✓ #3 (Oct 11, 2025, 7:49:54 PM)

Add description

Keep this build forever

Started by user [admin](#)

Started 28 sec ago  
Took **19 sec**

This run spent:

- 7 ms waiting;
- 19 sec build duration;
- 19 sec total from scheduled to completion.

git


Revision: 30ce8ddf0b3e0c31f11a85f589fef157e5eddd59

Repository: <https://github.com/vigneshmarimuthu/react-cicd-project>

- refs/remotes/origin/dev

</>

No changes.

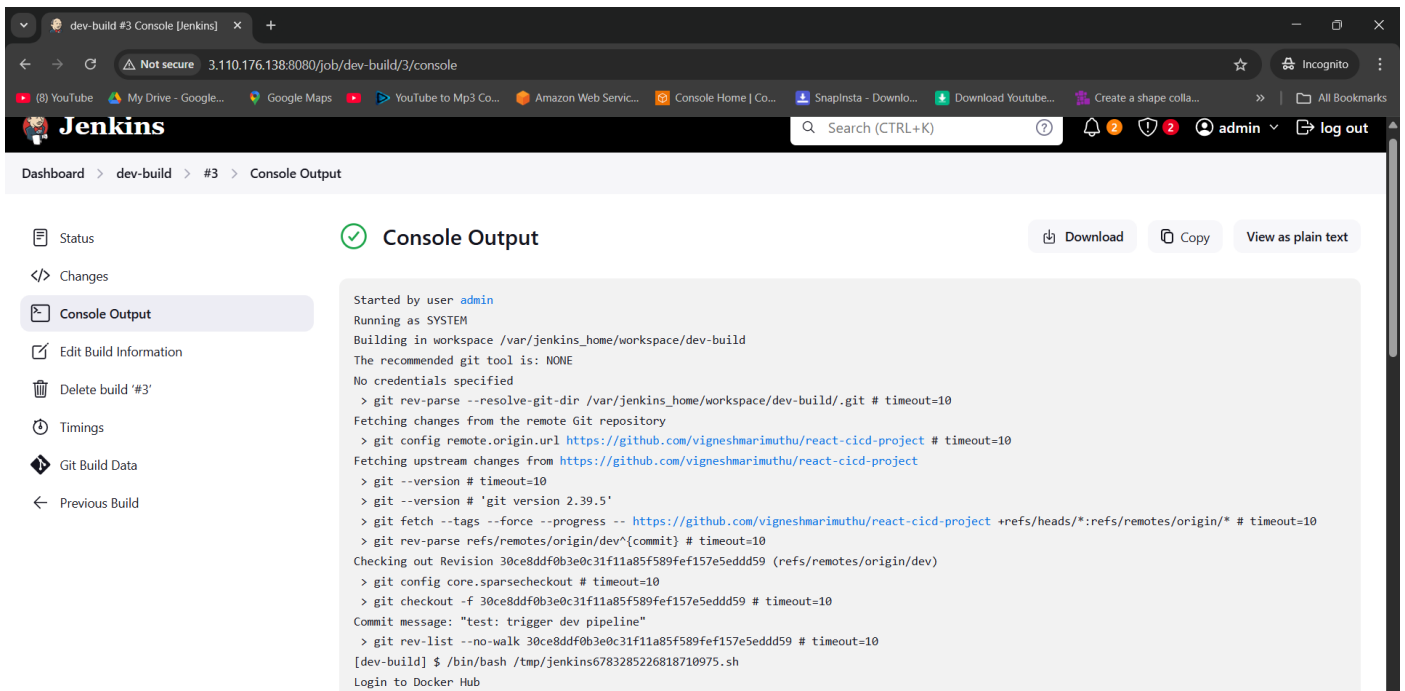


- I have uploaded build execute shell and console output to the my repository.

<https://github.com/vigneshmarimuthu/react-cicd-project>

## 2. prod-deploy (triggered on pushes to main/merge)

- Build production image, push to vigneshmarimuthu06/prod (private), pull it on the production server and run it (replace old container).

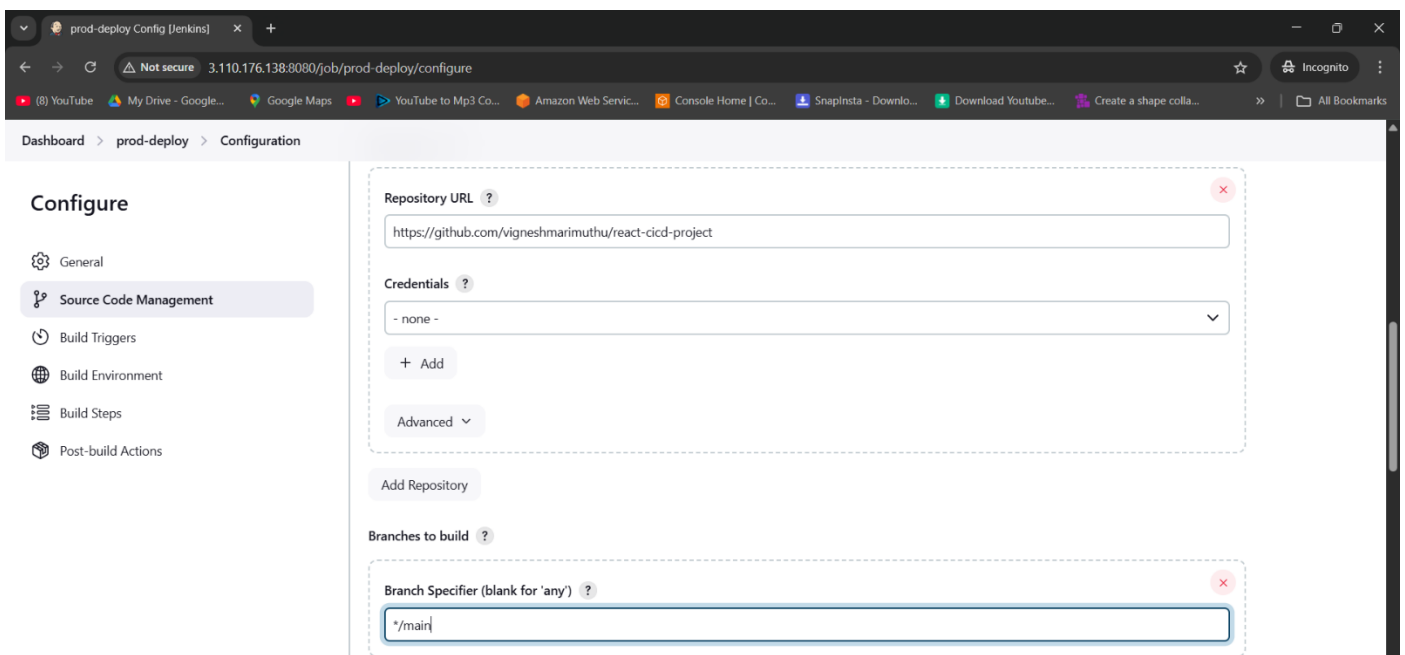

prod-deploy Config [Jenkins]

3.110.176.138:8080/job/prod-deploy/configure

Incognito

Dashboard > prod-deploy > Configuration

Configure

General

Source Code Management

**Build Triggers**

Build Environment

Build Steps

Post-build Actions

Additional Behaviours

Add

**Build Triggers**

☐ Trigger builds remotely (e.g., from scripts)

☐ Build after other projects are built

☐ Build periodically

☒ GitHub hook trigger for GITScm polling

☐ Poll SCM

prod-deploy Config [Jenkins]

3.110.176.138:8080/job/prod-deploy/configure

Incognito

Dashboard > prod-deploy > Configuration

Configure

General

Source Code Management

Build Triggers

**Build Environment**

Build Steps

Post-build Actions

**Build Environment**

☐ Delete workspace before build starts

☒ Use secret text(s) or file(s)

**Bindings**

Username and password (separated)

Username Variable

DOCKER\_USER

Password Variable

DOCKER\_PASS

Credentials

Specific credentials

Parameter expression

vigneshmarimuthu06/\*\*\*\*\*

prod-deploy [Jenkins]

3.110.176.138:8080/job/prod-deploy/

Incognito

Dashboard > prod-deploy >

Status

Changes

Workspace

Build Now

Configure

Delete Project

GitHub Hook Log

Rename

Build History

trend

Filter...

#4

Oct 11, 2025, 7:59 PM

prod-deploy

Add description

Permalinks

Last build (#4), 17 sec ago

Last stable build (#4), 17 sec ago

Last successful build (#4), 17 sec ago

Last failed build (#3), 4 min 34 sec ago

Last unsuccessful build (#3), 4 min 34 sec ago

Last completed build (#4), 17 sec ago

The screenshot shows the Jenkins web interface. The breadcrumb navigation is Dashboard > prod-deploy > #4 > Console Output. On the left sidebar, 'Console Output' is selected. The main area displays the console output for build #4, which was started by user 'admin'. The output shows the build process: running as SYSTEM, building in workspace /var/jenkins\_home/workspace/prod-deploy, fetching changes from the remote Git repository (https://github.com/vigneshmarimuthu/react-cicd-project), checking out revision 9310dcfe3c2b2aa05c5fff4bba72b87f9ed5ad42, and setting environment variables like DOCKER\_USER=vigneshmarimuthu06.

```
Started by user admin
Running as SYSTEM
Building in workspace /var/jenkins_home/workspace/prod-deploy
The recommended git tool is: NONE
No credentials specified
> git rev-parse --resolve-git-dir /var/jenkins_home/workspace/prod-deploy/.git # timeout=10
Fetching changes from the remote Git repository
> git config remote.origin.url https://github.com/vigneshmarimuthu/react-cicd-project # timeout=10
Fetching upstream changes from https://github.com/vigneshmarimuthu/react-cicd-project
> git --version # timeout=10
> git --version # 'git version 2.39.5'
> git fetch --tags --force --progress -- https://github.com/vigneshmarimuthu/react-cicd-project +refs/heads/*:refs/remotes/origin/* # timeout=10
> git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision 9310dcfe3c2b2aa05c5fff4bba72b87f9ed5ad42 (refs/remotes/origin/main)
> git config core.sparsecheckout # timeout=10
> git checkout -f 9310dcfe3c2b2aa05c5fff4bba72b87f9ed5ad42 # timeout=10
Commit message: "Initial commit: add Dockerfile and scripts"
> git rev-list --no-walk 9310dcfe3c2b2aa05c5fff4bba72b87f9ed5ad42 # timeout=10
[prod-deploy] $ /bin/sh -xe /tmp/jenkins9182476462316312593.sh
+ set -e
+ DOCKER_USER=vigneshmarimuthu06
```

- I have uploaded prod execute shell and console output to the my repository.

<https://github.com/vigneshmarimuthu/react-cicd-project>

## ✅ 10. Test the pipeline

The screenshot shows a terminal window on Ubuntu-24.04. The user is in the ~/devops-build directory and runs a series of git commands to ensure they are on the dev branch, make a small change to README.md, commit it with the message 'test1: trigger dev pipeline', and push it to the origin dev branch. The output shows the branch is up to date, the commit is successful, and the push is successful. The user then runs git config --global --edit and git commit --amend --reset-author. The final output shows the commit is successful and the branch is up to date.

```
ubuntu@ip-172-31-12-64:~/devops-build$ # ensure on dev branch
git checkout dev
# small change:
echo "// test change" >> README.md
git add README.md
git commit -m "test1: trigger dev pipeline"
git push origin dev
Already on 'dev'
Your branch is up to date with 'origin/dev'.
[dev 3912ee7] test1: trigger dev pipeline
Committer: Ubuntu <ubuntu@ip-172-31-12-64.ap-south-1.compute.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

1 file changed, 1 insertion(+)
Username for 'https://github.com': vigneshmarimuthu
Password for 'https://vigneshmarimuthu@github.com':
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 2 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 303 bytes | 303.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/vigneshmarimuthu/react-cicd-project.git
  30ce8dd..3912ee7 dev -> dev
ubuntu@ip-172-31-12-64:~/devops-build$
```

dev-build #4 Changes [Jenkins]

Not secure 3.110.176.138:8080/job/dev-build/4/changes

Search (CTRL+K)

admin log out

Dashboard > dev-build > #4 > Changes

Status

Changes

Console Output

Edit Build Information

Delete build '#4'

Polling Log

Timings

Git Build Data

Previous Build

Changes

Summary

1. test1: trigger dev pipeline (details)

Commit 3912ee7fb198688d35dc891c56d318f16500b01 by ubuntu  
test1: trigger dev pipeline

README.md (diff)

github.com/vigneshmarimuthu/react-cicd-project

vigneshmarimuthu / react-cicd-project

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

react-cicd-project Public

dev had recent pushes 2 seconds ago Compare & pull request

main 2 Branches 0 Tags

Go to file Add file Code

Ubuntu Initial commit: add Dockerfile and scripts 9310dcf · 48 minutes ago 2 Commits

build Add files via upload 2 years ago

.dockerignore Initial commit: add Dockerfile and scripts 48 minutes ago

.gitignore Initial commit: add Dockerfile and scripts 48 minutes ago

Dockerfile Initial commit: add Dockerfile and scripts 48 minutes ago

build.sh Initial commit: add Dockerfile and scripts 48 minutes ago

deploy.sh Initial commit: add Dockerfile and scripts 48 minutes ago

docker-compose.yml Initial commit: add Dockerfile and scripts 48 minutes ago

About

No description, website, or topics provided.

Activity

0 stars

0 watching

0 forks

Releases

No releases published

Create a new release

Packages

No packages published

Publish your first package

github.com/vigneshmarimuthu/react-cicd-project/pull/1

vigneshmarimuthu / react-cicd-project

Code Issues Pull requests 1 Actions Projects Wiki Security Insights Settings

Dev #1

Open vigneshmarimuthu wants to merge 2 commits into main from dev

Conversation 0 Commits 2 Checks 0 Files changed 1 +2 -0

vigneshmarimuthu commented now

No description provided.

Ubuntu added 2 commits 23 minutes ago

test: trigger dev pipeline 30ce8dd

test1: trigger dev pipeline 3912ee7

No conflicts with base branch

Merging can be performed automatically.

Reviewers

No reviews

Still in progress? Convert to draft

Assignees

No one—assign yourself

Labels

None yet


Projects

None yet

Milestone

No milestone

```
ubuntu@ip-172-31-12-64:~/devops-build$ docker ps
CONTAINER ID   IMAGE                                COMMAND                  NAMES                CREATED      STATUS      PORTS
9a0d2712cd91   vigneshmarimuthu06/prod:latest      "/docker-entrypoint..." react_prod_app        6 minutes ago Up 6 minutes 0.0.0.0:80->80/tcp, [::]:80->80/tcp
9d42e4c5a847   jenkins/jenkins:lts-jdk11          "/usr/bin/tini -- /u..." jenkins              23 minutes ago Up 23 minutes 0.0.0.0:8080->8080/tcp, [::]:8080->8080/tcp
ubuntu@ip-172-31-12-64:~/devops-build$
```



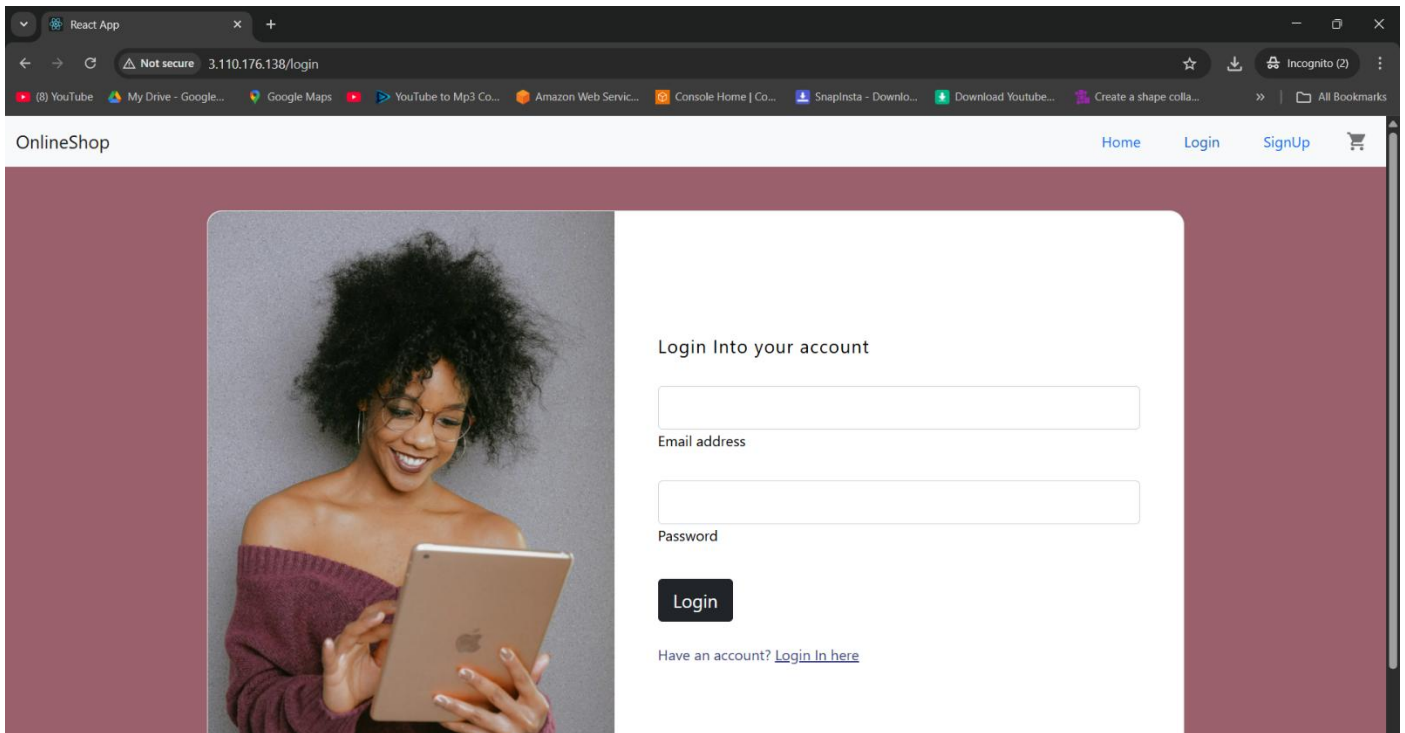


## ✓ 11. Monitoring: Install Uptime Kuma (self-hosted)



- Uptime Kuma is a simple, open-source uptime monitor with alerts. It will only notify you when the app is down.

```
ubuntu@ip-172-31-12-64:~/devops-build$ mkdir -p ~/uptime-kuma && cd ~/uptime-kuma
cat > docker-compose.yml <<'EOF'
version: '3.8'
services:
  uptime-kuma:
    image: louislam/uptime-kuma:1
    container_name: uptime-kuma
    ports:
      - "3001:3001"
    volumes:
      - ./data:/app/data
    restart: always
EOF

docker compose up -d
WARN[0000] /home/ubuntu/uptime-kuma/docker-compose.yml: the attribute 'version' is obsolete, it will be ignored, please remove it to avoid potential confusion
[+] Running 13/13
✔ uptime-kuma Pulled 19.4s
✔ b338562f40a7 Pull complete 2.8s
✔ 874bf4d93720 Pull complete 2.8s
✔ b16337721583 Pull complete 4.8s
✔ 7d955db85b85 Pull complete 4.9s
✔ 2c706596bd17 Pull complete 5.0s
✔ 88a5c59ed14f Pull complete 5.0s
✔ 5a1d0a896c33 Pull complete 6.6s
✔ e68c2f25b946 Pull complete 7.0s
✔ 2e6c90f010d6 Pull complete 7.0s
✔ ff15b10fabbb8 Pull complete 7.0s
✔ 4f4fb70def54 Pull complete 7.1s
✔ d2a400cc8adb Pull complete 16.1s
[+] Running 2/2
✔ Network uptime-kuma_default Created 0.1s
✔ Container uptime-kuma Started 1.6s
ubuntu@ip-172-31-12-64:~/uptime-kuma$
```

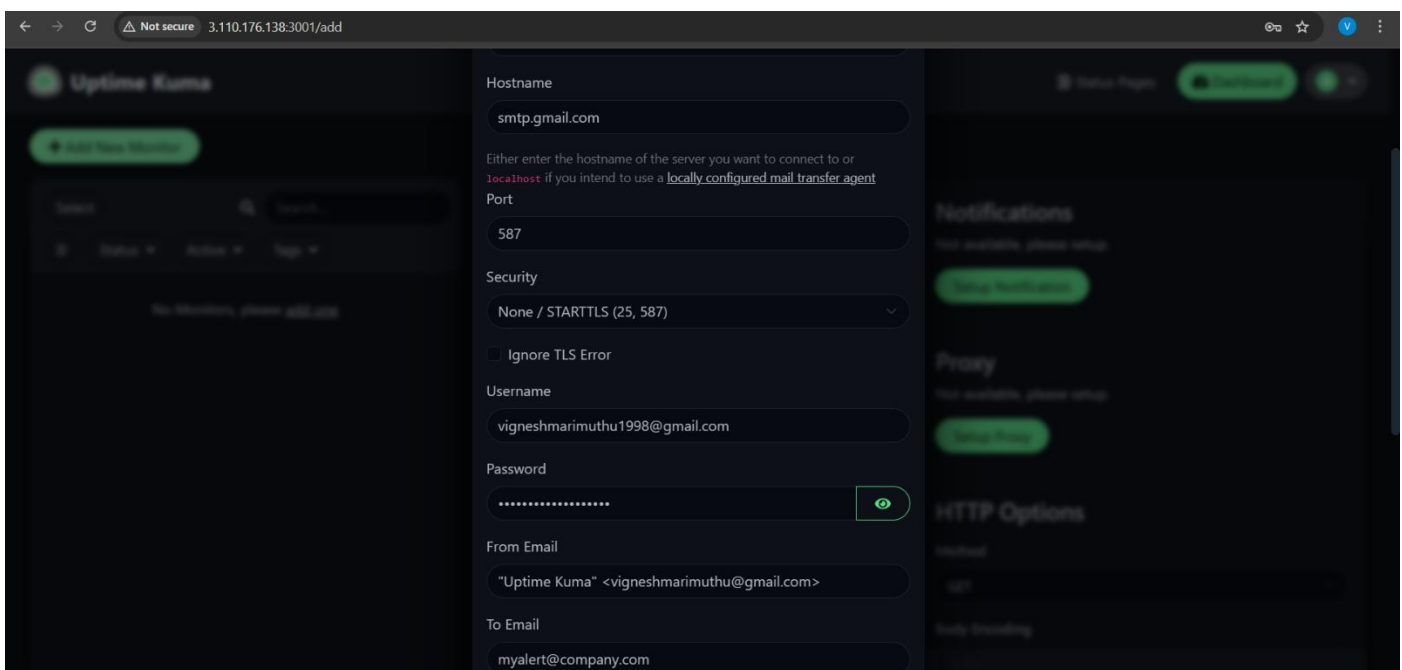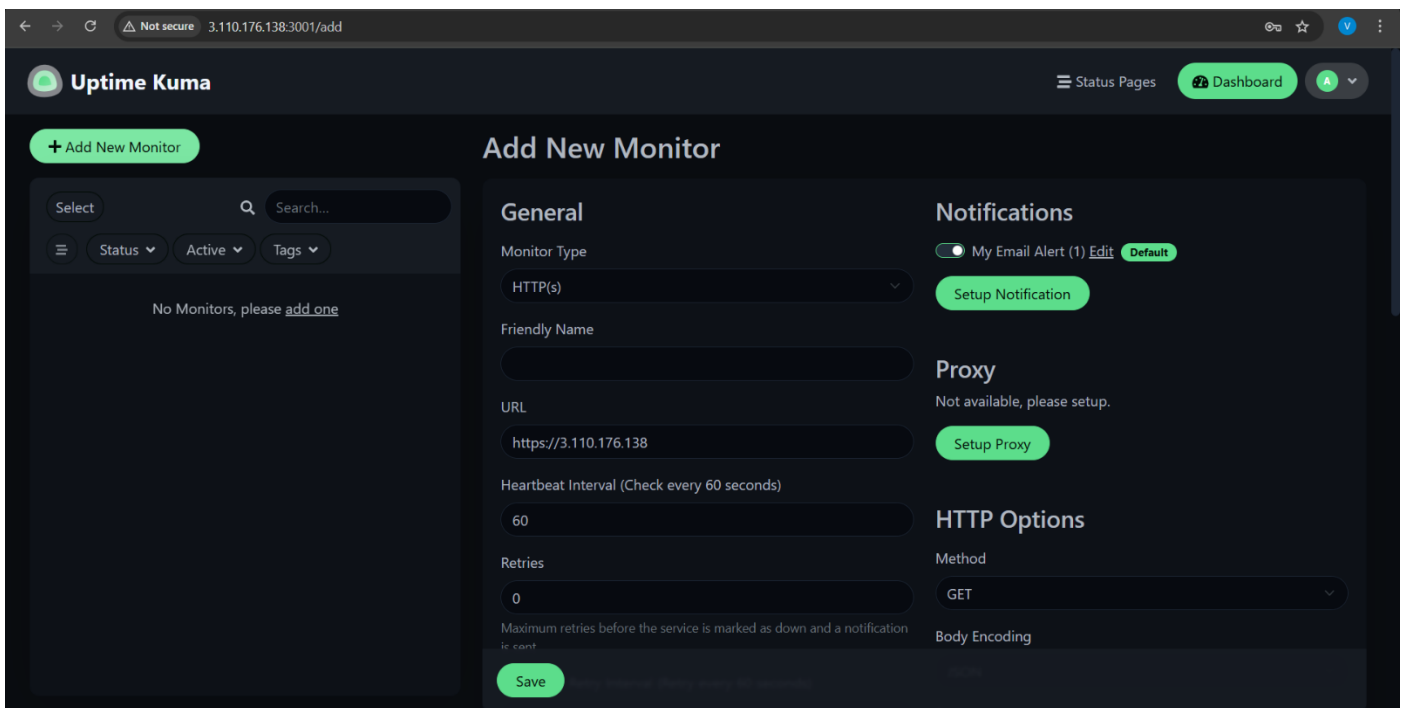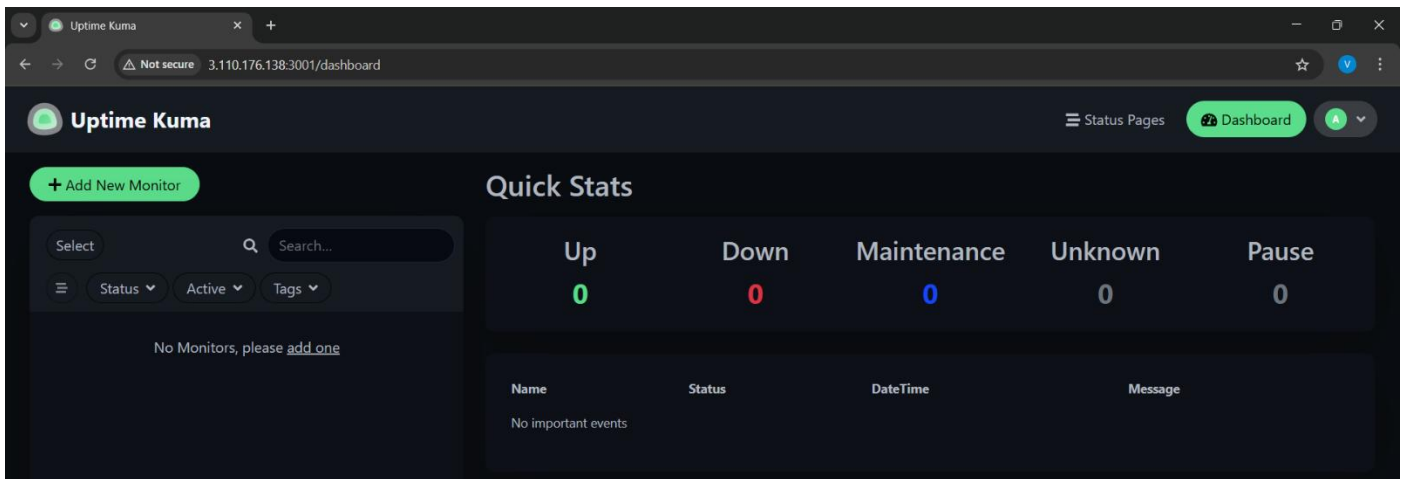



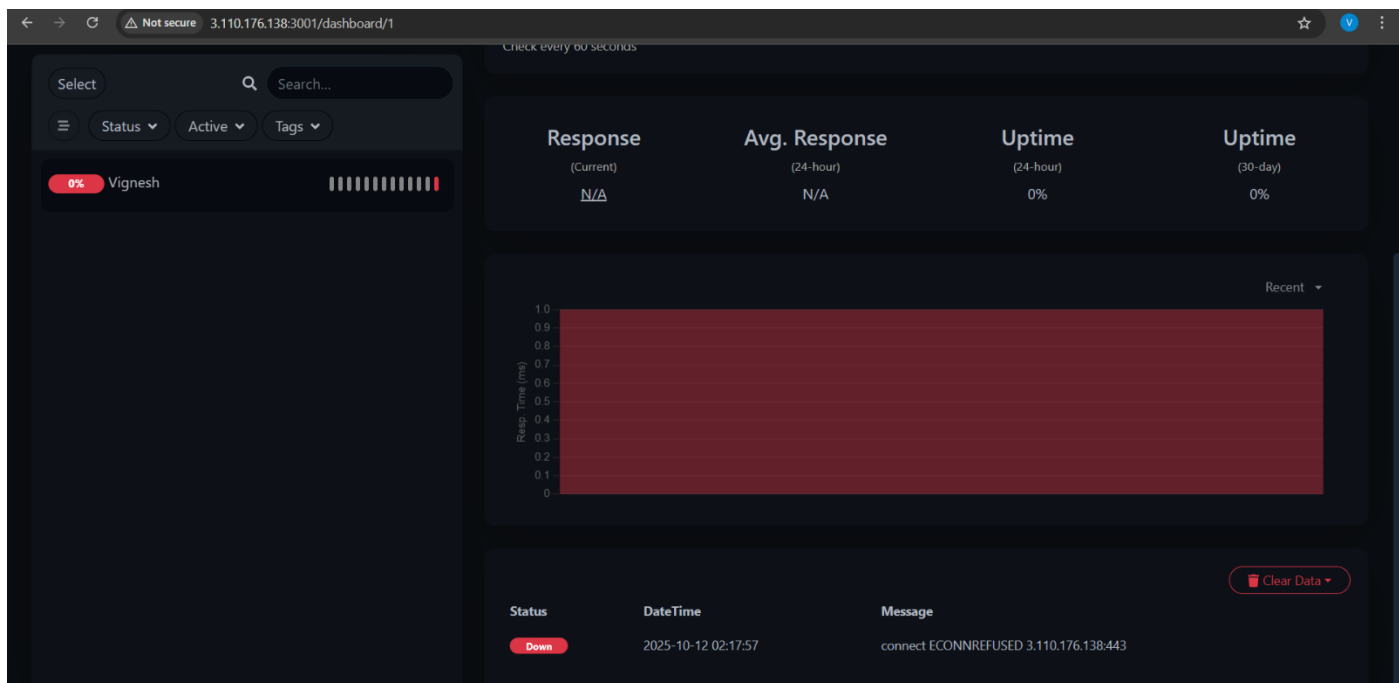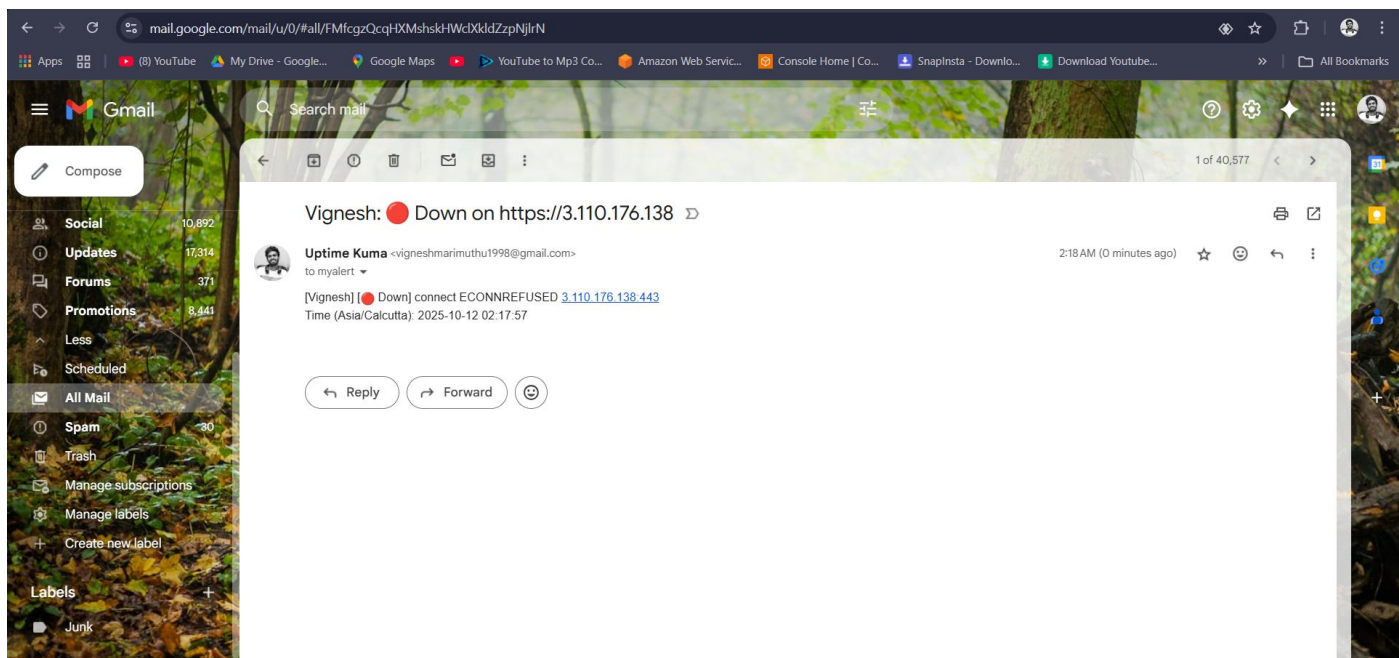

- I checked Uptime Kuma and monitored it.
- When I shut down Docker, it went down and I received a notification from the server. Everything was checked and it's all working.