

EXP NO -16: Create a **Cloning of a VM and Test it by loading the Previous Version/Cloned VM**

AIM:

To create a clone of an existing Virtual Machine (VM) using VMware Workstation and test the cloned VM by loading and running it.

PROCEDURE:

Step 1: Open **VMware Workstation Pro** and select the virtual machine that you want to clone.

Step 2: Ensure the virtual machine is **powered off**.

Step 3: Click **VM** → **Manage** → **Clone** to open the Clone Virtual Machine Wizard.


Step 4: Select the **Current State** (or an existing snapshot, if available) as the source and click **Next**.



Step 5: Choose the clone type (**Full Clone** or **Linked Clone**) and click **Next**.


Step 6: Enter the **name** and **location** for the cloned virtual machine, then click **Finish**.

Step 7: Wait for the cloning process to complete. The cloned virtual machine will be added to the VMware Library.


Step 8: Select the **cloned virtual machine** and click **Power on this Virtual Machine** to verify that it loads and runs successfully.

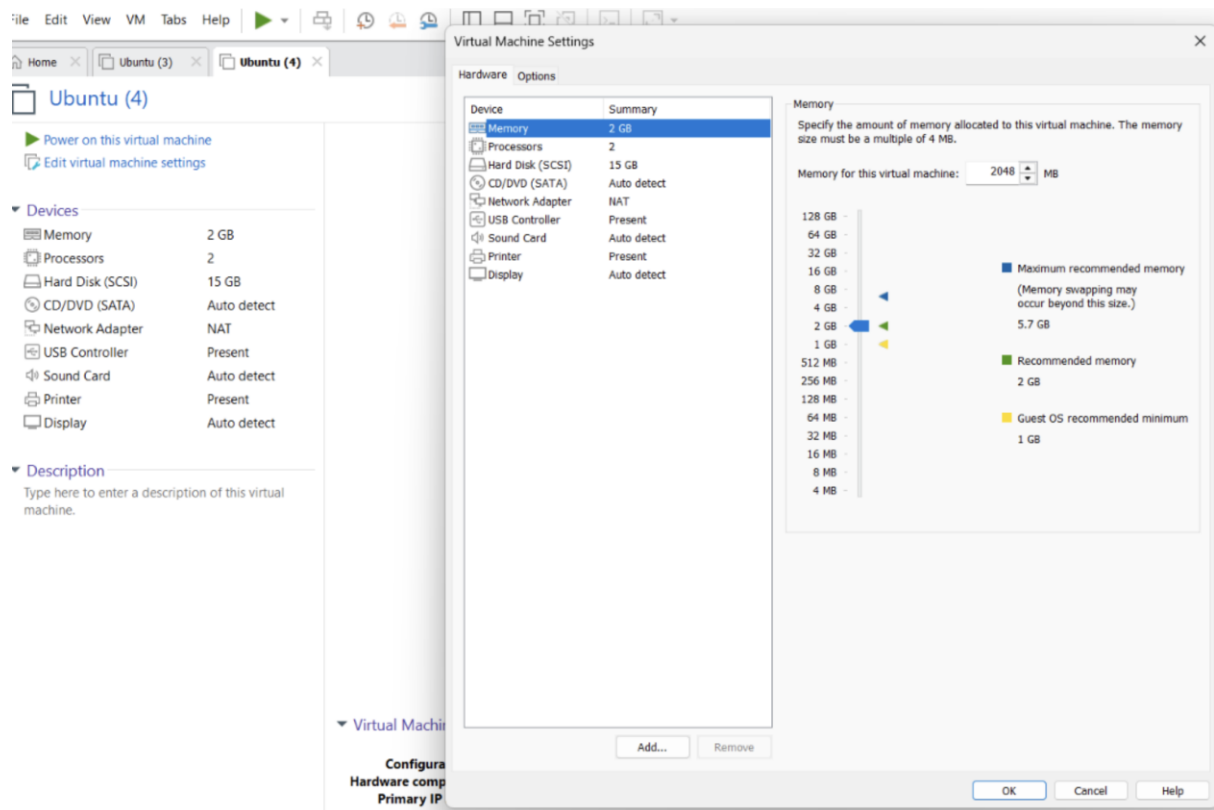

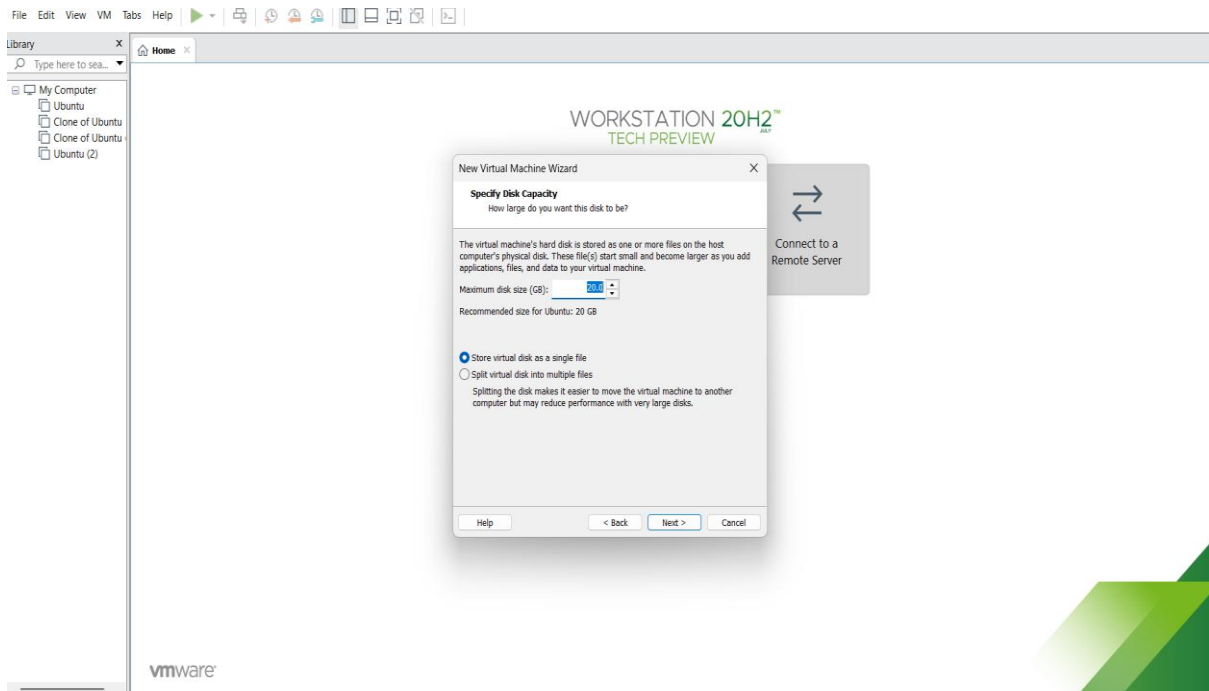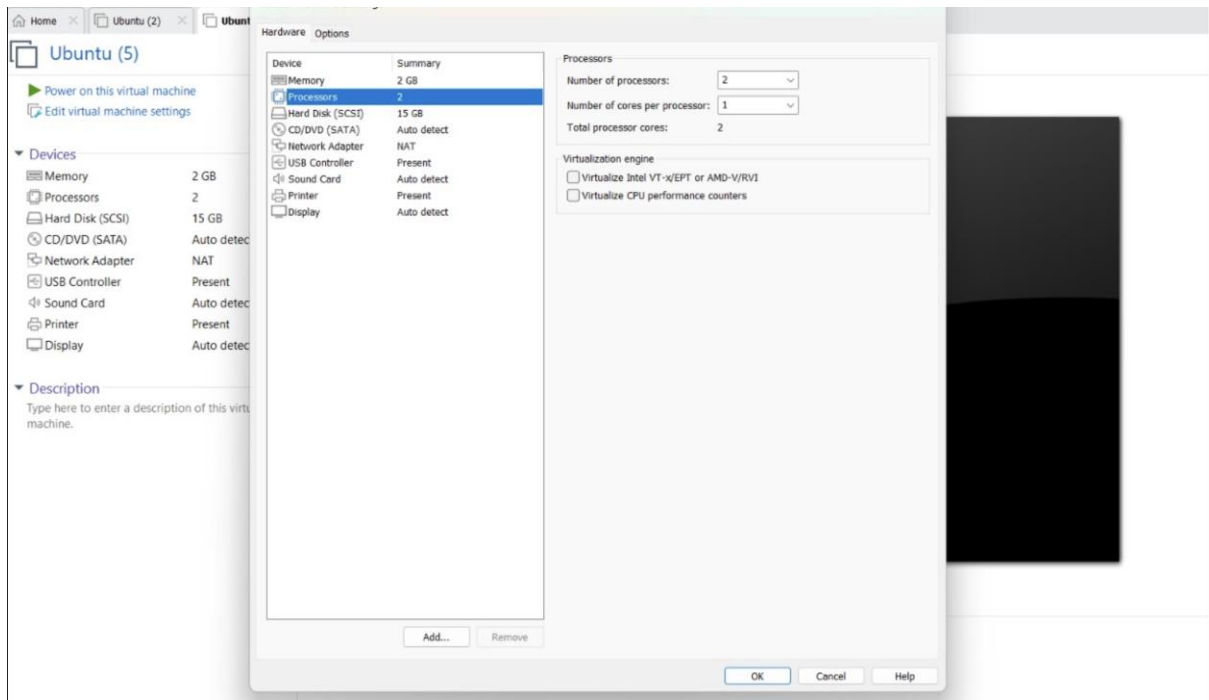

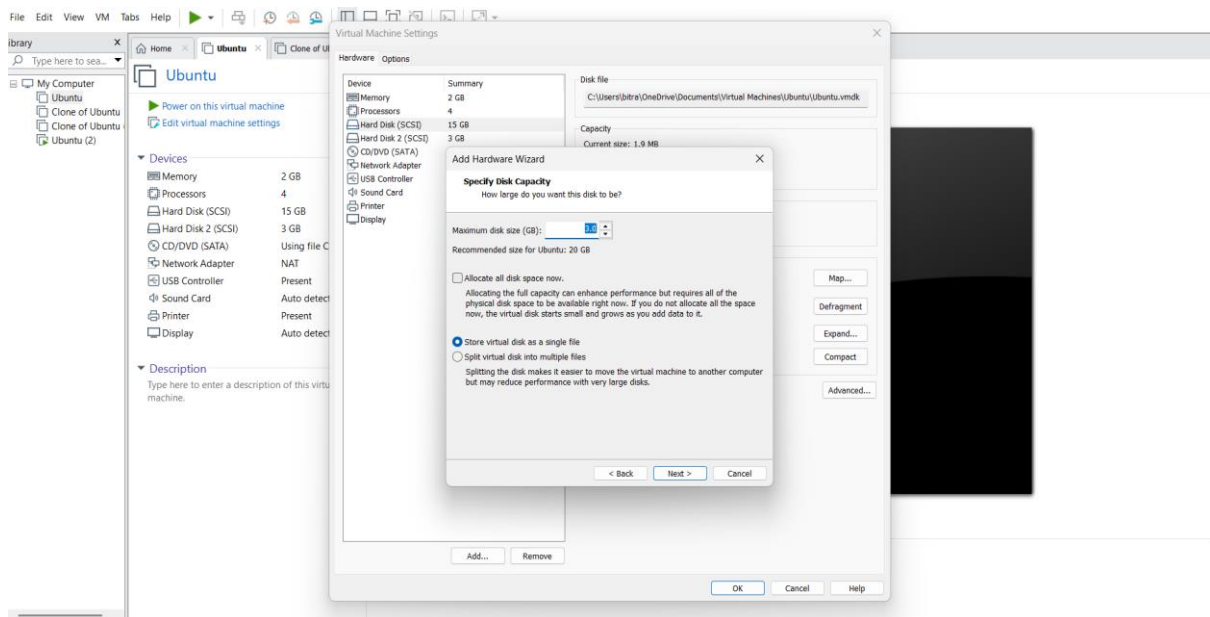

OUTPUT:

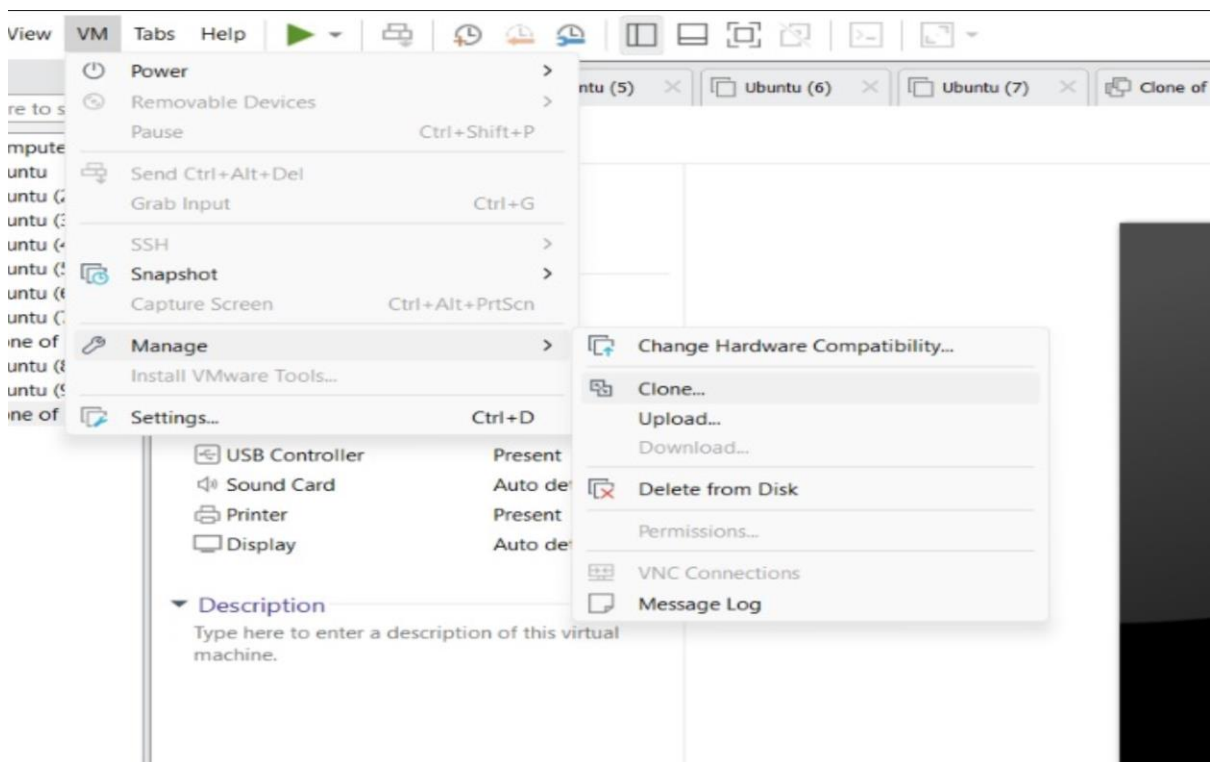

Home

Ubuntu (2)

Ubuntu (5)

Ubuntu (6)

Ubuntu (7)

Clone of Ubuntu (7)

Ubuntu (8)

Ubuntu (9)

Clone of Ubuntu (9)

Clone of Ubuntu (9)

Power on this virtual machine

Edit virtual machine settings

▼ Devices

Memory	2 GB
Processors	2
Hard Disk (SCSI)	15 GB
CD/DVD (SATA)	Auto detect
Network Adapter	NAT
USB Controller	Present
Sound Card	Auto detect
Printer	Present
Display	Auto detect

▼ Description

Type here to enter a description of this virtual machine.

▼ Virtual Machine Details

State:

Powered off

Configuration file:

C:\Users\Saranya R A\OneDrive\Documents\Virtual Machines\Clone of Ubuntu (9)\Clone of Ubuntu (9).vmx

Clone of:

C:\Users\Saranya R A\OneDrive\Documents\Virtual Machines\Ubuntu (9)\Ubuntu (9).vmx

Hardware compatibility:

Workstation 17.x virtual machine

Primary IP address:

Network information is not available