


Pay-as-you-go: 'pass'

```
1  if received_on_port == EXT_DEVICE and flow_map.has(internal_flow):
2      return ([...], [ether(h1, saddr=..., daddr=...), ipv4(h2, cksm=...), tcpudp(h3)])
3  else:
4      pass
```

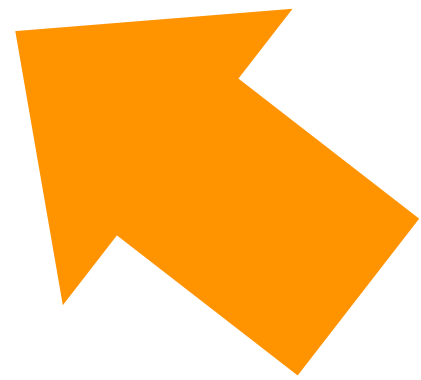

Pay-as-you-go: '...' (ellipsis)

```
1  if received_on_port == EXT_DEVICE and flow_map.has(internal_flow):
2      return ([...], [ether(h1, saddr=..., daddr=...), ipv4(h2, cksum=...), tcpudp(h3)])
3  else:
4      pass
```

