Client ID and Secret from Google

- Go to Google Cloud Console and follow these steps to generate a client ID and secret. You can also use an existing client ID and client secret.

- Log in to the Google Cloud console and click on the **Credentials** option from the left menu. Then click on the **+ CREATE CREDENTIALS** drop down from the top and select the **OAuth client ID** option as shown in the image below.

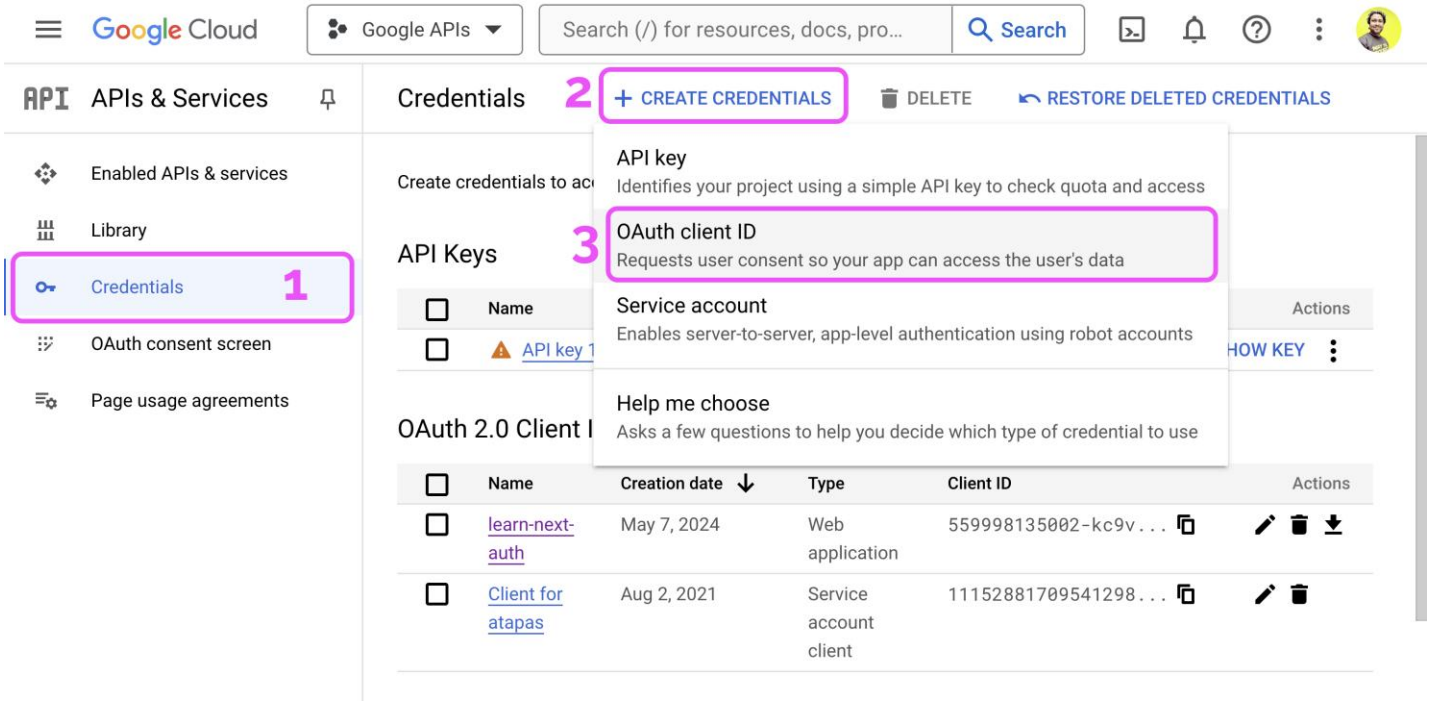

- In the next screen, select Web application as an application type, give a suitable name for the OAuth 2.0 client. Then provide http://localhost:3000 as the authorized JavaScript origin URL. It will make sure that the client and secrets cannot be used from elsewhere.

- Next, provide the URL http://localhost:3000/api/auth/callback/google as the value of the authorized redirect URI.

- Finally, click on the CREATE button.

Create OAuth client ID

A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See Setting up OAuth 2.0 for more information. Learn more about OAuth client types.

Application type *
Web application

Name *
next-social-login

The name of your OAuth 2.0 client. This name is only used to identify the client in the console and will not be shown to end users.

The domains of the URIs you add below will be automatically added to your OAuth consent screen as authorized domains.

Authorized JavaScript origins

For use with requests from a browser

URIs 1 *
http://localhost:3000

+ ADD URI

Authorized redirect URIs

For use with requests from a web server

URIs 1 *
http://localhost:3000/api/auth/callback/google

+ ADD URI

Note: It may take 5 minutes to a few hours for settings to take effect

CREATE CANCEL

- Now you will see a modal dialog with the OAuth client ID and secret created. Make sure you copy them, and optionally you can download them in a JSON file to use later.
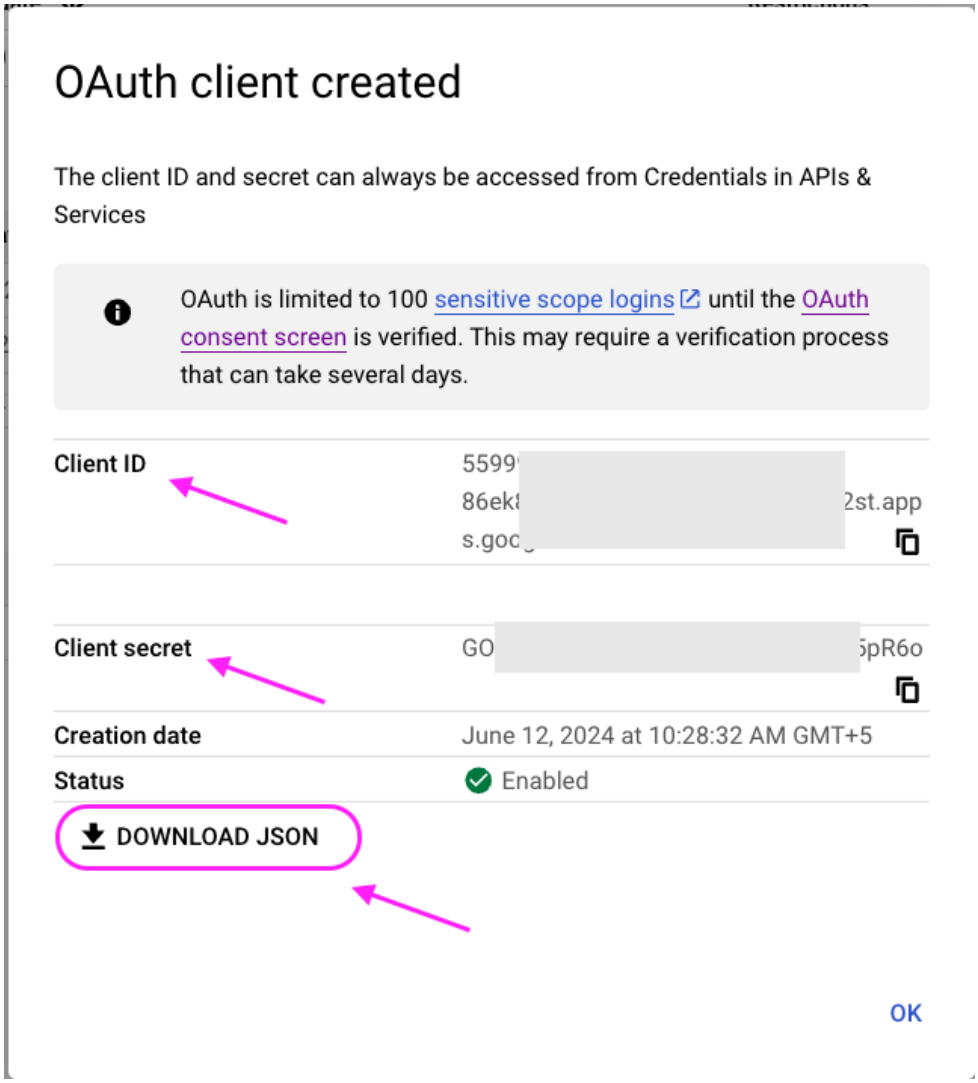
- Click on OK to close the modal.