## AI Agents

- OpenClaw
- Claude code
- Bmad
- Manus
- Stack
- Cursor

- → pydantic.ai (OS)
- → logfire
- → Confidence

- Sonnet
- Gemini
- ...

## LLM Capability

- completion / IF
- structured output / function
- Conversation / history
- Agentic / tools
- reasoning
- multimodal

semantic

pydantic

type based

- → a flow for model definition
- → auto validation
- → auto serialization
- → nested models.

python → dynamically typed

clojure

└ developers have to provide boilerplate methods.

isomorphism vs homomorphism

→ ○

Typescript

non-deterministic

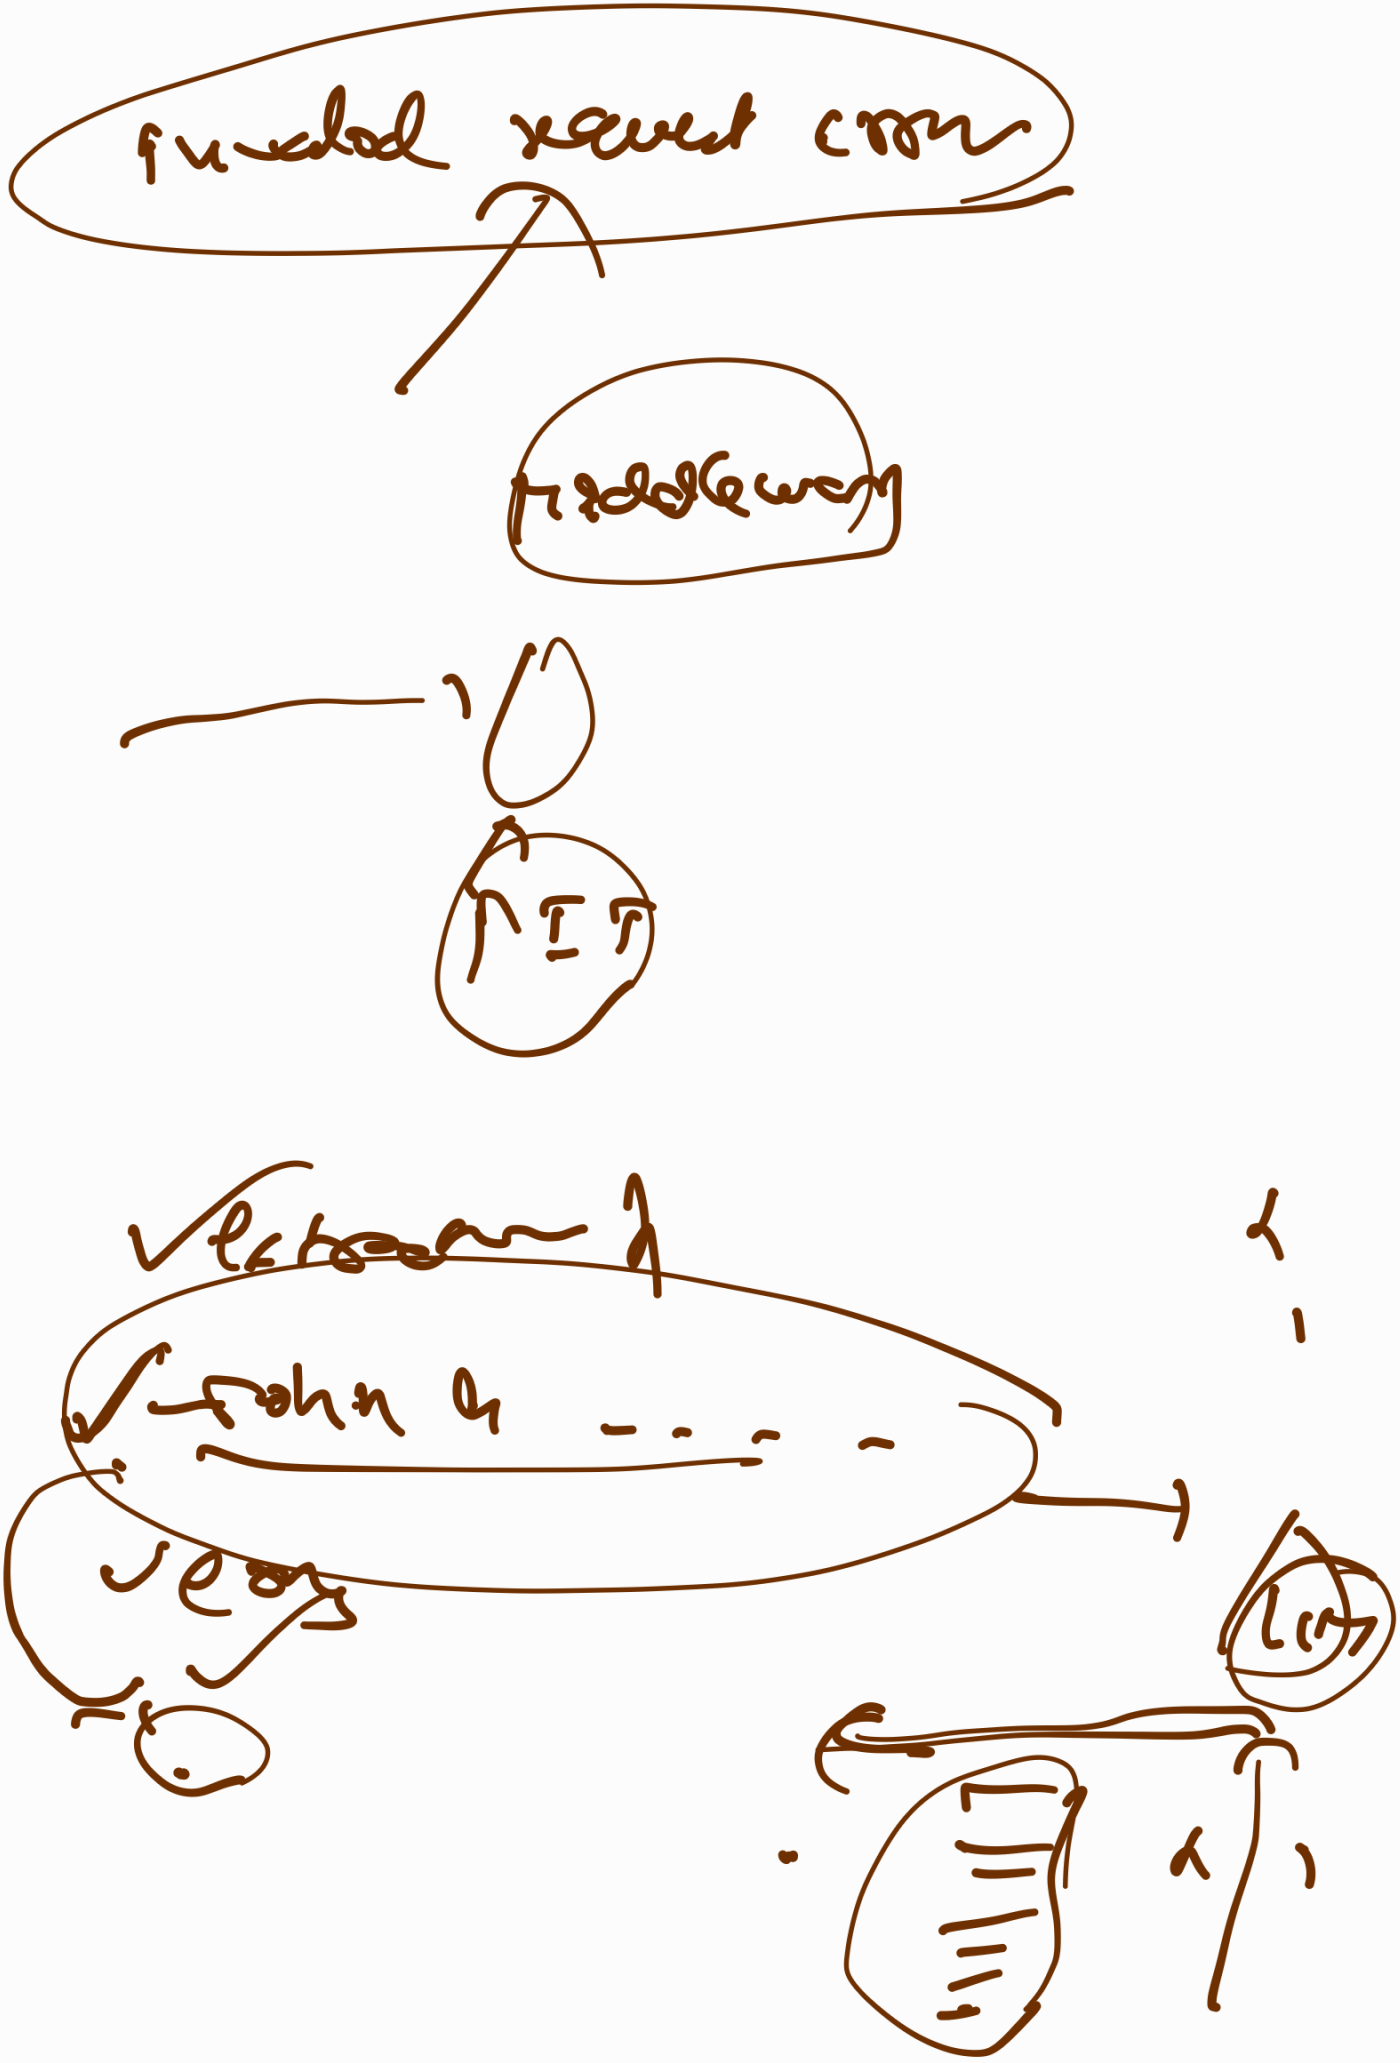

## Two modes of execution

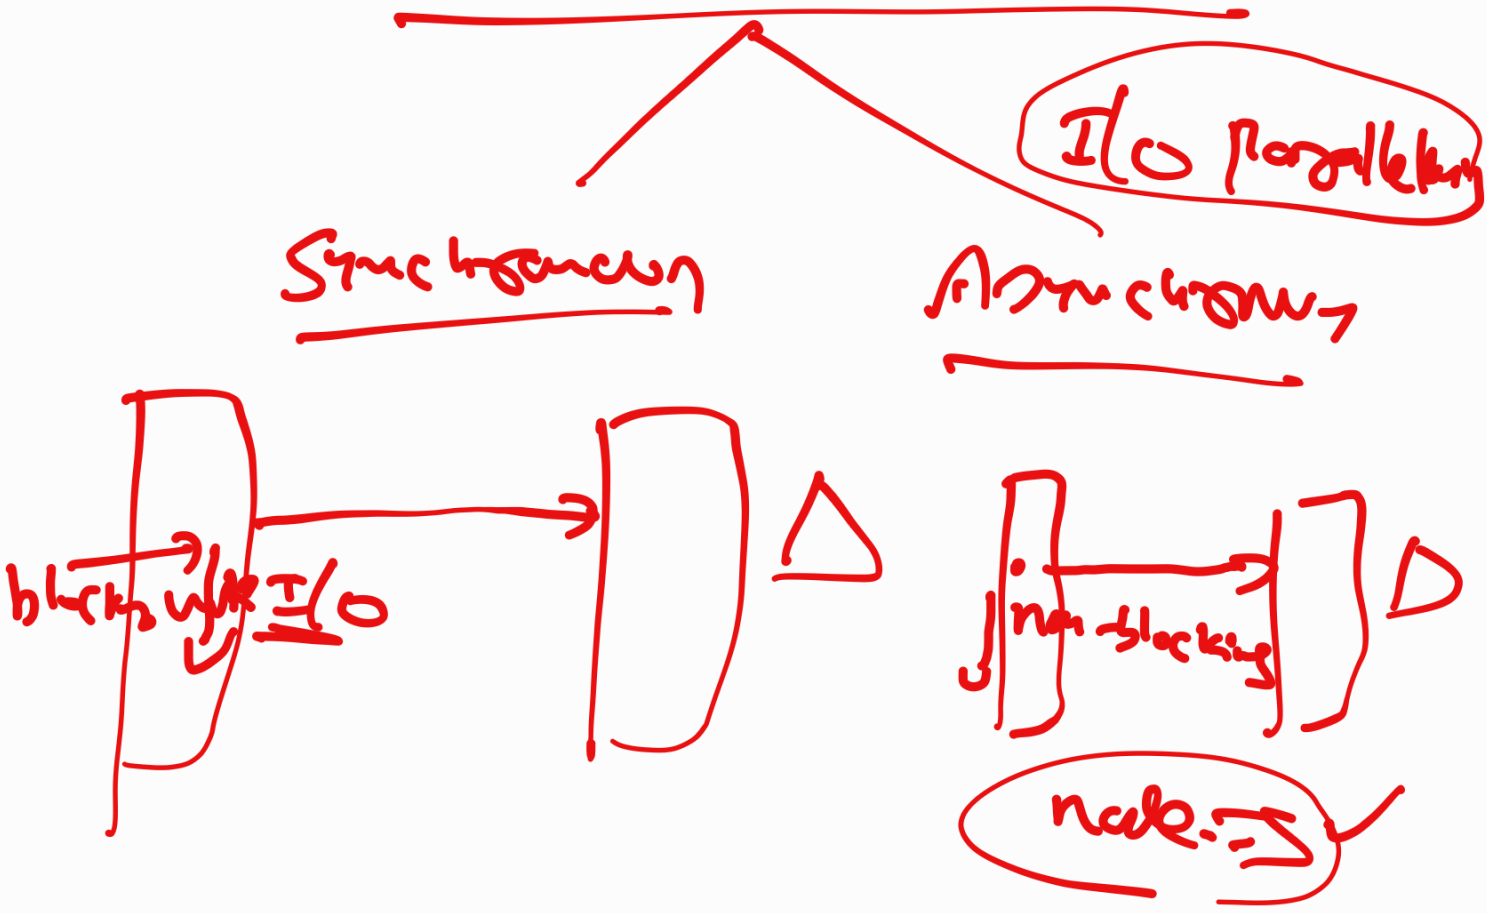

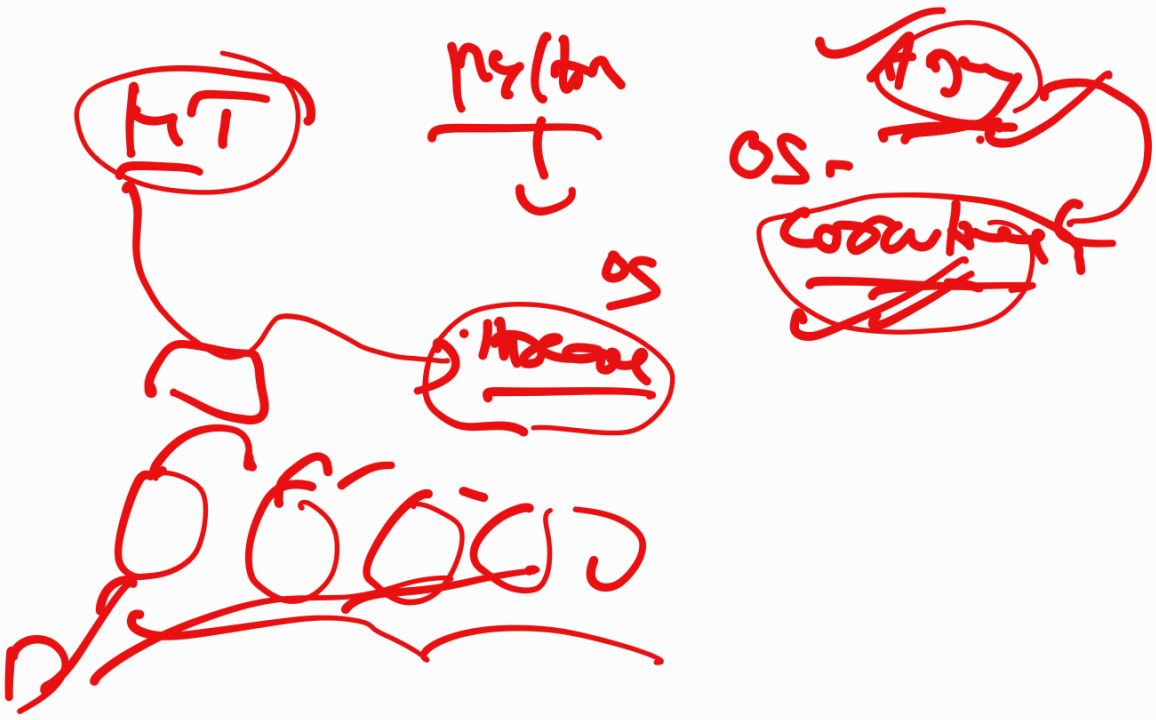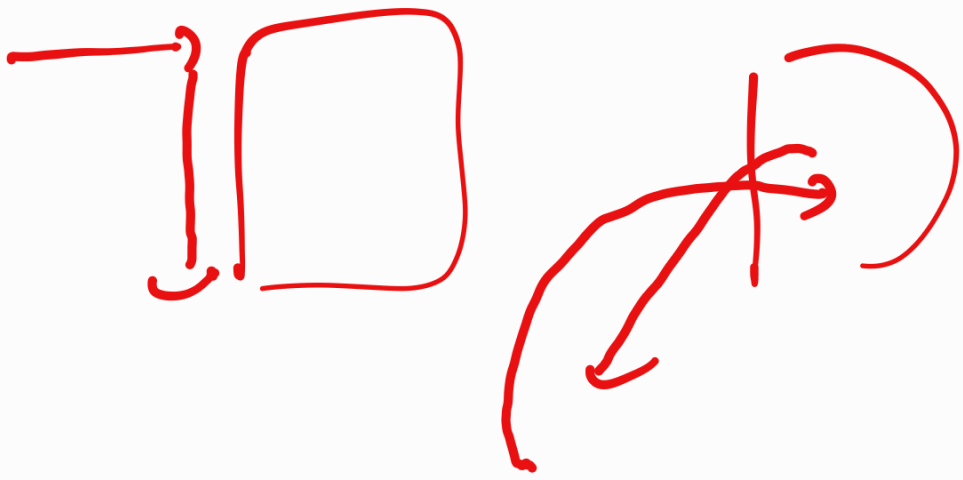
MT
OS
OS