



--local-branching-on-the-cheap

- [About](#)
- [Documentation](#)
 - [Reference](#)
 - [Book](#)
 - [Videos](#)
 - [External Links](#)
- [Blog](#)
- [Downloads](#)
 - [GUI Clients](#)
 - [Logos](#)
- [Community](#)

This book is available in [English](#).

Full translation available in [Deutsch](#), [简体中文](#), [正體中文](#), [Français](#), [日本語](#), [Nederlands](#), [Русский](#), [한국어](#), [Português \(Brasil\)](#) and [Čeština](#).

Partial translations available in [Arabic](#), [Español](#), [Indonesian](#), [Italiano](#), [Suomi](#), [Македонски](#), [Ελληνικά](#), [Polski](#) and [Türkçe](#).

Translations started for [Azərbaycan dili](#), [Беларуская](#), [Català](#), [Esperanto](#), [Español \(Nicaragua\)](#), [فارسی](#), [हिन्दी](#), [Magyar](#), [Norwegian Bokmål](#), [Română](#), [Српски](#), [ภาษาไทย](#), [Tiếng Việt](#), [Українська](#) and [Ўзбекча](#).

The source of this book is [hosted on GitHub](#).
Patches, suggestions and comments are welcome.

[Chapters](#) ▼

1. [1. Getting Started](#)

- 1. 1.1 [About Version Control](#)
- 2. 1.2 [A Short History of Git](#)
- 3. 1.3 [Git Basics](#)
- 4. 1.4 [The Command Line](#)
- 5. 1.5 [Installing Git](#)
- 6. 1.6 [First-Time Git Setup](#)
- 7. 1.7 [Getting Help](#)
- 8. 1.8 [Summary](#)

2. [2. Git Basics](#)

- 1. 2.1 [Getting a Git Repository](#)
- 2. 2.2 [Recording Changes to the Repository](#)
- 3. 2.3 [Viewing the Commit History](#)
- 4. 2.4 [Undoing Things](#)
- 5. 2.5 [Working with Remotes](#)
- 6. 2.6 [Tagging](#)
- 7. 2.7 [Git Aliases](#)
- 8. 2.8 [Summary](#)

3. [3. Git Branching](#)

1. 3.1 [Branches in a Nutshell](#)
2. 3.2 [Basic Branching and Merging](#)
3. 3.3 [Branch Management](#)
4. 3.4 [Branching Workflows](#)
5. 3.5 [Remote Branches](#)
6. 3.6 [Rebasing](#)
7. 3.7 [Summary](#)

4. [4. Git on the Server](#)

1. 4.1 [The Protocols](#)
2. 4.2 [Getting Git on a Server](#)
3. 4.3 [Generating Your SSH Public Key](#)
4. 4.4 [Setting Up the Server](#)
5. 4.5 [Git Daemon](#)
6. 4.6 [Smart HTTP](#)
7. 4.7 [GitWeb](#)
8. 4.8 [GitLab](#)
9. 4.9 [Third Party Hosted Options](#)
10. 4.10 [Summary](#)

5. [5. Distributed Git](#)

1. 5.1 [Distributed Workflows](#)
2. 5.2 [Contributing to a Project](#)
3. 5.3 [Maintaining a Project](#)
4. 5.4 [Summary](#)

1. [6. GitHub](#)

1. 6.1 [Account Setup and Configuration](#)
2. 6.2 [Contributing to a Project](#)
3. 6.3 [Maintaining a Project](#)
4. 6.4 [Managing an organization](#)
5. 6.5 [Scripting GitHub](#)
6. 6.6 [Summary](#)

2. [7. Git Tools](#)

1. 7.1 [Revision Selection](#)
2. 7.2 [Interactive Staging](#)
3. 7.3 [Stashing and Cleaning](#)
4. 7.4 [Signing Your Work](#)
5. 7.5 [Searching](#)
6. 7.6 [Rewriting History](#)
7. 7.7 [Reset Demystified](#)
8. 7.8 [Advanced Merging](#)
9. 7.9 [Rerere](#)
10. 7.10 [Debugging with Git](#)
11. 7.11 [Submodules](#)
12. 7.12 [Bundling](#)
13. 7.13 [Replace](#)
14. 7.14 [Credential Storage](#)
15. 7.15 [Summary](#)

3. **8. Customizing Git**

1. 8.1 [Git Configuration](#)
2. 8.2 [Git Attributes](#)
3. 8.3 [Git Hooks](#)
4. 8.4 [An Example Git-Enforced Policy](#)
5. 8.5 [Summary](#)

4. **9. Git and Other Systems**

1. 9.1 [Git as a Client](#)
2. 9.2 [Migrating to Git](#)
3. 9.3 [Summary](#)

5. **10. Git Internals**

1. 10.1 [Plumbing and Porcelain](#)
2. 10.2 [Git Objects](#)
3. 10.3 [Git References](#)
4. 10.4 [Packfiles](#)
5. 10.5 [The Refspec](#)
6. 10.6 [Transfer Protocols](#)
7. 10.7 [Maintenance and Data Recovery](#)
8. 10.8 [Environment Variables](#)
9. 10.9 [Summary](#)

1. **A1. Appendix A: Git in Other Environments**

1. A1.1 [Graphical Interfaces](#)
2. A1.2 [Git in Visual Studio](#)
3. A1.3 [Git in Eclipse](#)
4. A1.4 [Git in Bash](#)
5. A1.5 [Git in Zsh](#)
6. A1.6 [Git in Powershell](#)
7. A1.7 [Summary](#)

2. **A2. Appendix B: Embedding Git in your Applications**

1. A2.1 [Command-line Git](#)
2. A2.2 [Libgit2](#)
3. A2.3 [JGit](#)

3. **A3. Appendix C: Git Commands**

1. A3.1 [Setup and Config](#)
2. A3.2 [Getting and Creating Projects](#)
3. A3.3 [Basic Snapshotting](#)
4. A3.4 [Branching and Merging](#)
5. A3.5 [Sharing and Updating Projects](#)
6. A3.6 [Inspection and Comparison](#)
7. A3.7 [Debugging](#)
8. A3.8 [Patching](#)
9. A3.9 [Email](#)
10. A3.10 [External Systems](#)
11. A3.11 [Administration](#)

12. A3.12 [Plumbing Commands](#)

2nd Edition

3.1 Git Branching - Branches in a Nutshell

Nearly every VCS has some form of branching support. Branching means you diverge from the main line of development and continue to do work without messing with that main line. In many VCS tools, this is a somewhat expensive process, often requiring you to create a new copy of your source code directory, which can take a long time for large projects.

Some people refer to Git's branching model as its "killer feature," and it certainly sets Git apart in the VCS community. Why is it so special? The way Git branches is incredibly lightweight, making branching operations nearly instantaneous, and switching back and forth between branches generally just as fast. Unlike many other VCSs, Git encourages workflows that branch and merge often, even multiple times in a day. Understanding and mastering this feature gives you a powerful and unique tool and can entirely change the way that you develop.

Branches in a Nutshell

To really understand the way Git does branching, we need to take a step back and examine how Git stores its data.

As you may remember from [Getting Started](#), Git doesn't store data as a series of changesets or differences, but instead as a series of snapshots.

When you make a commit, Git stores a commit object that contains a pointer to the snapshot of the content you staged. This object also contains the author's name and email, the message that you typed, and pointers to the commit or commits that directly came before this commit (its parent or parents): zero parents for the initial commit, one parent for a normal commit, and multiple parents for a commit that results from a merge of two or more branches.

To visualize this, let's assume that you have a directory containing three files, and you stage them all and commit. Staging the files computes a checksum for each one (the SHA-1 hash we mentioned in [Getting Started](#)), stores that version of the file in the Git repository (Git refers to them as blobs), and adds that checksum to the staging area:

```
$ git add README test.rb LICENSE
$ git commit -m 'The initial commit of my project'
```

When you create the commit by running `git commit`, Git checksums each subdirectory (in this case, just the root project directory) and stores those tree objects in the Git repository. Git then creates a commit object that has the metadata and a pointer to the root project tree so it can re-create that snapshot when needed.

Your Git repository now contains five objects: one blob for the contents of each of your three files, one tree that lists the contents of the directory and specifies which file names are stored as which blobs, and one commit with the pointer to that root tree and all the commit metadata.

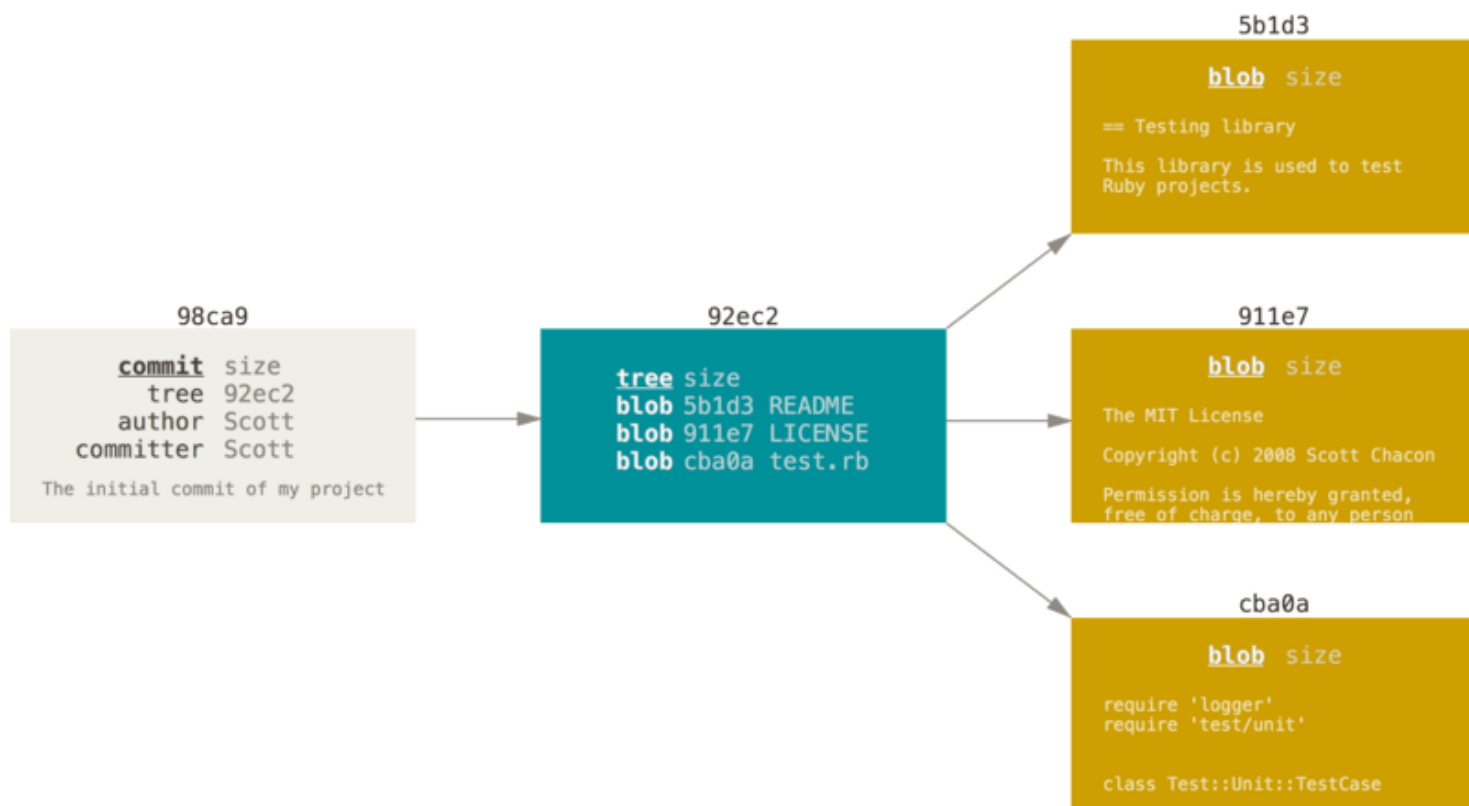


Figure 9. A commit and its tree

If you make some changes and commit again, the next commit stores a pointer to the commit that came immediately before it.

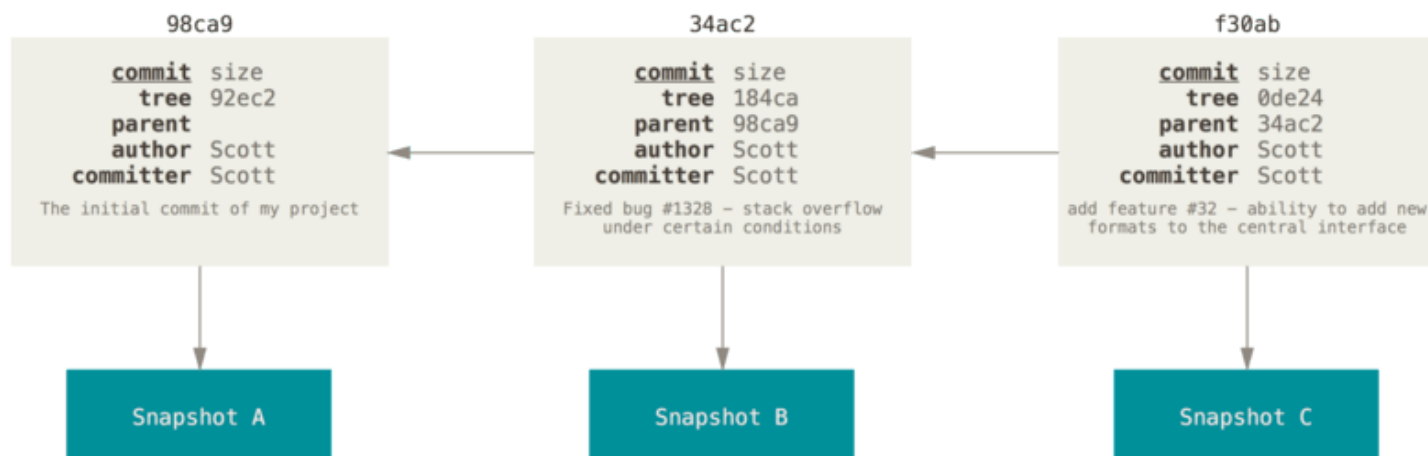


Figure 10. Commits and their parents

A branch in Git is simply a lightweight movable pointer to one of these commits. The default branch name in Git is `master`. As you start making commits, you're given a `master` branch that points to the last commit you made. Every time you commit, it moves forward automatically.

Note The “master” branch in Git is not a special branch. It is exactly like any other branch. The only reason nearly every repository has one is that the `git init` command creates it by default and most people don't bother to change it.

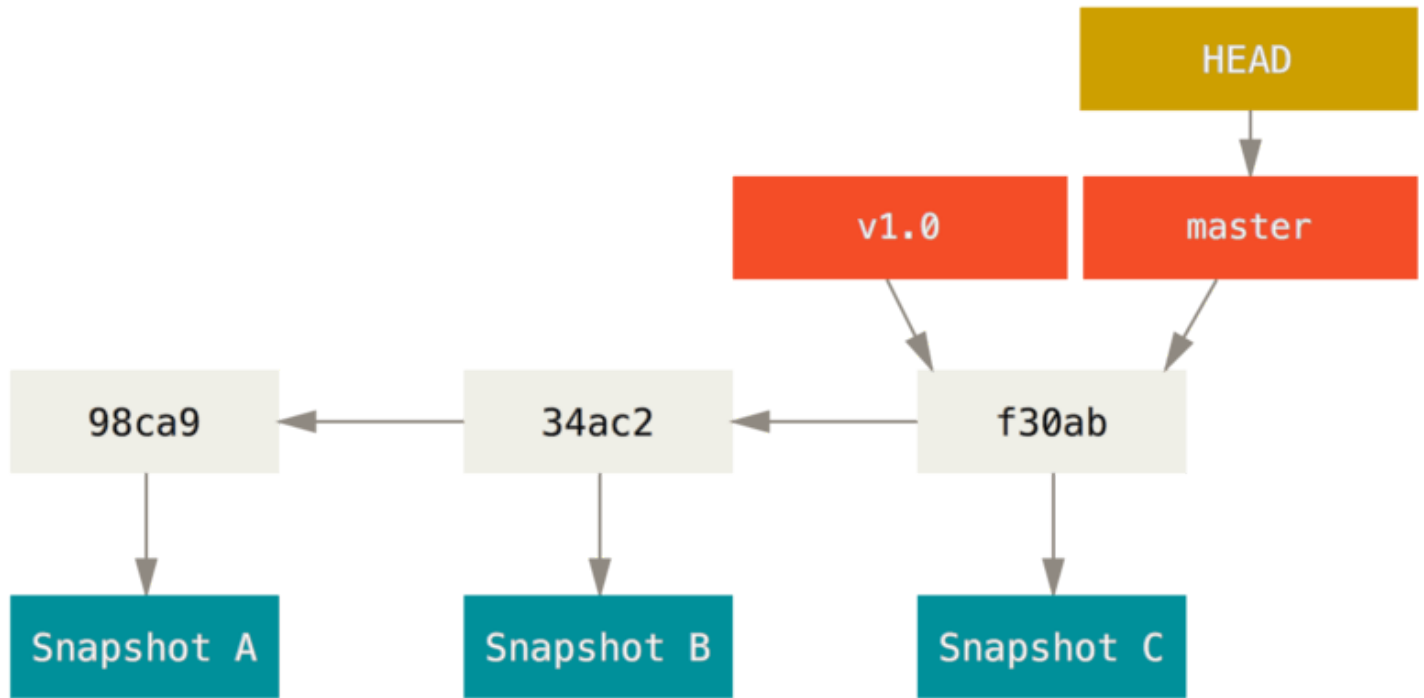


Figure 11. A branch and its commit history

Creating a New Branch

What happens if you create a new branch? Well, doing so creates a new pointer for you to move around. Let's say you create a new branch called testing. You do this with the `git branch` command:

```
$ git branch testing
```

This creates a new pointer to the same commit you're currently on.

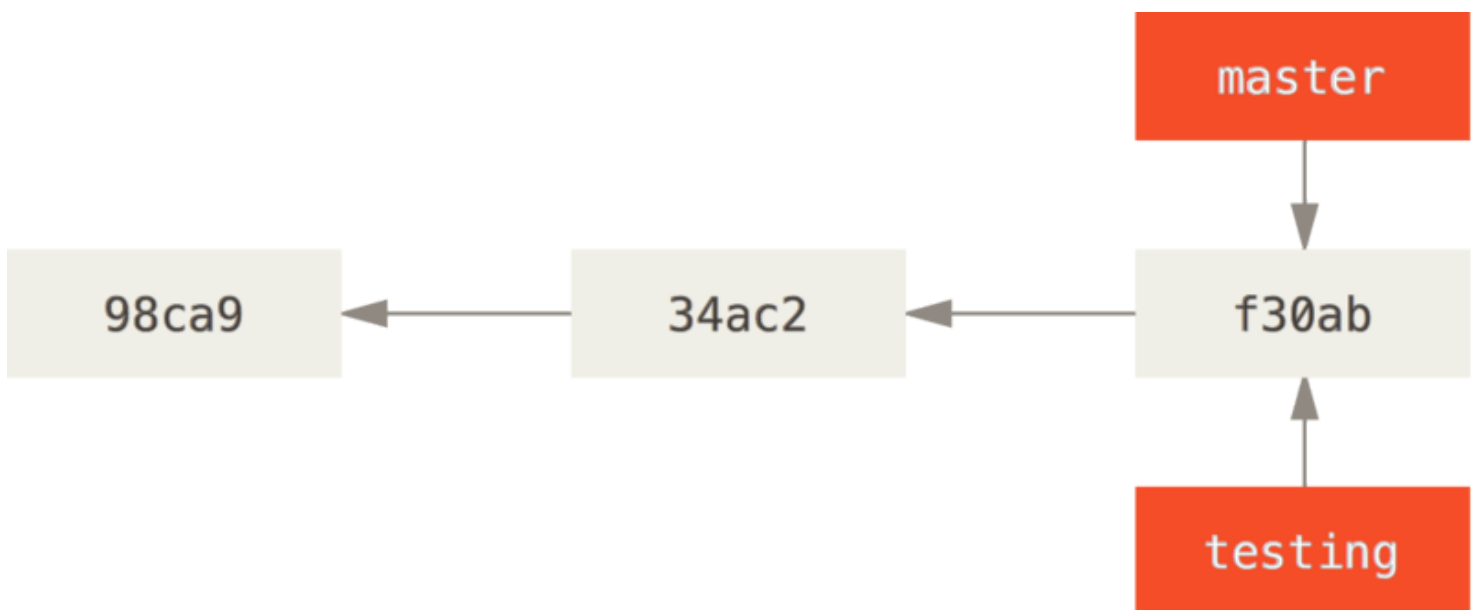


Figure 12. Two branches pointing into the same series of commits

How does Git know what branch you're currently on? It keeps a special pointer called HEAD. Note that this is a lot different than the concept of HEAD in other VCSs you may be used to, such as Subversion or CVS. In Git, this is a pointer to the local branch you're currently on. In this case, you're still on master. The `git branch` command only *created* a new branch – it didn't switch to that branch.

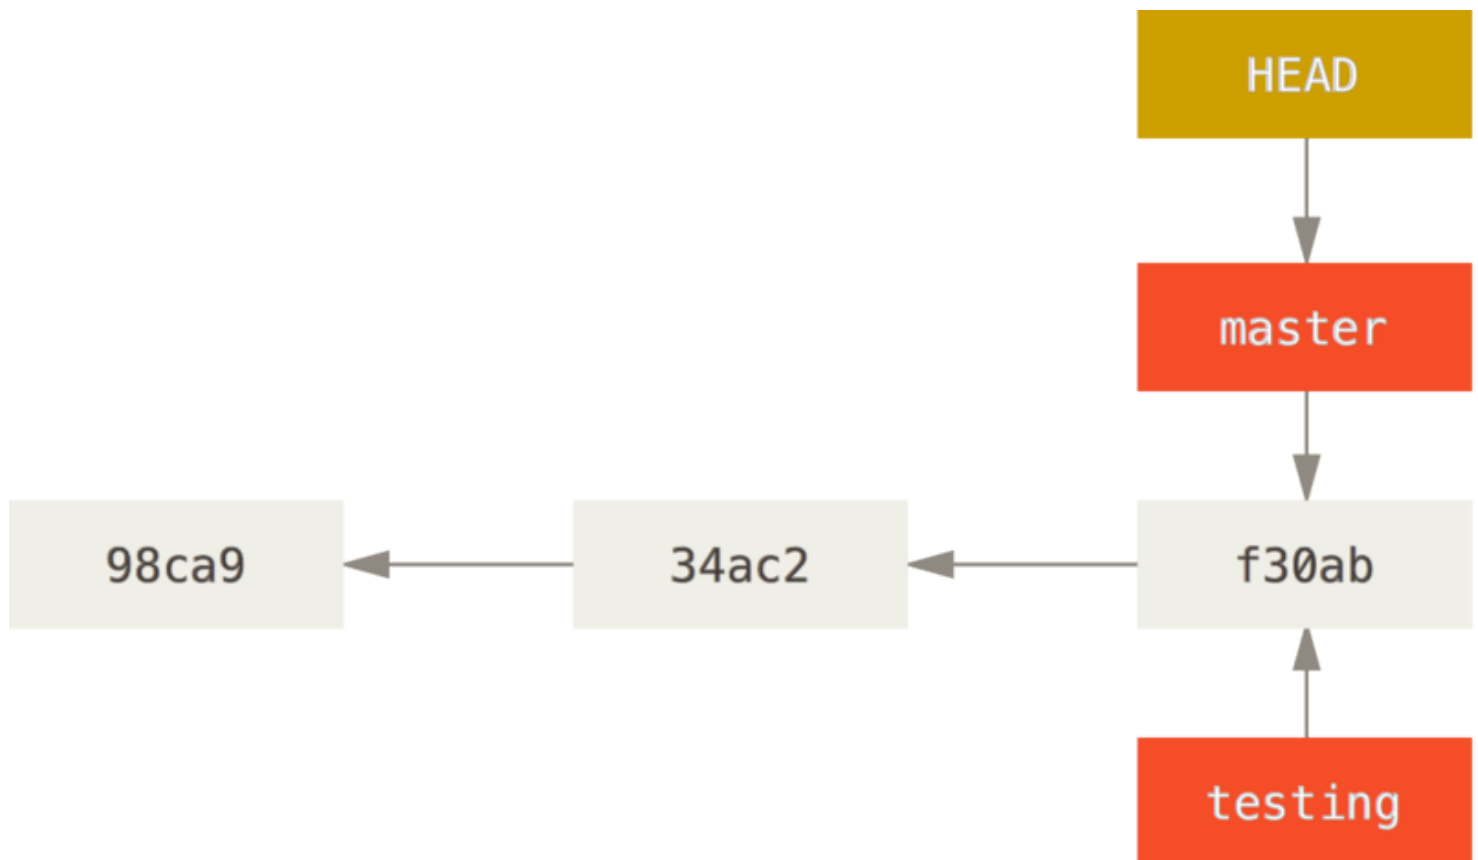


Figure 13. HEAD pointing to a branch

You can easily see this by running a simple `git log` command that shows you where the branch pointers are pointing. This option is called `--decorate`.

```
$ git log --oneline --decorate
f30ab (HEAD -> master, testing) add feature #32 - ability to add new formats to the central interface
34ac2 Fixed bug #1328 - stack overflow under certain conditions
98ca9 The initial commit of my project
```

You can see the “master” and “testing” branches that are right there next to the `f30ab` commit.

Switching Branches

To switch to an existing branch, you run the `git checkout` command. Let’s switch to the new testing branch:

```
$ git checkout testing
```

This moves HEAD to point to the testing branch.

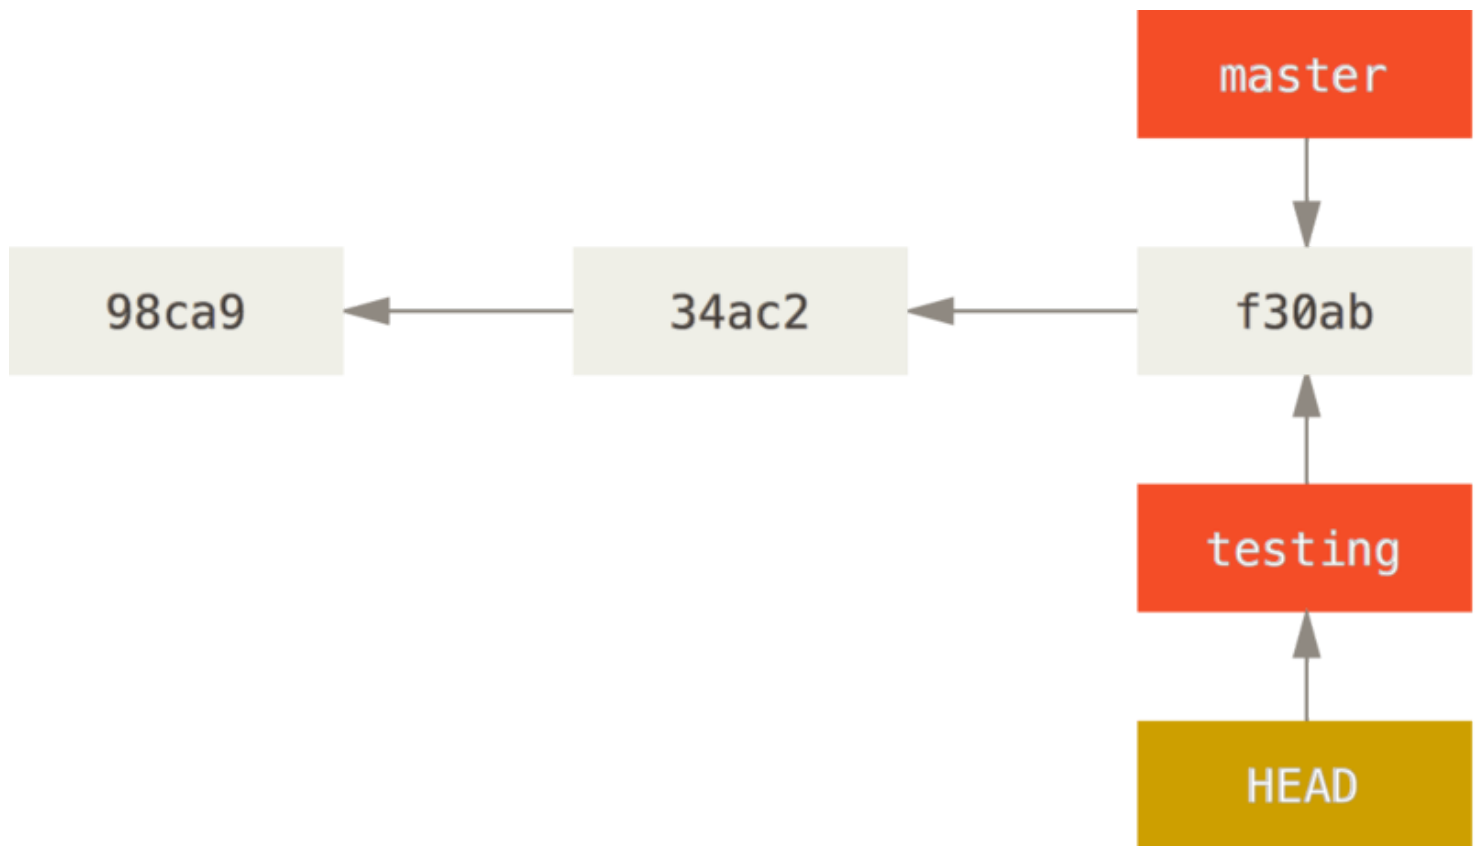


Figure 14. HEAD points to the current branch

What is the significance of that? Well, let's do another commit:

```
$ vim test.rb  
$ git commit -a -m 'made a change'
```

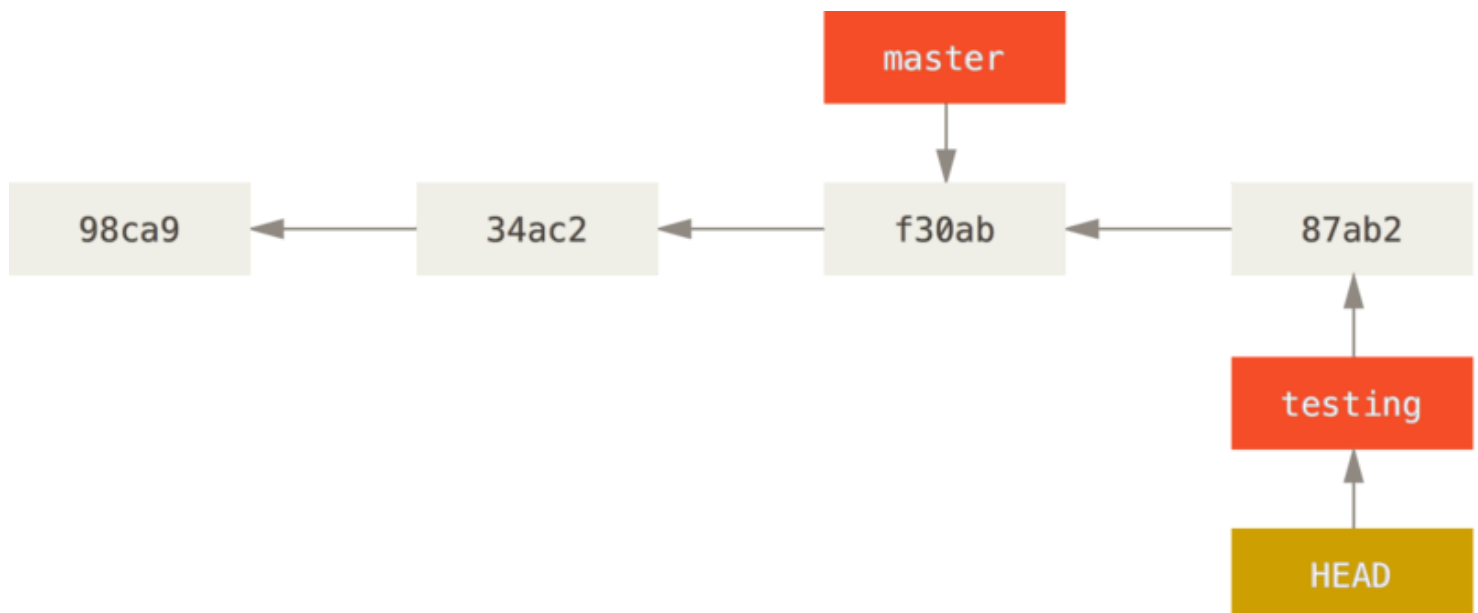


Figure 15. The HEAD branch moves forward when a commit is made

This is interesting, because now your `testing` branch has moved forward, but your `master` branch still points to the commit you were on when you ran `git checkout` to switch branches. Let's switch back to the `master` branch:

```
$ git checkout master
```

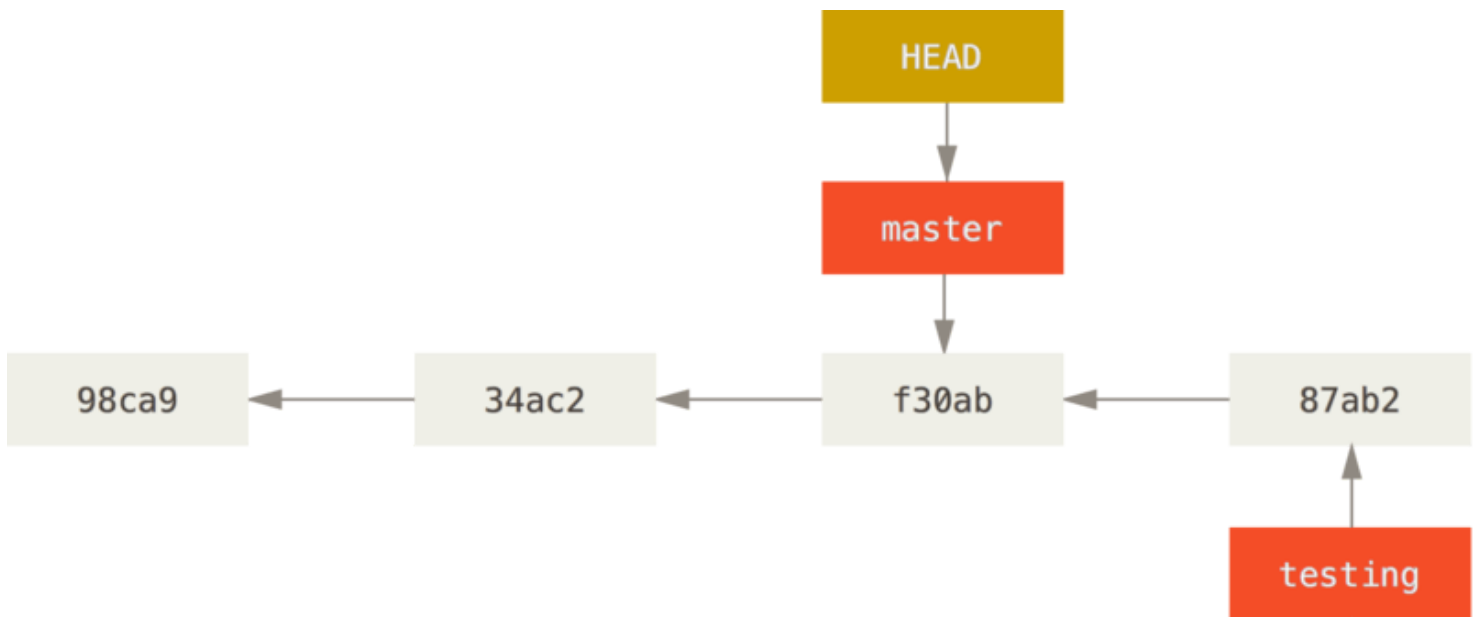



Figure 16. HEAD moves when you checkout

That command did two things. It moved the HEAD pointer back to point to the master branch, and it reverted the files in your working directory back to the snapshot that master points to. This also means the changes you make from this point forward will diverge from an older version of the project. It essentially rewinds the work you've done in your testing branch so you can go in a different direction.

Switching branches changes files in your working directory

Note It's important to note that when you switch branches in Git, files in your working directory will change. If you switch to an older branch, your working directory will be reverted to look like it did the last time you committed on that branch. If Git cannot do it cleanly, it will not let you switch at all.

Let's make a few changes and commit again:

```
$ vim test.rb
$ git commit -a -m 'made other changes'
```

Now your project history has diverged (see [Divergent history](#)). You created and switched to a branch, did some work on it, and then switched back to your main branch and did other work. Both of those changes are isolated in separate branches: you can switch back and forth between the branches and merge them together when you're ready. And you did all that with simple branch, checkout, and commit commands.

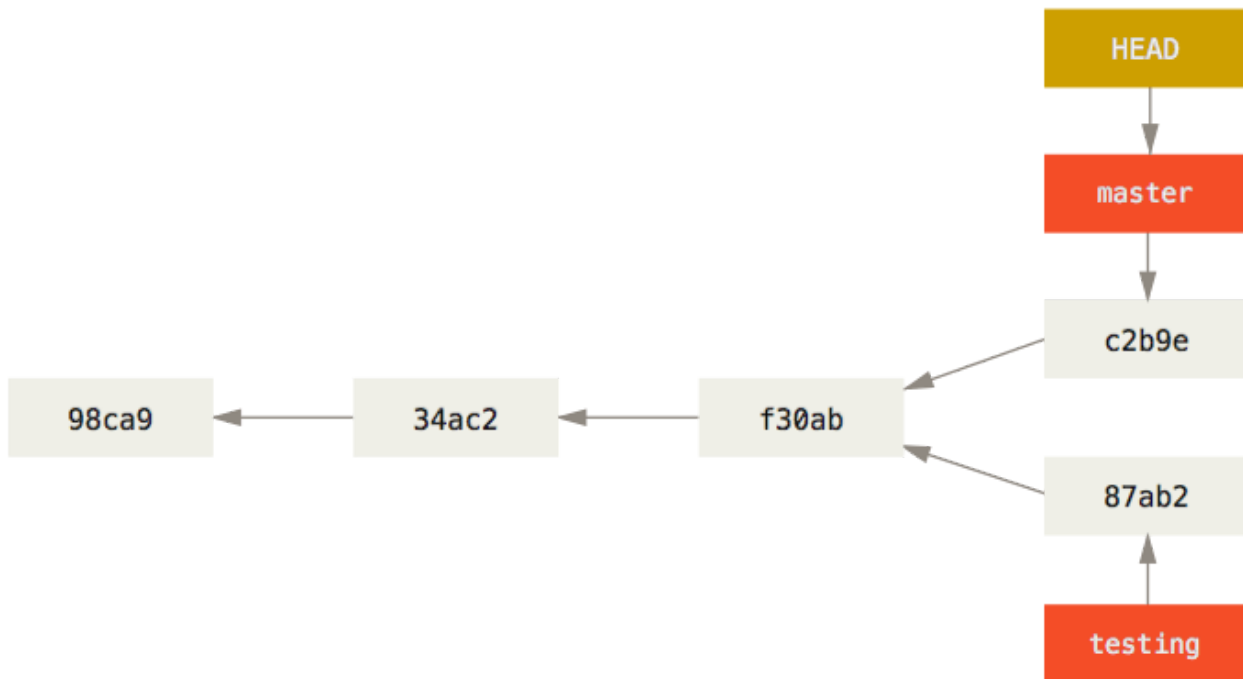


Figure 17. Divergent history

You can also see this easily with the `git log` command. If you run `git log --oneline --decorate --graph --all` it will print out the history of your commits, showing where your branch pointers are and how your history has diverged.

```

$ git log --oneline --decorate --graph --all
* c2b9e (HEAD, master) made other changes
| * 87ab2 (testing) made a change
|/
* f30ab add feature #32 - ability to add new formats to the
* 34ac2 fixed bug #1328 - stack overflow under certain conditions
* 98ca9 initial commit of my project
  
```

Because a branch in Git is actually a simple file that contains the 40 character SHA-1 checksum of the commit it points to, branches are cheap to create and destroy. Creating a new branch is as quick and simple as writing 41 bytes to a file (40 characters and a newline).

This is in sharp contrast to the way most older VCS tools branch, which involves copying all of the project's files into a second directory. This can take several seconds or even minutes, depending on the size of the project, whereas in Git the process is always instantaneous. Also, because we're recording the parents when we commit, finding a proper merge base for merging is automatically done for us and is generally very easy to do. These features help encourage developers to create and use branches often.

Let's see why you should do so.

[prev](#) | [next](#)

This [open sourced](#) site is [hosted on GitHub](#).

Patches, suggestions and comments are welcome.

Git is a member of [Software Freedom Conservancy](#)