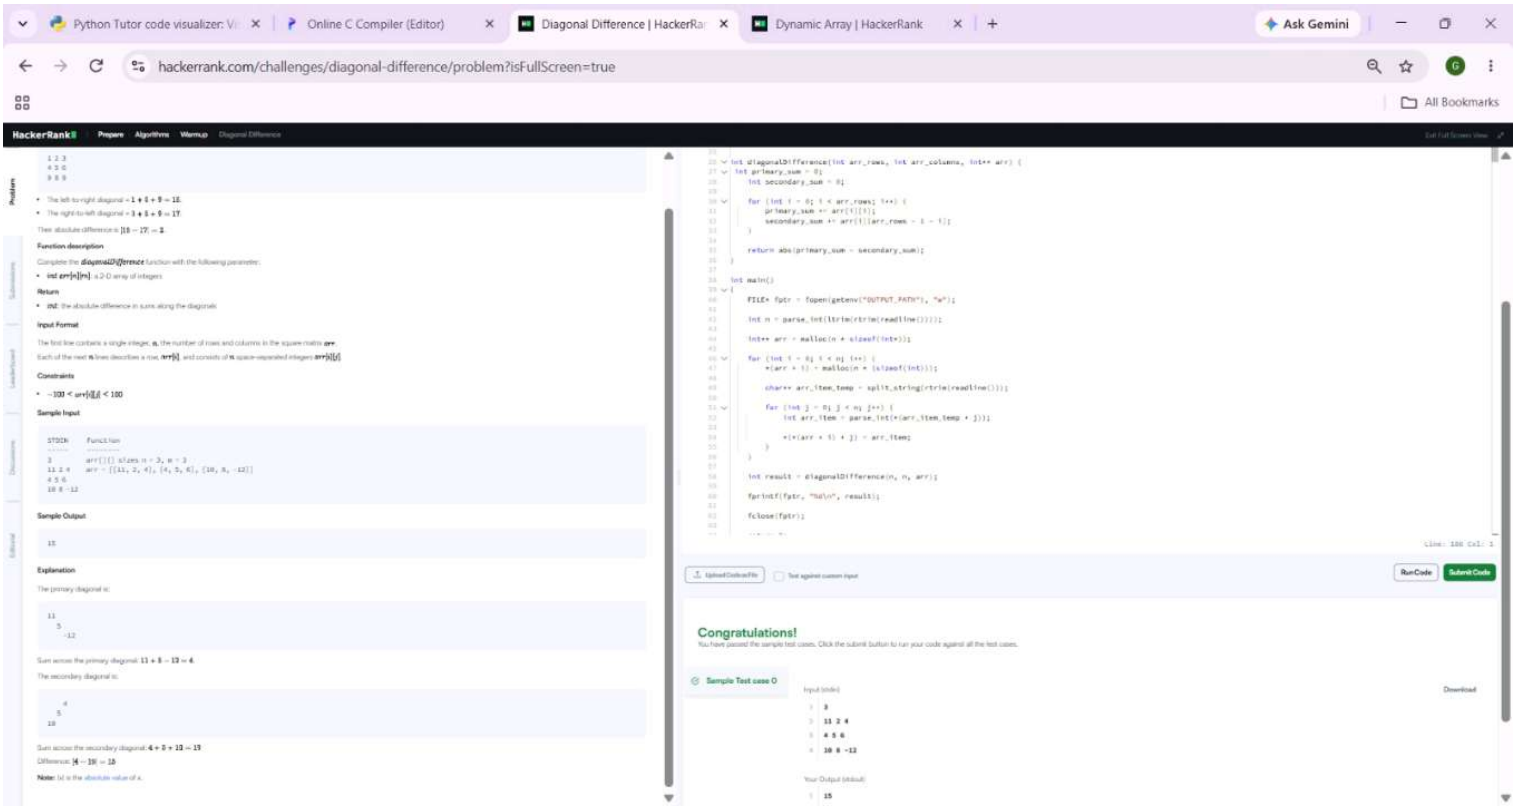
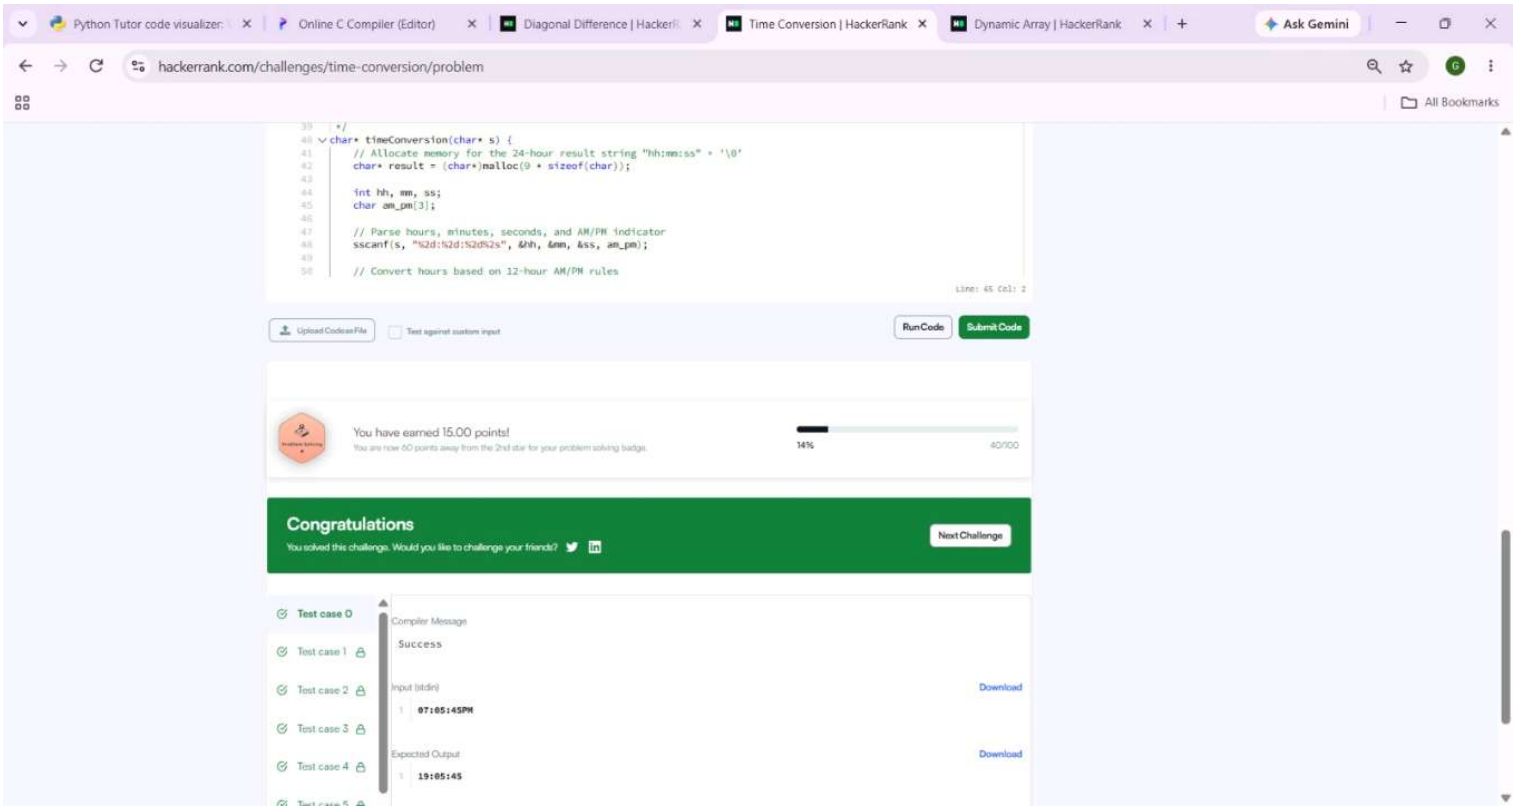
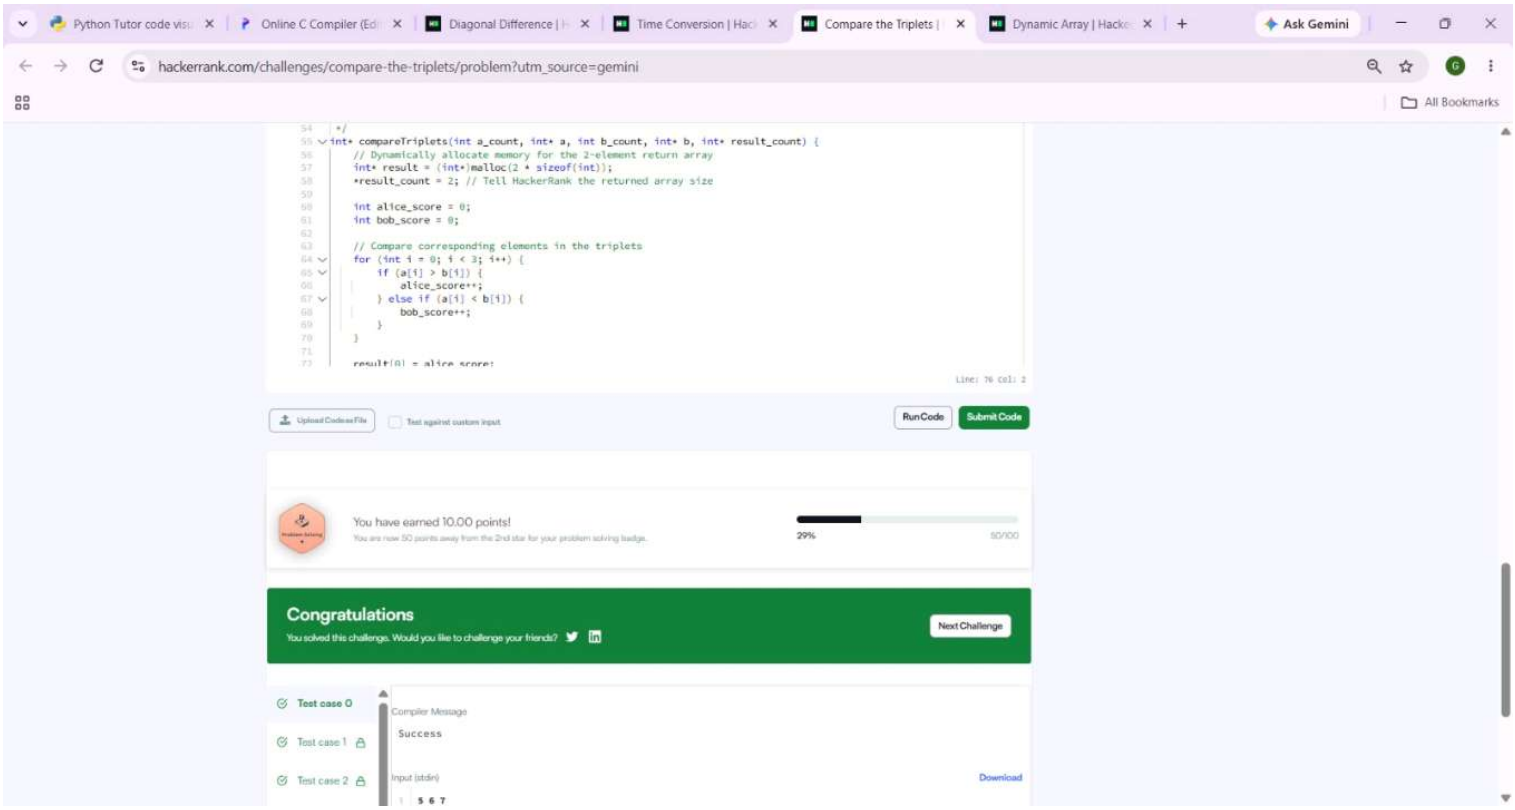
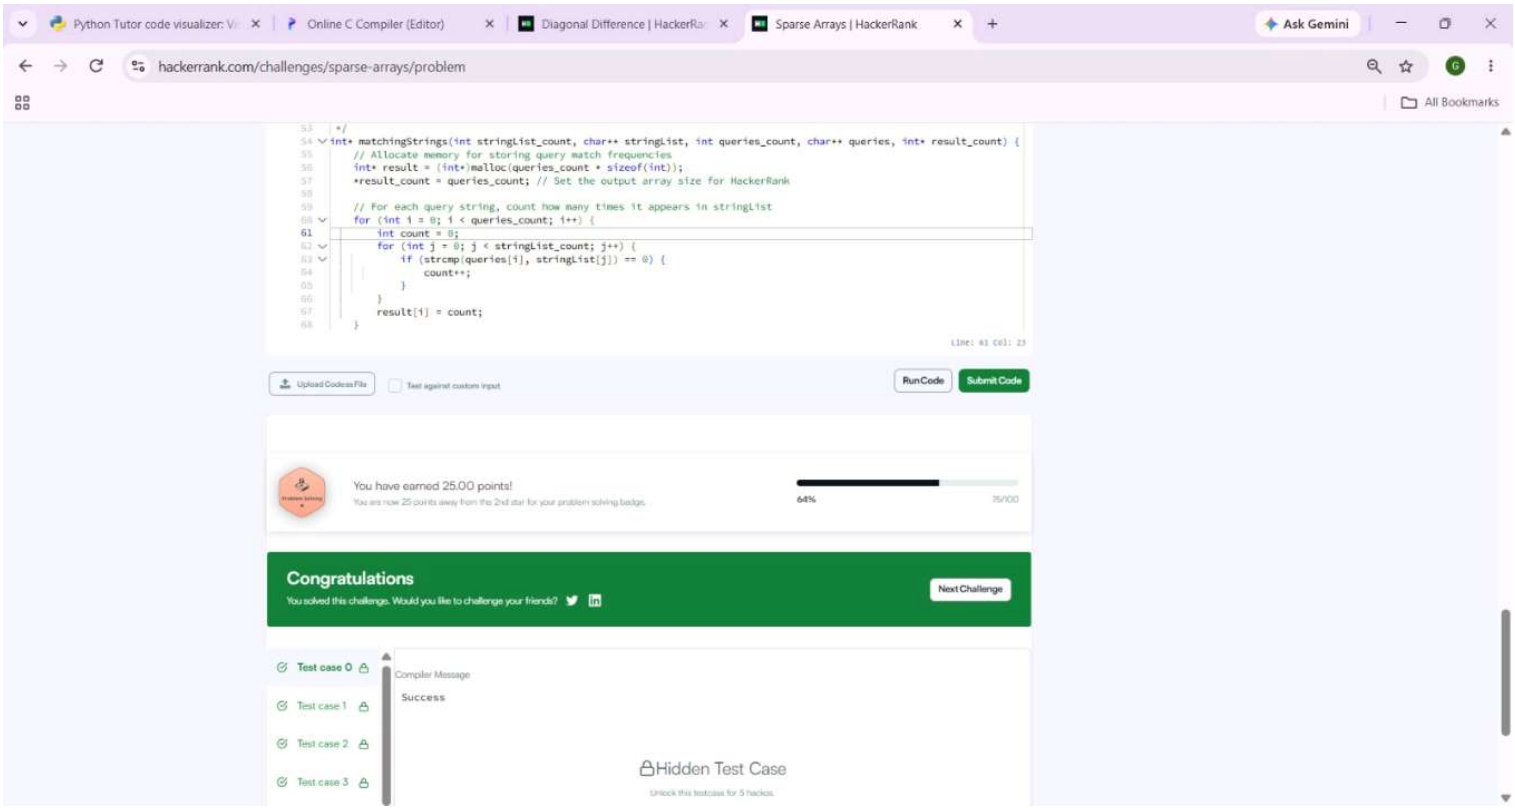

Python Tutor code visualizer: Vi
Online C Compiler (Editor)
Diagonal Difference | HackerRa
Dynamic Array | HackerRank
Ask Gemini
hackerrank.com/challenges/diagonal-difference/problem?isFullScreen=true
All Bookmarks
HackerRank
Prepare
Algorithms
Warmup
Diagonal Difference
Problem
Submissions
Leaderboard
Discussions
Editorial
1 2 3
4 5 6
9 8 9
The left-to-right diagonal = 1 + 5 + 9 = 15.
The right-to-left diagonal = 3 + 5 + 9 = 17.
Their absolute difference is |15 − 17| = 2.
Function description
Complete the diagonalDifference function with the following parameters:
int arr[n][m]: a 2-D array of integers
Return
int: the absolute difference in sums along the diagonals
Input Format
The first line contains a single integer, n, the number of rows and columns in the square matrix arr.
Each of the next n lines describes a row, arr[i], and consists of n space-separated integers arr[i][j].
Constraints
−100 < arr[i][j] < 100
Sample Input
STDIN Function
----- --------
3 arr[][] size n = 3, m = 3
11 2 4 arr = [[11, 2, 4], [4, 5, 6], [10, 8, -12]]
4 5 6
10 8 -12
Sample Output
15
Explanation
The primary diagonal is:
11
5
-12
Sum across the primary diagonal: 11 + 5 − 12 = 4.
The secondary diagonal is:
4
5
10
Sum across the secondary diagonal: 4 + 5 + 10 = 19
Difference: |4 − 19| = 15
Note: |x| is the absolute value of x.
int diagonalDifference(int arr_rows, int arr_columns, int** arr) {
int primary_sum = 0;
int secondary_sum = 0;
for (int i = 0; i < arr_rows; i++) {
primary_sum += arr[i][i];
secondary_sum += arr[i][arr_rows - 1 - i];
}
return abs(primary_sum - secondary_sum);
}
int main()
{
FILE* fptr = fopen(getenv("OUTPUT_PATH"), "w");
int n = parse_int(ltrim(rtrim(readline())));
int** arr = malloc(n * sizeof(int*));
for (int i = 0; i < n; i++) {
*(arr + i) = malloc(n * sizeof(int));
char** arr_item_temp = split_string(rtrim(readline()));
for (int j = 0; j < n; j++) {
int arr_item = parse_int(*(arr_item_temp + j));
((arr + i) + j) = arr_item;
}
}
int result = diagonalDifference(n, n, arr);
fprintf(fptr, "%d\n", result);
fclose(fptr);
Line: 108 Col: 1
Upload Code as File
Test against custom input
Run Code
Submit Code
Congratulations!
You have passed the sample test cases. Click the submit button to run your code against all the test cases.
Sample Test case 0
Input (stdin)
Download
3
11 2 4
4 5 6
10 8 -12
Your Output (stdout)
15


Python Tutor code visualizer:
Online C Compiler (Editor)
Diagonal Difference | HackerR
Time Conversion | HackerRank
Dynamic Array | HackerRank
Ask Gemini
hackerrank.com/challenges/time-conversion/problem
All Bookmarks
*/
char* timeConversion(char* s) {
// Allocate memory for the 24-hour result string "hh:mm:ss" + '\0'
char* result = (char*)malloc(9 * sizeof(char));
int hh, mm, ss;
char am_pm[3];
// Parse hours, minutes, seconds, and AM/PM indicator
sscanf(s, "%2d:%2d:%2d%2s", &hh, &mm, &ss, am_pm);
// Convert hours based on 12-hour AM/PM rules
Line: 45 Col: 2
Upload Code as File
Test against custom input
Run Code
Submit Code
You have earned 15.00 points!
You are now 60 points away from the 2nd star for your problem solving badge.
14%
40/100
Congratulations
You solved this challenge. Would you like to challenge your friends?
Next Challenge
Test case 0
Test case 1
Test case 2
Test case 3
Test case 4
Compiler Message
Success
Input (stdin)
Download
1 07:05:45PM
Expected Output
Download
1 19:05:45


Python Tutor code visu
Online C Compiler (Edi
Diagonal Difference | H
Time Conversion | Hac
Compare the Triplets |
Dynamic Array | Hacke
Ask Gemini
hackerrank.com/challenges/compare-the-triplets/problem?utm_source=gemini
All Bookmarks
*/
int* compareTriplets(int a_count, int* a, int b_count, int* b, int* result_count) {
// Dynamically allocate memory for the 2-element return array
int* result = (int*)malloc(2 * sizeof(int));
*result_count = 2; // Tell HackerRank the returned array size
int alice_score = 0;
int bob_score = 0;
// Compare corresponding elements in the triplets
for (int i = 0; i < 3; i++) {
if (a[i] > b[i]) {
alice_score++;
} else if (a[i] < b[i]) {
bob_score++;
}
}
result[0] = alice_score;
Line: 76 Col: 2
Upload Code as File
Test against custom input
Run Code
Submit Code
You have earned 10.00 points!
You are now 50 points away from the 2nd star for your problem solving badge.
29%
50/100
Congratulations
You solved this challenge. Would you like to challenge your friends?
Next Challenge
Test case 0
Test case 1
Test case 2
Compiler Message
Success
Input (stdin)
Download
5 6 7


Python Tutor code visualizer: Vi
Online C Compiler (Editor)
Diagonal Difference | HackerRa
Sparse Arrays | HackerRank
Ask Gemini
hackerrank.com/challenges/sparse-arrays/problem
All Bookmarks
*/
int* matchingStrings(int stringList_count, char** stringList, int queries_count, char** queries, int* result_count) {
// Allocate memory for storing query match frequencies
int* result = (int*)malloc(queries_count * sizeof(int));
*result_count = queries_count; // Set the output array size for HackerRank
// For each query string, count how many times it appears in stringList
for (int i = 0; i < queries_count; i++) {
int count = 0;
for (int j = 0; j < stringList_count; j++) {
if (strcmp(queries[i], stringList[j]) == 0) {
count++;
}
}
result[i] = count;
}
Line: 61 Col: 23
Upload Code as File
Test against custom input
Run Code
Submit Code
You have earned 25.00 points!
You are now 25 points away from the 2nd star for your problem solving badge.
64%
75/100
Congratulations
You solved this challenge. Would you like to challenge your friends?
Next Challenge
Test case 0
Test case 1
Test case 2
Test case 3
Compiler Message
Success
Hidden Test Case
Unlock this testcase for 5 hacks.