

Top Private University in Bang...My Semester Courses | REVA...Course: Portfolio Building | RE...Reverse String - LeetCodeTwo Sum - LeetCodeAsk Gemini

leetcode.com/problems/two-sum/submissions/2143461576/

All Bookmarks

Problem List

AcceptedEditorialSolutionsSubmissions

All Submissions

Accepted65 / 65 testcases passed

Gummalla\_vijayalakshmi submitted at Sep 16, 2026 14:07

School's in. Leet's on.  
Get LeetCode Annual Premium for \$99!

Runtime

99 msBeats 78.80%

Memory

9.36 MBBeats 78.96%



Code | C

```
1 #include <stdlib.h>
2
3 int* twoSum(int* nums, int numsSize, int target, int* returnSize) {
```

Code

C Auto

```
1 #include <stdlib.h>
2
3 int* twoSum(int* nums, int numsSize, int target, int* returnSize) {
4     *returnSize = 2;
5
6     int* result = (int*)malloc(2 * sizeof(int));
7
8     for (int i = 0; i < numsSize; i++) {
9         for (int j = i + 1; j < numsSize; j++) {
10             if (nums[i] + nums[j] == target) {
11                 result[0] = i;
12                 result[1] = j;
13                 return result;
14             }
15         }
16     }
17     return NULL;
18 }
```

SavedLn 5, Col 5

TestcaseTest Result

AcceptedRuntime: 0 ms

Case 1Case 2Case 3

Input

nums =  
[3,3]

Top Private University in Bangal... My Semester Courses | REVA Activity\_4\_LeetCode\_Portfolio... Reverse String - LeetCode

leetcode.com/problems/reverse-string/submissions/2136079813/

Problem List

Description Accepted Editorial Solutions Submissions

All Submissions

Accepted 477 / 477 testcases passed

Gummalla\_vijayalakshmi submitted at Sep 09, 2026 13:44

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

0 ms Beats 100.00%

Memory

17.87 MB Beats 46.43%

Code | C

```
1 #include <stdio.h>
2 #include <string.h>
3
4 void reverseString(char* s, int sSize) {
5     int left = 0;
6     int right = sSize - 1;
7
8     while (left < right) {
9         char temp = s[left];
10        s[left] = s[right];
11        s[right] = temp;
12        left++;
13        right--;
14    }
```

Testcase Test Result

Input

s = ["h","e","l","l","o"]

Output

["o","l","l","e","h"]

Expected

["o","l","l","e","h"]

Contribute a testcase

30°C Search

ENG IN 01:45 PM 09-09-2026

Top Private University in Bang...My Semester Courses | REVA...Activity\_4\_LeetCode\_Portfolio...Search - LeetCodeValid Anagram - LeetCodeAsk Gemini

leetcode.com/problems/valid-anagram/submissions/2148712655/

All Bookmarks

Problem List

AcceptedEditorialSolutionsSubmissions

All Submissions

Accepted55 / 55 testcases passed

Gummalla\_vijayalakshmi submitted at Sep 21, 2026 19:39

School's in. Leet's on.


Get LeetCode Annual Premium for \$99!

Runtime

1 msBeats 27.30%

Memory

8.80 MBBeats 88.97%

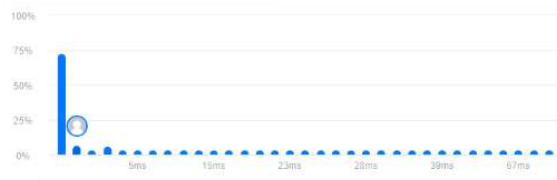

Code | C

```
1 #include <stdbool.h>
2 #include <string.h>
3
```

Code

C Auto

```
1 #include <stdbool.h>
2 #include <string.h>
3
4 bool isAnagram(char* s, char* t) {
5     // If lengths differ, they cannot be anagrams
6     if (strlen(s) != strlen(t)) {
7         return false;
8     }
9
10    // Frequency array for 26 lowercase English letters
11    int count[26] = {0};
12
13    for (int i = 0; s[i] != '\0'; i++) {
14        count[s[i] - 'a']++;
15    }
16
17    for (int i = 0; t[i] != '\0'; i++) {
18        count[t[i] - 'a']--;
19    }
20
21    for (int i = 0; i < 26; i++) {
22        if (count[i] != 0) {
23            return false;
24        }
25    }
26    return true;
27 }
```

SavedLn 1, Col 1

TestcaseTest Result

AcceptedRuntime: 0 ms

Case 1

Case 2

Input

s =  
"anagram"

t =  
"nagaram"

Output

My Semester Courses | REVAActivity\_4\_LeetCode\_PortfolioSearch - LeetCodeBest Time to Buy and Sell StockAsk Gemini

leetcode.com/problems/best-time-to-buy-and-sell-stock/submissions/2148361281/

All Bookmarks

Problem List

AcceptedEditorialSolutionsSubmissions

All Submissions

Accepted213 / 213 testcases passed

Gummalla\_vijayalakshmi submitted at Sep 21, 2026 12:12

AnalysisSolution


School's in. Leet's on.  
Get LeetCode Annual Premium for \$99!

Runtime

0 msBeats 100.00%

Memory

15.94 MBBeats 85.95%

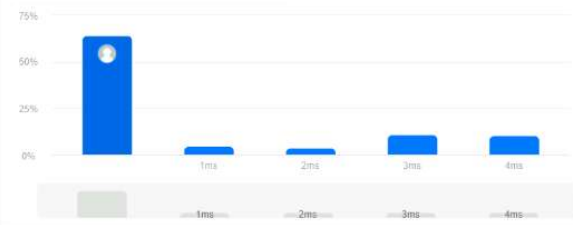

Code | C

```
1 int maxProfit(int* prices, int pricesSize) {
2     if (pricesSize <= 1) return 0;
3
```

Code

C Auto

```
1 int maxProfit(int* prices, int pricesSize) {
2     if (pricesSize <= 1) return 0;
3
4     int min_price = prices[0];
5     int max_profit = 0;
6
7     for (int i = 1; i < pricesSize; i++) {
8         if (prices[i] < min_price) {
9             min_price = prices[i];
10        } else if (prices[i] - min_price > max_profit) {
11            max_profit = prices[i] - min_price;
12        }
13    }
14 }
```

SavedLn 16, Col 2

TestcaseTest Result

AcceptedRuntime: 0 ms

Case 1Case 2

Input

prices =  
[7,1,5,3,6,4]

Output

5

Top Private University in Bang...My Semester Courses | REVA...Activity\_4\_LeetCode\_Portfolio...Search - LeetCode...Longest Common Prefix - Leet...Ask Gemini

leetcode.com/problems/longest-common-prefix/submissions/2148346350/

Problem List<>SubmitCtrlEnter

DescriptionAcceptedEditorialSolutionsSubmissions

All Submissions

Accepted126 / 126 testcases passed

Gummalla\_vijayalakshmi submitted at Sep 21, 2026 11:55

₹583.25

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

0 msBeats 100.00%

Memory

8.71 MBBeats 89.26%

| Runtime (ms) | Beats (%) |
|--------------|-----------|
| 0            | 100.00    |
| 1            | ~10       |
| 2            | ~10       |
| 3            | ~10       |
| 4            | ~10       |

Code | C

```
1 char* longestCommonPrefix(char** strs, int strsSize) {
2     if (strsSize == 0) return "";
3
```

C Auto

```
1 char* longestCommonPrefix(char** strs, int strsSize) {
2     if (strsSize == 0) return "";
3
4     for (int i = 0; strs[0][i] != '\0'; i++) {
5         char c = strs[0][i];
6         for (int j = 1; j < strsSize; j++) {
7             if (strs[j][i] == '\0' || strs[j][i] != c) {
8                 strs[0][i] = '\0';
9                 return strs[0];
10            }
11        }
12    }
13
14    return strs[0];
15 }
```

SavedLn 15, Col 2

Testcase>Test Result

AcceptedRuntime: 0 ms

Case 1

Case 2

Input

strs = ["flower", "flow", "flight"]

[https://leetcode.com/subscribe/?ref=lp\\_pl&source=qd](https://leetcode.com/subscribe/?ref=lp_pl&source=qd)