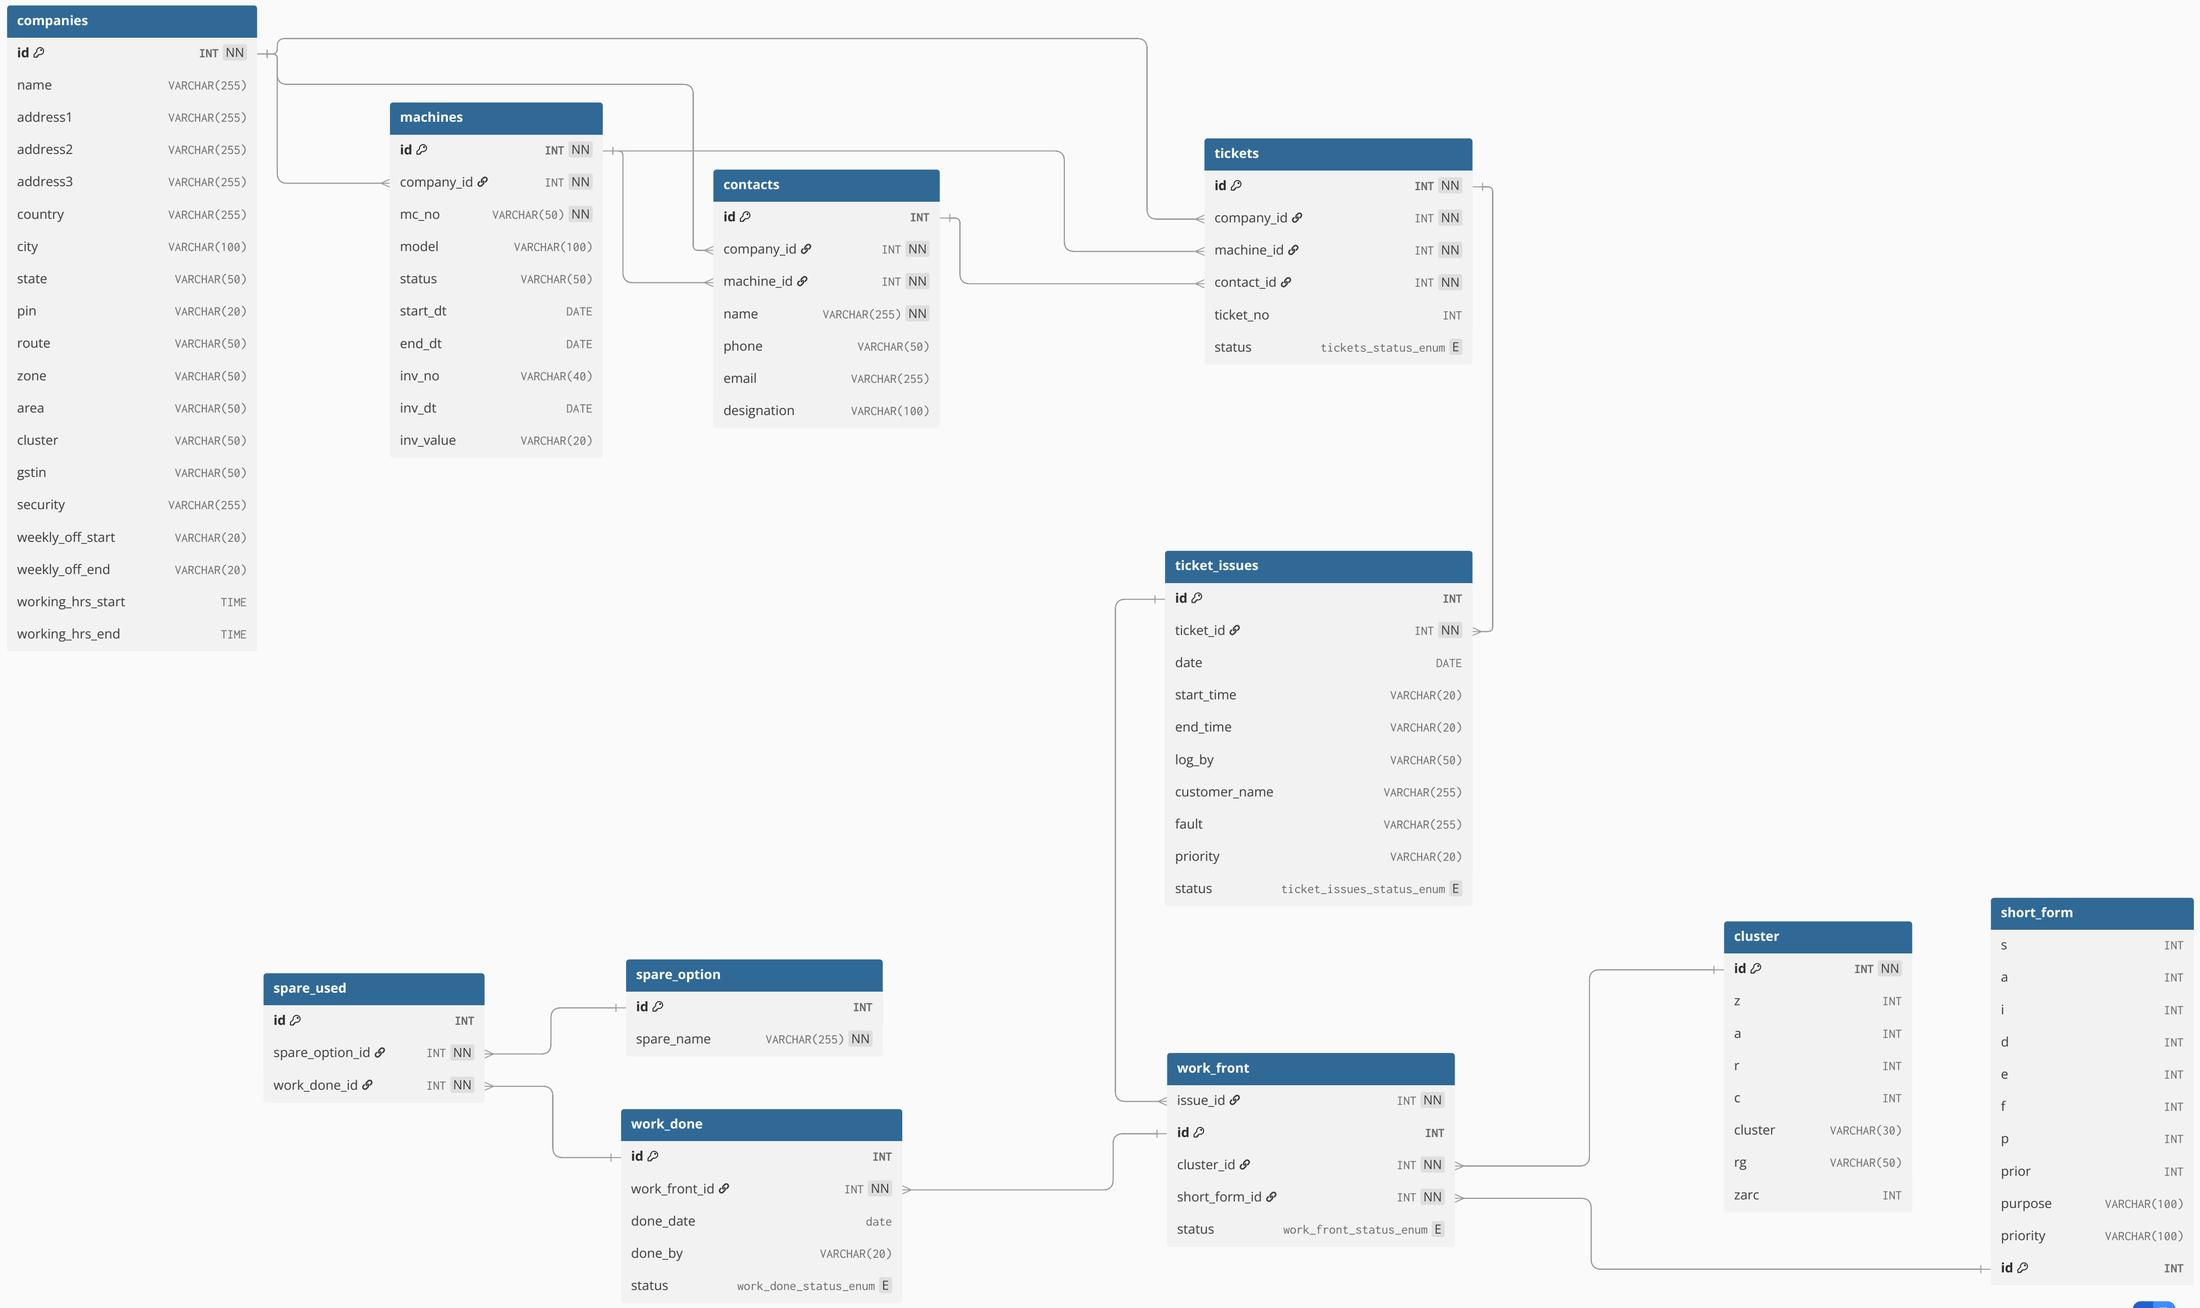
companies
id INT NN
name VARCHAR(255)
address1 VARCHAR(255)
address2 VARCHAR(255)
address3 VARCHAR(255)
country VARCHAR(255)
city VARCHAR(100)
state VARCHAR(50)
pin VARCHAR(20)
route VARCHAR(50)
zone VARCHAR(50)
area VARCHAR(50)
cluster VARCHAR(50)
gstin VARCHAR(50)
security VARCHAR(255)
weekly_off_start VARCHAR(20)
weekly_off_end VARCHAR(20)
working_hrs_start TIME
working_hrs_end TIME
machines
id INT NN
company_id INT NN
mc_no VARCHAR(50) NN
model VARCHAR(100)
status VARCHAR(50)
start_dt DATE
end_dt DATE
inv_no VARCHAR(40)
inv_dt DATE
inv_value VARCHAR(20)
contacts
id INT
company_id INT NN
machine_id INT NN
name VARCHAR(255) NN
phone VARCHAR(50)
email VARCHAR(255)
designation VARCHAR(100)
tickets
id INT NN
company_id INT NN
machine_id INT NN
contact_id INT NN
ticket_no INT
status tickets_status_enum E
ticket_issues
id INT
ticket_id INT NN
date DATE
start_time VARCHAR(20)
end_time VARCHAR(20)
log_by VARCHAR(50)
customer_name VARCHAR(255)
fault VARCHAR(255)
priority VARCHAR(20)
status ticket_issues_status_enum E
spare_used
id INT
spare_option_id INT NN
work_done_id INT NN
spare_option
id INT
spare_name VARCHAR(255) NN
work_done
id INT
work_front_id INT NN
done_date date
done_by VARCHAR(20)
status work_done_status_enum E
work_front
issue_id INT NN
id INT
cluster_id INT NN
short_form_id INT NN
status work_front_status_enum E
cluster
id INT NN
z INT
a INT
r INT
c INT
cluster VARCHAR(30)
rg VARCHAR(50)
zarc INT
short_form
s INT
a INT
i INT
d INT
e INT
f INT
p INT
prior INT
purpose VARCHAR(100)
priority VARCHAR(100)
id INT
dbdiagram.io


companies
id INT NN
name VARCHAR(255)
address1 VARCHAR(255)
address2 VARCHAR(255)
address3 VARCHAR(255)
country VARCHAR(255)
city VARCHAR(100)
state VARCHAR(50)
pin VARCHAR(20)
route VARCHAR(50)
zone VARCHAR(50)
area VARCHAR(50)
cluster VARCHAR(50)
gstin VARCHAR(50)
security VARCHAR(255)
weekly_off_start VARCHAR(20)
weekly_off_end VARCHAR(20)
working_hrs_start TIME
working_hrs_end TIME
machines
id INT NN
company_id INT NN
mc_no VARCHAR(50) NN
model VARCHAR(100)
status VARCHAR(50)
start_dt DATE
end_dt DATE
inv_no VARCHAR(40)
inv_dt DATE
inv_value VARCHAR(20)
contacts
id INT
company_id INT NN
machine_id INT NN
name VARCHAR(255) NN
phone VARCHAR(50)
email VARCHAR(255)
designation VARCHAR(100)
tickets
id INT NN
company_id INT NN
machine_id INT NN
contact_id INT NN
ticket_no INT
status tickets_status_enum E
ticket_issues
id INT
ticket_id INT NN
date DATE
start_time VARCHAR(20)
end_time VARCHAR(20)
log_by VARCHAR(50)
customer_name VARCHAR(255)
fault VARCHAR(255)
priority VARCHAR(20)
status ticket_issues_status_enum E
spare_used
id INT
spare_option_id INT NN
work_done_id INT NN
spare_option
id INT
spare_name VARCHAR(255) NN
work_done
id INT
work_front_id INT NN
done_date date
done_by VARCHAR(20)
status work_done_status_enum E
work_front
issue_id INT NN
id INT
cluster_id INT NN
short_form_id INT NN
status work_front_status_enum E
cluster
id INT NN
z INT
a INT
r INT
c INT
cluster VARCHAR(30)
rg VARCHAR(50)
zarc INT
short_form
s INT
a INT
i INT
d INT
e INT
f INT
p INT
prior INT
purpose VARCHAR(100)
priority VARCHAR(100)
id INT
dbdiagram.io

```
Enum tickets_status_enum {
    open
    closed
}


Enum ticket_issues_status_enum {
    open
    WF
    close
}


Enum work_front_status_enum {
    open
    done
}


Enum work_done_status_enum {
    open
    closed
}
```

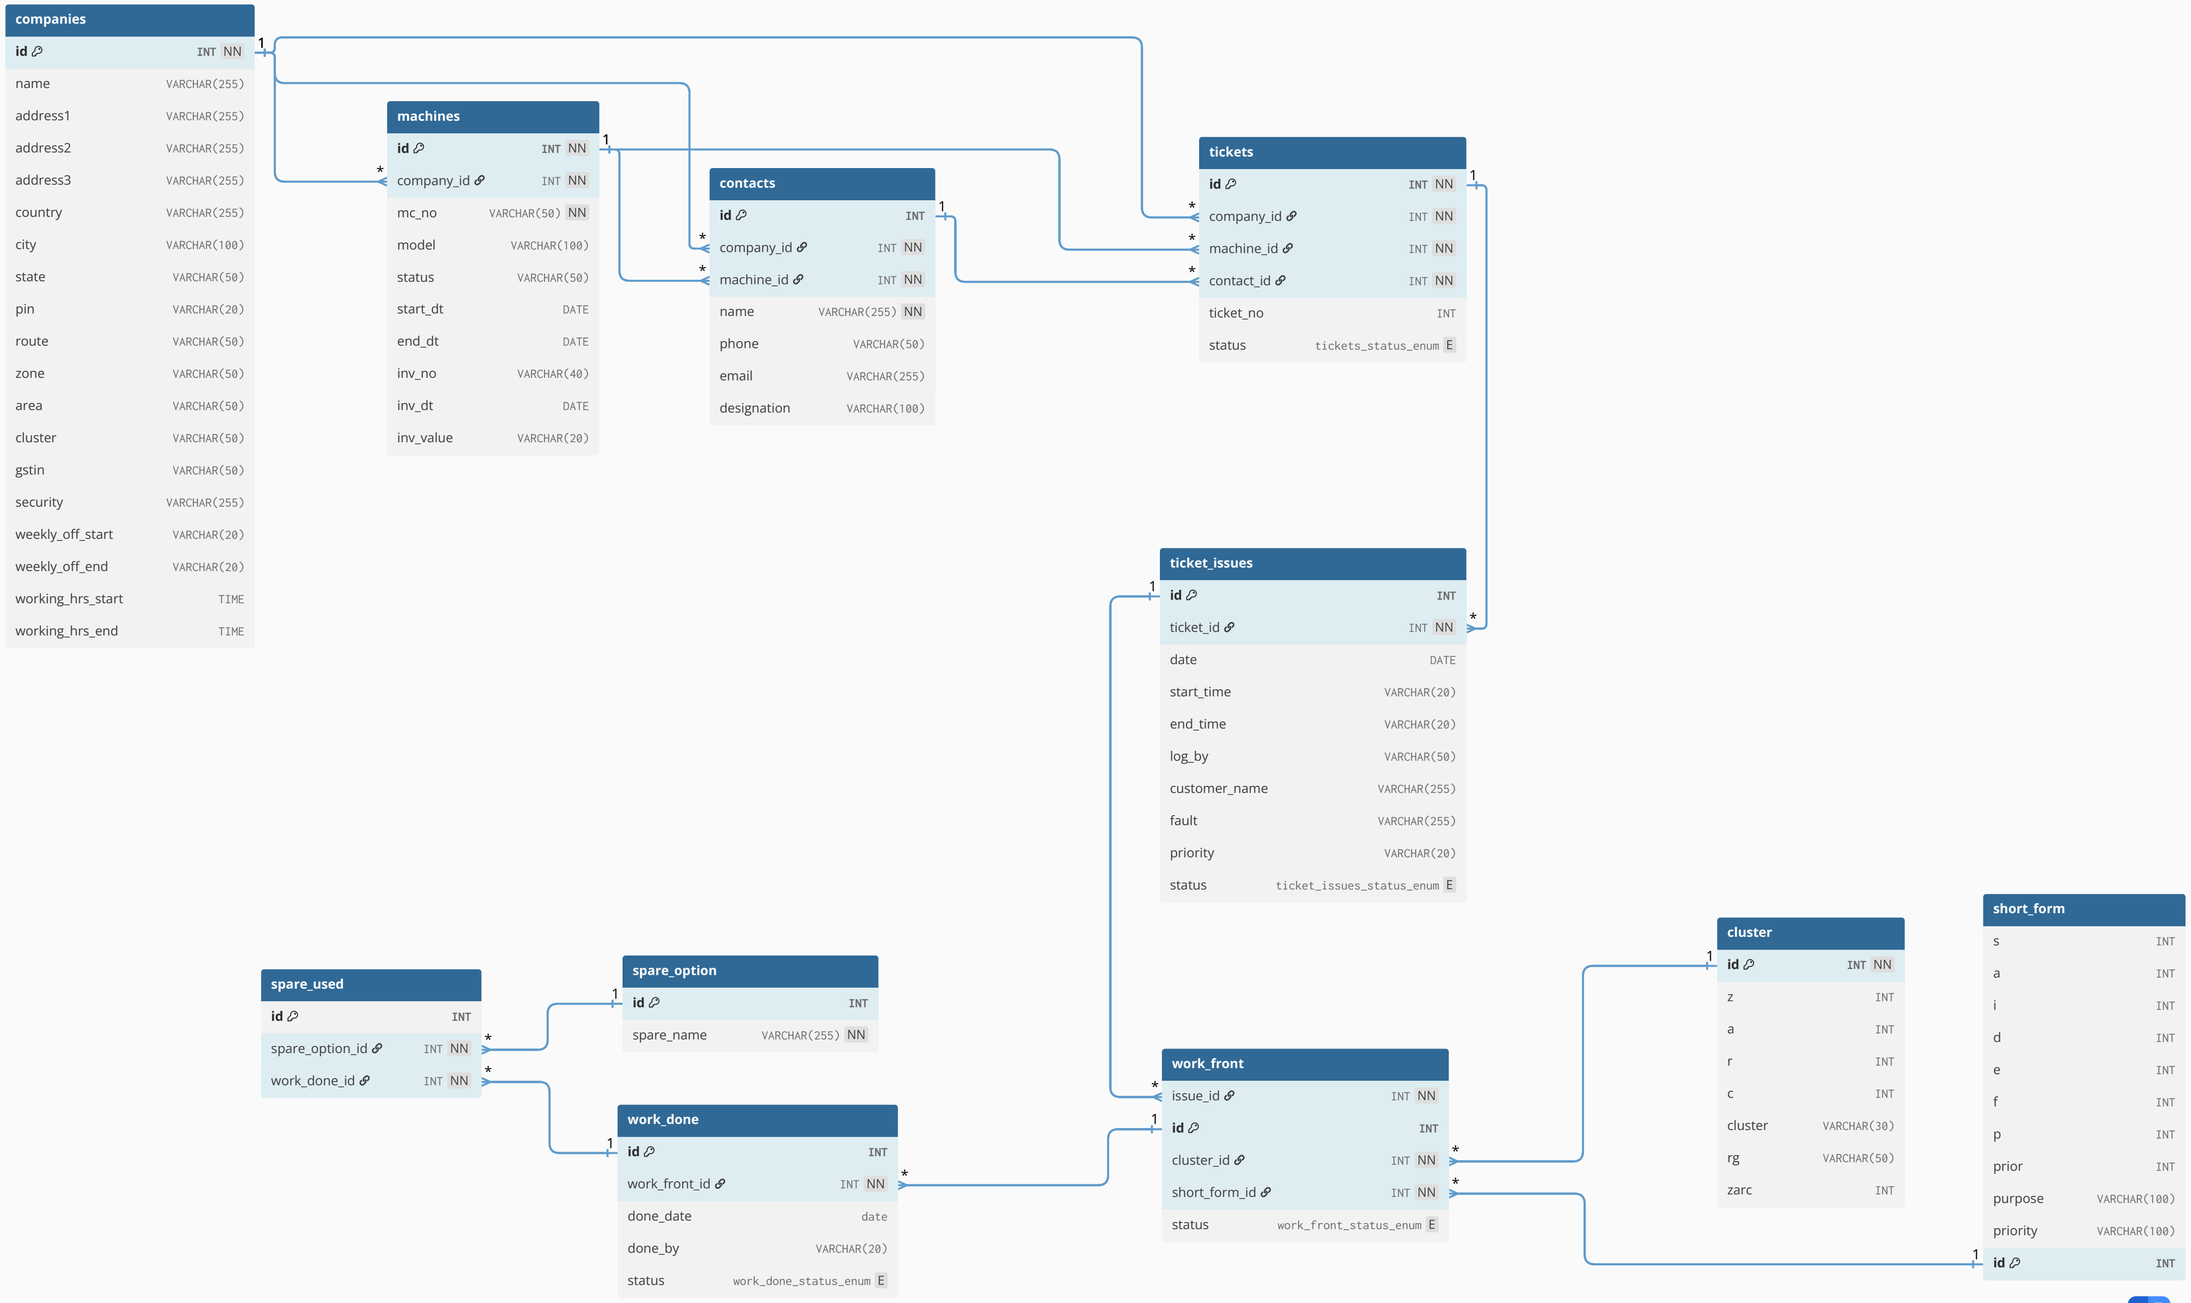dbdiagram.io