
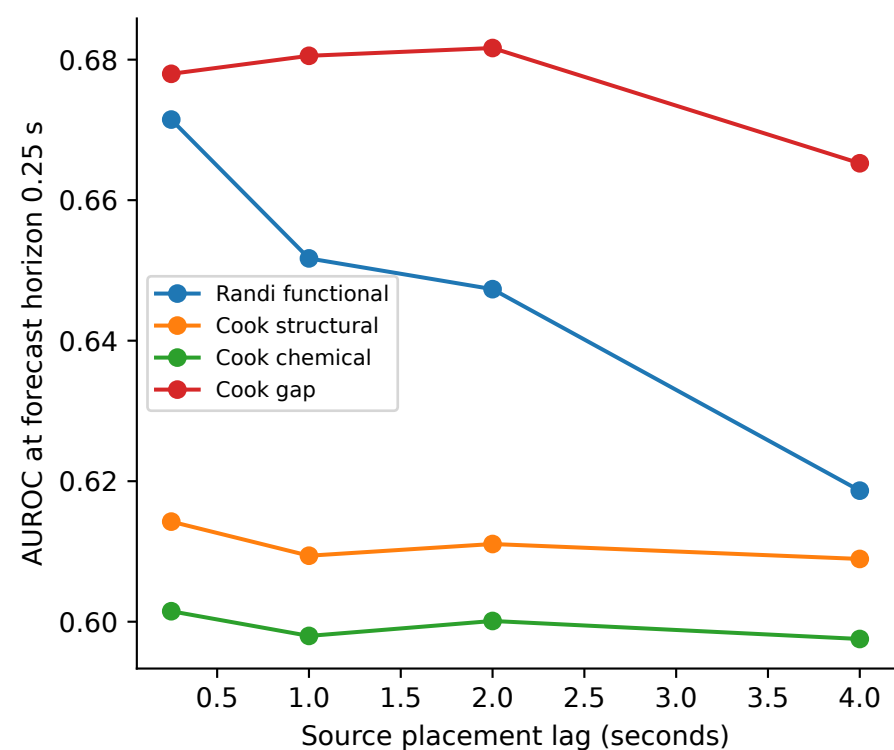
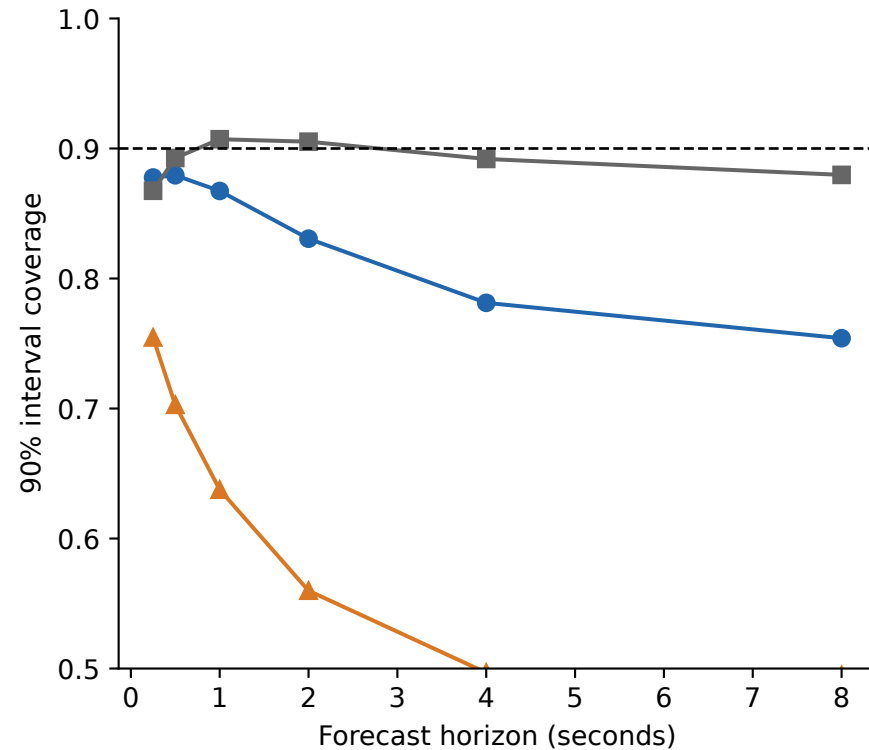


Corrected 54 classes · 17 recordings | Prediction and two time axes

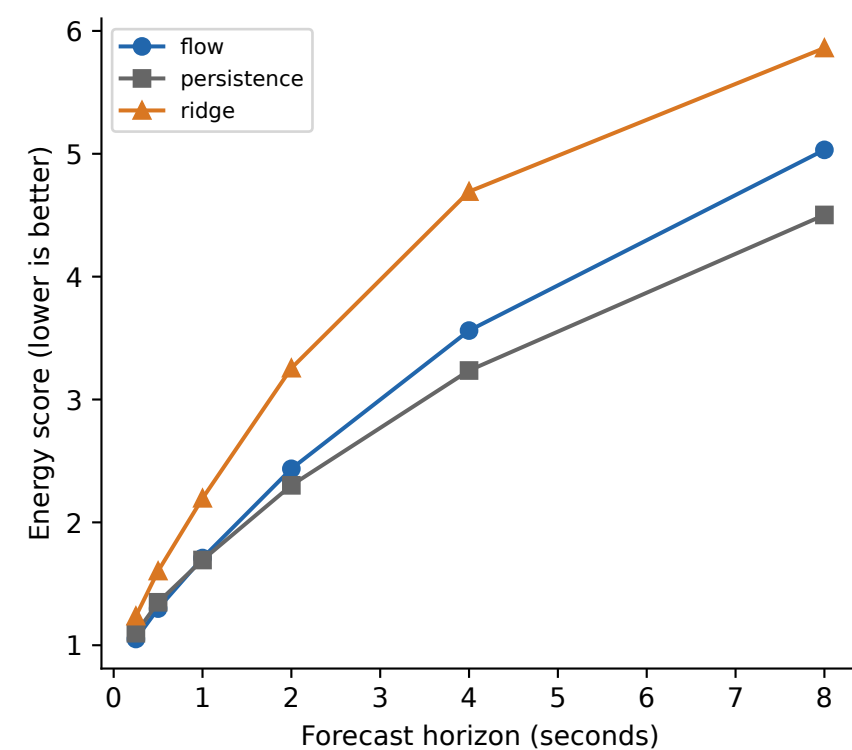

Predictive curves are equal-recording summaries, averaged over training seeds. No independent refit interval is implied. Source placement lag, forecast horizon, and source-to-endpoint separation (their sum) are different quantities.