

slick

the last carousel you'll ever need

[demos](#)

[usage](#)

[settings](#)

[wordpress](#)

[get it now](#)



The new generation of project management tools is here
and it's visual.

ADS VIA CARBON

Features

Fully responsive. Scales with its container.

Separate settings per breakpoint

Uses CSS3 when available. Fully functional when not.

Swipe enabled. Or disabled, if you prefer.

Desktop mouse dragging

Infinite looping.

Fully accessible with arrow key navigation

Add, remove, filter & unfilter slides


Autoplay, dots, arrows, callbacks, etc...

Single Item



```
$('.single-item').slick();
```

Multiple Items

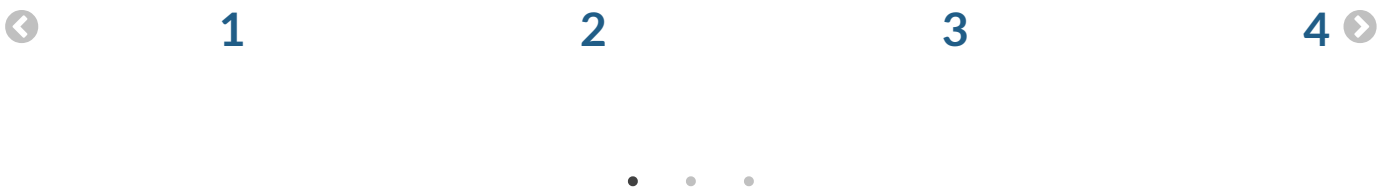

```
$('.multiple-items').slick({  
  infinite: true,  
  slidesToShow: 3,  
  slidesToScroll: 3  
});
```

Responsive Display



1

2

3

4

5



```
$('.responsive').slick({
  dots: true,
  infinite: false,
  speed: 300,
  slidesToShow: 4,
  slidesToScroll: 4,
  responsive: [
    {
      breakpoint: 1024,
      settings: {
        slidesToShow: 3,
        slidesToScroll: 3,
        infinite: true,
        dots: true
      }
    },
    {
      breakpoint: 600,
      settings: {
        slidesToShow: 2,
        slidesToScroll: 2
      }
    },
    {
      breakpoint: 480,
      settings: {
        slidesToShow: 1,
        slidesToScroll: 1
      }
    }
  ]
  // You can unslick at a given breakpoint now by adding:
  // settings: "unslick"
  // instead of a settings object
});
```

Variable Width

125

200

175

150



```
$('.variable-width').slick({  
  dots: true,  
  infinite: true,  
  speed: 300,  
  slidesToShow: 1,  
  centerMode: true,  
  variableWidth: true  
});
```

Adaptive Height



1



```
$('.one-time').slick({  
  dots: true,  
  infinite: true,  
  speed: 300,  
  slidesToShow: 1,  
  adaptiveHeight: true  
});
```

Data Attribute Settings

In slick 1.5 you can now add settings using the data-slick attribute. You still need to call `$(element).slick()` to initialize slick on the element.

```
<div data-slick='{ "slidesToShow": 4, "slidesToScroll": 4 }'>
  <div><h3>1</h3></div>
  <div><h3>2</h3></div>
  <div><h3>3</h3></div>
  <div><h3>4</h3></div>
  <div><h3>5</h3></div>
  <div><h3>6</h3></div>
</div>
```

Center Mode

```
$('.center').slick({
  centerMode: true,
  centerPadding: '60px',
  slidesToShow: 3,
  responsive: [
    {
      breakpoint: 768,
      settings: {
        arrows: false,
        centerMode: true,
        centerPadding: '40px',
        slidesToShow: 3
      }
    },
    {
      breakpoint: 480,
      settings: {
        arrows: false,
        centerMode: true,
        centerPadding: '40px',
```

```
        slidesToShow: 1
      }
    }
  ]
});
```

Lazy Loading



```
// To use lazy loading, set a data-lazy attribute
// on your img tags and leave off the src
```

```
<img data-lazy="img/lazyfonz1.png"/>
```

```
$('.lazy').slick({
  lazyLoad: 'ondemand',
  slidesToShow: 3,
  slidesToScroll: 1
});
```

Autoplay



1

2

3



```
$('.autoplay').slick({  
  slidesToShow: 3,  
  slidesToScroll: 1,  
  autoplay: true,  
  autoplaySpeed: 2000,  
});
```

Fade



```
$('.fade').slick({  
  dots: true,  
  infinite: true,  
  speed: 500,  
  fade: true,  
  cssEase: 'linear'  
});
```

Add & Remove

1

Add Slide

Remove Slide

```
$('.add-remove').slick({
  slidesToShow: 3,
  slidesToScroll: 3
});
$('.js-add-slide').on('click', function() {
  slideIndex++;
  $('.add-remove').slick('slickAdd', '<div><h3>' + slideIndex + '</h3></div>');
});

$('.js-remove-slide').on('click', function() {
  $('.add-remove').slick('slickRemove', slideIndex - 1);
  if (slideIndex !== 0){
    slideIndex--;
  }
});
```

Filtering

◀ 1 2 3 4 5 ▶

• • •

Filter Slides

```
$('.filtering').slick({
  slidesToShow: 4,
  slidesToScroll: 4
```



```
});

var filtered = false;

$('.js-filter').on('click', function(){
  if (filtered === false) {
    $('.filtering').slick('slickFilter', ':even');
    $(this).text('Unfilter Slides');
    filtered = true;
  } else {
    $('.filtering').slick('slickUnfilter');
    $(this).text('Filter Slides');
    filtered = false;
  }
});
```

Destroy

If you really want to be that guy...

```
$('.your-slider').slick('unslick');
```

Slider Syncing

1

◀ 5 1 2 3 ▶

• • • • •

```
$('.slider-for').slick({
  slidesToShow: 1,
  slidesToScroll: 1,
  arrows: false,
  fade: true,
  asNavFor: '.slider-nav'
});
$('.slider-nav').slick({
  slidesToShow: 3,
  slidesToScroll: 1,
  asNavFor: '.slider-for',
  dots: true,
  centerMode: true,
  focusOnSelect: true
});
```

Right to Left



1



```
$('.single-item-rtl').slick({
  rtl: true
});
```

Note: the HTML tag or the parent of the slider must have the attribute "dir" set to "rtl".

and a whole lot more...

Getting Started

Set up your HTML markup.

```
<div class="your-class">
  <div>your content</div>
  <div>your content</div>
  <div>your content</div>
</div>
```

Move the /slick folder into your project

Add slick.css in your <head>

```
<link rel="stylesheet" type="text/css" href="slick/slick.css"/>
// Add the new slick-theme.css if you want the default styling
<link rel="stylesheet" type="text/css" href="slick/slick-theme.css"/>
```

Add slick.js before your closing <body> tag, after jQuery (requires jQuery 1.7 +)

```
<script type="text/javascript" src="//code.jquery.com/jquery-1.11.0.min.js"></script>
<script type="text/javascript" src="//code.jquery.com/jquery-migrate-1.2.1.min.js"></script>
<script type="text/javascript" src="slick/slick.min.js"></script>
```



Initialize your slider in your script file or an inline script tag

```
$(document).ready(function(){
  $('your-class').slick({
    setting-name: setting-value
```

```
});  
});
```

When complete, your HTML should look something like:

```
<html>  
  <head>  
    <title>My Now Amazing Webpage</title>  
    <link rel="stylesheet" type="text/css" href="slick/slick.css"/>  
    <link rel="stylesheet" type="text/css" href="slick/slick-theme.css"/>  
  </head>  
  <body>  
  
    <div class="your-class">  
      <div>your content</div>  
      <div>your content</div>  
      <div>your content</div>  
    </div>  
  
    <script type="text/javascript" src="//code.jquery.com/jquery-1.11.0.min.js"></script>  
    <script type="text/javascript" src="//code.jquery.com/jquery-migrate-1.2.1.min.js"></scrip  
    <script type="text/javascript" src="slick/slick.min.js"></script>  
  
    <script type="text/javascript">  
      $(document).ready(function(){  
        $('your-class').slick({  
          setting-name: setting-value  
        });  
      });  
    </script>  
  
  </body>  
</html>
```

NOTE: I highly recommend putting your initialization script in an external JS file.

Settings

accessibility

Type: boolean

Default: true

Enables tabbing and arrow key navigation

adaptiveHeight

Type: boolean

Default: false

Enables adaptive height for single slide horizontal carousels.

autoplay

Type: boolean

Default: false

Enables Autoplay

autoplaySpeed

Type: int(ms)

Default: 3000

Autoplay Speed in milliseconds

arrows

Type: boolean

Default: true

Prev/Next Arrows

asNavFor

Type: string

Default: null

Set the slider to be the navigation of other slider (Class or ID Name)

appendArrows

Type: string

Default: \$(element)

Change where the navigation arrows are attached (Selector, htmlString, Array, Element, jQuery object)

appendDots

Type: string

Default: \$(element)

Change where the navigation dots are attached (Selector, htmlString, Array, Element, jQuery object)

prevArrow

Type: string (html|jQuery selector) | object (DOM node|jQuery object)

Default: <button type="button" class="slick-prev">Previous</button>

Allows you to select a node or customize the HTML for the "Previous" arrow.

nextArrow

Type: string (html|jQuery selector) | object (DOM node|jQuery object)

Default: <button type="button" class="slick-next">Next</button>

Allows you to select a node or customize the HTML for the "Next" arrow.

centerMode

Type: boolean

Default: false

Enables centered view with partial prev/next slides. Use with odd numbered slidesToShow counts.

centerPadding

Type: string

Default: '50px'

Side padding when in center mode (px or %)

cssEase

Type: string

Default: 'ease'

CSS3 Animation Easing

customPaging

Type: function

Default: n/a

Custom paging templates. See source for use example.

dots

Type: boolean

Default: false

Show dot indicators

dotsClass

Type: string

Default: 'slick-dots'

Class for slide indicator dots container

draggable

Type: boolean

Default: true

Enable mouse dragging

fade

Type: boolean

Default: false

Enable fade

focusOnSelect

Type: boolean

Default: false

Enable focus on selected element (click)

easing

Type: string

Default: 'linear'

Add easing for jQuery animate. Use with easing libraries or default easing methods

edgeFriction

Type: integer

Default: 0.15

Resistance when swiping edges of non-infinite carousels

infinite

Type: boolean

Default: true

Infinite loop sliding

initialSlide

Type: integer

Default: 0

Slide to start on

lazyLoad

Type: string

Default: 'ondemand'

Set lazy loading technique. Accepts 'ondemand' or 'progressive'

mobileFirst

Type: boolean

Default: false

Responsive settings use mobile first calculation

pauseOnFocus

Type: boolean

Default: true

Pause Autoplay On Focus

pauseOnHover

Type: boolean

Default: true

Pause Autoplay On Hover

pauseOnDotsHover

Type: boolean

Default: false

Pause Autoplay when a dot is hovered

respondTo

Type: string

Default: 'window'

Width that responsive object responds to. Can be 'window', 'slider' or 'min' (the smaller of the two)

responsive

Type: object

Default: none

Object containing breakpoints and settings objects (see demo). Enables settings sets at given screen width. Set settings to "unslick" instead of an object to disable slick at a given breakpoint.

rows

Type: int

Default: 1

Setting this to more than 1 initializes grid mode. Use slidesPerRow to set how many slides should be in each row.

slide

Type: element

Default: "

Element query to use as slide

slidesPerRow

Type: int

Default: 1

With grid mode intialized via the rows option, this sets how many slides are in each grid row. dver

slidesToShow

Type: int

Default: 1

of slides to show

slidesToScroll

Type: int

Default: 1

of slides to scroll

speed

Type: int(ms)

Default: 300

Slide/Fade animation speed

swipe

Type: boolean

Default: true

Enable swiping

swipeToSlide

Type: boolean

Default: false

Allow users to drag or swipe directly to a slide irrespective of slidesToScroll

touchMove

Type: boolean

Default: true

Enable slide motion with touch

touchThreshold

Type: int

Default: 5

To advance slides, the user must swipe a length of $(1/\text{touchThreshold}) * \text{the width of the slider}$

useCSS

Type: boolean

Default: true

Enable/Disable CSS Transitions

useTransform

Type: boolean

Default: true

Enable/Disable CSS Transforms

variableWidth

Type: boolean

Default: false

Variable width slides

vertical

Type: boolean

Default: false

Vertical slide mode

verticalSwiping

Type: boolean

Default: false

Vertical swipe mode

rtl

Type: boolean

Default: false

Change the slider's direction to become right-to-left

waitForAnimate

Type: boolean

Default: true

Ignores requests to advance the slide while animating

zIndex

Type: number

Default: 1000

Set the zIndex values for slides, useful for IE9 and lower

Events

In slick 1.4, callback methods have been deprecated and replaced with events. Use them as shown below:

```
// On swipe event
$('.your-element').on('swipe', function(event, slick, direction){
  console.log(direction);
  // left
});

// On edge hit
$('.your-element').on('edge', function(event, slick, direction){
  console.log('edge was hit')
});

// On before slide change
$('.your-element').on('beforeChange', function(event, slick, currentSlide, nextSlide){
  console.log(nextSlide);
});
```

afterChange

Arguments: slick, currentSlide

Fires after slide change

beforeChange

Arguments: slick, currentSlide, nextSlide

Fires before slide change

breakpoint

Arguments: event, slick, breakpoint

Fires after a breakpoint is hit.

destroy

Arguments: event, slick

When slider is destroyed, or unslicked.

edge

Arguments: slick, direction

Fires when an edge is overscrolled in non-infinite mode.

init

Arguments: slick

Fires after first initialization.

reInit

Arguments: slick

Fires after every re-initialization

setPosition

Arguments: slick

Fires after position/size changes

swipe

Arguments: slick, direction

Fires after swipe/drag

lazyLoaded

Arguments: event, slick, image, imageSource

Fires after image loads lazily

lazyLoadError

Arguments: event, slick, image, imageSource

Fires after image fails to load

Methods

Methods are called on slick instances through the slick method itself in version 1.4, see below:

```
// Add a slide
$('.your-element').slick('slickAdd', "<div></div>");

// Get the current slide
var currentSlide = $('.your-element').slick('slickCurrentSlide');
```

This new syntax allows you to call any internal slick method as well:

```
// Manually refresh positioning of slick  
$('.your-element').slick('setPosition');
```

slickCurrentSlide

Arguments: none

Returns the current slide index

slickGoTo

Arguments: int : slide number, boolean: dont animate

Navigates to a slide by index

slickNext

Arguments: none

Navigates to the next slide

slickPrev

Arguments: none

Navigates to the previous slide

slickPause

Arguments: none

Pauses autoplay

slickPlay

Arguments: none

Starts autoplay

slickAdd

Arguments: html or DOM object, index, addBefore

Add a slide. If an index is provided, will add at that index, or before if addBefore is set. If no index is provided, add to the end or to the beginning if addBefore is set. Accepts HTML String || Object

slickRemove

Arguments: index, removeBefore

Remove slide by index. If removeBefore is set true, remove slide preceding index, or the first slide if no index is specified. If removeBefore is set to false, remove the slide following index, or the last slide if no index is set.

slickFilter

Arguments: Selector or Function

Filters slides using jQuery .filter()

slickUnfilter

Arguments: index

Removes applied filtering

slickGetOption

Arguments: option : string

Gets an individual option value.

slickSetOption

Arguments: option : string, value : depends on option, refresh : boolean

Sets an individual value live. Set refresh to true if it's a UI update.

unslick

Arguments: none

Deconstructs slick

getSlick

Arguments: none

Get Slick Object

Wordpress

Go Get It

[Download Now](#)

[View On Github](#)

You can also use slick with the jsDelivr CDN!

CSS

```
<link rel="stylesheet" type="text/css" href="//cdn.jsdelivr.net/npm/slick-carousel@1.8.1/sli
```

JS

```
<script type="text/javascript" src="//cdn.jsdelivr.net/npm/slick-carousel@1.8.1/slick/slick.
```



If you like slick, and also like Sass, try my [Guff](#) mixin library!

New Laser Eye Causing Sensation in the UK

The latest wave of vision correction has arrived in the UK.

[Learn More](#)

Sponsored by **Clinic Compare**

[Report ad](#)

3507 Comments

slick

[1 Login](#) ▾

 Recommend 334

 Tweet

 Share

Sort by Best ▾



Join the discussion...

LOG IN WITH



OR SIGN UP WITH DISQUS 

Name



Abaza • 5 years ago


Simple&Perfect! Nice job! Thx...

94   • Reply • Share ›



Codevz • 2 years ago



Thanks for this great script :)

58   • Reply • Share ›



Pipo Gomez → **Codevz** • 6 months ago

ijo de puta malpario ojala la shuta te agarre putoooo



4   • Reply • Share ›



ysf • 4 years ago

for all informations about how using this plugin this is a great tutorial

<https://www.youtube.com/wat...>

57   • Reply • Share ›



Pipo Gomez → **ysf** • 6 months ago

mamaverga

1   • Reply • Share ›



meyerdev.ch → **ysf** • a month ago

"This video is no longer available because the YouTube account associated with this video has been terminated."

  • Reply • Share ›

Comments continue after advertisement

New Laser Eye Causing Sensation in the UK

The latest wave of vision correction has arrived in the UK.

[Learn More](#)

Sponsored by **Clinic Compare**

[Report ad](#)



Nick Price • 5 years ago

Dear Ken

Thanks for this great script. Only one issue I have found is that the slider resizes great when I manually resize my browser window. But if I press the maximise window button, it doesn't seem to realise that the window size has changed, and doesn't resize appropriately...

57 ^ | v • Reply • Share ›



Vladimir Udartsev ➔ Nick Price • 2 months ago

Same to me. I have 30+ images in the slider and hight autoresizing when scroll starts and shows all photos and divs!

Seems like in .js code errors with autohight functions... Can't understand how to fix it now.

4 ^ | v • Reply • Share ›



Murray Chapman ➔ Nick Price • 3 months ago

This could be handled with jQuery. By adding an .resize to the Window object.

```
$( window ).resize(function() {  
  $( "#slideshow-div-Name" ).slick();  
});
```

I used this once and it cause the slideshow to jagger for a split second but corrected the slideshow.

Also realise that sometimes this can be a browser window object and how it handles passing browser window resizing into the page object for the scripts to trigger when detected. It may be worth checking this on multiple browsers just to make sure.

Cheers

^ | v • Reply • Share ›

[Show more replies](#)



John Shaw • 3 years ago

Hi there Ken, Love the slider

In Wordpress, I've implemented Slick-slider using ACF pro. But it's not working very well: basically for a split second the slides all load one on top of the other at first.


I think this must be some sort of conflict as even if I remove the images the blank slides still load one on top of the other.

I've also gone through the plugins and turned them off with no change.

The images are loaded as inline background image and then CSS and media queries control the style.

This is a dev site: <http://renfrewshirechamber...>

This is the code in the template:



[see more](#)

54 • [Reply](#) • [Share](#) ›



Christoph Kaun → John Shaw • 3 years ago

Couldn't find your script in which you initialize the slider but just by looking at your site I think the problem is that you load a lot of stuff. It took my browser ~4 seconds to load your site. When using `$(document).ready(...);` in your script the script will be executed after the DOM is loaded.

So the larger your website, the longer the slider will not be initialized. And that's why your images show on top of each other for some time

• [Reply](#) • [Share](#) ›



Pipo Gomez → John Shaw • 6 months ago

loko te boi a romper la kabesa me cuchate? pvto

• [Reply](#) • [Share](#) ›



Luke Dohner • 10 months ago

Is there a way to add titles that show with each dot at the bottom? Sort of a title for each slide. It would go next to the indicator dots.

42 • [Reply](#) • [Share](#) ›



Youssef Mahmoud • 5 years ago

How can I change the width between each image in the carousel?

111 • [Reply](#) • [Share](#) ›



OneLocoCobra → Youssef Mahmoud • 5 years ago

any fixes here?

10 • [Reply](#) • [Share](#) ›



DAMR → Youssef Mahmoud • 4 years ago

you have to set -----> `variableWidth: true`
and then style the slick-slide class

```
.slick-slide{  
width: 270px;  
}
```

23 • [Reply](#) • [Share](#) ›



Guest → DAMR • 4 years ago

could you modify this to demonstrate normal width settings? The height of the container doubles for some reason when I try to add margins. I followed

the container doubles for some reason when I try to add margins, I followed your instructions <http://jsfiddle.net/basicla...>

5 ^ | v • Reply • Share ›

[Show more replies](#)

[Show more replies](#)



Musa • 4 years ago

I use slick to display dynamic pictures and number of picture varies of i use j query to remove so element.

The issues is because i originally have have seven slides in the HTML even remove removing the code of 5 it to scrolls through 7 blank pages.

How do i remove the index after deleting the code.

Please see code below.

Thanks

```
$('.listing-slider').slick({  
  
  draggable: true,  
  
  infinite: false,  
});  
  
$(jQuery).ready(function () {  
  
  if (jQuery("#bodyContent_Listing_ListView_Image1_0").attr("src").length < 38) {  
  
    $('#bodyContent_Listing_ListView_Panel_0').remove();  
  
  };  
  
});
```

60 ^ | v • Reply • Share ›



MArk Leidman • 3 years ago

Here you can see a bag in Safari on Mac <http://take.ms/SFe68>

It is possible to view the same on your page in Fade example.

59 ^ | v • Reply • Share ›

Comments continue after advertisement

New Laser Eye Causing Sensation in the UK

The latest wave of vision correction has arrived in the UK.

[Learn More](#)

Sponsored by **Clinic Compare**

Report ad



Kiki Schülling • 2 years ago



Hello I built a Joomla Module from your carousel. Everything works like a charm.

But If I'm using more than one carousel in responsive mode, then the first carousel displayed has a bug

in the penultimate responsive breakpoint.

The "slick-track" Element from this slider and on this specific breakpoint collapses to a width of 0px.

It happens only on the portrait breakpoint - so If you use a iPad (or other tablet) in landscape mode, then the sldiers all work perfect.

Its only on the first slider - no matter if you use 2, 3 or more sliders....

Maybe anyone has the same problem or a solution?!

Thank you, Kiki

Edit: I thought he hadn't saved my first post...but he did. Sorry for double posting!!!!!!!!!!!!!!

58 ^ | v • Reply • Share ›



Prabhu Chincholikar • 3 years ago

Hi thekenwheeler!.

I used the slick.js library for swipe functionality.

I want to control the slidesToScroll property based clicks on arrow buttons. If i click next arrow 5 times, then 5 slides to be scrolled. Please help in this.

56 ^ | v • Reply • Share ›



Halberyk • 2 years ago

Hello, great slider but i have a problem with it. I don't know why but the slider produces a shift to the right on the website. Can you help me please?

55 ^ | v • Reply • Share ›



Dhruv • a year ago

Does this work with bootstrap classes for each image in the carousel? e.g.

...

```
<div class="container">
```

```
<div class="row sponsor centered">
```

```
<div class="col-sm-2 col-sm-offset-0 col-xs-8 col-xs-offset-2">
```

```

```

```
</div>
```

```
<div class="col-sm-2 col-sm-offset-0 col-xs-8 col-xs-offset-2">
```

```

```

```
</div>
```

```
</div>
```

```
</div>
```

...

Or do I have to remove these?

51 ^ | v • Reply • Share ›



thussain • 5 years ago

Thanks for this awesome slider

Is there any chance i can disable & hide (next & prev buttons) in the single-item slider

Thanks once again for your help

34 ^ | v • Reply • Share ›



ezuhaib → thussain • a year ago

Use arrows: false in settings.

^ | v • Reply • Share ›



Vaaneet Kapoor → ezuhaib • 9 months ago

I have written arrows: true in setting but still it isnt showing on the page

^ | v • Reply • Share ›

[Show more replies](#)



Dennis • 5 years ago

hi,

thank you for this slider. its dynamic functionality with responsiveness is really great. but there is one feauture i missed and so i implemented it by myself. maybe you want to add it in a future release. it is "adaptiveHeight" - e.g. the bxslider has this feature.

i wrote an additional prototype and hope this is an inspiration for you to add this functionality. i think its far away from "perfect", but for me it works.

- 1) i do a children loop to find all slide elements of the slick slider
- 2) i get the heights of all currently/next visible elements and get the maximum height
- 3) i do a jquery animate of the heights of .slick-list and .slick-track

my code is:

```
Slick.prototype.updateAdaptiveHeight = function() {
    var _ = this;
    if (_.options.adaptiveHeight === true) {
        var first_slide = _.currentSlide;
        var last_slide = _.currentSlide + _.options.slidesToScroll;
        if(last_slide > _.slideCount) {
```

[see more](#)

34 ^ | v • Reply • Share ›



weeps → Dennis • 5 years ago

Could you point to some information how to implement this (prototype) into the actual plugin?

Very appreciated, thanks!

15 ^ | v • Reply • Share ›



boris → Dennis • 5 years ago

Hi, maybe can you help me with this issue? I also wanted to use slick slider to slide some divs with different height. I am very interested in your solution. The code above doesn't work out of the box or i do something wrong. I am new to javascript.

Would be great to hear from you. The option of Adaptive Height would be great!

7 ^ | v • Reply • Share ›



Chris Howard ➔ boris • 5 years ago

Boris,

This is what I'm using. Works in my usages. Haven't tested it with different box models. I always use: box-sizing:border-box;.

```
var afterChange = function(slider,i) {  
  var slideHeight = jQuery(slider.$slides[i]).height();  
  jQuery(slider.$slider).height( slideHeight);  
};
```

To use it, add:

```
onAfterChange: afterChange
```

to your slider settings.

6 ^ | v • Reply • Share ›

[Show more replies](#)

[Show more replies](#)

[Show more replies](#)

Comments continue after advertisement

New Laser Eye Causing Sensation in the UK

The latest wave of vision correction has arrived in the UK.

[Learn More](#)

Sponsored by **Clinic Compare**

[Report ad](#)



stevens osorio • 5 years ago

Is perfect!, so How works a custom paging?

34 ^ | v • Reply • Share ›



DrShitferbrains ➔ stevens osorio • a year ago

Use customPaging, dots: true, and appendDots:

```
$('.myslickcarousel').slick({  
  dots: true,  
  appendDots:$('some div outside of .myslickcarousel'),  
  customPaging:function(slider, pageIndex) {  
    //you can reference the slider being instantiated as slider.$slider  
    return $('<button></button>').text(slider.$slider.data("buttonlabel"));>
```

3 ^ | v • Reply • Share ›



xanderoid • 5 years ago



I am a novice but have been playing around with a few slider/carousels. None of them are responsive (or they don't handle that aspect very well at least). I want to try out yours. Is there any place where I can get more detailed directions about how to set it up? Thank you for your hard work.

34 ^ | v • Reply • Share ›



thekenwheeler Mod → xanderoid • 5 years ago

Email me. Ken@outlook.com

^ | v • Reply • Share ›



Aaron Fisk • 3 years ago

I've been trying to configure a slide show in a very similar way to the fade example. The main difference is I want to make it switch between the fade and sliding transitions if nextSlide is more than one slide away.

To elaborate:

if I go from slide 1 to 2, 2 slides in from right

If I go from slide 1 to 3, 1 fades out and 3 fades in

if I attempt to turn fading on or off from inside the beforeChange event, the nextSlide fades out but doesn't fade in. I had tried several things including time outs and forcing a fade in during the afterChange event

Is there anyway that I can make it so that the next slide shown is always the destination slide?

50 ^ | v • Reply • Share ›



Marcelo Gasparian Gosling • 5 years ago

What is the difference between the two easing options? What are the valid values for them?

33 ^ | v • Reply • Share ›



thekenwheeler Mod → Marcelo Gasparian Gosling • 5 years ago

ease is for the jquery animation fallback. It takes 'linear' or 'swing', or whatever string you would use with jquery UI or easings.js . cssEase is your css transitions ease property. Check the css3 transition docs for valid values. It uses 'ease' by default.

1 ^ | v • Reply • Share ›



Nishizaki • 4 years ago

Anyone knows how to make the carousel plays automatic, but no 'slide per slider' but fluid (without stop between slides)? :/

31 ^ | v • Reply • Share ›



Exrik → Nishizaki • 4 years ago

Try this, could be exactly what you want :)

autoplay: true,

autoplaySpeed: 0,

cssEase: 'linear',

speed: 3000,

1 ^ | v • Reply • Share ›



fahim ahmed → Nishizaki • a year ago

autoplay=true,

^ | v • Reply • Share ›



Mustafa Şatiroğlu • 8 months ago

Hi, Firstly I speak little English, Sorry.. I have a problem, I use Slick Slider with Bootsrap tab in my project. Everything is Ok. But when pagination is hover as if pagination hover is frozing every li element

I am sharing link:

<http://95.0.133.245:81/ege/?site=ciftcidenhaber>

Can you help me?

30 ^ | v • Reply • Share ›



David W • 5 years ago

Why does the centerMode always force it to be infinite loop? Can we change that?

31 ^ | v • Reply • Share ›



Артем Яковенко → David W • 2 years ago

2 years later I have the exact same problem

3 ^ | v • Reply • Share ›



Anton Stasyuk → David W • a year ago

I asume that's happening because the center mode always needs an odd number of slides, to be sure you have them it's better to hard activate infinite mode.

^ | v • Reply • Share ›



Vasyl Stanislavchuk • 5 years ago

Thanks, man :)

17 ^ | v • Reply • Share ›



Tammy Hart • 3 years ago

Odd request: it would be great if the examples and options had anchors so I could link a colleague to a specific place on this page.

16 ^ | v • Reply • Share ›



Paul Shipman • 4 years ago

I can't even get the simplest example to work in my pages. Do you have any examples that contain only the html/css/js necessary to make it work, without all the extras to style the page. Thanks.

50 ^ | v • Reply • Share ›



jonas marco → Paul Shipman • 3 years ago

I think exactly like you. More examples with

html / css / js code. It is so important to see how the developer thought that

html / CSS / JS code. It is so important to see how the developer thought that example so that we can make our own adjustments.

2 ^ | v • Reply • Share ›



Jesse • 8 months ago

I'm having an issue where when the first slide comes back into view, clicking it does nothing, or any that follow, until it gets back to its original position. Anyone else have that issue? Here are the options I'm using:

```
infinite: true,  
draggable: true,  
slidesToScroll: 1,  
slidesToShow: 4,  
autoplay: false,  
dots: false,  
arrows: true,  
responsive: [{  
  breakpoint: 640,  
  settings: {  
    dots: false,  
    draggable: true  
  }  
}]
```

13 ^ | v • Reply • Share ›



trilli • 4 years ago

Hi,

i'm using the new version 1.4, and have a problem with the init event: it seems that it is not fired

```
element.on('init', function(slick){  
  console.log('init');  
});
```

13 ^ | v • Reply • Share ›

[Show more replies](#)

[Load more comments](#)

New Laser Eye Causing Sensation in the UK

The latest wave of vision correction has arrived in the UK.

[Learn More](#)

Sponsored by **Clinic Compare**

Report ad