

Example Quarto File

Annamalai Vikash Raam Manoj

Introduction

This document demonstrates GitHub collaboration and version control using Git branches.

Step 1: Creating a Quarto Document

A new project was created in Positron to organise the workflow. Inside this project, a Quarto document named `example.qmd` was created. The file contains a simple R code chunk to demonstrate execution within Quarto.

Example Code

The following code shows a preview of the `mtcars` dataset and calculates the average miles per gallon.

```
head(mtcars)
```

	mpg	cyl	disp	hp	drat	wt	qsec	vs	am	gear	carb
Mazda RX4	21.0	6	160	110	3.90	2.620	16.46	0	1	4	4
Mazda RX4 Wag	21.0	6	160	110	3.90	2.875	17.02	0	1	4	4
Datsun 710	22.8	4	108	93	3.85	2.320	18.61	1	1	4	1
Hornet 4 Drive	21.4	6	258	110	3.08	3.215	19.44	1	0	3	1
Hornet Sportabout	18.7	8	360	175	3.15	3.440	17.02	0	0	3	2
Valiant	18.1	6	225	105	2.76	3.460	20.22	1	0	3	1


```
mean(mtcars$mpg)
```

```
[1] 20.09062
```

The document was rendered into HTML using the following command in the terminal:

```
quarto render example.qmd --to html
```

This generated an HTML file, confirming that the Quarto document renders correctly and executes R code.



Example Quarto File

Author

Annamalai Vikash Raam Manoj

Introduction

This document demonstrates a simple Quarto file that can be rendered into HTML.

Example Code

The following code shows a preview of the `mtcars` dataset and calculates the average miles per gallon.

```
head(mtcars)
```

	mpg	cyl	disp	hp	drat	wt	qsec	vs	am	gear	carb
Mazda RX4	21.0	6	160	110	3.90	2.620	16.46	0	1	4	4
Mazda RX4 Wag	21.0	6	160	110	3.90	2.875	17.02	0	1	4	4
Datsun 710	22.8	4	108	93	3.85	2.320	18.61	1	1	4	1
Hornet 4 Drive	21.4	6	258	110	3.08	3.215	19.44	1	0	3	1
Hornet Sportabout	18.7	8	360	175	3.15	3.440	17.02	0	0	3	2
Valiant	18.1	6	225	105	2.76	3.460	20.22	1	0	3	1

```
mean(mtcars$mpg)
```

```
[1] 20.09062
```

Figure 1: Output of sample code in the example html file

Step 2: Initialising Git and Pushing to GitHub

- The project folder was initialised as a Git repository using the command: `git init`
This creates a hidden `.git` directory that allows Git to track changes in the project.

- All files in the project were added to the staging area using:

```
git add .
```

This prepares the files to be committed.

- An initial commit was created using:

```
git commit -m "Initial commit: added example quarto file and rendered  
HTML output"
```

This saves the current state of the project in the Git history.

- A remote repository was then created on GitHub and linked to the local repository using:

```
git remote add origin <repository-url>
```

```
git branch -M main
```

```
git push -u origin main
```

These commands connect the local repository to GitHub and push the committed files to the remote repository, making them available online.

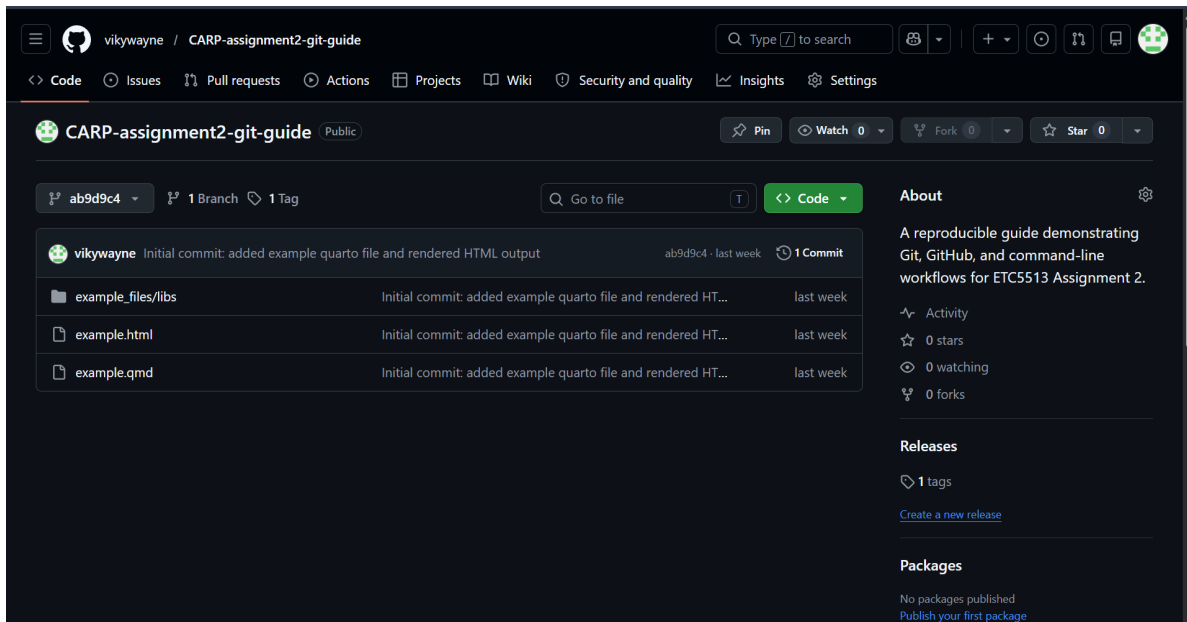


Figure 2: snapshot of Github repository with all the files from local repository

Step 3: Creating and Working on a Branch

- A new branch named `testbranch` was created and checked out using:

```
git checkout -b testbranch
```

This creates a separate branch for development without affecting the `main` branch.

- The `example.qmd` file was modified in the branch and the changes were staged.
- The changes were committed using:

```
git commit -m "Updated introduction in testbranch"
```

This saves the modifications in the branch history.

- The branch was then pushed to GitHub using:

```
git push -u origin testbranch
```

This creates a remote version of the branch and links it to the local branch.

Step 4: Amending a Previous Commit

- A `data` folder was created and the dataset from Assignment 1 was added to it.
- Instead of creating a new commit, the previous commit was amended using:

```
git commit --amend -m "Updated introduction and added data folder"
```

- This updates the most recent commit by including the newly added files.

The amended commit was pushed to GitHub using:

```
git push --force
```

Force push was required because amending a commit changes the commit history and creates a new commit hash.

Step 5: Creating a Merge Conflict on Main

- The `main` branch was checked out again and the introduction section in `example.qmd` was modified differently from the version in `testbranch`.
- The updated file was committed using:

```
git commit -m "Modified introduction in main branch for merge conflict"
```

- The changes were then pushed to GitHub.

Modifying the same section differently in both branches intentionally created a merge conflict scenario.

Step 6: Merging and Resolving a Conflict

- The changes from `testbranch` were merged into the `main` branch using:

```
git merge testbranch
```

- Git detected a merge conflict because the same line had been modified differently in both branches.

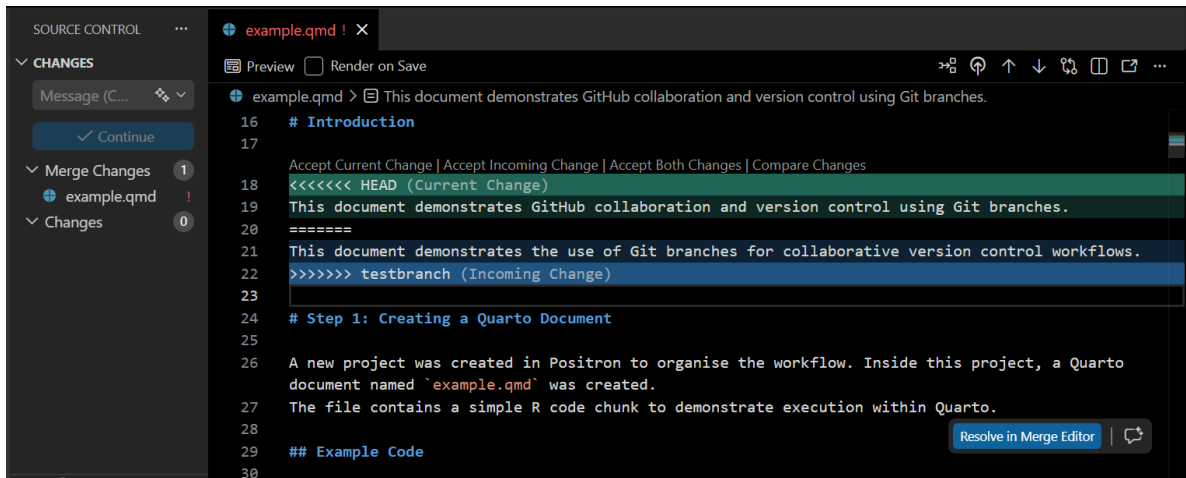


Figure 3: Merge conflict shown while merging testbranch into main

- The conflict markers were manually removed and the correct final version of the text was retained.

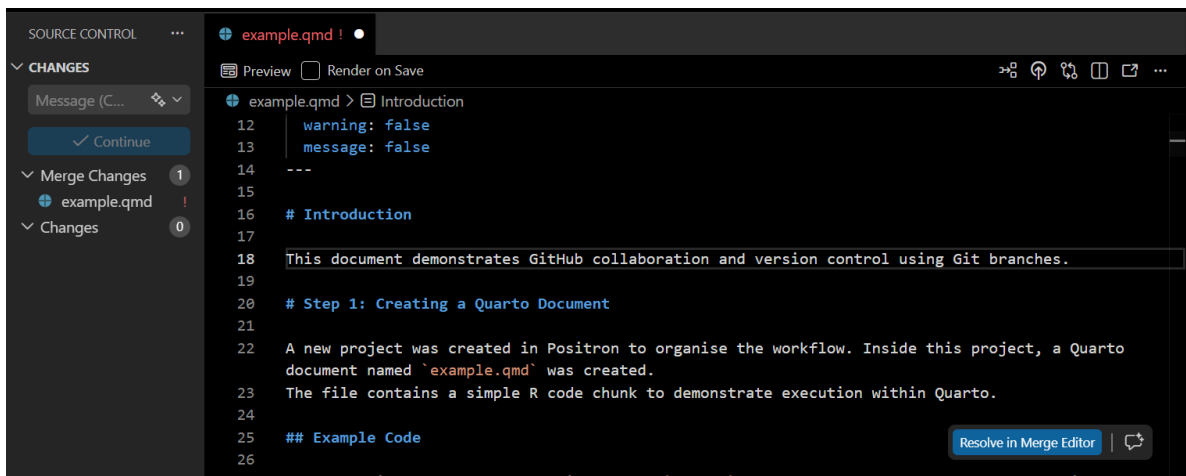


Figure 4: Conflict markers removed after resolving the merge conflict

- After resolving the conflict, the merge was completed using:

```
git commit -m "Resolved merge conflict between main and testbranch"
```
- The resolved merge was then pushed to GitHub using:

```
git push
```


This updated the remote repository with the merged changes.

Step 7: Creating an Annotated Tag

- An annotated tag named `v1.0` was created using:

```
git tag -a v1.0 -m "Version 1.0 after merge conflict resolution"
```

This tag marks a stable project version after resolving the merge conflict.

- The tag was pushed to GitHub using:

```
git push origin v1.0
```

This made the version tag available in the remote repository.

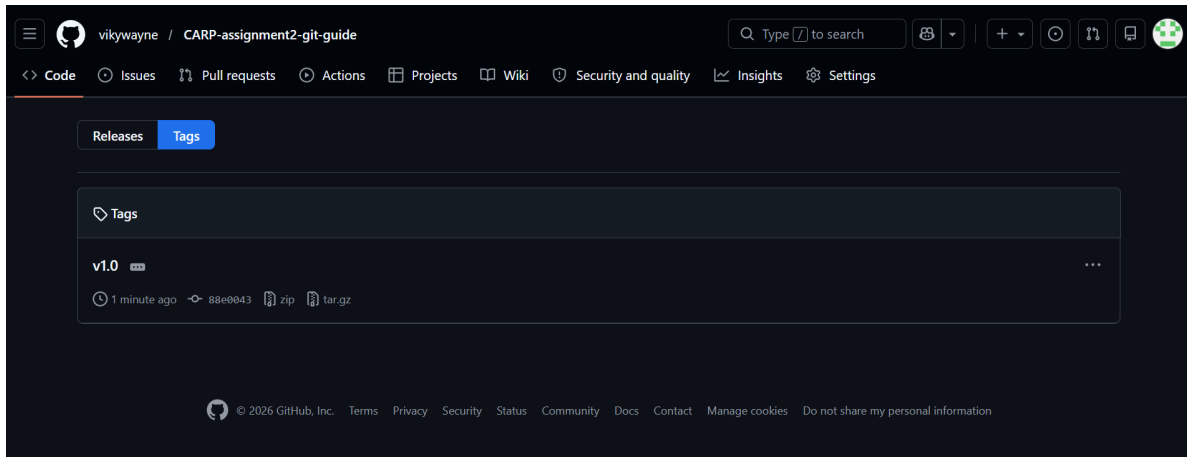


Figure 5: tag shown in Github repository

Step 8: Deleting the Branch

- After the merge was completed, the `testbranch` branch was deleted locally using:

```
git branch -d testbranch
```

- The remote version of the branch was deleted from GitHub using:

```
git push origin --delete testbranch
```

Removing unused branches helps keep the repository organised.

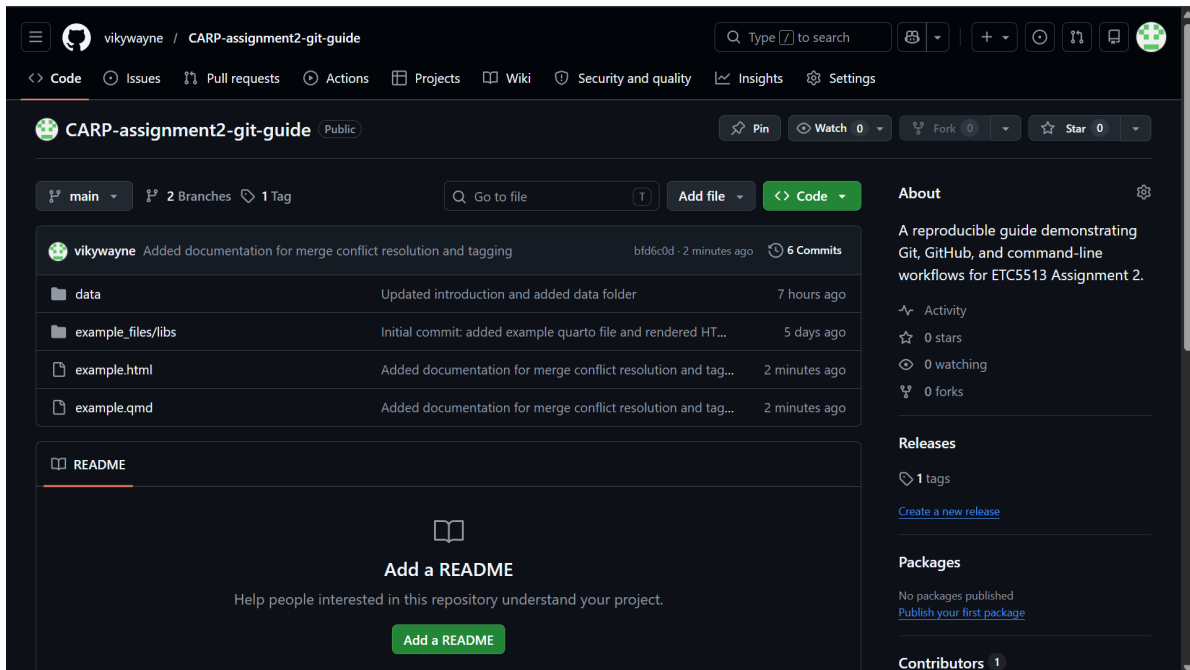


Figure 6: github repo page before deleting the branch in remote

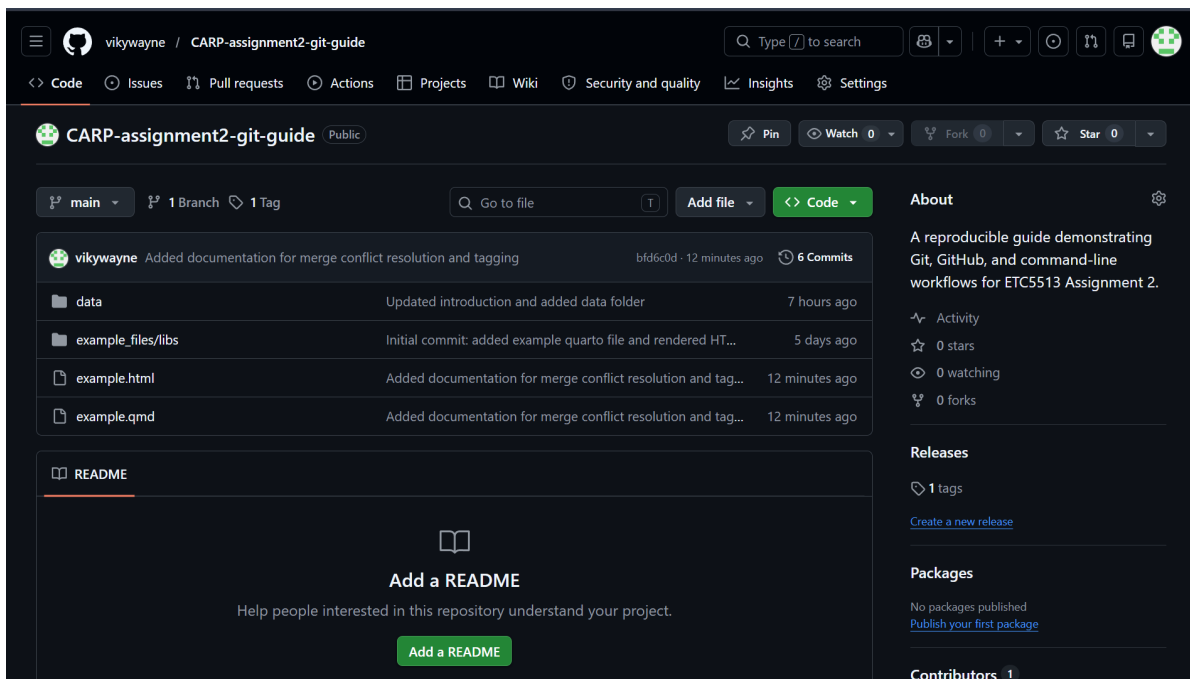


Figure 7: github repo page after deleting the branch in remote

Step 9: Viewing the Commit History

- The condensed commit history was displayed using:

```
git log --oneline
```

This command provides a simplified view of the commit history, showing commit hashes and commit messages.


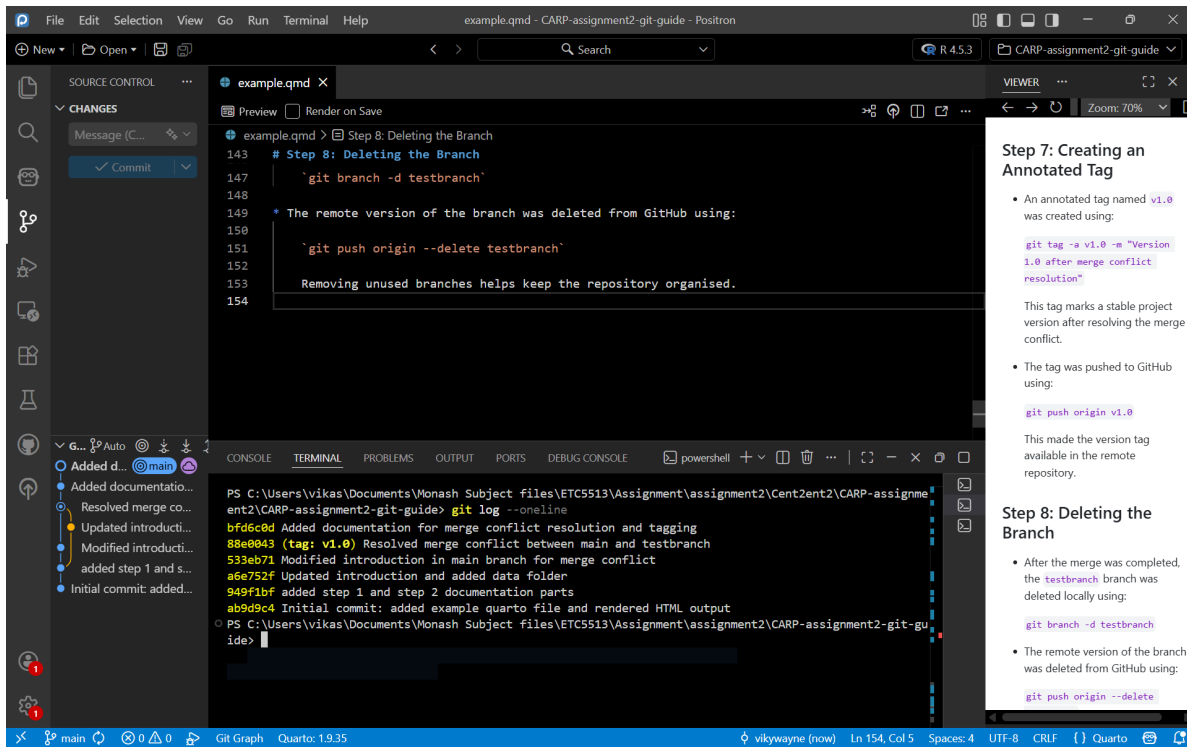


Figure 8: Condensed git commit history

Step 10: Undoing a Commit Without Losing Changes

- A new section containing a simple plot was added to the Quarto document.

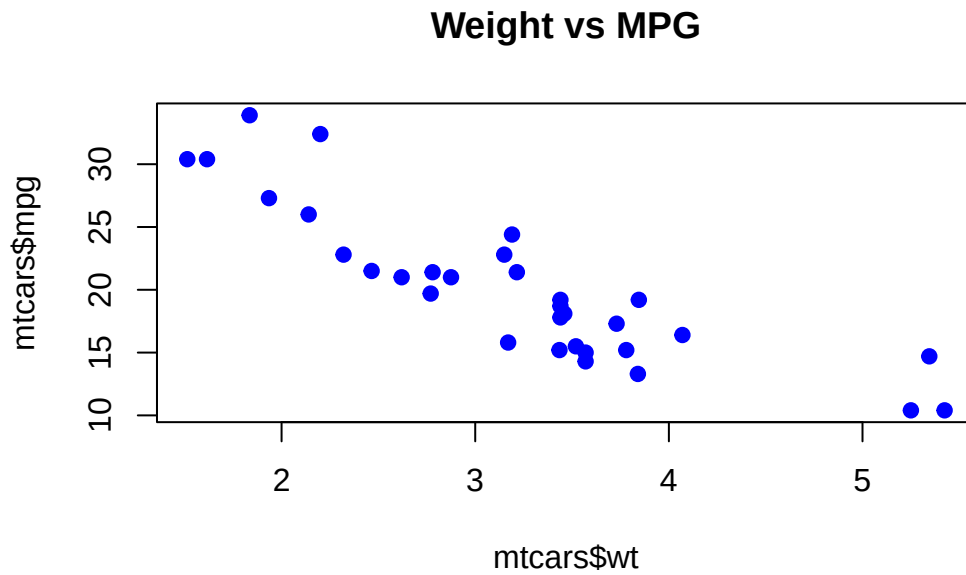

- The changes were committed using:

```
git commit -m "Added plot section for reset demonstration"
```

- The commit was then undone without removing the local file changes using:

```
git reset --soft HEAD~1
```

This removed the most recent commit from the Git history while keeping the changes available locally.

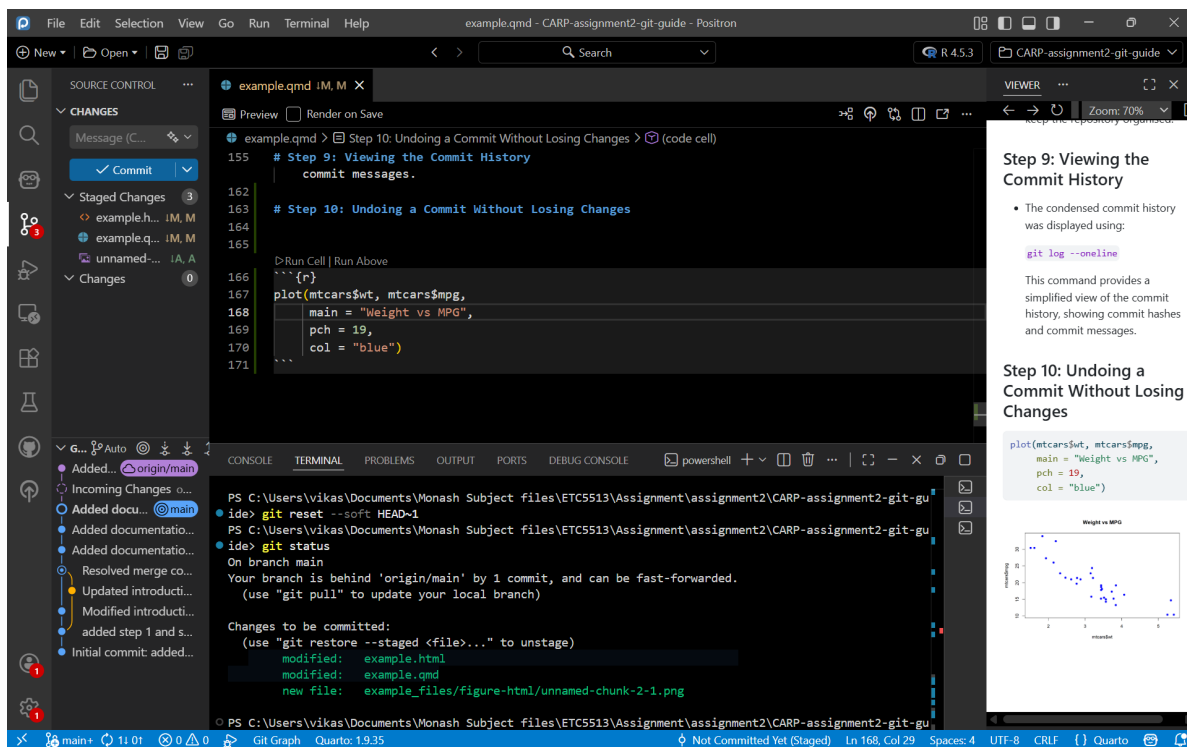


Figure 9: terminal showcasing git soft reset in process

Conclusion

This guide demonstrated the use of Git, GitHub, and command-line workflows within a reproducible Quarto project.

The workflow included repository initialisation, branching, committing changes, resolving merge conflicts, tagging versions, viewing commit history, and undoing commits while preserving local changes.

These steps demonstrate how version control tools can support collaborative and reproducible development workflows.