


2. Monoalphabetic Substitution Cipher

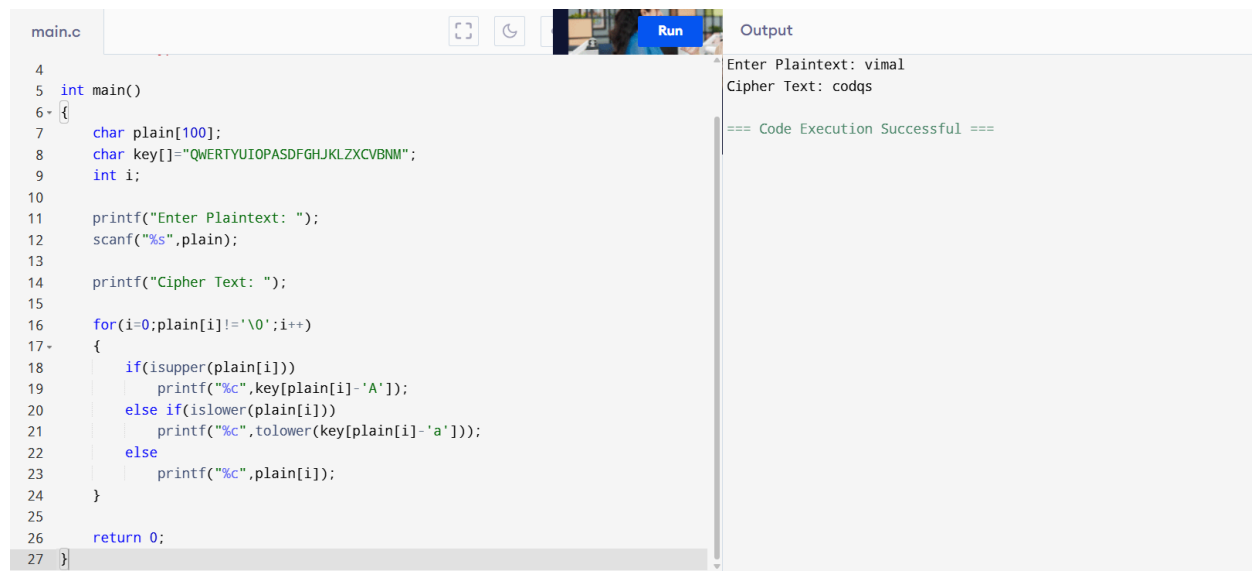

The image shows a code editor window with a file named 'main.c'. The code is a C program that implements a Monoalphabetic Substitution Cipher. It prompts the user to enter a plaintext, which is then encrypted using a predefined key. The output shows the plaintext 'vimal' being encrypted to the ciphertext 'codqs'. The code execution is successful.

```
main.c
4
5 int main()
6 {
7     char plain[100];
8     char key[]="QWERTYUIOPASDFGHJKLZXCVBNM";
9     int i;
10
11     printf("Enter Plaintext: ");
12     scanf("%s",plain);
13
14     printf("Cipher Text: ");
15
16     for(i=0;plain[i]!='\0';i++)
17     {
18         if(isupper(plain[i]))
19             printf("%c",key[plain[i]-'A']);
20         else if(islower(plain[i]))
21             printf("%c",tolower(key[plain[i]-'a']));
22         else
23             printf("%c",plain[i]);
24     }
25
26     return 0;
27 }
```

Output

Enter Plaintext: vimal
Cipher Text: codqs
=== Code Execution Successful ===