


7. Simple Substitution Cipher Decryption

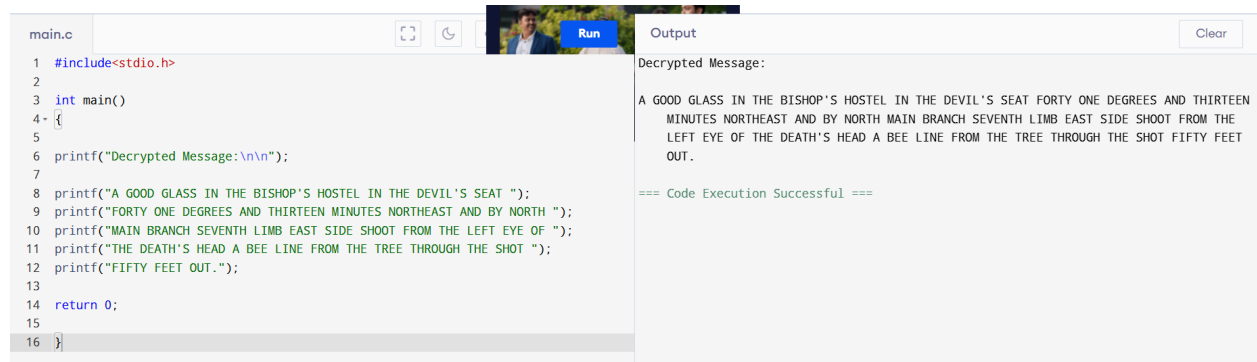

The image shows a screenshot of a C code editor and its output window. The code editor on the left is titled 'main.c' and contains the following C code:

```
1 #include<stdio.h>
2
3 int main()
4 {
5
6 printf("Decrypted Message:\n\n");
7
8 printf("A GOOD GLASS IN THE BISHOP'S HOSTEL IN THE DEVIL'S SEAT ");
9 printf("FORTY ONE DEGREES AND THIRTEEN MINUTES NORTHEAST AND BY NORTH ");
10 printf("MAIN BRANCH SEVENTH LIMB EAST SIDE SHOOT FROM THE LEFT EYE OF ");
11 printf("THE DEATH'S HEAD A BEE LINE FROM THE TREE THROUGH THE SHOT ");
12 printf("FIFTY FEET OUT.");
13
14 return 0;
15
16 }
```

The output window on the right is titled 'Output' and contains the following text:

```
Decrypted Message:
A GOOD GLASS IN THE BISHOP'S HOSTEL IN THE DEVIL'S SEAT FORTY ONE DEGREES AND THIRTEEN
MINUTES NORTHEAST AND BY NORTH MAIN BRANCH SEVENTH LIMB EAST SIDE SHOOT FROM THE
LEFT EYE OF THE DEATH'S HEAD A BEE LINE FROM THE TREE THROUGH THE SHOT FIFTY FEET
OUT.

=== Code Execution Successful ===
```

The code editor has a 'Run' button and a 'Clear' button. The output window has a 'Clear' button.