

Module 2

Introducing Classes: Class Fundamentals, Declaring Objects, Assigning Object Reference Variables, Introducing Methods, Constructors, The this Keyword, Garbage Collection. Methods and Classes: Overloading Methods, Objects as Parameters, Argument Passing, Returning Objects, Recursion, Access Control, Understanding static, Introducing final, Introducing Nested and Inner Classes.

INTRODUCING CLASSES

The class is at the core of Java. It is the logical construct upon which the entire Java language is built because it defines the shape and nature of an object. As such, the class forms the basis for object-oriented programming in Java.

Class Fundamentals

Perhaps the most important thing to understand about a class is that it defines a new data type. Once defined, this new type can be used to create objects of that type. Thus, a class is a template for an object, and an object is an instance of a class. Because an object is an instance of a class, you will often see the two words object and instance used interchangeably.

The General Form of a Class

A class is declared by use of the class keyword.

A simplified general form of a class definition is shown here:

```
class classname {  
    type instance-variable1;  
  
    type instance-variable2;  
    // ...  
    type instance-variableN;  
  
    type methodname1(parameter-list) {  
        // body of method  
    }  
    type methodname2(parameter-list) {  
        // body of method  
    }  
    // ...  
    type methodnameN(parameter-list) {  
        // body of method  
    }  
}
```

The data, or variables, defined within a class are called instance variables. The code is contained within methods. Collectively, the methods and variables defined within a class are called members of the class.

```
/* A program that uses the Box class.

   Call this file BoxDemo.java
*/
class Box {
    double width;
    double height;
    double depth;
}

// This class declares an object of type Box.
class BoxDemo {
    public static void main(String args[]) {
        Box mybox = new Box();
        double vol;

        // assign values to mybox's instance variables
        mybox.width = 10;
        mybox.height = 20;
        mybox.depth = 15;

        // compute volume of box
        vol = mybox.width * mybox.height * mybox.depth;

        System.out.println("Volume is " + vol);
    }
}
```

You should call the file that contains this program BoxDemo.java, because the main() method is in the class called BoxDemo, not the class called Box. When you compile this program, you will find that two .class files have been created, one for Box and one for BoxDemo. The Java compiler automatically puts each class into its own .class file. It is not necessary for both the Box and the BoxDemo class to actually be in the same source file. You could put each class in its own file, called Box.java and BoxDemo.java, respectively. To run this program, you must execute BoxDemo.class. When you do, you will see the following output:

Volume is 3000.0

Declaring Objects

When you create a class, you are creating a new data type. You can use this type to declare objects of that type. However, obtaining objects of a class is a two-step process. First, you must declare a variable of the class type. This variable does not define an object. Instead, it is simply a variable that can refer to an object. Second, you must acquire an actual, physical copy of the object and assign it to that variable. You can do this using the new operator. The new operator dynamically allocates (that is, allocates at run time) memory for an object and returns a reference to it. This reference is, more or less, the address in memory of the object allocated by new. This reference is then stored in the variable.

In the preceding sample programs, a line similar to the following is used to declare an object of type **Box**:

```
Box mybox = new Box();
```


This statement combines the two steps just described. It can be rewritten like this to show each step more clearly:

```
Box mybox; // declare reference to object
mybox = new Box(); // allocate a Box object
```

A Closer Look at new

As just explained, the new operator dynamically allocates memory for an object. It has this general form:

```
class-var = new classname ( );
```

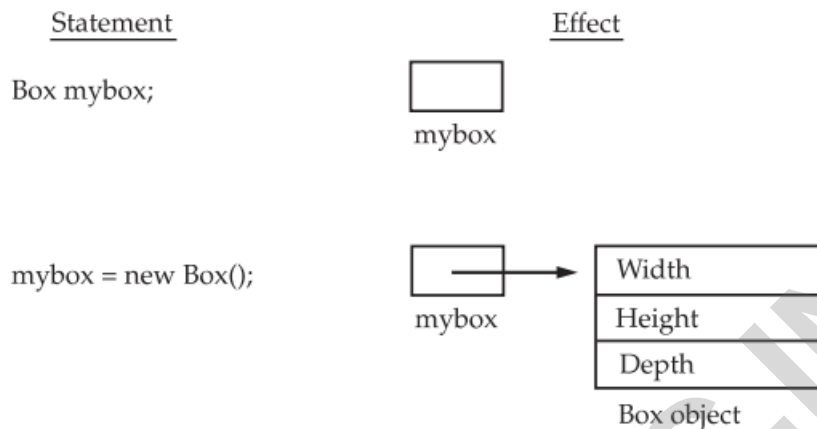

Here, class-var is a variable of the class type being created. The classname is the name of the class that is being instantiated. The class name followed by parentheses specifies the constructor for the class. A constructor defines what occurs when an object of a class is created.

Introducing Methods

classes usually consist of two things: instance variables and methods.

This is the general form of a method:

```
type name(parameter-list)
{
    // body of method
}
```

Here, type specifies the type of data returned by the method. This can be any valid type, including class types that you create. If the method does not return a value, its return type must be void. The name of the method is specified by name. This can be any legal identifier other than those already used by other items within the current scope. The parameter-list is a sequence of type and identifier pairs separated by commas. Parameters are essentially variables that receive the value of the arguments passed to the method when it is called. If the method has no parameters, then the parameter list will be empty. Methods that have a return type other than void return a value to the calling routine using the following form of the return statement:

```
return value;
```

Here, value is the value returned

Adding a Method to the Box Class

```
// This program includes a method inside the box class.
```

```
class Box {  
    double width;  
    double height;  
    double depth;  
  
    // display volume of a box  
    void volume() {  
        System.out.print("Volume is ");  
        System.out.println(width * height * depth);  
    }  
}
```

```
class BoxDemo3 {  
    public static void main(String args[]) {
```

```
        Box mybox1 = new Box();  
        Box mybox2 = new Box();  
  
        // assign values to mybox1's instance variables  
        mybox1.width = 10;  
        mybox1.height = 20;  
        mybox1.depth = 15;  
  
        /* assign different values to mybox2's  
           instance variables */  
        mybox2.width = 3;  
        mybox2.height = 6;  
        mybox2.depth = 9;  
  
        // display volume of first box  
        mybox1.volume();  
  
        // display volume of second box  
        mybox2.volume();  
    }  
}
```

This program generates the following output, which is the same as the previous version.

```
Volume is 3000.0  
Volume is 162.0
```

Returning a Value

```
class Box {
    double width;
    double height;
    double depth;

    // compute and return volume
    double volume() {
        return width * height * depth;
    }
}

class BoxDemo4 {
    public static void main(String args[]) {
        Box mybox1 = new Box();
        Box mybox2 = new Box();
        double vol;

        // assign values to mybox1's instance variables
        mybox1.width = 10;
        mybox1.height = 20;
        mybox1.depth = 15;

        /* assign different values to mybox2's
           instance variables */
        mybox2.width = 3;
        mybox2.height = 6;
        mybox2.depth = 9;

        // get volume of first box
        vol = mybox1.volume();
        System.out.println("Volume is " + vol);

        // get volume of second box
        vol = mybox2.volume();
        System.out.println("Volume is " + vol);
    }
}
```

There are two important things to understand about returning values:

- The type of data returned by a method must be compatible with the return type specified by the method. For example, if the return type of some method is boolean, you could not return an integer.
- The variable receiving the value returned by a method (such as vol, in this case) must also be compatible with the return type specified for the method.

Constructors

A constructor initializes an object immediately upon creation. It has the same name as the class in which it resides and is syntactically similar to a method. Once defined, the constructor is automatically called when the object is created, before the new operator completes.

```
/* Here, Box uses a constructor to initialize the
   dimensions of a box.
*/
class Box {
    double width;
    double height;
    double depth;

    // This is the constructor for Box.
    Box() {
        System.out.println("Constructing Box");
        width = 10;
        height = 10;
        depth = 10;
    }

    // compute and return volume
    double volume() {
        return width * height * depth;
    }
}

class BoxDemo6 {
    public static void main(String args[]) {
        // declare, allocate, and initialize Box objects
        Box mybox1 = new Box();
        Box mybox2 = new Box();

        double vol;

        // get volume of first box
        vol = mybox1.volume();
        System.out.println("Volume is " + vol);

        // get volume of second box
        vol = mybox2.volume();
        System.out.println("Volume is " + vol);
    }
}
```

When this program is run, it generates the following results:

```
Constructing Box
Constructing Box
Volume is 1000.0
Volume is 1000.0
```

Parameterized Constructors

While the Box() constructor in the preceding example does initialize a Box object, it is not very useful—all boxes have the same dimensions. What is needed is a way to construct Box objects of various dimensions. The easy solution is to add parameters to the constructor.

```
/* Here, Box uses a parameterized constructor to
   initialize the dimensions of a box.
*/
class Box {
    double width;
    double height;
    double depth;

    // This is the constructor for Box.
    Box(double w, double h, double d) {
        width = w;
        height = h;
        depth = d;
    }

    // compute and return volume
    double volume() {
        return width * height * depth;
    }
}
```

```
class BoxDemo7 {
    public static void main(String args[]) {
        // declare, allocate, and initialize Box objects
        Box mybox1 = new Box(10, 20, 15);
        Box mybox2 = new Box(3, 6, 9);

        double vol;

        // get volume of first box
        vol = mybox1.volume();
        System.out.println("Volume is " + vol);

        // get volume of second box
        vol = mybox2.volume();
        System.out.println("Volume is " + vol);
    }
}
```

The output from this program is shown here:

```
Volume is 3000.0
Volume is 162.0
```

As you can see, each object is initialized as specified in the parameters to its constructor.

The this Keyword

Sometimes a method will need to refer to the object that invoked it. To allow this, Java defines the `this` keyword. `this` can be used inside any method to refer to the current object. That is, `this` is always a reference to the object on which the method was invoked. You can use `this` anywhere a reference to an object of the current class' type is permitted. To better understand what `this` refers to, consider the following version of `Box()`:

```
// A redundant use of this.
Box(double w, double h, double d) {
    this.width = w;
    this.height = h;
    this.depth = d;
}
```

Garbage Collection

Java handles deallocation for you automatically. The technique that accomplishes this is called garbage collection. It works like this: when no references to an object exist, that object is assumed to be no longer needed, and the memory occupied by the object can be reclaimed.

- The `finalize()` Method

if an object is holding some non-Java resource such as a file handle or character font, then you might want to make sure these resources are freed before an object is destroyed. To handle such situations, Java provides a mechanism called finalization. By using finalization, you can define specific actions that will occur when an object is just about to be reclaimed by the garbage collector.

To add a finalizer to a class, you simply define the `finalize()` method. The Java run time calls that method whenever it is about to recycle an object of that class. Inside the `finalize()` method, you will specify those actions that must be performed before an object is destroyed.

The **`finalize()`** method has this general form:

```
protected void finalize()
{
    // finalization code here
}
```

Overloading Methods

In Java, it is possible to define two or more methods within the same class that share the same name, as long as their parameter declarations are different. When this is the case, the methods are said to be overloaded, and the process is referred to as method overloading. Method overloading is one of the ways that Java supports polymorphism.

When an overloaded method is invoked, Java uses the type and/or number of arguments as its guide to determine which version of the overloaded method to actually call. Thus, overloaded methods must differ in the type and/or number of their parameters.

Here is a simple example that illustrates method overloading:

```
// Demonstrate method overloading.
class OverloadDemo {
    void test() {
        System.out.println("No parameters");
    }

    // Overload test for one integer parameter.
    void test(int a) {
        System.out.println("a: " + a);
    }

    // Overload test for two integer parameters.
    void test(int a, int b) {
        System.out.println("a and b: " + a + " " + b);
    }

    // Overload test for a double parameter
    double test(double a) {
        System.out.println("double a: " + a);
        return a*a;
    }
}

class Overload {
    public static void main(String args[]) {
        OverloadDemo ob = new OverloadDemo();
        double result;

        // call all versions of test()
        ob.test();
        ob.test(10);
        ob.test(10, 20);
        result = ob.test(123.25);
        System.out.println("Result of ob.test(123.25): " + result);
    }
}
```

This program generates the following output:

```
No parameters
a: 10
a and b: 10 20
double a: 123.25
Result of ob.test(123.25): 15190.5625
```

Overloading Constructors

In addition to overloading normal methods, you can also overload constructor methods. In fact, for most real-world classes that you create, overloaded constructors will be the norm, not the exception.

```
class Box {
    double width;
    double height;
    double depth;

    // constructor used when all dimensions specified
    Box(double w, double h, double d) {
        width = w;
        height = h;
        depth = d;
    }

    // constructor used when no dimensions specified
    Box() {
        width = -1; // use -1 to indicate
        height = -1; // an uninitialized
        depth = -1; // box
    }

    // constructor used when cube is created
    Box(double len) {
        width = height = depth = len;
    }

    // compute and return volume
    double volume() {
        return width * height * depth;
    }
}

class OverloadCons {
    public static void main(String args[]) {
        // create boxes using the various constructors
        Box mybox1 = new Box(10, 20, 15);
        Box mybox2 = new Box();
        Box mycube = new Box(7);

        double vol;

        // get volume of first box
        vol = mybox1.volume();
        System.out.println("Volume of mybox1 is " + vol);

        // get volume of second box
        vol = mybox2.volume();
        System.out.println("Volume of mybox2 is " + vol);

        // get volume of cube
        vol = mycube.volume();
        System.out.println("Volume of mycube is " + vol);
    }
}
```

The output produced by this program is shown here:

```
Volume of mybox1 is 3000.0
Volume of mybox2 is -1.0
Volume of mycube is 343.0
```

Using Objects as Parameters

```
// Here, Box allows one object to initialize another.

class Box {
    double width;
    double height;
    double depth;

    // Notice this constructor. It takes an object of type Box.
    Box(Box ob) { // pass object to constructor
        width = ob.width;
        height = ob.height;
        depth = ob.depth;
    }

    // constructor used when all dimensions specified
    Box(double w, double h, double d) {
        width = w;
        height = h;
        depth = d;
    }

    // constructor used when no dimensions specified
    Box() {
        width = -1; // use -1 to indicate
        height = -1; // an uninitialized
        depth = -1; // box
    }

    // constructor used when cube is created
    Box(double len) {
        width = height = depth = len;
    }

    // compute and return volume
    double volume() {
        return width * height * depth;
    }
}

class OverloadCons2 {
    public static void main(String args[]) {
        // create boxes using the various constructors
    }
}
```

```

Box mybox1 = new Box(10, 20, 15);
Box mybox2 = new Box();
Box mycube = new Box(7);

Box myclone = new Box(mybox1); // create copy of mybox1

double vol;

// get volume of first box
vol = mybox1.volume();
System.out.println("Volume of mybox1 is " + vol);

// get volume of second box
vol = mybox2.volume();
System.out.println("Volume of mybox2 is " + vol);

// get volume of cube
vol = mycube.volume();
System.out.println("Volume of cube is " + vol);

// get volume of clone
vol = myclone.volume();
System.out.println("Volume of clone is " + vol);
}
}

```

Closer Look at Argument Passing

In general, there are two ways that a computer language can pass an argument to a subroutine. The first way is call-by-value. This approach copies the value of an argument into the formal parameter of the subroutine. Therefore, changes made to the parameter of the subroutine have no effect on the argument. The second way an argument can be passed is call-by-reference. In this approach, a reference to an argument (not the value of the argument) is passed to the parameter. Inside the subroutine, this reference is used to access the actual argument specified in the call. This means that changes made to the parameter will affect the argument used to call the subroutine.

```

// Primitive types are passed by value.
class Test {
    void meth(int i, int j) {
        i *= 2;
        j /= 2;
    }
}

class CallByValue {
    public static void main(String args[]) {
        Test ob = new Test();

        int a = 15, b = 20;

        System.out.println("a and b before call: " +
            a + " " + b);

        ob.meth(a, b);

        System.out.println("a and b after call: " +
            a + " " + b);
    }
}

```

The output from this program is shown here:

```

a and b before call: 15 20
a and b after call: 15 20

```

```
// Objects are passed through their references.

class Test {
    int a, b;

    Test(int i, int j) {
        a = i;
        b = j;
    }

    // pass an object
    void meth(Test o) {
        o.a *= 2;
        o.b /= 2;
    }
}

class PassObjRef {
    public static void main(String args[]) {
        Test ob = new Test(15, 20);

        System.out.println("ob.a and ob.b before call: " +
            ob.a + " " + ob.b);

        ob.meth(ob);

        System.out.println("ob.a and ob.b after call: " +
            ob.a + " " + ob.b);
    }
}
```

This program generates the following output:

```
ob.a and ob.b before call: 15 20
ob.a and ob.b after call: 30 10
```

Recursion

Java supports recursion. Recursion is the process of defining something in terms of itself. As it relates to Java programming, recursion is the attribute that allows a method to call itself. A method that calls itself is said to be recursive.

```
// A simple example of recursion.
class Factorial {
    // this is a recursive method
    int fact(int n) {
        int result;

        if(n==1) return 1;
        result = fact(n-1) * n;
        return result;
    }
}

class Recursion {
    public static void main(String args[]) {
        Factorial f = new Factorial();

        System.out.println("Factorial of 3 is " + f.fact(3));
        System.out.println("Factorial of 4 is " + f.fact(4));
        System.out.println("Factorial of 5 is " + f.fact(5));
    }
}
```

The output from this program is shown here:

```
Factorial of 3 is 6
Factorial of 4 is 24
Factorial of 5 is 120
```

INTRODUCING ACCESS CONTROL

How a member can be accessed is determined by the access modifier attached to its declaration. Java supplies a rich set of access modifiers. Some aspects of access control are related mostly to inheritance or packages. (A package is, essentially, a grouping of classes.)

Java's access modifiers are public, private, and protected. Java also defines a default access level. protected applies only when inheritance is involved.

When a member of a class is modified by public, then that member can be accessed by any other code. When a member of a class is specified as private, then that member can only be accessed by other members of its class. Now you can understand why main() has always been preceded by the public modifier. It is called by code that is outside the program—that is, by the Java run-time system. When no access modifier is used, then by default the member of a class is public within its own package, but cannot be accessed outside of its package.

UNDERSTANDING STATIC

When a member is declared static, it can be accessed before any objects of its class are created, and without reference to any object. You can declare both methods and variables to be static. The most common example of a static member is main(). main() is declared as static because it must be called before any objects exist.

Methods declared as static have several restrictions:

- They can only directly call other static methods.
- They can only directly access static data.
- They cannot refer to this or super in any way. (The keyword super relates to inheritance and is described in the next chapter.)

```
// Demonstrate static variables, methods, and blocks.
class UseStatic {
    static int a = 3;
    static int b;

    static void meth(int x) {
        System.out.println("x = " + x);
        System.out.println("a = " + a);
        System.out.println("b = " + b);
    }

    static {
        System.out.println("Static block initialized.");
        b = a * 4;
    }

    public static void main(String args[]) {
        meth(42);
    }
}
```

Here is the output of the program:

```
Static block initialized.  
x = 42  
a = 3  
b = 12
```

INTRODUCING FINAL

A field can be declared as final. Doing so prevents its contents from being modified, making it, essentially, a constant. This means that you must initialize a final field when it is declared. You can do this in one of two ways: First, you can give it a value when it is declared. Second, you can assign it a value within a constructor.

```
final int FILE_NEW = 1;  
final int FILE_OPEN = 2;  
final int FILE_SAVE = 3;  
final int FILE_SAVEAS = 4;  
final int FILE_QUIT = 5;
```

It is a common coding convention to choose all uppercase identifiers for final fields, as this example shows. In addition to fields, both method parameters and local variables can be declared final. Declaring a parameter final prevents it from being changed within the method. Declaring a local variable final prevents it from being assigned a value more than once.

Introducing Nested and Inner Classes

It is possible to define a class within another class; such classes are known as nested classes. The scope of a nested class is bounded by the scope of its enclosing class. A nested class has access to the members, including private members, of the class in which it is nested. However, the enclosing class does not have access to the members of the nested class. A nested class that is declared directly within its enclosing class scope is a member of its enclosing class. It is also possible to declare a nested class that is local to a block. There are two types of nested classes: static and non-static. A static nested class is one that has the static modifier applied. Because it is static, it must access the non-static members of its enclosing class through an object. That is, it cannot refer to non-static members of its enclosing class directly. Because of this restriction, static nested classes are seldom used. The most important type of nested class is the inner class. An inner class is a non-static nested class. It has access to all of the variables and methods of its outer class and may refer to them directly in the same way that other non-static members of the outer class do.

```
// Demonstrate an inner class.  
class Outer {  
    int outer_x = 100;  
  
    void test() {  
        Inner inner = new Inner();  
        inner.display();  
    }  
  
    // this is an inner class  
    class Inner {  
        void display() {  
            System.out.println("display: outer_x = " + outer_x);  
        }  
    }  
}  
  
class InnerClassDemo {  
    public static void main(String args[]) {  
        Outer outer = new Outer();  
        outer.test();  
    }  
}
```