Vinayak Yadav

PipedPeer Major Project Report

Project

Document Details

Submission ID
trn:oid:::3618:157031417

Submission Date
Nov 3, 2026, 5:27 PM GMT+5:30

Download Date
Nov 3, 2026, 5:32 PM GMT+5:30

File Name
main.pdf

File Size
5.7 MB

72 Pages

22,937 Words

115,989 Characters

9% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

Match Groups

86 Not Cited or Quoted 7%
Matches with neither in-text citation nor quotation marks

0 Missing Quotations 0%
Matches that are still very similar to source material

15 Missing Citation 1%
Matches that have quotation marks, but no in-text citation

11 Cited and Quoted 0%
Matches with in-text citation present, but no quotation marks

Top Sources

8% Internet sources
7% Publications
8% Submitted works (Student Papers)

Match Groups

- **86** Not Cited or Quoted 7%
  Matches with neither in-text citation nor quotation marks
- **0** Missing Quotations 0%
  Matches that are still very similar to source material
- **15** Missing Citation 1%
  Matches that have quotation marks, but no in-text citation
- **11** Cited and Quoted 0%
  Matches with in-text citation present, but no quotation marks

Top Sources

8% Internet sources
7% Publications
8% Submitted works (Student Papers)

Top Sources

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1	Internet	arxiv.org 1%
2	Student papers	Sardar Patel Institute of Technology on 2026-02-13 <1%
3	Student papers	Sardar Patel Institute of Technology on 2026-06-23 <1%
4	Internet	export.arxiv.org <1%
5	Internet	media-publisher.ru <1%
6	Publication	Wang Xiong, Xi Wang, Shufeng Chen, Zhuocheng Ge, Tinhang Hui, Weilun Han, Ya... <1%
7	Internet	www.thinkmind.org <1%
8	Publication	Haifeng Zheng, Min Gao, Zhizhang Chen, Xinxin Feng. "A Distributed Hierarchical ... <1%
9	Student papers	Moodle2025 on 2026-08-04 <1%
10	Internet	dspace.cvut.cz <1%

11 Publication
Sambi Reddy Gottam, Udit Narayana Kar. "Power Controlled Resource Allocation ... <1%

12 Student papers
Sardar Patel Institute of Technology on 2026-09-30 <1%

13 Internet
web.njit.edu <1%

14 Student papers
Tampere University on 2026-04-14 <1%

15 Student papers
Aligarh Muslim University, Aligarh on 2026-05-18 <1%

16 Publication
Haozhao Wang, Zhihao Qu, Qihua Zhou, Haobo Zhang, Boyuan Luo, Wenchao Xu, ... <1%

17 Student papers
University of Newcastle upon Tyne on 2025-09-05 <1%

18 Internet
uwaterloo.ca <1%

19 Publication
Libo Feng, Chenxi Wang, Zhenli He, Mengzhuang Liu, Jixian Zhang, Keqin Li. "Fair ... <1%

20 Student papers
Sardar Patel Institute of Technology on 2025-11-28 <1%

21 Publication
Al Lahham, Mhd Saria. "Quantifying Computational Reliability in Extreme Edge C... <1%

22 Student papers
Associatie K.U.Leuven on 2026-06-06 <1%

23 Publication
Bommakanti L.V.N. Sowmya, Balivada Parnika Srija, Parvathy Chaitanya T, Jallu S... <1%

24 Internet
Karl-Johan Grinnemo, Tom Jones, Gorry Fairhurst, David Ros, Anna Brunstrom, Pe... <1%

25 Publication
Mausmi Verma, Uma Rathore Bhatt, Raksha Upadhyay, Vijay Bhat. "Streamlining ... <1%

26 Publication
Philip Branch, Phillip Weinstock. "Functional Programming for the Internet of Thi... <1%

27 Internet
i.cs.hku.hk <1%

28 Student papers
Liberty University on 2026-07-06 <1%

29 Student papers
University of York on 2026-11-01 <1%

30 Publication
Yoshio Okiyama. "PyFMO: A Python Framework for Fragment Molecular Orbital C... <1%

31 Internet
dspace.lboro.ac.uk <1%

32 Internet
researchonline.ljmu.ac.uk <1%

33 Publication
Peichen Yu, Chao Wang, Yixian Tang, Weikang Zhang, Lichuan Zou, Shaoyang Gu... <1%

34 Internet
www.cs.newpaltz.edu <1%

35 Internet
www.lingayasvidyapeeth.edu.in <1%

36 Student papers
Temasek Polytechnic on 2026-10-08 <1%

37 Internet
kgr.ac.in <1%

38 Student papers
Sardar Patel Institute of Technology on 2026-06-22 <1%

39 Student papers

The Independent Institute of Education (IIE) on 2025-08-27 <1%

40 Internet

www.neat-project.org <1%

41 Student papers

Middlesex University on 2026-04-24 <1%

42 Publication

Moradi Kalarde, Faeze. "Communication Design for Dynamic Distributed Learnin... <1%

43 Student papers

Maejo University on 2026-07-20 <1%

44 Internet

mobiuk.org <1%

45 Student papers

Imperial College of Science, Technology and Medicine on 2020-06-15 <1%

46 Student papers

University of Edinburgh on 2024-07-15 <1%

47 Internet

recipp.ipp.pt <1%

48 Publication

"Table of Contents", IEEE Transactions on Vehicular Technology, 2023 <1%

49 Publication

D. Anderson, A. Bashyal, M. Diefenthaler, C. Fanelli et al. "Scalable AI-assisted wor... <1%

50 Student papers

Sardar Patel Institute of Technology on 2018-04-20 <1%

51 Student papers

Yeditepe University on 2012-01-09 <1%

52 Internet

dspace.dtu.ac.in:8080 <1%

53	Publication	
Arash Tavakkol, Pooyan Mehrvarzy, Mohammad Arjomand, Hamid Sarbazi-Azad. ...		<1%
54	Student papers	
Technological University Dublin on 2026-10-26		<1%
55	Internet	
link.springer.com		<1%
56	Internet	
technologyjournal.net		<1%
57	Publication	
"Advances in Knowledge Discovery and Data Mining", Springer Science and Busin...		<1%
58	Publication	
Fan, Shuyuan. "Pier: Efficient Large Language Model Pretraining With Relaxed Gl...		<1%
59	Internet	
digital.library.unt.edu		<1%
60	Internet	
kth.diva-portal.org		<1%
61	Student papers	
HTM (Haridus- ja Teadusministeerium) on 2023-12-25		<1%
62	Student papers	
University of Lancaster on 2019-12-09		<1%
63	Student papers	
Vellore Institute of Technology Chennai Campus on 2026-10-20		<1%
64	Internet	
pubmed.ncbi.nlm.nih.gov		<1%
65	Internet	
technodocbox.com		<1%
66	Student papers	
RDI Distance Learning on 2026-10-20		<1%

67 Internet
ai-safety-atlas.com <1%

68 Internet
digitalassets.lib.berkeley.edu <1%

69 Internet
minerva.usc.gal <1%

70 Internet
speed.cs.nycu.edu.tw <1%

71 Student papers
National Institute of Technology, Warangal, Telangana, India on 2026-04-15 <1%

72 Publication
Nikhil Singh, Anurag Singh Baghel, Priyanka Mishara. "Modularity and Lazy Evalu... <1%

73 Student papers
RDI Distance Learning on 2025-11-18 <1%

74 Student papers
SRM University AP Amravati on 2026-10-02 <1%

75 Student papers
Sardar Patel Institute of Technology on 2025-11-26 <1%

76 Internet
cse.buffalo.edu <1%

77 Internet
github.com <1%

78 Internet
jira.whamcloud.com <1%

79 Internet
pure.port.ac.uk <1%

80 Internet
www.cs.mcgill.ca <1%

81 Publication

Andreas Muller, Andreas Klenk, Georg Carle. "ANTS - A Framework for Knowledge... <1%

82 Student papers

Banasthali University on 2026-10-19 <1%

83 Student papers

Universitat Oberta de Catalunya on 2026-10-10 <1%

84 Publication

Hajime Tazaki, Akira Moroo, Yohei Kuga, Ryo Nakamura. "How to design a library ... <1%

85 Student papers

Imperial College of Science, Technology and Medicine on 2017-09-14 <1%

PipedPeer: Zero-Configuration Distributed Computing via Recursive, Decentralised Coordination

35 submitted in partial fulfilment of the requirement
for the award of the Degree of

Bachelor of Technology

in

Computer Engineering

by

Yateen Vaviya (2023300251)

Vinayak Yadav (2023300264)

Sahil Gupta (2023300072)

3 under the guidance of

Dr. Rupali Sawant



Department of Computer Engineering
Bharatiya Vidya Bhavan's
Sardar Patel Institute of Technology
(Autonomous Institute Affiliated to University of Mumbai)
Munshi Nagar, Andheri (W), Mumbai-400058
University of Mumbai

November 2026

Certificate

This is to certify that the Project entitled "PipedPeer: Zero-Configuration Distributed Computing via Recursive, Decentralised Coordination" has been completed to our satisfaction by Yateen Vaviya, Vinayak Yadav and Sahil Gupta under the guidance of Dr. Rupali Sawant for the award of Degree of Bachelor of Technology in Computer Engineering from University of Mumbai.

Certified by

Dr. Rupali Sawant
Project Guide

Dr. Sudhir Dhage
Head of Department

Dr. Bhalchandra Chaudhari
Principal

Department of Computer Engineering
Bharatiya Vidya Bhavan's
Sardar Patel Institute of Technology
(Autonomous Institute Affiliated to University of Mumbai)
Munshi Nagar, Andheri (W), Mumbai-400058
University of Mumbai
November 2026

Project Approval Certificate

This is to certify that the Project entitled "PipedPeer: Zero-Configuration Distributed Computing via Recursive, Decentralised Coordination" by Yateen Vaviya, Vinayak Yadav and Sahil Gupta is found to be satisfactory and is approved for the award of Degree of Bachelor of Technology in Computer Engineering from University of Mumbai.

External Examiner

(signature)

Name:

Date:

Internal Examiner

(signature)

Name:

Date:

Seal of the Institute

Statement by the Candidates

We wish to state that the work embodied in this thesis titled "PipedPeer: Zero-Configuration Distributed Computing via Recursive, Decentralised Coordination" forms our own contribution to the work carried out under the guidance of Dr. Rupali Sawant at the Sardar Patel Institute of Technology. We declare that this written submission represents our ideas in our own words and where others' ideas or words have been included, we have adequately cited and referenced the original sources. We also declare that we have adhered to all principles of academic honesty and integrity and have not misrepresented or fabricated or falsified any idea/data/fact/source in our submission.

Name and Signature:

1. **Yateen Vaviya (2023300251)**

2. **Vinayak Yadav (2023300264)**

3. **Sahil Gupta (2023300072)**

Acknowledgements

50 We express our sincere gratitude to our guide, Dr. Rupali Sawant, for the guidance and encouragement given throughout this project, and for the freedom we were given in shaping it.

37 38 We thank our examiners for their advice, and Dr. Sudhir Dhage, Head of the Department of Computer Engineering, and its staff for the facilities required to carry out this work.

We thank our families and well-wishers for their constant encouragement.

Contents

List of Algorithms ix

List of Abbreviations x

Abstract xi

1 Introduction 1
- 1.1 Problem Statement . . . 1
- 1.2 Objectives . . . 3
- 1.3 Scope . . . 3
- 1.4 Technologies Used . . . 4
- 1.5 Assumptions and Constraints . . . 4
- 1.6 Layout of the Report . . . 5

2 Literature Survey 6

3 Design 13
- 3.1 System Architecture . . . 13
- 3.2 Data Flow Diagram . . . 13
  - Level 0 — Context Diagram . . . 13
  - Level 1 — System Decomposition . . . 16
- 3.3 Use Case Diagram . . . 17
- 3.4 Sequence Diagram . . . 17

4 Implementation 19
- 4.1 Node Discovery and the Address Book . . . 19
- 4.2 Joining Across Networks . . . 19
- 4.3 Security and Identity . . . 22
- 4.4 Placement and Scoring . . . 23
- 4.5 The Lease Protocol . . . 25
- 4.6 Reproducing the Environment . . . 26
- 4.7 Closure Transfer and Cache Reuse . . . 27
- 4.8 Execution and Isolation . . . 28

turnitin Page 16 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

4.9 Transparent Interception 30
4.9.1 Parallel Maps 30
4.9.2 Data-Parallel Training 33
4.10 The Cost Model 36
4.11 Fault Tolerance 38
4.12 Resource Estimation and Run Reporting 39

5 Results **40**
5.1 Evaluation Setup 40
5.2 Functional Verification 42
5.3 Environment Cache 43
5.4 Interception and Sandbox Overheads 43
5.5 Distribution Across Machines 44
5.6 Training 45
5.7 Fault Tolerance and Recovery 47
5.8 End-to-End Runs in the LAN Lab 47
5.9 Measurements Between Real Machines 47
5.10 Comparative Analysis 50

52 **6 Conclusion** **52**
6.1 Conclusion 52
6.2 Limitations 52

7 Future Scope **54**

8 Research Publication **55**
8.1 PipedPeer: Running Unmodified Python Across a Small Group's Machines Without a Configured Cluster 55

Bibliography **57**

A Implementation Size and Further Measurements **60**
A.1 Scale of the Implementation 60
A.2 Further Measurements 60

turnitin Page 16 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

List of Figures

3.1 PipedPeer system design 14
3.2 Level 0 DFD (context diagram) 14
3.3 Level 1 DFD 16
3.4 Use case diagram 17
3.5 Sequence diagram of one job 18

4.1 Joining across networks 20
4.2 The three layers of trust 22
4.3 Placement flow 24
4.4 Lease states 25
4.5 Closure cache and transfer 27
4.6 The sandbox 28
4.7 Shim injection 30
4.8 Hash shuffle 33
4.9 Training synchronisation over the daemon port 36
4.10 Cost model decision regions 38
4.11 Racing local and remote work 39

5.1 Cold and warm submissions 43
5.2 Cost of interception 44
5.3 Sandbox start cost 44
5.4 Exact and fast synchronisation 46

List of Tables

1.1 Technologies used in PipedPeer 4

2.1 Summary of the surveyed work 11

3.1 Subsystems and their responsibilities 15

4.1 Intercepted primitives and their distribution strategies 32

5.1 The three test models 41
5.2 Two-rank ring at the default interval 46
5.3 Failure drills 48
5.4 End-to-end steps, first run and cached 48
5.5 Two laptops over the internet (RTX 3060 and RTX 3050) 49
5.6 Further measurements between real machines 50
5.7 PipedPeer against existing systems 51

A.1 Implementation size 60
A.2 Further measurements 60

List of Algorithms

4.1 Dividing a chunk of n items among devices by measured speed 31
4.2 Admitting a training ring and choosing its synchronisation 35

List of Abbreviations

AI	Artificial Intelligence
API	Application Programming Interface
BLAS	Basic Linear Algebra Subprograms
BOINC	Berkeley Open Infrastructure for Network Computing
CLI	Command-Line Interface
CPU	Central Processing Unit
CSV	Comma-Separated Values
CUDA	Compute Unified Device Architecture
D2D	Device-to-Device
DDP	Distributed Data Parallel (PyTorch)
DFD	Data Flow Diagram
DiLoCo	Distributed Low-Communication training
EDA	Event-Driven Architecture
FLOP	Floating-Point Operation
GFLOP	Giga (billion) Floating-Point Operations
GPU	Graphics Processing Unit
HMAC	Hash-based Message Authentication Code
HTTP	Hypertext Transfer Protocol
IGD	Internet Gateway Device
IoT	Internet of Things
IP	Internet Protocol
IPC	Inter-Process Communication
JSON	JavaScript Object Notation
LAN	Local Area Network
MEC	Multi-access Edge Computing
MLP	Multi-Layer Perceptron
MQTT	Message Queuing Telemetry Transport
NAT	Network Address Translation
NAT-PMP	NAT Port Mapping Protocol
NCCL	NVIDIA Collective Communications Library
OCI	Open Container Initiative
OTP	Open Telecom Platform
PCP	Port Control Protocol
POSIX	Portable Operating System Interface
QUIC	QUIC transport protocol (originally Quick UDP Internet Connections)
REST	Representational State Transfer
RFC	Request for Comments
ROCm	Radeon Open Compute platform
RTT	Round-Trip Time
SGD	Stochastic Gradient Descent
SQLite	SQL (Structured Query Language) database library
STUN	Session Traversal Utilities for NAT
SVD	Singular Value Decomposition
TCP	Transmission Control Protocol
TLS	Transport Layer Security
TUI	Text-based User Interface
UDP	User Datagram Protocol
UPnP	Universal Plug and Play
URL	Uniform Resource Locator
VM	Virtual Machine
VPN	Virtual Private Network
VRAM	Video Random-Access Memory

Abstract

Idle computers are common in homes, offices and college laboratories, but using them for a Python script normally requires a configured cluster, a program rewritten against a cluster API, and machines that can reach one another through their routers. This report presents **PipedPeer**, a system that runs an unmodified Python script on other machines without a configured cluster, a rewritten program or an open route between the machines. Each machine runs one daemon from a single binary; the submitting machine builds the script's environment as a pinned **Nix closure**, places the job by live capacity, sends only the store paths the chosen machine lacks, and runs the job in a `crun` sandbox under its own memory ceiling. Placement runs in the submitting client under a lease, and every distributed path falls back to a local one. A shim injected into the interpreter **intercepts the parallel primitives the script already uses** — `multiprocessing.Pool`, `joblib`, pandas, NumPy and torch data-parallel training — and spreads their work across machines in proportion to measured throughput, only when a cost model predicts a gain. Machines on different networks meet through an introducer that every daemon provides, then connect directly over QUIC links, authenticated by each node's key and a shared cluster secret, after port mapping or hole punching; no relay carries job data and no central server exists. NAT traversal was evaluated on a two-site container testbed; the runs between physical machines in different homes used Tailscale. An Android phone under Termux joins as a worker for parallel chunks.

In a container lab, a job whose environment is already in place starts in a median of 0.83 s against 23.4 s for its first submission. Between two laptops in different homes, joined over Tailscale, a mixed CPU script finished in 13.3–14.6 s against 17.4–18.1 s on one laptop, while a small training model was faster on one GPU than split across both laptops. On a two-rank training ring simulated with all ranks in one process, synchronising every 32 steps instead of every step kept the mean validation loss over three seeds no more than 1% above one device's on every test model, and in a separate container-lab run (one seed) each rank sent 7.6 to 9.2 times fewer bytes. A mutation audit that disables each of 95 features in turn found that the test suite detects every one.

Keywords: Distributed Computing, Peer-to-Peer, NAT Traversal, Transparent Interception, Nix, Content-Addressed Caching, OCI Sandboxing, Cost-Based Scheduling, Data-Parallel Training, Fault Tolerance.

Chapter 1

Introduction

Much everyday computation is already parallel. A parameter sweep, a cross-validated model search, a simulation over many seeds or the training of a small network is written with `multiprocessing.Pool`, `joblib` or PyTorch, and runs on one machine because that is where it was written, while other machines nearby sit idle: the laptops of a project group, the workstations of a college laboratory after hours, a desktop at home. Using them is rarely worth the setup, so the work waits instead. This project sets out to make that choice free: a script uses other machines when that is faster, and runs as before when it is not.

1.1 Problem Statement

A developer with a laptop, a laboratory workstation and a spare desktop has a considerable amount of idle computing capacity and no practical way to use it. The frameworks that exist for distributed computation — Apache Spark [1], Ray [2], Dask [3] — presuppose a cluster that somebody has already configured: a head node, matching software on every worker, a scheduler process, and a network on which every machine can reach every other. Ordinary machines fail the last of these, since each sits behind its own home or campus router and accepts no inbound connection. The alternative, `ssh` with `rsync`, means reproducing the environment by hand on every machine and receiving no scheduling, isolation or fault tolerance in return.

Three distinct problems sit underneath this:

1. **The environment problem.** A script needs a particular interpreter and a particular set of libraries, and making a remote machine match the local one is the bulk of the work.
2. **The code problem.** Even with a matching environment, using more than one machine normally means rewriting the program against a cluster API.
3. **The reachability problem.** Machines on different networks cannot open a connection to one another without a VPN, port forwarding, or a relay that carries every byte between them.

PipedPeer addresses all three without asking the user to change the program. The environment is reproduced exactly by shipping a Nix closure; the program is distributed without modification by intercepting the parallel primitives it already uses; and machines on different networks are joined by a direct path through their routers, with an introducer that only tells each machine where the others are. No machine is a head node: coordination is done per job by the machine that submits it. The contributions of this work are:

1. **Peer-to-peer closure distribution.** Building on Nix's content-addressed store paths, signed closures are pushed between peers, only the store paths a receiver lacks are sent, and distributed work is offered only to peers that can run the closure (Sections 4.6 and 4.7).
2. **Transparent interception with measured work sharing.** Parallel primitives are substituted at import time, parallel maps are divided by a makespan solver over measured rates, and numerical work is gated by a cost model (Sections 4.9 and 4.10).
3. **Joining across networks without a relay**, through an introducer that only exchanges addresses and that every daemon serves (Section 4.2).
4. **Placement without a scheduler**: filters and a bounded score evaluated in the submitting client, with a three-phase lease (Sections 4.4 and 4.5).
5. **A fallback that preserves the result on every distributed path** (Section 4.11).
6. **Speed-weighted data-parallel training through the daemon**, with exact or fast synchronisation chosen by ring size (Section 4.9.2).
7. **An unprivileged per-job sandbox and a phone worker.** Each job runs in a `crun` container under its own memory ceiling, with the GPU driver files bound in one by one, and an Android phone under Termux joins as a worker for parallel chunks (Section 4.8).

The two words of the title are used in a precise sense. Coordination is *decentralised*: every daemon serves the introducer for its own cluster, placement is computed in the submitting client, and a training ring's lead is simply the node that runs rank 0 of that job, so no machine holds a role that the others depend on. It is *recursive* in that division repeats at each level, machines and then cores (Section 4.9).

turnitin Page 23 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

1.2 Objectives

1. To run an unmodified Python script on the best available machine, with results appearing in the user's working directory as though the script had run locally.
2. To reproduce the script's environment exactly on that machine, sending only the store paths that machine does not already hold.
3. To choose the machine from live capacity, treating architecture and GPU availability as hard requirements and load, memory and hardware as a ranking.
4. To distribute the parallel work inside the script with no code changes, only when doing so is expected to be faster than running it locally, and in proportion to each machine's measured throughput.
5. To join machines on different networks into one cluster with a single command, with no VPN, no port forwarding and no relay in the data path.
6. To authenticate every request, encrypt traffic between machines, isolate each job, and survive the loss of any worker without losing the run.
7. To require no manual installation on a new machine: a single binary whose setup command installs the remaining dependencies, without root privileges where the machine does not grant them.
8. To admit an Android phone as a worker for parallel chunks, alongside laptops and desktops.

1.3 Scope

Within scope and implemented are a Go daemon and CLI in a single binary; discovery on the local subnet and an address book of every path to every node; joining across networks by an introducer in every daemon, router port mapping, hole punching and QUIC links; a shared secret, pinned TLS and signed closures; reproducible Nix environments transferred as a path-level difference; placement by hard filters and a score, with a three-phase lease; per-job `crun` sandboxes under memory ceilings, with GPU passthrough and without root; transparent interception of `multiprocessing.Pool`, pandas, NumPy, `joblib` and scikit-learn, and torch data-parallel training; and Android phones as workers for parallel chunks. Out of scope are per-user authorisation (a cluster shares a single secret; Section 4.3), runtimes other than Python, relaying traffic for a peer that no direct path can reach (such a peer is reported and routed around), and any incentive mechanism for contributing capacity.

turnitin Page 23 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 24 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

1.4 Technologies Used

PipedPeer is written in Go, so that the client, the daemon and the coordinator ship as one static binary with no runtime to install, and it relies on established components for everything that is not specific to the problem: Nix for reproducible environments, `crun` and cgroups for isolation, QUIC and TLS for transport and security, and SQLite for the address book. The interception shim is written in Python, the language it intercepts. Table 1.1 lists each technology and its purpose.

Table 1.1: Technologies used in PipedPeer

Technology	Category	Purpose
Go 1.25	Core language	Daemon, CLI and coordinator in one static binary
`go-chi/chi`	HTTP	Routing for the daemon API
`gorilla/websocket`	Streaming	Live output from a running job
`quic-go`	Transport	Encrypted, multiplexed peer links over the punched UDP socket
`crypto/tls`, Ed25519	Security	Pinned TLS on the daemon port; node identity and signing keys
Nix (pinned)	Environments	Content-addressed closures; the store path is the cache key
`crun`	Sandboxing	OCI container per job, including GPU device passthrough
cgroup v2, `systemd-run`	Resources	Memory ceilings for the daemon and for each job
zstd (`klauspost/compress`)	Compression	Workspace, results and request bodies
`modernc.org/sqlite`	Storage	Address book, in pure Go so the binary stays static
`gopsutil`	Metrics	CPU, memory and process-tree measurements
Cobra; Bubble Tea, Lip Gloss	CLI, TUI	Command structure; live dashboard
`zerolog`	Logging	Structured, levelled logging
Python, cloudpickle	Interception	The shim, embedded in the binary; shipping closures by value

1.5 Assumptions and Constraints

- Every participating machine runs the same binary. `pipedpeer setup` installs Nix and `crun` when they are missing, and can do so without root by using a private Nix store.
- Workers run Linux, since `crun`, cgroups and the Nix store are Linux-specific;

turnitin Page 24 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 25 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

phones run Linux user space under Termux.

- Machines in a cluster share a single secret, created by the first machine's setup and carried to the others by an invite code.
- Joining across networks needs one reachable member or public introducer. Introducers carry no job data.
- Two machines between which no direct path exists cannot work together.
- The submitting process holds the lease of a parallel script and must remain alive for its duration; a single remote job can be detached.

1.6 Layout of the Report

- Chapter 2 surveys the work PipedPeer draws on.
- Chapter 3 gives the design: architecture, data flow, use cases and the sequence of a run.
- Chapter 4 describes the implementation of each mechanism, from discovery and joining across networks to interception, training and fault tolerance.
- Chapter 5 sets out the evaluation and its results.
- Chapter 6 concludes, with the limitations.
- Chapter 7 lists future scope, and Chapter 8 summarises the research paper drawn from this work.
- Appendix A holds the implementation's size and further measurements.

turnitin Page 25 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Chapter 2

Literature Survey

This chapter surveys work in the areas PipedPeer draws on: frameworks for distributed Python, reproducible environments and container runtimes, data-parallel training and gradient compression, lightweight sandboxing at the edge, fault tolerance and failure-transparent programming, portability in the Python ecosystem, scheduling, and collaborative task offloading. Each review states its bearing on the design of Chapters 3 and 4.

"Spark: Cluster Computing with Working Sets" [1] by M. Zaharia *et al.* keeps a working set in memory across parallel operations as resilient distributed datasets, which a lost partition rebuilds from its lineage, and runs iterative jobs up to ten times faster than MapReduce [4]. A program is written against the dataset API and runs on a cluster with a master, which is exactly the setup PipedPeer removes; its hash partitioning by key is the technique PipedPeer's dataframe shuffle uses (Section 4.9).

62 "Ray: A Distributed Framework for Emerging AI Applications" [2] by P. Moritz *et al.* unifies tasks and actors over a distributed scheduler and a sharded control store, and reaches millions of tasks per second. Ray offers a drop-in `multiprocessing.Pool` and a `joblib` backend, the closest existing answer to PipedPeer's code problem, but each needs a changed import and a running cluster with a head node on one network. PipedPeer substitutes the same primitives without the import and decides per call whether distributing them pays.

69 "Dask: Parallel Computation with Blocked Algorithms and Task Scheduling" [3] by M. Rocklin expresses NumPy- and pandas-like operations as graphs of blocked tasks run by a dynamic scheduler, so that arrays and dataframes larger than memory can be processed in parallel. Its interfaces mirror the libraries they replace, yet the program must still be written against Dask's collections. The out-of-core `read_csv` and row-block matrix products of Section 4.9 follow Dask's blocking idea while leaving the original pandas and NumPy calls in place.

"Towards Scalable Dataframe Systems" [5] by D. Petersohn *et al.* formalises the dataframe and its algebra, and presents Modin, which keeps the pandas API while partitioning the frame and running its operations in parallel on Ray or Dask. Modin is the nearest precedent for distributing pandas without rewriting it, yet it still needs

turnitin Page 27 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

a changed import and a running engine. BOINC [6] showed that volunteers' idle machines can serve real computation, but as a platform for specific projects with their own servers rather than a general executor.

Condor, now HTCondor, introduced cycle scavenging: Litzkow *et al.* [56] ran batch jobs on workstations whose owners were not using them, returned each machine as soon as its owner came back, and checkpointed a job so that it could resume elsewhere; Thain *et al.* [57] describe the system's growth into a matchmaking scheduler for pools of thousands of machines. Its premise, that idle machines nearby are worth harvesting and that the owner comes first, is PipedPeer's, and placement likewise leaves a busy machine to its user (Section 4.4). HTCondor, however, relies on a central manager that matches jobs to machines, and a job is submitted through a description file rather than run as an unmodified script.

"Nix: A Safe and Policy-Free System for Software Deployment" [7] by E. Dolstra *et al.* stores every package under a path named by a cryptographic hash of all its build inputs, so that versions coexist, dependencies are complete by construction, and a package's closure can be copied between machines exactly. With the package set pinned, that path names an environment identically on every machine, which makes it a cluster-wide cache key and lets a transfer send only the paths a peer lacks (Section 4.7). Nix itself decides nothing about where a job should run or how it reaches that machine.

The OCI Runtime Specification [8] defines a container as a root filesystem plus a configuration of namespaces, mounts, cgroups and devices, and `crun` [9] implements it in C with a small footprint and a fast start. Used directly, without an image format or a container daemon, the specification gives each job a minimal read-only root over the Nix store and a device model through which a GPU can be passed in (Section 4.8).

Five studies examine WebAssembly as a lighter sandbox at the edge. Sekigawa *et al.* [10] run WebAssembly modules as isolated compute units without a container daemon; Hoque and Harras [11] name an immature system interface, limited file-system and networking APIs and absent GPU support as the blocking gaps; Kakati and Brorsson [12] report 70–90% of native speed across x86_64, ARM64 and RISC-V; and Bachmeier *et al.* [13] and Khelifa *et al.* [14] find GPU acceleration immature and memory the dominant constraint for AI inference. The argument that a lightweight sandbox can replace a full container runtime carries over, but CPython with native extensions and CUDA libraries cannot run under WebAssembly, so a native environment is shipped as a Nix closure and run under an OCI runtime instead, at 15 to 21 ms more per job than the unprivileged Bubblewrap sandbox (`bwrap`) [60]

turnitin Page 27 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 28 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

(Section 5.4).

1 "PyTorch Distributed: Experiences on Accelerating Data Parallel Training" [15] by S. Li *et al.* describes DDP, which replicates the model, buckets gradients and overlaps their all-reduce with the backward pass, scaling near-linearly to 256 GPUs. It assumes ranks that open connections to one another on their own ports, usually inside one data centre. Machines behind different routers cannot, so PipedPeer leaves the model and optimiser to the script and routes the gradient exchange through its daemons (Section 4.9.2). Horovod [58] by A. Sergeev and M. Del Balso made the ring all-reduce, in which each of N workers sends and receives $2(N-1)/N$ of the gradient, the standard way to synchronise data-parallel training with a few changed lines; it too assumes that every rank can reach its neighbours in the ring. PipedPeer's butterfly reduction through the daemons gives each machine the same per-link volume over connections that the daemons have already established.

1 "8-Bit Approximations for Parallelism in Deep Learning" [16] by T. Dettmers compresses gradients to 8 bits for transfer while keeping model accuracy, and "1-Bit Stochastic Gradient Descent" [17] by F. Seide *et al.* quantises them to a single bit, carrying each step's quantisation error into the next (error feedback) so that convergence stays close to full precision. The two combine in PipedPeer's wire format: 8-bit values with one scale per block of 4096 and error feedback in both directions, about a quarter of the float32 volume.

68 "Don't Use Large Mini-Batches, Use Local SGD" [18] by T. Lin *et al.* shows that workers taking several local steps between averages communicate less and, in post-local SGD, generalise better than large-batch training. The observation explains why a periodically averaged ring can finish slightly below one device's loss (Section 5.6).

67 "DiLoCo: Distributed Low-Communication Training of Language Models" [19] by A. Douillard *et al.*, the work closest to PipedPeer's training path, trains replicas independently for hundreds of steps and merges their parameter changes with an outer Nesterov step, matching synchronous training on a language model while communicating about 500 times less. PipedPeer's fast synchronisation applies the same structure to links between homes. At its intervals of 2 to 64 steps, however, DiLoCo's outer momentum amplifies each averaged update about sevenfold, which failed the accuracy bar, so the merge is a plain average (Section 4.9.2).

1 "PowerSGD: Practical Low-Rank Gradient Compression for Distributed Optimization" [20] by T. Vogels *et al.* approximates each gradient matrix by a low-rank product found with one step of power iteration, with error feedback, and matches full-precision accuracy at high compression. Of ten methods tried at 4, 8 and 11 ranks, rank-16 PowerSGD on exact synchronisation alone kept every test model

turnitin Page 28 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

within 1%, yet on a small transformer's narrow matrices it sends more bytes than 8-bit values (Section 5.6), which is why it is not the default.

Li and Fujita build an IoT edge server on Elixir and OTP, where supervisor trees restart failed processes [21], and combine Elixir with an event-driven architecture and MQTT publish-subscribe messaging for high-frequency telemetry [22]. A failed job in PipedPeer is likewise placed again on the next-best node with back-off, but no supervisor process exists: recovery follows from lease expiry (Section 4.5). Closures, workspaces and results are bulk transfers that need streaming and back-pressure, so dispatch uses plain HTTP with a WebSocket for output rather than a message broker.

"Programming Models for Failure-Transparent Distributed Systems" [23] by J. Spenger defines failure transparency — masking failures fully from the programmer — independently of a particular semantics, proves it for a model of stateful dataflow streaming, and builds two programming models on that base. Failure transparency is PipedPeer's central invariant: the user's script contains no failure handling, so every remote path must degrade to a working local one, enforced here by layered fallback and tests rather than by proof (Sections 4.11 and 5.7).

"Python Array API Standard" [24] by A. Meurer *et al.* standardises an array interface so that the same code runs on NumPy, CuPy or JAX without modification. Its goal, portability without code change, is PipedPeer's, but the mechanism is the mirror image: the standard asks libraries to converge on one interface that users then adopt, while interception changes nothing the user writes and substitutes the implementations behind the interfaces the script already uses.

"iDDS: Intelligent Distributed Dispatch and Scheduling" [25] by W. Guan *et al.* assigns workflow tasks to heterogeneous resources from real-time CPU, memory, data-locality and dependency constraints, driven by a task graph. Its scoring-based assignment is comparable to PipedPeer's placement function (Section 4.4), with two differences: PipedPeer schedules whole scripts rather than task graphs, and its scoring runs in the submitting client, with no scheduler process. Data locality, which iDDS treats as first-class, is left to future work.

48 "Task Offloading in Multi-Hop Relay-Aided Multi-Access Edge Computing" [26] by Y. Deng *et al.* formulates joint task assignment and relay selection to minimise completion time under transmission and energy constraints. Its comparison of transmission time against local computation time has the same shape as PipedPeer's cost model (Section 4.10), which measures link bandwidth at run time rather than assuming a channel model, and for parallel maps fits each peer's setup time and throughput from the work it has returned.

turnitin Page 30 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

"Multi-Agent Deep Reinforcement Learning Based Dynamic Task Offloading" [27] by H. He *et al.* lets each device learn an offloading policy from local observations without a central coordinator, outperforming centralised heuristics on the energy-delay trade-off. A learned policy needs training data and a training phase, which is at odds with a tool that a new machine joins by running a single binary; a deterministic rule-based model is used instead, and a learned policy is a natural direction once a deployment has history.

"Joint Optimization of Multi-User Partial Offloading and Resource Allocation" [28] by D. Yong *et al.* optimises the split between locally executed and offloaded portions of a task and finds partial offloading consistently better than all-or-nothing. Interception offloads partially in this sense: it splits a script's work at the granularity of pool chunks, shuffle buckets and matrix row blocks while the rest runs locally, choosing the split by minimising completion time over measured rates (Section 4.9).

"Energy-Efficient Collaborative Task Offloading in MEC" [29] by S. Wang *et al.* has devices cooperate by relaying tasks towards edge servers, with a learned policy that cuts total energy. Its symmetric model, in which every device is both client and server, matches a single binary in which any node may submit or accept work, but PipedPeer assumes no edge servers and forwards a map once, by a fixed rule rather than a learned policy.

"Blockchain Enabled Task Offloading" [30] by C. Li *et al.* enforces service agreements between task submitters and edge workers with smart contracts, preventing free-riding among parties that do not trust one another. PipedPeer instead trusts every holder of the cluster secret (Section 4.3), so it needs no contract layer but cannot police an admitted participant.

"Congestion-Aware Distributed Task Offloading Using Graph Neural Networks" [31] by Z. Zhao *et al.* trains a graph neural network to produce distributed offloading policies from local neighbourhood observations. PipedPeer scores each node on scalar metrics and is blind to topology when it places a whole job; link cost is measured only where work is divided. Feeding a graph-structured view into placement is the most concrete extension this survey suggests.

The survey leaves a gap that PipedPeer fills. The systems for distributed Python — Spark, Ray, Dask — assume a configured cluster on one network; the offloading literature models the decision of what to move but not the environment, the program or the network path; and the sandboxing work stops at a single node. None runs an unmodified script across machines behind different routers.

Standards for cross-network operation. Joining machines on different networks

turnitin Page 30 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 31 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

(Section 4.2) rests on established standards. Address discovery uses the reflexive-address idea of STUN [32], and a router's mapping and filtering behaviour is classified in the terms of RFC 5780 [33]. Port mapping follows NAT-PMP [34], its successor PCP [35], and UPnP IGD [36]. Simultaneous UDP probing from the socket that will carry the connection is hole punching, as analysed by Ford, Srisuresh and Kegel [37], whose observation that a router's mapping belongs to a socket shapes PipedPeer's shared-socket design. Links are QUIC [38] secured by TLS 1.3 [39] rather than a kernel tunnel such as WireGuard [59], which underlies the Tailscale overlay used between physical machines in Chapter 5; node identities are Ed25519 keys [40], and archives are compressed with Zstandard [41].

63

Table 2.1 summarises the surveyed work.

Table 2.1: Summary of the surveyed work

Author	Year	Method	Gap for PipedPeer
Litzkow et al. [56]	1988	Batch jobs on idle workstations, owner first	Central manager; jobs described for submission, not scripts
Anderson [6]	2004	Volunteer computing on idle machines	Platform for specific projects, not a general executor
Dolstra et al. [7]	2004	Store paths named by a hash of their build inputs	No placement or transfer between machines
Zaharia et al. [1]	2010	In-memory resilient datasets rebuilt from lineage	Dataset API; cluster with a master
Seide et al. [17]	2014	1-bit quantisation with error feedback	Synchronisation still every step
Rocklin [3]	2015	Blocked task graphs for array and dataframe work	Program written against Dask's collections
Dettmers [16]	2016	8-bit gradient approximation	Synchronisation still every step
Sergeev and Del Balso [58]	2018	Ring all-reduce for data-parallel training	Ranks must reach their ring neighbours
Moritz et al. [2]	2018	Tasks and actors over a distributed scheduler	Changed import; cluster with a head node on one network
Vogels et al. [20]	2019	Low-rank gradient compression with error feedback	More bytes than 8-bit on small matrices
Petersohn et al. [5]	2020	pandas API over a partitioned, parallel dataframe	Changed import; running Ray or Dask engine
OCI [8], `crun` [9]	2020	Container runtime specification and a light runtime	Isolation only; no environment or placement
Li et al. [15]	2020	Bucketed all-reduce overlapped with the backward pass	Ranks must reach one another directly
Lin et al. [18]	2020	Local steps between averages	Ranks within one cluster
Hoque and Harras [11]	2022	WebAssembly against containers and VMs	Immature system interface; no GPU
Li and Fujita [21]	2022	Elixir/OTP edge server with supervisor trees	Needs a supervisor process
Douillard et al. [19]	2023	Local training with an outer Nesterov merge	Intervals of hundreds of steps; outer step fails at short ones

turnitin Page 31 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 32 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Author	Year	Method	Gap for PipedPeer
Sekigawa et al. [10]	2023	WebAssembly containers at the extreme edge	Cannot host CPython with native extensions
Meurer et al. [24]	2023	A standard array API across libraries	Libraries and users must adopt the interface
Deng et al. [26]	2023	Joint assignment and relay selection in MEC	Assumes a channel model
Yong et al. [28]	2023	Optimised partial offloading	Environment, program and network path not modelled
Li et al. [30]	2023	Smart-contract service agreements	Blockchain infrastructure required
Kakati and Brorsson [12]	2024	WebAssembly across three architectures	10–30% below native speed
Li and Fujita [22]	2024	Elixir, event-driven design and MQTT	Broker messaging, not bulk transfer
Khelifa et al. [14]	2024	Four WebAssembly runtimes for AI inference	Inference only; memory the main limit
He et al. [27]	2024	Multi-agent reinforcement learning for offloading	Needs training data and a training phase
Zhao et al. [31]	2024	Graph-neural-network offloading policies	A learned model that must first be trained
Bachmeier et al. [13]	2025	wasi-nn for edge inference	Immature GPU acceleration
Spenger [23]	2025	Failure-transparent programming models	Proved for dataflow streaming, not scripts
Guan et al. [25]	2025	Scored dispatch of workflow task graphs	Central scheduler; task graphs, not scripts
Wang et al. [29]	2025	Cooperative relaying of tasks towards edge servers	Learned policy; edge servers assumed

turnitin Page 32 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Chapter 3

Design

3.1 System Architecture

PipedPeer is built around a long-lived **daemon** on every machine, which handles discovery, admission, execution and result delivery; the `pipedpeer` command is a short-lived client of it, and no state lives in the command.

The property that distinguishes the system from the frameworks of Chapter 2 is that **the coordinator is a library linked into the client, not a service** (Figure 3.1). There is no scheduler process, no head node and no master. A machine is submitter and worker at once, and the same binary does both; each job is coordinated by the machine that submits it, and a training ring's synchronisation by the daemon of its lead rank, chosen per job. A new participant runs `pipedpeer connect` with the one-line code another member's `pipedpeer invite` printed; on one network the machines also find each other unaided. Across networks they meet through an **introducer**, an address book that tells machines where to find each other and carries no job data. Every daemon is an introducer for its own cluster. Two optional roles exist: `chunks-only`, for a phone that takes parallel chunks but not whole jobs, and `introducer-only`, for a hosted server that introduces machines but runs no jobs.

The principal subsystems are listed in Table 3.1. All are packages under `src/internal/`; the remainder are supporting code (process management, setup, paths, logging).

3.2 Data Flow Diagram

Level 0 — Context Diagram

At the highest level (Figure 3.2) the system has three external entities: the **user**, who submits a script and receives output and result files; **peer nodes**, which supply capacity and return computed results; and an optional **introducer**, which exchanges candidate addresses so that peers on other networks can reach one another.

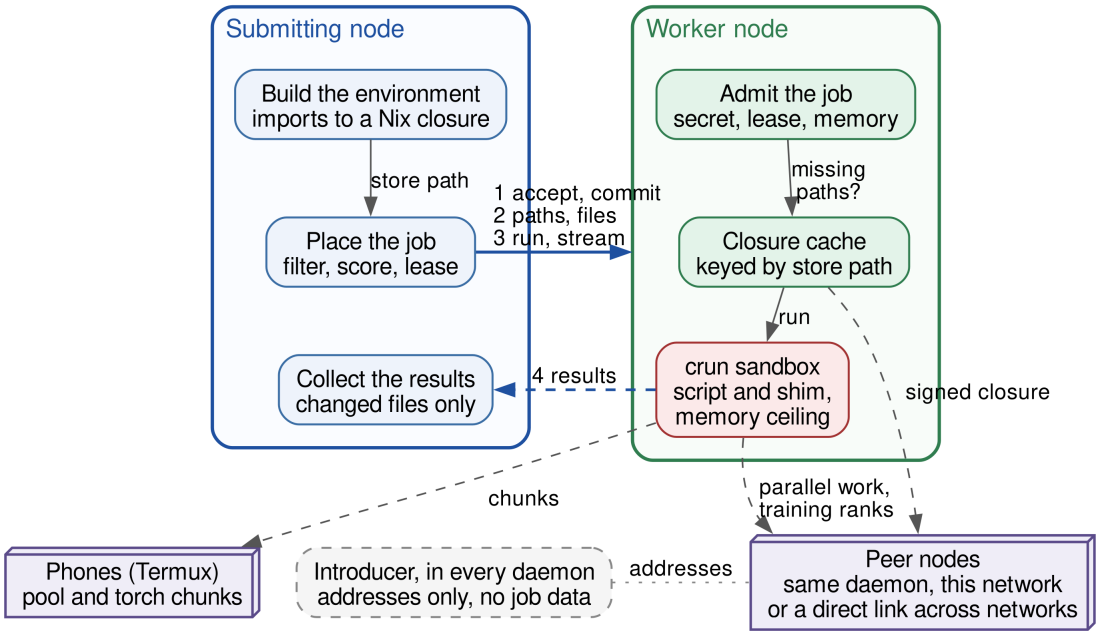


Figure 3.1: PipedPeer system design. The submitting side builds the environment and places the job; the worker admits it, caches the closure and runs it sandboxed under a memory ceiling. Both roles are the same binary. Peers on other networks are reached over direct QUIC links that an introducer helps establish but never carries; every daemon is an introducer for its own cluster. Phones take parallel chunks.

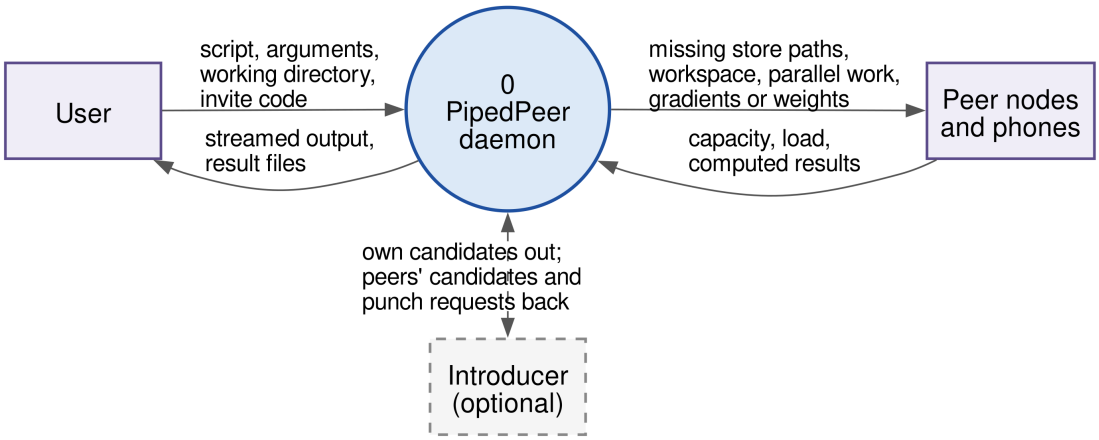


Figure 3.2: Level 0 DFD — context diagram. The introducer is dashed because the system works without it on one network.

turnitin Page 35 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Table 3.1: Subsystems and their responsibilities

Package	Responsibility
`coordinator`	Filters, scores and selects a node; takes the lease; retries on failure
`daemonapi`	HTTP and WebSocket surface, lease manager, sandbox, pool executor, gradient reduction, closure caches, node poller and address gossip
`schedule`	Makespan-optimal division of a chunk across measured devices
`ddpplace`	Choosing the ranks of a training ring by measured throughput
`discovery`	UDP multicast and broadcast probes, TCP health sweep fallback
`internet`	Peer manager across networks: register with every introducer, punch, link, migrate, forward; the in-daemon introducer
`direct`	Shared UDP socket, candidate race, birthday-collision fallback, QUIC links
`rendezvous`	The introducer's address book and punch-request forwarding
`portmap`	Router port mapping by PCP, NAT-PMP and UPnP-IGD
`authtoken`, `tlsid`	Shared-secret middleware; certificate from the node key, pins by node id, TLS and HTTP on a single port
`clustercfg`, `invite`	The one configuration file (secret, introducers, role); the invite code
`identity`, `nixsign`	Ed25519 node key, whose fingerprint is the node id; signing closures and the trusted-key list
`narpack`, `nixstore`	Signed closure archives and cache pruning; system or private (rootless) Nix store
`cgroups`	Memory ceilings for the daemon and for each job
`nodestore`	SQLite address book: every path to every node, last observed capacity
`nixgen`, `pythondeps`	Flake generation, wheel pins and the interception shim; import scanning and resolution
`resourceest`, `runrec`	Tiered memory estimate; the run record of timed steps
`heartbeat`, `gpu`	Capability and load reporting; vendor GPU detection
`service`, `warmup`, `doctor`, `phone`	Autostart unit; background environment builds; diagnostics; phone worker

turnitin Page 35 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 36 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Level 1 — System Decomposition

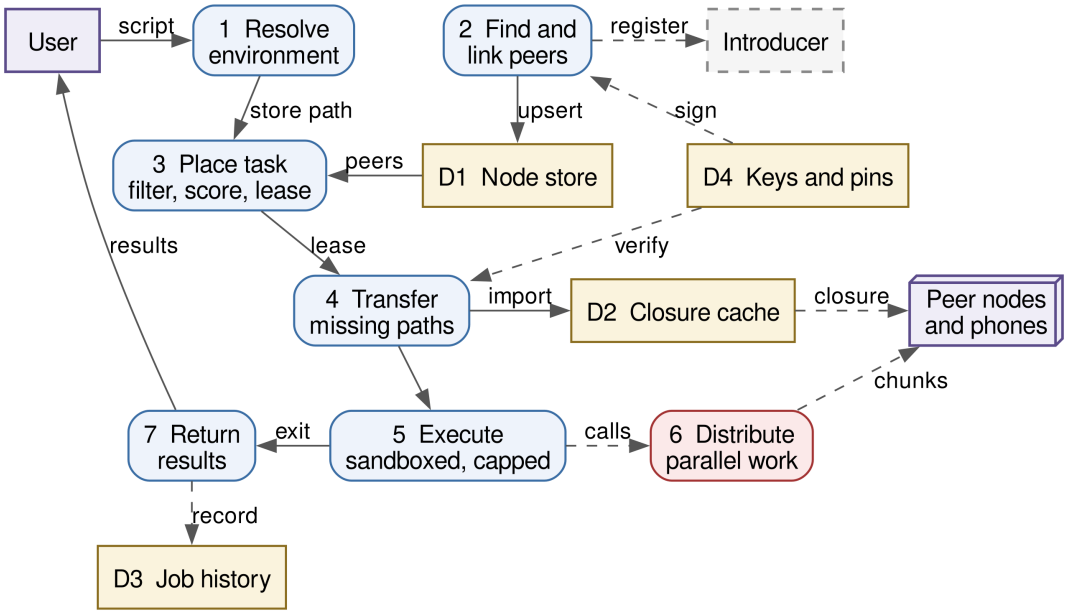


Figure 3.3: Level 1 DFD — seven processes over four data stores.

Figure 3.3 decomposes the system into seven processes:

- **1 Resolve environment.** Scan the script's imports, generate a flake, build the closure.
- **2 Find and link peers.** Probe the subnet; across networks, publish candidates to the introducer, punch, and register each direct link as a node.
- **3 Place task.** Apply hard filters, score the remaining candidates, reserve a lease on the best.
- **4 Transfer.** Upload the workspace, and of the closure only the store paths the worker lacks; signed between daemons.
- **5 Execute.** Run inside a `crun` sandbox under a memory ceiling, streaming output back as it is written.
- **6 Distribute parallel work.** Share chunks among peers by measured throughput, subject to the cost model.
- **7 Return results.** Send back changed files and a deletion manifest.

The four stores are the address book, the closure cache, job history, and the identity and trust store (node key, pinned certificates, trusted Nix keys).

turnitin Page 36 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 37 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

65

3.3 Use Case Diagram

Figure 3.4 shows who uses the system and for what; machines are actors as well as people.

- **User:** runs a script on the cluster, asks for a GPU or a memory floor, trains with data parallelism, and inspects jobs and nodes.
- **Node operator:** sets up a machine, invites another machine, and connects a machine with an invite code.
- **Peer daemon:** accepts and leases work, serves signed closures, executes parallel chunks, and introduces its cluster's peers to one another.
- **Phone (Termux):** joins under `proot` and Nix and executes parallel chunks.
- **Hosted introducer:** registers nodes and forwards punch requests; it carries no job data.

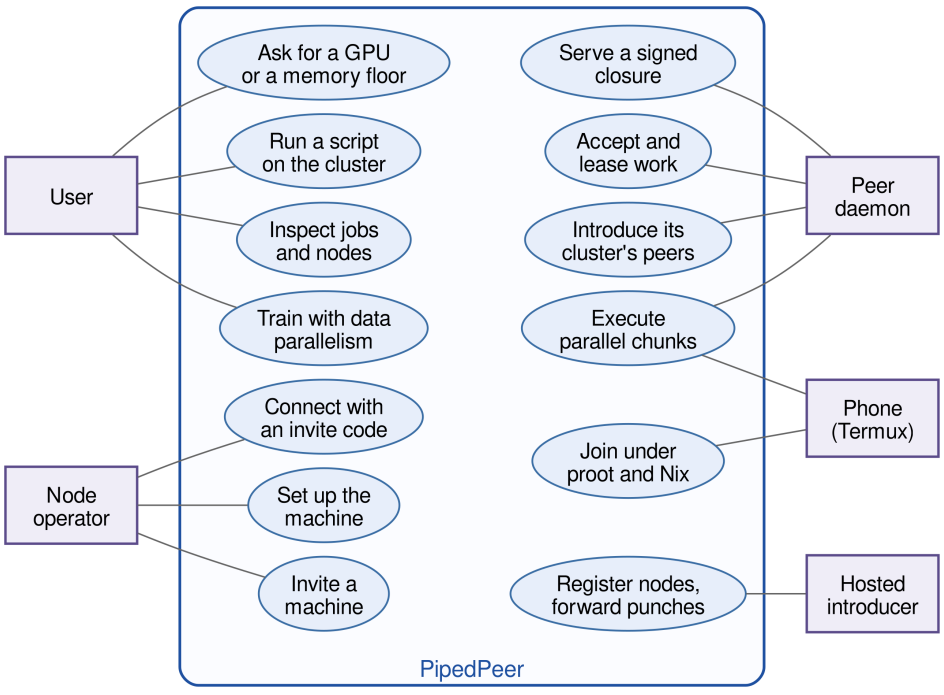


Figure 3.4: Use cases. A peer daemon is an actor in its own right, because every node serves closures, executes chunks and introduces its cluster's peers; a phone executes chunks; a hosted introducer only registers nodes and forwards punch requests.

3.4 Sequence Diagram

Figure 3.5 follows one job from submission to results:

turnitin Page 37 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

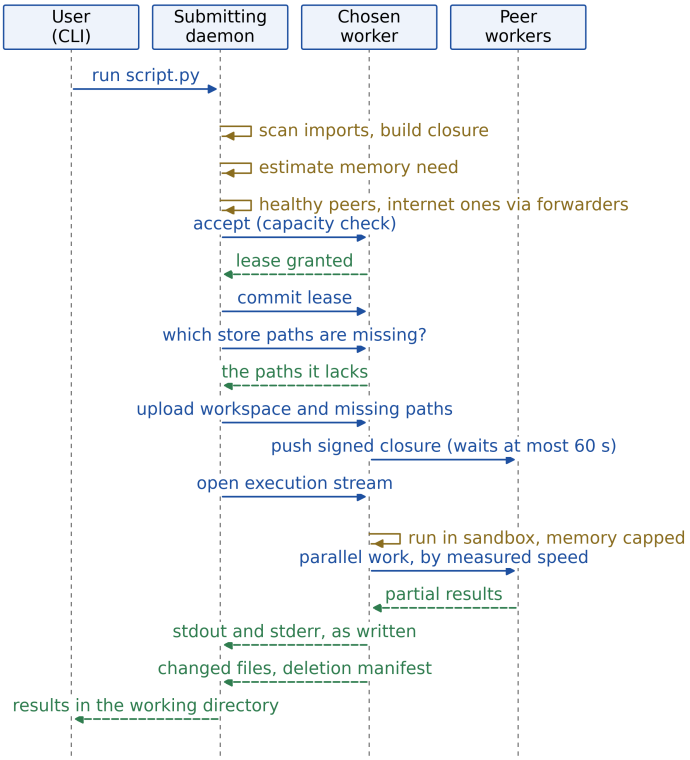


Figure 3.5: End-to-end execution of one job.

1. The user runs `pipedpeer run script.py`.
2. The client scans imports, builds a Nix closure locally, and estimates the job's memory requirement.
3. It asks its own daemon for the healthy peers, including peers on other networks, reached through local forwarders onto direct links.
4. The coordinator filters and scores them and sends `accept` to the best candidate, which reserves capacity; `commit` turns the reservation into a running lease.
5. It asks whether the worker can already run the closure; if not, it asks which store paths are missing and sends only those, then uploads the workspace.
6. The worker pushes the closure to peers that lack it, so that they can take a share of the parallel work.
7. Execution proceeds inside a sandbox under a per-job memory ceiling, with output streamed back; the shim distributes any parallel primitive subject to the cost model.
8. On exit, changed files and a deletion manifest return as a compressed archive and are extracted into the user's directory.

Every request carries the cluster secret, over pinned TLS on a local network or a QUIC link across networks.

Chapter 4

Implementation

4.1 Node Discovery and the Address Book

Node discovery merges addresses from three non-blocking sources into a single table.

UDP probes. The daemon opens two sockets on UDP port `4242`, one joined to multicast group `239.255.0.99` and one bound for broadcast, both with address and port reuse. The probe is a fixed magic string and the reply carries a JSON node descriptor; it is a bare request-response probe, not mDNS. The multicast socket exists because a UDP broadcast to a shared port is delivered by the kernel to only one socket, so two daemons on one host would never see each other; multicast with port reuse reaches all of them.

TCP fallback. Access points with client isolation drop broadcast traffic without error. When the UDP probe returns nothing, the daemon sweeps each local interface's prefix (container and VPN interfaces skipped) with concurrent health probes, and stops once any daemon answers. A reply's host is taken from the packet's source address, never from the address the peer advertised at startup.

The address book. The node store keeps every node under its node id, the fingerprint of its key, together with every *path* to it: its kind (LAN, internet, gossip, self), host, port, and when it was last seen, last worked and last failed. A sighting only adds a candidate. A path becomes the active one only after the poller has reached it and the certificate's key matched the node id; an active path that still answers is kept, and a verified LAN path is preferred to a verified internet path. Members also gossip their own addresses, signed with their node keys, over the authenticated API; a gossiped address is a candidate, never a fact.

The poller tries the active path first; a node with no verified path for 15 minutes is removed, and a sighting alone never refreshes it.

4.2 Joining Across Networks

A broadcast cannot leave the local network, and a machine behind another router accepts no inbound connection. Figure 4.1 shows how two such machines come to

turnitin Page 40 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

share a direct, encrypted link without either opening a port by hand and without any machine relaying their traffic.

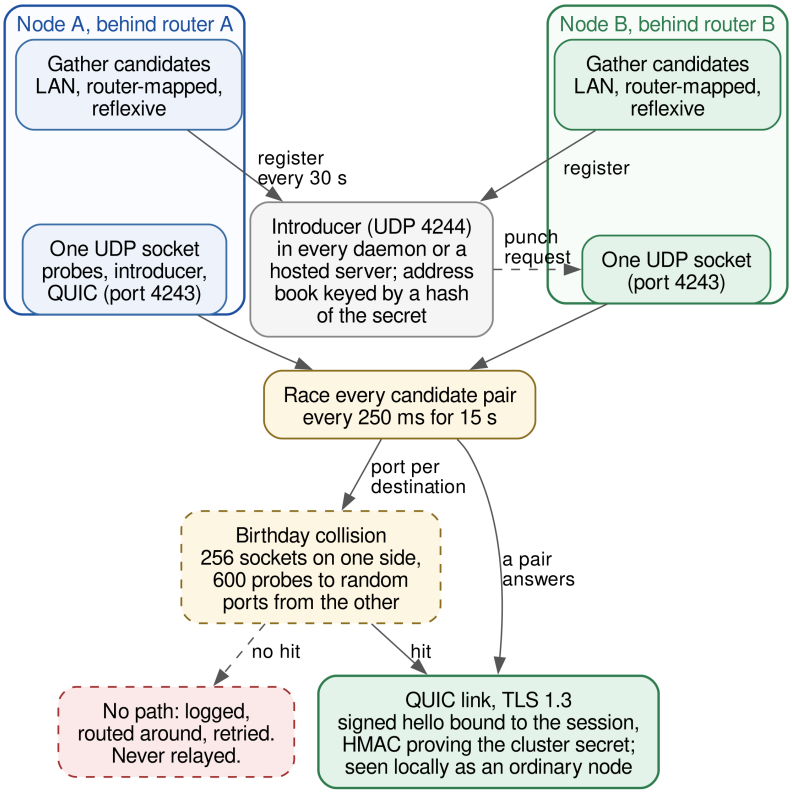


Figure 4.1: Joining across networks. The introducer exchanges candidate addresses and forwards one punch request; the two nodes then race their candidate pairs over a single UDP socket, fall back to a birthday collision when one NAT allocates a port per destination, and carry everything over a mutually authenticated QUIC link exposed locally as an ordinary node.

One command per machine. `pipedpeer invite` prints a single line, `pipedpeer connect <code>`, whose code carries the cluster secret and up to six introducer addresses with a checksum, so a mistyped code is refused as damaged rather than tried. `connect` saves both, restarts the daemon once, waits up to 60 s, and ends with one of three results: connected, naming the machines (exit 0); partly connected, giving each missing machine's reason and fix (exit 2); or failed, with what to do (exit 1).

An introducer in every daemon. Every daemon holding a secret serves the introducer for its own cluster on UDP 4244 and refuses other clusters. A node registers with every introducer it knows — those in its invite code and members it has verified — periodically and at once when its own address changes, so the cluster survives the loss or readdressing of any one member. A public server can join as an introducer that takes no jobs. Nodes register their candidates under a cluster

turnitin Page 40 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 41 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

identifier derived from the secret by hashing, so an introducer never holds the secret itself. A `connect` request makes it forward a single punch datagram to the target, carrying only the candidates the caller itself registered, rate-limited per source. It carries no job data.

Candidates. Each node offers three kinds of address: its LAN addresses; a port its router agreed to forward, requested by PCP [35], NAT-PMP [34] or UPnP-IGD [36] and renewed before it lapses; and the reflexive address the introducer observed, in the manner of STUN [32]. A router mapping is withheld when its external address differs from the reflexive one: behind a second layer of NAT, such as a phone tether, the router that answers is not the one facing the internet.

One socket. Punch probes, introducer messages and QUIC share a single UDP socket on port 4243. Sharing one socket is required for correctness, not convenience: a router's mapping belongs to the socket that created it [37], so the connection must arrive on the socket the probes left from. Datagrams are separated by content — probes by four magic bytes, introducer messages by a leading brace, everything else handed to QUIC.

The race. Both sides probe every pairing of their candidates every 250 ms for 15 s, rather than trying candidates in turn, which would add a timeout for every address that cannot work. When one side's NAT allocates a fresh external port for every destination there is no address to publish, and the **birthday collision** [42] runs: that side opens 256 sockets towards the peer, the other sends 600 probes to random ports among the 64,511 above 1024, and the socket that is hit is kept, since its mapping is the reachable one. A round hits one of the 256 mappings with probability $1 - (1 - 256/64511)^{600} \approx 91\%$ if the NAT draws ports uniformly. This is a computed figure; the success rate was not measured.

The link. The winning path carries QUIC [38] with TLS 1.3. Inside it each side sends a hello signed with its Ed25519 node key, and each checks that the key's fingerprint is the node it meant to reach and that the cluster identifier matches. The hello signs the session's exported keying material [43] and proves the cluster secret with an HMAC [44] over the same value, so it is valid for one session and one cluster only and cannot be replayed to a third node. The link is exposed to the rest of the daemon as a TCP forwarder on a loopback port, recorded as that node's internet path, and each local connection becomes one QUIC stream to the peer's daemon. Placement, closure transfer and gradient exchange therefore work over the link unchanged.

Roaming. A hello from a key that already has a link replaces that link at once. The daemon watches its interfaces; on a change it migrates the QUIC connections it

turnitin Page 41 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 42 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

dialled to the new address, redials those it accepted, and registers again with every introducer.

Peers without a direct path. No relay is in the data path, since a relay would carry every byte of every job and become the cluster's bottleneck and its cost. A peer with no direct path is logged with the reason, never offered to the scheduler, and retried after a back-off; `pipedpeer status` lists it with that reason.

4.3 Security and Identity

Security has three layers (Figure 4.2).

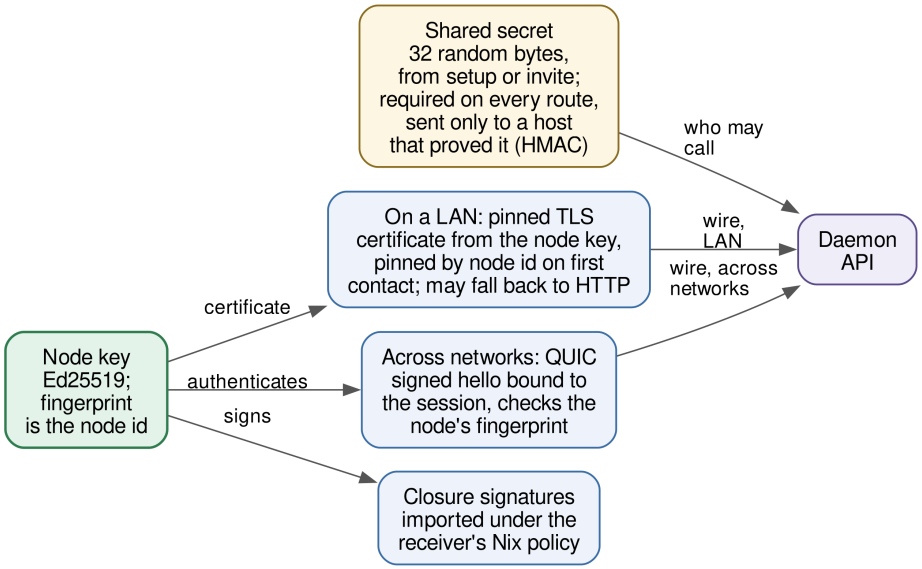


Figure 4.2: The three layers of trust: a shared secret on every API route, pinned TLS (or QUIC across networks) on the wire, and the node key that makes the certificate, authenticates links and signs closures.

The shared secret. The first machine's setup stores 32 random bytes, readable only by the user, before its daemon first starts; `connect` stores the secret from the invite code. Every route on the daemon, `/health` included, requires it, compared in constant time, and outbound requests carry it automatically. Loopback is not exempt, since peers across networks arrive through loopback forwarders. The secret is attached only to a host that has proved it holds it, by returning an HMAC over a challenge. Jobs receive it so that the shim can reach its own daemon, and the web page receives it in the URL fragment opened by `pipedpeer ui`, which a browser never sends to a server.

Pinned TLS. Each daemon's self-signed certificate is made from its Ed25519 node key. TLS and plain HTTP share the daemon port; the listener inspects the first byte

turnitin Page 42 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 43 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

of each connection. Clients try TLS first, and the pin is keyed by node id rather than by address: a certificate whose key matches the expected node id is accepted wherever the node now is, and a different key for a known node id is refused. The scheme is trust on first use and opportunistic: a handshake that fails for a reason other than a pin mismatch makes the client remember that peer as plain HTTP. Traffic across networks is encrypted by QUIC.

Node keys and signed closures. Each node holds one Ed25519 key [40] whose fingerprint is its node id everywhere. The same key authenticates QUIC links, makes the TLS certificate, signs gossiped addresses, and signs closures as a Nix signing key. Nodes publish the public half in their heartbeat, each daemon keeps a list of the keys of the nodes it knows, and `setup`, with consent, adds them to the system Nix configuration as trusted keys; it never disables Nix's signature requirement. A closure sent between daemons in the signed format is imported under the receiver's own signature policy.

A worker learns a new peer's key before Nix does, so the import passes the cluster's keys to that one copy operation, after checking the archive's named signer against the signer's published identity. Because a multi-user Nix daemon ignores keys passed by an untrusted user, setup also installs a root-owned helper that can do nothing but add or remove keys of the cluster's fixed form.

Limits. These protections have significant limits. Every holder of the secret can run code on every node, and jobs can read the secret. TLS on a local network is trust on first use and can be downgraded by an attacker who can break the handshake. The list of keys trusted to sign closures includes nodes found by unauthenticated LAN discovery, and the submitter's own upload is imported without a signature check. PipedPeer therefore suits machines whose owners trust one another, over networks they need not trust.

4.4 Placement and Scoring

Candidates are merged from the address book, live discovery and the local node, deduplicated by node id; a node with a role is never offered a job. Five hard filters run in order: architecture must match the closure; a GPU must be present if one was required; and free memory, free cores and free VRAM must each satisfy the request (Figure 4.3). Every rejection records a reason, shown by `pipedpeer jobs <id> --explain`.

The nodes that pass every filter are scored. Writing u_{cpu} and u_{mem} for CPU and memory utilisation in percent, n_{jobs} for the count of running jobs, $\hat{c}$ and $\hat{f}$ for the

turnitin Page 43 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 44 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

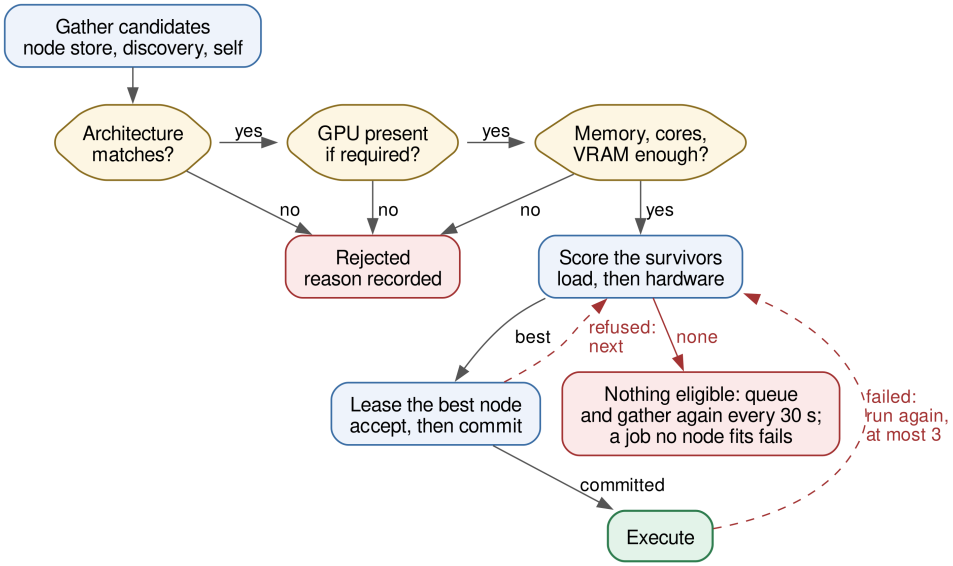


Figure 4.3: Placement: gather, filter, score, lease, retry. A task is never dropped; when nothing is eligible it is queued and retried.

core count and clock speed (capacity terms), $\hat{m}$ and $\hat{r}$ for the free memory and the free-core ratio (headroom terms), and h for the node's health score, the score is

$$S = \Big(1 - \frac{u_{\text{cpu}} + u_{\text{mem}}}{200} - 0.05\, n_{\text{jobs}} + 0.10(\hat{c} - 0.5) + 0.06(\hat{f} - 0.5) + 0.10(\hat{m} - 0.5) + 0.10(\hat{r} - 0.5)\Big) \cdot h. \tag{4.1}$$

Each term is normalised against a saturation point: $\hat{c} = \min(c/32, 1)$ for c cores, $\hat{f} = \min(f/4000, 1)$ for a clock of f MHz, and $\hat{m} = \min(m/32, 1)$ for m GiB of free memory, while $\hat{r}$ is the fraction of the node's cores that are free. The health factor h is the value the node store holds for the node: it starts at 1.0, halves each time the node fails a job or stops answering (never below 0.1), and regains 0.1 with each health check it answers, so a flaky node loses to an equal healthy one. Two properties matter more than the individual coefficients. **Utilisation dominates capacity**: the two utilisation terms can subtract 1.0, while the four normalised terms together move the score by at most 0.18 in either direction, so a fast but busy machine ranks below a slower idle one and is left to the person using it. **Missing telemetry is neutral**: an absent value takes the midpoint 0.5, so a node that does not report its clock speed is neither rewarded nor penalised. S is clamped at zero.

When a GPU is requested or preferred, a second term is added to S: up to 0.3 for total VRAM (saturating at 32 GiB), 0.1 for each device beyond the first, up to 0.2 for the free fraction of the best device's VRAM and up to 0.2 for compute capability (saturating at 9.0), less up to 0.1 for GPU utilisation, the sum clamped to $[0, 0.8]$. The free memory a node advertises is what it can actually *grant*: its own budget

turnitin Page 44 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 45 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

less the reservations of every daemon on the same machine (Section 4.8).

A node that refuses the job's signed closure is left out for the rest of the run, and the client prints the command that fixes it on that node.

4.5 The Lease Protocol

Placement is a three-phase handshake, and its state machine is where crash recovery lives (Figure 4.4).

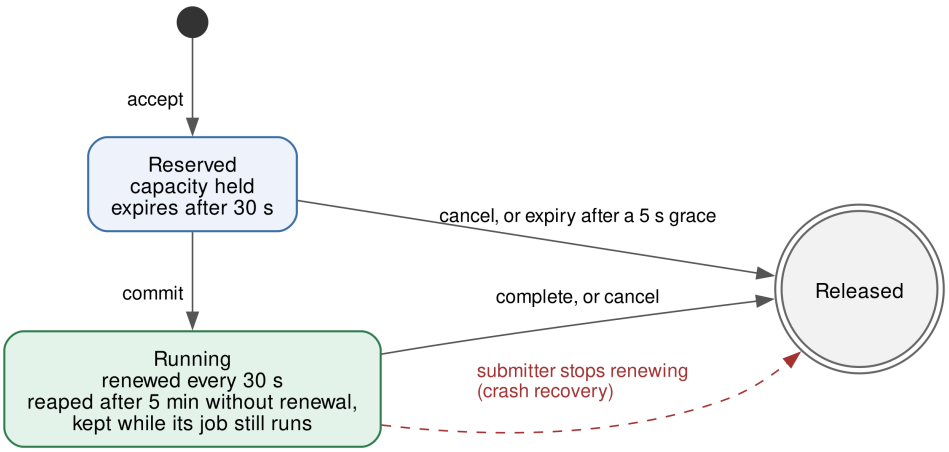


Figure 4.4: Lease states. Recovery is a consequence of expiry rather than a separate mechanism.

An `accept` reserves capacity for 30 s; a `commit` promotes the reservation to running, renewed every 30 s and reaped after 5 minutes without renewal; `complete` releases it, and a sweeper reclaims what has expired. The submitter renews while the environment builds and uploads, so a long build never outlives its lease, and a lease bound to a running job is kept past its expiry.

Two details carry the correctness argument. The concurrency and memory checks and the lease insertion happen **under a single lock**, so two submitters racing for the last slot cannot both succeed. And the concurrency limit counts reserved and running leases together, so a burst of submitters cannot slip through the window between accept and commit.

Recovery then needs no further machinery. A submitter that dies stops renewing, and the sweeper reclaims its slot. A worker that dies stops answering health checks and its in-flight connection fails, which the coordinator treats as a failed attempt and reschedules, with exponential back-off. Waiting for room never drops a task, while a job that *fails* is run at most three times, on untried nodes first. From the submitter a dead node and a lost network look the same, but a dead node calls for

turnitin Page 45 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 46 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

running the job elsewhere and a lost network for waiting; the client therefore runs three short probes at once, none needing root — another peer's health endpoint, a registration with the introducer, and a TCP connection to the default gateway — and an answer to any of them confirms that the remote peer, not the local network, failed.

4.6 Reproducing the Environment

Import scanning. The client extracts imports with a line-oriented parser: it strips comments, takes the module from `from X import …`, and splits `import a, b as c` into every module named. It does not see an import performed through `importlib`. Each name is classified as a local file, a standard-library module, or an external dependency, and external names are resolved through a mapping table (`sklearn` to `scikit-learn`, for example) and otherwise looked up as a package of the same name in the pinned package set, with one evaluation for all of them. The scan follows the script's own modules, with a visited set so that import cycles end; a `requirements.txt` beside the script is read, and a `uv.lock` file or an explicit `--pkg` flag override detection. Only what is still unresolved is reported, before anything runs, with the flag that would add it.

Content-addressed environment pinning. Nix [7] names every build output by a hash of its inputs. The generated flake pins an *exact* nixpkgs revision, not a branch. A branch resolves at build time, so two nodes building the same script on different days would produce different store paths and the system would re-ship a multi-hundred-megabyte archive for every job. Pinning makes the store path a stable, content-derived name for an environment, identical across machines and across time, and therefore a cluster-wide cache key (Section 5.3).

Every environment also contains `cloudpickle` [45], so that parallel kernels with no source can be shipped by value. On x86_64 Linux, scikit-learn is pinned to a specific wheel, and torch with CUDA is fetched as a pinned wheel set inside a *fixed-output derivation* with a recorded hash, because building it from source takes hours. The CUDA build is used when a GPU is requested, which is the default when a script imports torch.

Common packages built ahead of time. Environments share Nix store paths, and a transfer sends only the paths a peer lacks. After `connect`, every machine builds in the background one environment importing the usual scientific set (NumPy, pandas, scikit-learn, SciPy, matplotlib, seaborn, tqdm and CUDA torch), so a script seen for the first time shares those paths and builds only what it adds.

77

turnitin Page 46 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 47 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

4.7 Closure Transfer and Cache Reuse

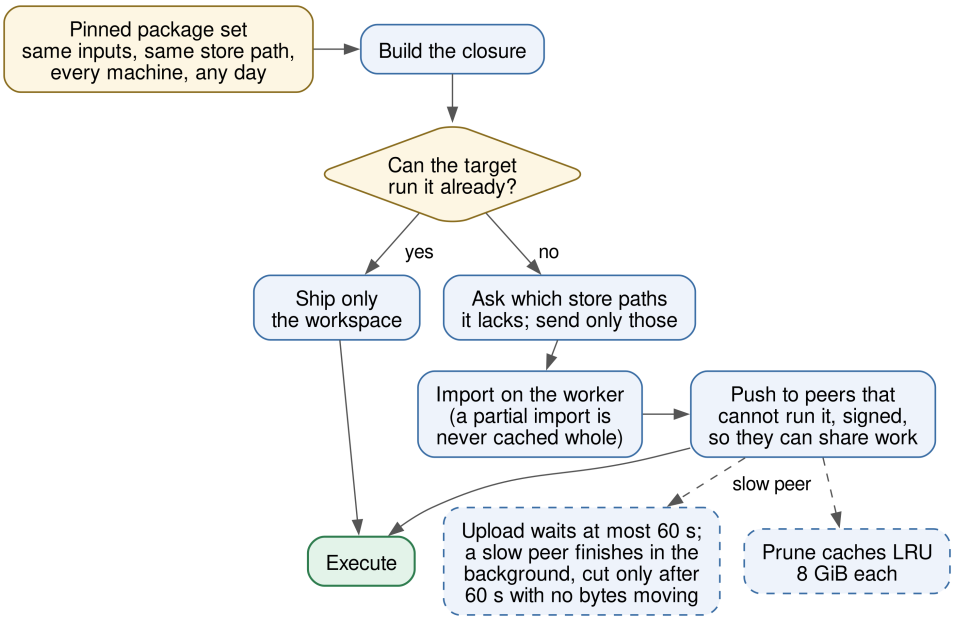


Figure 4.5: The store path is the cluster-wide cache key. Most submissions ship no environment at all, and a related environment ships only the store paths the receiver lacks. The upload never waits more than 60 s for a slow peer.

Before uploading, the client asks the target whether it can already run the closure (Figure 4.5), and only on a negative answer does anything cross the wire. Two questions are needed: whether the archive is in the node's cache, and whether the closure is *materialised*, that is, whether its entry point exists on disk. A deployment with a shared store volume has the closure present without ever having cached an archive, while on a per-node store the entry point appears only after an import; either predicate alone is wrong for one of the layouts.

Path-level difference. A closure is a set of store paths, and two environments that differ by one package share most of them. The client lists the closure's paths and asks the target which it lacks; if some but not all are missing, only those are sent, as a partial import that the receiver never caches as the whole closure. A fresh node may instead fetch public paths from the Nix binary cache; if that download falls well behind the sender's archive, it is abandoned and the sender sends every missing path itself.

Signed transfer between daemons. After an upload, the worker pushes the closure to peers that cannot yet run it. Parallel work is shared only with peers that can run the closure, so this push is what makes the cluster usable for the distribution of Section 4.9. A peer that advertises the signed format receives one archive containing a signed binary cache — the signature records for every path and

turnitin Page 47 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 48 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

the compressed archives for the paths it lacks — produced and imported by Nix's own copy mechanism.

Not waiting for the slowest peer. The upload waits at most 60 s for these pushes. A peer still importing finishes in the background and joins the pool by itself, since each parallel chunk asks afresh which peers can run it; meanwhile it reports "importing", so no second send starts. A background send is cut only when it stops moving. Both closure caches are pruned least-recently-used to 8 GiB each, and workspace and results archives are compressed with Zstandard [41].

4.8 Execution and Isolation

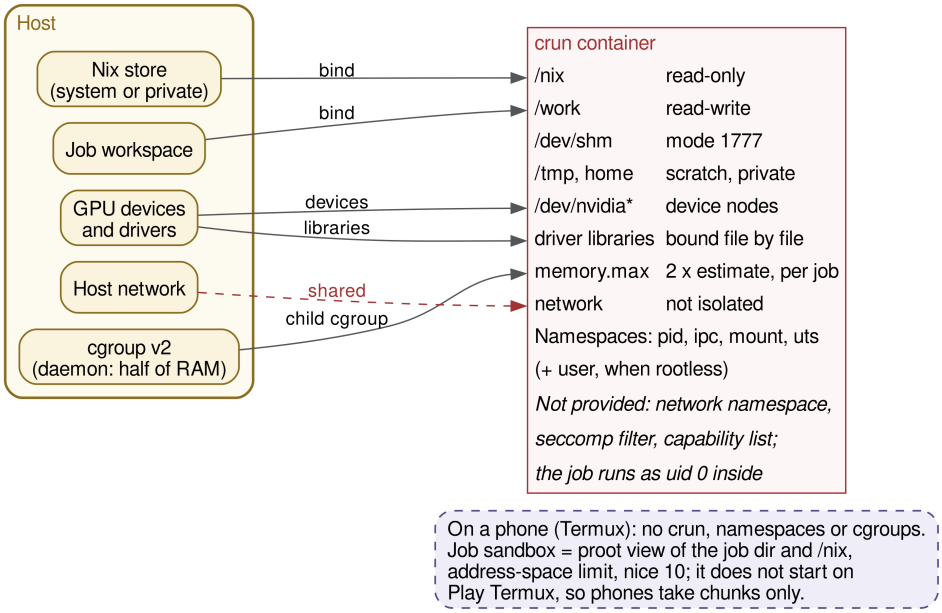


Figure 4.6: What the job can and cannot see. Shared memory is mounted world-writable because Python's `multiprocessing` requires it, and the driver libraries are bound file by file so that the host C library cannot shadow the closure's.

Jobs run under `crun` [9] in an OCI bundle [8] with a minimal read-only root (Figure 4.6): the store read-only, the workspace read-write, a private home, and temporary filesystems for scratch space. Shared memory is mounted world-writable because Python's `multiprocessing` maps POSIX shared memory for its semaphores. GPU support mounts the device nodes and binds the driver libraries *file by file*, because binding the host library directory would place the host C library ahead of the closure's, and torch would then fall back to the CPU silently.

A memory ceiling for every job. Where the daemon has a usable cgroup v2 hierarchy, each job runs in its own cgroup with a memory limit, and an equal swap

turnitin Page 48 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 49 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

limit, of twice its estimated requirement, clamped to what the node can grant but never below what admission approved. When a job is killed and the cgroup's out-of-memory counter has risen, the client reports the out-of-memory kill and how to raise the limit with `--mem`.

A memory ceiling for the daemon. Parallel chunks run in warm worker processes in the daemon's own cgroup, so `pipedpeer start` launches the daemon in a user `systemd` scope whose memory ceiling is half of the machine's memory and whose swap limit is zero. A daemon without a user `systemd`, such as one in a container, runs a watchdog instead that measures the daemon's children and, past the ceiling, kills the largest child and logs it, never the daemon. A hard limit is used rather than a throttling one, because a job held at a throttling limit stalls instead of failing. Daemons on a single machine, recognised by the kernel's boot identifier, subtract one another's reservations, so two of them cannot promise the same memory twice.

Without root. On a machine with no system Nix, setup seeds a private store in the user's data directory and mounts it at `/nix` inside a user and mount namespace, and installs `crun` into the user's own binary directory when no package manager supplies it.

What the sandbox does not do. The job runs as user 0 inside the container and shares the host's network; the specification sets no seccomp filter and no capability list. The namespaces in use are process, IPC and mount, plus hostname where the kernel allows it, and a user namespace when `crun` runs without root. A node without `crun` or user namespaces warns and runs the job unisolated, unless it uses a private Nix store, in which case it refuses.

Results and output. Only files created or modified during the run are returned, with deletions carried in a manifest, so a job cannot overwrite the submitter's own sources; any path that escapes the job's directory is refused on both sides. Output is forwarded as each read arrives, so a progress bar on a remote node animates on the submitter's terminal.

Stopping and detaching. An interrupt or a closed terminal makes the client send one cancel frame; the daemon signals the job's process group, kills it if it is still alive shortly after, and the cancel reaches remote runs, parallel chunks on peers and every training rank. A connection that ends *without* a cancel frame never kills the job, and background mode builds on this: the daemon logs every output frame, a detach closes the channel without a cancel, and `pipedpeer attach` replays the log, follows live, and downloads the results at the end. A detached job's directory is pruned 24 hours after it ends.

turnitin Page 49 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 50 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Phones. An Android phone joins under Termux [46] as a worker for parallel chunks, running them from a Nix environment inside a Debian under `proot` [47] where setup can install one, and otherwise with Termux's own Python. Closures go only to peers of the same architecture, so a phone receives the job's package list instead, builds its own environment in the background, and declines the job until it is ready.

4.9 Transparent Interception

Delivery. The shim is a Python package embedded in the binary. It is appended to the workspace archive under a hidden directory, so the user's project on disk is never modified, and the worker points the interpreter's module path at that directory, where a `sitecustomize` module makes CPython import it before the user's first line. Nothing is installed on any node. Nix ships its own module of the same name, which adds the environment's package directories; the shim performs that work first, since only the first module on the path is imported (Figure 4.7). `multiprocessing.Pool` and `ProcessPoolExecutor` are patched at startup, while NumPy, pandas, torch and joblib are patched on their first import through an import hook, so a job that never imports torch never pays for patching it (Section 5.4 measures the startup cost). Table 4.1 lists the intercepted primitives and how each is distributed.

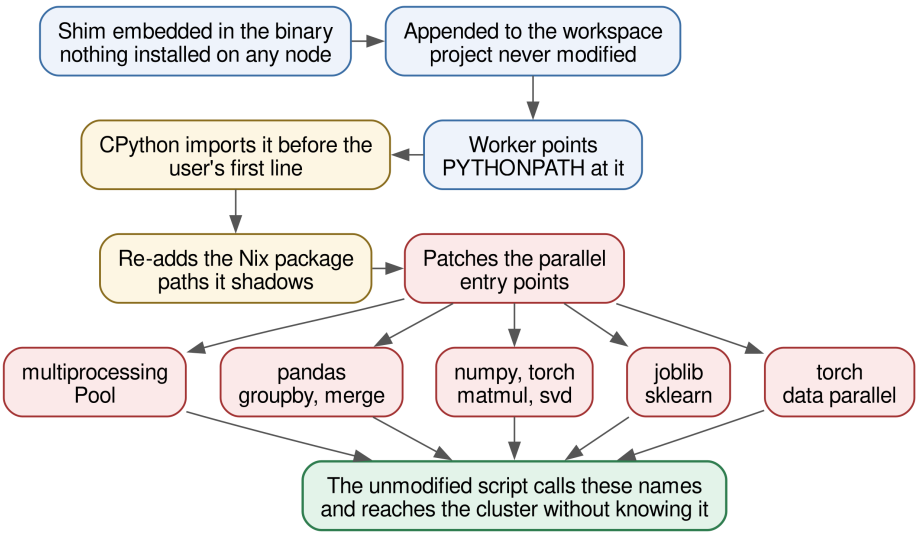


Figure 4.7: How the shim reaches the interpreter and what it replaces.

4.9.1 Parallel Maps

`map`, `starmap`, `imap` and `imap_unordered` go to the cluster (`imap` lazily, in batches), while `apply` and `apply_async` stay local. A small prefix of items runs locally first to measure per-item cost, and a map whose remaining work is under half a second

turnitin Page 50 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 51 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

stays local. The kernel reaches the peer in one of two ways. A module-level function, including one defined in the script's `__main__`, travels as its *source*, with the helper functions it calls and a pickle of the module data it reads. A lambda, closure, bound method, partial or decorated function travels *by value* through `cloudpickle`. Anything neither can carry is counted as unshippable and runs locally. Every run can write a **receipt** counting the items that ran remotely and locally, the parts that failed, and the node each part ran on, so a claim about where work ran can be checked.

Sharing work by measured speed. On the daemon, a chunk is divided among peers by a makespan solver. Each device is modelled as a setup time o_i plus a throughput r_i, fitted by least squares from the recent parts it returned; an unmeasured peer is assumed to be as fast as this node, scaled by its core count, since assuming it slow would size its share below anything worth sending. The solver finds the finishing time T at which the devices together complete the work, allocating $(T - o_i)\, r_i$ items to each, and drops any device whose setup time alone exceeds T, solving again until no device is dropped (Algorithm 4.1). On a peer, a part fans out across its cores. Division therefore repeats at two levels, machines and then cores, and a part already split off is never split across machines or forwarded again. A map too large for the node that holds it is the one case of forwarding: it goes whole, once, to a peer that can hold it, and that peer makes the split (Section 4.11).

Algorithm 4.1 Dividing a chunk of n items among devices by measured speed

Require: devices D, each with fitted setup time o_i and throughput r_i; item count n
$A \leftarrow \{\, i \in D : r_i > 0 \,\}$ ▷ unmeasured peers carry a core-count prior
repeat
  $T \leftarrow \textsc{Makespan}(A, n)$
  $X \leftarrow \{\, i \in A : o_i \geq T \,\}$ ▷ cannot start before the rest finish
  $A \leftarrow A \setminus X$
until $X = \emptyset$ **or** $A = \emptyset$
for each $i \in A$ **do**
  $n_i \leftarrow \max\bigl(0, \lfloor (T - o_i)\, r_i \rfloor\bigr)$
end for
add $n - \sum_i n_i$ to the share of the device with the largest r_i
return $\{n_i\}$
▷ $\textsc{Makespan}(A, n)$: the smallest T with $\sum_{i \in A} \max(0, T - o_i)\, r_i = n$, found exactly by walking the setup times o_i in increasing order, the total rate growing by r_i at each

Slow peers. A part still unfinished past its prediction counts as taking at least that long, so a slow peer's estimate can only grow. Three rules act before the fit has caught up: a split part waiting for its peer starts on another peer with a free slot when that would finish sooner; a part running past its prediction gets a copy on the fastest free peer, the first result is kept and the other copy cancelled; and a chunk

turnitin Page 51 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 52 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

too small to split goes to the peer predicted to finish first. A peer that keeps losing races stops being raced.

Transfer. Each node's chunks in flight follow its measured round trip, and chunk size follows the measured transfer cost. Large functions and globals cross once per peer, by hash; requests are compressed at a level chosen by the measured link speed; and numerical buffers travel outside the serialised request. With `--offload`, every distributed piece goes only to other machines, keeping the sender free for its user.

Table 4.1: Intercepted primitives and their distribution strategies

Primitive	**Strategy**
`multiprocessing.Pool`, `ProcessPoolExecutor.map`	Measure a few items locally, then race local against remote chunks shared by measured speed
pandas `groupby().agg()`, `merge`, `join`	Hash shuffle on the key; bucket zero local
pandas `read_csv`, `read_parquet`	Out-of-core reads in 64 MiB chunks cut at record boundaries
`numpy.matmul`, `dot`, `tensordot` (2-D)	Split into row blocks, concatenated at the origin
`numpy.linalg.svd`, `eig`	Whole matrix offloaded to one worker
`joblib.Parallel`, scikit-learn `n_jobs`	Batches of delayed tasks, shared arrays sent once per chunk
torch `matmul`, `mm`	Row blocks, gated on size
torch training (`--ddp`)	Gradients or weights averaged by the lead daemon, weighted by samples

Interception replaces module functions, so the operator form `A @ B` is not intercepted for NumPy arrays. A `joblib` call made inside a remote task runs inline on that worker. Because their arithmetic intensity is low, pandas operations are considered for distribution only above 512 MiB unless forced (Section 4.10).

Why the shuffle is exact. Hash partitioning on the key is the standard technique of MapReduce [4]; PipedPeer uses only that path, never a combiner. Rows are bucketed by a hash of the grouping or join key, so equal keys land on the same node and every key is complete on exactly one node (Figure 4.8). Each node's aggregation is therefore a *complete* aggregation, the origin combines the partials by concatenation, and *any* aggregation specification works, including those with no combiner form. Exactness is of values, not of row order: a concatenation of buckets does not reproduce pandas' join ordering, so a script that depends on the row order of a `merge` result can see a different order.

turnitin Page 52 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 53 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

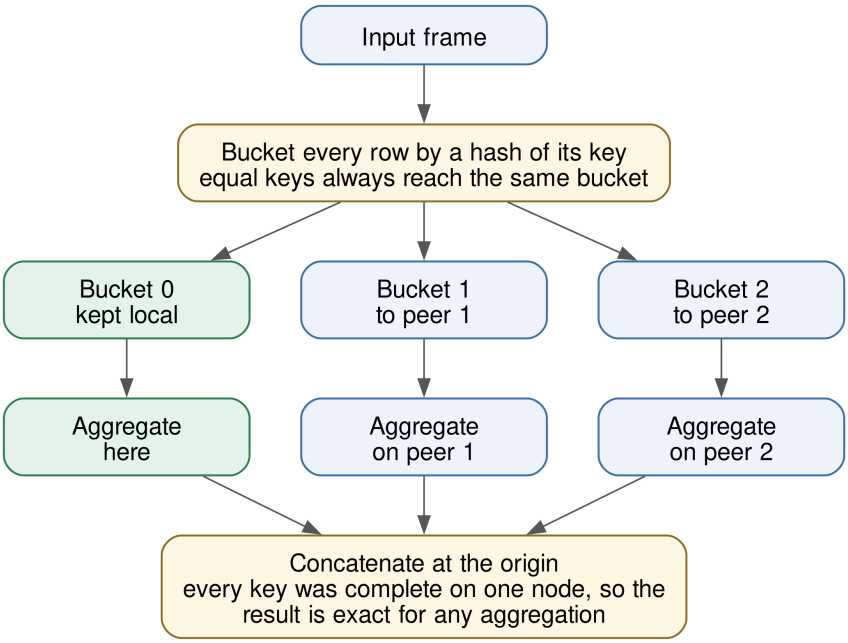


Figure 4.8: Hash shuffle. Correctness follows from key locality, not from combiner algebra.

4.9.2 Data-Parallel Training

Synchronisation over the daemon port. Rather than let torch build its rank-to-rank mesh [15], which needs direct connections on its own ports between every pair of ranks, each rank posts its gradient to the lead node's ordinary daemon port, which works wherever the daemon port works, including over the links of Section 4.2. The daemon *reduces*: gradients arrive as raw frames, are summed in double precision weighted by the number of samples behind each, $\sum_i n_i g_i / \sum_i n_i$, and one averaged gradient is returned (Figure 4.9). An all-to-all exchange, in which every rank receives every other rank's gradient, was measured at 62.9 s for a two-machine job that takes 2.9 s on one machine. Gradients travel as 8-bit integers with one scale per block of 4096 values, the rounding error carried into the next step in both directions (error feedback) [16, 17]; `PIPEDPEER_DDP_INT8=0` sends 16-bit floats instead. In exact mode a ring of three or more machines, each reachable directly, reduces in a butterfly instead: each rank's daemon averages one shard of the gradient, so each machine's link carries $2(N-1)/N$ of a gradient in each direction (its rank's shards and its daemon's replies), where through the lead the lead's link carries $N-1$ in each direction. Ranks that share a machine instead average there first and send one synchronisation for the machine. A ring of two, and every fast-mode round, goes through the lead.

Choosing the ring. Each candidate's throughput is probed, using one device kind

turnitin Page 53 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 54 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

only (GPUs when any are wanted and present, with the lead on a GPU node), and the ring admitted is the prefix of the k fastest that maximises $k \cdot r_k$, r_k being the slowest admitted rate: the throughput if every rank took an equal batch. Ranks then take slices in proportion to their rates, which can only do better, so the rule is a conservative lower bound; placement cannot price the synchronisation each extra rank adds, and admitting every rank that proportional slices would use produced rings that spent about half their time exchanging gradients. The slices sum to the script's own batch, so the learning rate and the mathematics are the script's. Every rank sends a manifest of its parameters to the opening barrier, and a mismatch stops every rank with one message. The daemon periodically refits the shares from observed step rates, applying them at the next epoch boundary when a share has moved enough to matter, and it can drop the slowest rank — never rank 0, never below two — when that rank adds more synchronisation time than computation. A round that a straggler has not joined completes without it after a timeout.

One GPU or a split. After a warm-up, the lead daemon compares the measured step time of the split with that of the fastest rank alone, and either keeps the ring or releases every rank but the fastest, which exit with a code meaning "released" rather than "failed". A user who names a ring size with `--ddp` N fixes the number of ranks, and the ring is then never released or shrunk.

Synchronising less often. `--ddp-sync fast` synchronises every H steps instead of every step, in the manner of DiLoCo [19] and post-local SGD [18], on this schedule:

1. Exact synchronisation as a warm-up for a tenth of the run, at least 10 and at most 500 steps (10 when the run's length is unknown).
2. Local steps, after which the ranks' weights are averaged by the number of samples each processed; every epoch ends on a synchronisation.
3. The optimiser's moments are averaged every tenth round.
4. Over the last tenth of the run, the interval shrinks towards one step.

It never adds epochs or changes the batch or the learning rate. The outer step is plain averaging (outer learning rate 1, no momentum). DiLoCo's Nesterov outer step, with momentum 0.9 at an outer learning rate of 0.7, applies in the steady state $0.7/(1-0.9) = 7$ times the averaged change of the weights in each round. DiLoCo uses it with intervals of hundreds of steps; at the 2 to 64 steps used here, the amplified update failed the accuracy bar at every interval tried. The bar is one-sided: the final validation loss may be at most 1% above one device's, as a mean over three seeds, on every test model. The interval depends on the ring's size: the largest that passed on every model was 32 steps at two ranks, 16 at three and 4 at four,

74

turnitin Page 54 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 55 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

and none passed at eight ranks, so none is used for five or more (Section 5.6). These intervals are the defaults; an explicit fast ring beyond four ranks runs at $H = 4$ with a warning.

Choosing automatically. By default the lead daemon switches a ring to fast synchronisation once, at a check made every 20 synchronisations, when every rank has reported, the ring is within the validated size, and the predicted fast step, inflated by 10%, is shorter than the exact split and, for a ring not fixed by `--ddp` N, also the fastest rank alone. Under `--ddp` N the ring size is fixed and the automatic choice is between the two sync modes only. Every rank switches at the same step boundary, rank 0 prints why, and a joining rank adopts the ring's mode; a join that takes an automatic fast ring past the validated size returns it to exact synchronisation at the next epoch boundary. A rank whose local round runs past four times the ring's median step time skips that round's remaining batches but counts them, so every rank stays on the same step. Algorithm 4.2 gives the admission rule and the decisions the lead takes from the ranks' reports.

Algorithm 4.2 Admitting a training ring and choosing its synchronisation

Require: candidates of one device kind with probed rates; script batch B; ring size N if fixed by `--ddp` N
discard candidates without a measured rate or without memory for the working set
sort the rest by rate, $r_{(1)} \geq r_{(2)} \geq \dots$
if N is fixed **then**
    admit the N fastest
else
    $k^* \leftarrow \arg\max_k \; k \cdot r_{(k)}$; admit the k^* fastest ▷ equal-batch throughput
end if
give each admitted rank the batch slice $B\, r_i / \sum_j r_j$
▷ at every 20th synchronisation, once every rank i has reported samples s_i, step time t_i and synchronisation time y_i:
$h \leftarrow$ current interval (1 if exact); $k \leftarrow$ live ranks; $\mathit{split} \leftarrow \min_i(t_i + y_i/h)$
$\mathit{solo} \leftarrow \sum_i s_i \,/\, \max_i(s_i/t_i)$, or ∞ if N is fixed
if the sync mode is automatic, the ring is still exact, and $H(k)$ is defined **then**
    $\mathit{fast} \leftarrow \min_i(t_i + y_i/H(k))$ ▷ $H(2), H(3), H(4) = 32, 16, 4$
    if $1.1 \cdot \mathit{fast} < \min(\mathit{split}, \mathit{solo})$ **then**
        switch every rank to fast synchronisation every $H(k)$ steps; **return**
    end if
end if
if N is not fixed, the data is hash-sharded, and $1.1 \cdot \mathit{solo} < \mathit{split}$ **then**
    release every rank but the fastest, which takes the whole dataset
else
    refit the batch shares from the measured rates, or drop the slowest rank if it adds more synchronisation than computation (never when N is fixed)
end if

Losing and regaining ranks. When a machine is lost, the client names the rank and host, the lead daemon stops waiting for it, and the remaining ranks take new

turnitin Page 55 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 56 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

shares at the next epoch boundary. Samples are assigned to ranks by a weighted rendezvous hash [48], which keeps each remaining rank's share exact and over 95% of its samples in place, where hash-modulo routing would move most of them. A rank whose script fails stops every rank at once. Losing rank 0's machine ends the run, since its daemon holds the synchronisation, and the remaining ranks stop with that reason. A returning machine or a new eligible node joins the ring at the next epoch boundary: it loads the lead's model, optimiser and buffer snapshot through the lead daemon, runs one inert batch for each epoch it missed so that the script's loop variables exist, and the world size and shards grow to include it, moving about $1/n$ of the data. Only scripts that use a data loader can be re-spread.

The first synchronisation is a barrier: every rank must reach the opening weight broadcast within a configurable wait, 5 minutes by default, and ranks still missing are dropped and named. The torch gloo and NCCL backends are not used.

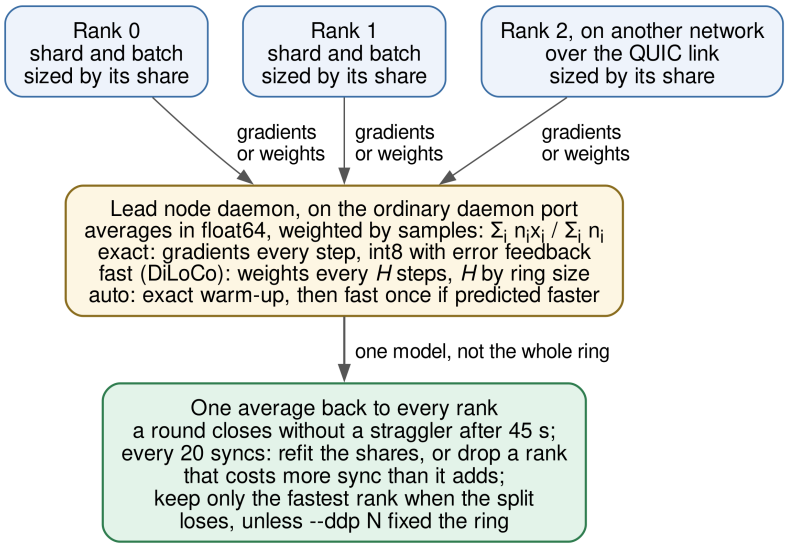


Figure 4.9: Synchronisation over the daemon port. The lead daemon averages by samples and returns one average: 8-bit gradients every step in exact mode, weights every H steps in fast mode; auto switches to fast once.

4.10 The Cost Model

Numerical work is gated so that it moves only when the cluster finishes sooner. Writing ϕ for the arithmetic intensity in floating-point operations per byte, ρ for the times each byte crosses the link, B for the bandwidth, R for the local throughput, R' for that assumed for each node, and K for the nodes that hold the environment, the submitter included, divisible work is distributed only when its time per byte is

turnitin Page 56 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 57 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

lower on the cluster:

$$\underbrace{\frac{\phi}{R}}_{\text{local compute}} > \underbrace{\frac{\rho}{B}}_{\text{transfer}} + \underbrace{1.3\,\frac{\phi}{R'K}}_{\text{remote compute}} \tag{4.2}$$

The payload size multiplies every term of the time comparison and cancels, so the inequality depends only on intensity, bandwidth and throughput; size enters through the separate rules below. The factor 1.3 charges 30% overhead against ideal parallel speedup. Each operation carries its own constants: a matrix product of n rows has $\phi = \max(8, n/8)$, $\rho = 5$ and $R = 200\,\text{GFLOP/s}$; pandas grouping has $\phi = 4$ and joining $\phi = 2$, both with $\rho = 1$ and $R = 1\,\text{GFLOP/s}$; and $R' = R$ except where a GPU is reported. Work that cannot be divided — an SVD or eigendecomposition, with $\phi = \max(8, n/4)$, priced at $1.5\,\text{GFLOP/s}$ and sent whole to one worker — moves when its transfer ($\rho = 3$, over one peer's share of the bandwidth) costs less than half the local computation, since moving it frees the origin entirely.

The checks run in order:

1. At least two nodes and at least 32 MiB of payload are required (`PIPEDPEER_SPILL_MIN` changes the floor). Forced distribution removes the default floor and skips the remaining checks.
2. For pandas work, an intensity below 8 FLOP per byte keeps a payload of up to 512 MiB local. Grouping and joining fall below that intensity, so pandas work is considered only above 512 MiB, and Equation 4.2 then decides.
3. For NumPy work, a working set that does not fit in nine tenths of the available memory goes to the cluster whatever the inequality says, and a matrix product that the cluster cannot accept either raises an error that names the size and the remedy, rather than exhausting the machine.
4. For NumPy work, if any healthy peer reports a GPU, R' is set to $6R$ for all K nodes, a conservative multiplier for the GPU's speed rather than a measured one. The inequality is then evaluated at an optimistic 10 Gbit/s; if offloading is slower even there, the work stays local and nothing is measured.
5. Otherwise the bandwidth is *measured*: the daemon's rate over recent real transfers is used when it has one, and otherwise an 8 MiB probe is pushed through the real dispatch path. The result is cached, and a failed probe keeps the work local.

The GPU multiplier is coarse: one GPU peer prices every node at the GPU rate, although the row blocks of a product run under NumPy on the peers' processors.

The consequence for dense matrix multiplication is that it stays local on a CPU cluster: local BLAS at about 200 GFLOP/s outruns what a CPU cluster's transport can feed it at practical sizes. Measured against a four-core peer, the local product

turnitin Page 57 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 58 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

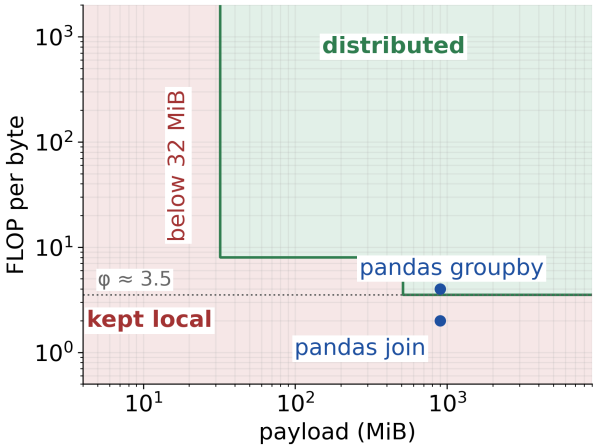


Figure 4.10: Decision regions for pandas work ($\rho = 1$, $R = R' = 1$ GFLOP/s) with three nodes on a 500 MB/s link. Nothing below 32 MiB moves, and work below 8 FLOP per byte stays local up to 512 MiB. Above 512 MiB, Equation 4.2 decides, and on this link it distributes work above about 3.5 FLOP per byte: a 900 MiB grouping ($\phi = 4$) is distributed, while a join of the same size ($\phi = 2$) is kept local.

was 25 to 100 times faster across four shapes, and the model chose local every time. A product ships when it does not fit locally, when a GPU peer makes the model favour it, or when forced. Singular value decomposition, two orders of magnitude slower locally, is offloaded.

4.11 Fault Tolerance

The invariant is that using the cluster is never worse than not using it. Five independent layers enforce it for parallel work; a training ring that loses a rank continues on the remaining ranks (Section 4.9.2).

1. **The race.** Chunks are dealt alternately to the local side and the cluster (Figure 4.11), and results fill a slot table in which the first result for each slot is kept. Idle local cores re-run any chunk the cluster has not yet returned, and the call returns only once every item is covered, so a dead cluster degrades to a plain local pool.

2. **Per-primitive fallback.** Every intercepted call is wrapped, and any error falls back to the original implementation; only a matrix product that fits nowhere raises.

3. **Peer fallback.** A failed peer is skipped for the rest of that chunk and the next candidate tried; if all fail, the work runs locally. A slow peer is raced by a copy of its part.

4. **Worker respawn.** A dead warm worker is restarted, falling back to a one-shot

turnitin Page 58 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 59 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

process if that fails.

5. **Rescheduling.** A failed job is placed again with back-off, on an untried node first and at most three times (Section 4.5).

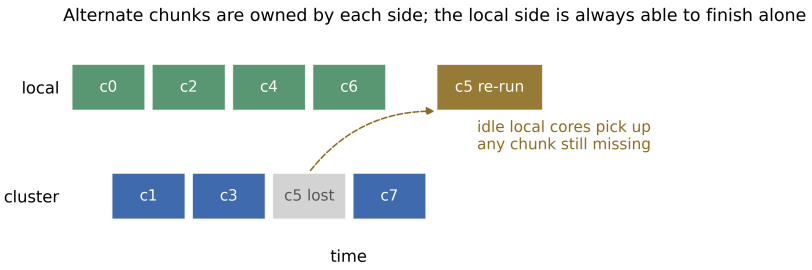


Figure 4.11: Racing local and remote work. The local side is always able to finish alone, which is what makes the guarantee unconditional.

Memory is bounded at the same time: a parallel-map request larger than a node can grant is forwarded to a peer that can, one exceeding 40% of that memory is split into sequential parts, and a request body is capped at the smaller of 2 GiB and half the daemon's memory budget.

4.12 Resource Estimation and Run Reporting

Resource estimation. Tiers are consulted in order, the first that yields a value winning: an explicit `--mem`; 1.2 times the largest peak memory of the recent runs of the same script; or per-library baselines plus 100 MiB for the interpreter; 512 MiB when nothing is known. Each job's recorded peak sizes the next run's admission request.

Commands. The fifteen commands include setup, invite, connect, run, status, attach, doctor and uninstall. The ports are 4242 for the daemon API and discovery, 4243 for direct links and 4244 for the introducer. `pipedpeer doctor` checks the daemon, secret, introducers, peers, firewall, user namespaces, `crun`, Nix, GPU driver, disk and clock, each with its fix. A plain run behaves like Python: it prints the script's own output, passes the script its arguments and returns its exit code, adding one line on where the work ran when any left the machine.

The run record. Every run keeps one record of timed steps — serialising, sending, queueing, computing and receiving each chunk on each machine, building and sending the environment, each synchronisation round, and the script itself — written by the shim, the daemon and the client, and shown by `-v`, the job history, the web page of `pipedpeer ui`, and as CSV or JSON. A dry run reports the memory estimate, unresolved imports, the calls that can spread and where the job would go.

turnitin Page 59 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Chapter 5

Results

The evaluation asks six questions. Does content-addressed caching make repeated submissions cheap (Section 5.3)? What does interception cost when it decides not to distribute (Section 5.4)? Does parallel work cross machines, and is it shared well across unequal ones (Section 5.5)? Does training across machines stay accurate, and when does it pay (Section 5.6)? Does a run survive the loss of a machine (Section 5.7)? And what happens between real machines on different networks (Section 5.9)?

5.1 Evaluation Setup

Hosts. Laboratory measurements ran on two laptops: one with a 13th-generation Intel Core i5-13420H (12 hardware threads) and 15 GiB of memory under Fedora 43, and one with an AMD Ryzen 7 5800H (16 hardware threads), an RTX 3060 laptop GPU and about 14 GiB of usable memory under Fedora 44.

Container labs. Worker daemons run in containers on one host. In the *plain lab* (three workers) the containers share the host's processor, memory and loopback interface; it measures correctness, overhead, cache behaviour and fault handling, and cannot measure multi-machine speedup. Where a figure depends on speed or on the network, each container is given a fixed processor and memory limit and the links between containers are shaped by `tc netem` to the latency, bandwidth and loss of a LAN, a Wi-Fi network or a 5G link, with up to 5% loss; speedup is then one container against N containers of the same size. The *LAN lab* reproduces a college laboratory: containers on one bridge network, the host's own daemon as the GPU machine and one container on multi-user Nix, with a two-container variant sharing the host's GPU for training rings.

Two-site testbed. Joining across networks without Tailscale is evaluated on a two-site container testbed on the same host: two containers on separate private networks, both numbered 192.168.0.0/24, each behind a router container whose iptables rules translate addresses and drop unsolicited inbound packets, with the introducer on a third network standing for the internet. Every user command is run across it.

Training accuracy. The accuracy of each synchronisation setting is measured on

turnitin Page 61 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

three models (Table 5.1) — a four-layer perceptron sized for a GPU (MLP-G), the same perceptron at a CPU sizing (MLP-C), and a small transformer — against one device trained on the same data and seeds: two-rank rings in the lab, larger rings in-process, with the ranks side by side on a single machine. Every model keeps its batch, learning rate and epochs in every arm.

Table 5.1: The three test models

Model	Network and optimiser	Parameters	Samples	Batch	Epochs (steps)
MLP-G	MLP 64–512–512–512–1; SGD 0.05, mom. 0.9	559,105	200,000	4096	3 (147)
MLP-C	Same MLP; SGD 0.1, mom. 0.9	559,105	60,000	2048	6 (180)
Transformer	2 layers, width 64, 4 heads, 32 tokens; AdamW	70,211	40,000	256	2 (314)

Real machines. Two sets of measurements used physical machines. The first joined two laptops in different homes over a direct Tailscale path [42], which runs over WireGuard [59] — the Ryzen 7 5800H laptop and one with an Intel Core i5-13420H (12 threads), an RTX 3050 6 GB laptop GPU and 15.3 GiB — and a Samsung Galaxy S20 FE phone under Termux. The second set is that of Table 5.6: a parallel map between a 20-core 13th-generation Intel Core i9 machine and the Ryzen 7 5800H laptop over Tailscale, training runs over a home link of about 54 Mbit/s, and introducer measurements in which a public cloud host served as the introducer. Per-run records of every measurement are in the project repository [61], under `docs/benchmarks`.

Workloads. Seven example workloads cover a standard-library parallel map, a map over a lambda, scikit-learn with `joblib`, NumPy linear algebra, out-of-core pandas, torch data-parallel training and file synchronisation; one script combines every kind of intercepted work, and five idiomatic, unoptimised user scripts stand in for unseen workloads.

Statistics. Lab wall times are medians of three to five runs, and training rings one seed. Two microbenchmarks use their tool's statistic: interpreter startup is the best of five runs, sandbox start the mean of 20 runs after five warm-up runs. Lab accuracy is the mean of three seeds; in-process accuracy is the mean of seeds 0–2 and, for MLP-C and the transformer, also of seeds 0–5, and both means must pass (seeds 3–5 were run for MLP-C and the transformer only). Sizes in KiB, MiB and GiB are binary (2^{10}, 2^{20} and 2^{30} bytes); KB, MB and GB are decimal.

53
53

turnitin Page 61 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 62 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

5.2 Functional Verification

Correctness is checked at three levels: a unit and integration suite, a mutation audit of that suite, and whole-system runs — every user command across the two-site testbed, the end-to-end runs of Section 5.8 and the failure drills of Section 5.7, which remove machines, links and terminals during a run.

The suite. The Go test suite, run with every optional Python library present (NumPy, pandas, scikit-learn, joblib and torch), passed 1,012 of its 1,017 top-level tests at commit `6bc0ef0`. Four were skipped: two need a container runtime and run under a separate integration flag, one needs a Termux environment and one a system-wide Nix. One failed: a test that requires a cancelled job to stop within one second took 1.56 s, and it failed one of five isolated reruns, so it is timing-sensitive rather than consistently broken. A check fails the build when any of the 15 tests that exercise distribution was skipped, so a missing library cannot turn them into silent passes. The suite checks that a hash-shuffled aggregation equals local pandas, that a parallel map whose every remote part fails still returns the correct result, that the daemon's average is weighted by samples, and that a link hello replayed on another session is refused.

The mutation audit. A suite can pass without proving anything, so a mutation audit disables each of 95 features in turn and requires a named test to fail. The features span every area: in training, the sample-weighted gradient fold, equal step counts across unequal shares and the rule for dropping a rank; in joining across networks, the refusal to publish a router mapping behind a second NAT, the nonce a PCP reply must carry, an introducer that forwards only within its cluster, and one socket for probes and QUIC; in trust, that a signing key must belong to the node offering it, that a peer that leaves stops being trusted, and that setup never disables Nix's signature checking; in shipping work, that a kernel that cannot be serialised runs on local threads; and the cost model's out-of-memory branch, memory accounting between daemons on one machine, and eviction from both closure caches. Every mutation was caught.

Continuous integration. Every pull request runs formatting and static checks, the suite under the race detector, the skip check, a parallel-map benchmark that fails if PipedPeer is more than three times slower than plain Python on one machine, and the startup benchmark of Section 5.4, which fails if interception raises the startup of a trivial job above three times that of plain Python.

turnitin Page 62 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 63 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

5.3 Environment Cache

The same trivial job was submitted five times to the plain lab (Figure 5.1). The first submission, which also built the environment, took 23.4 s; the second landed on a worker that did not yet hold the closure and took 8.1 s; once the closure was in place, a submission sent only the workspace and took a median of 0.83 s.

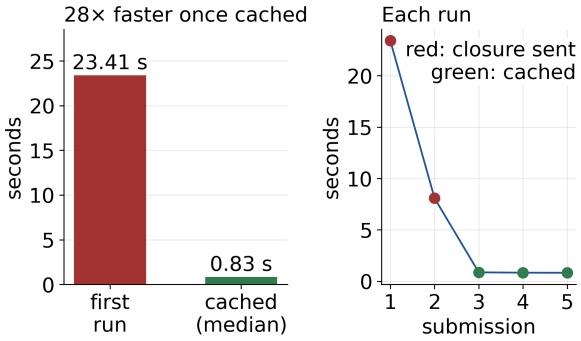


Figure 5.1: Left: first submission against the median of the submissions that sent nothing. Right: every run, coloured by what its log says was sent.

Against a container peer on the submitting laptop, the path-level difference sent 28.6 MB (7 of 43 store paths) instead of 206.0 MB when one package was added to an environment the peer held, 86% fewer bytes, and a peer holding an environment fetched 0.45 MB of a 466 MB closure for one that differed from it by one small pure-Python package. In the LAN lab, a dry-run build of an unseen script's environment took 4 s on a container that had built the common packages ahead of time, against 54 s on one that had not.

With one of two nodes held to 800 kbit/s, the first run waited the upload's 60 s limit for the slow node and then started; the send to that node continued in the background and held up no run, and once it had finished a run took 2.1 s with the slow node taking a share of the items. With the cache cap lowered, both caches were pruned and the next job still ran on its peer.

5.4 Interception and Sandbox Overheads

A 16-item parallel map whose tail is 0.01 s of work against a 0.5 s dispatch floor is declined by the cost model; a forced run of the same workload does dispatch, so the decline is the model's choice and not a dead cluster. Declining costs about 0.12 s per job, the measurement of the head of the map plus the decision: a median of 0.80 s against 0.68 s with interception disabled. Interpreter startup for a job that imports nothing heavy, best of five runs on the Core i5-13420H laptop, is 1.24× that of plain Python when NumPy, pandas, torch and joblib are patched on first import; patching

turnitin Page 63 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 64 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

them at startup instead cost 20.0×, measured on a different machine (Figure 5.2). A continuous-integration check fails any change that raises this ratio above 3×.

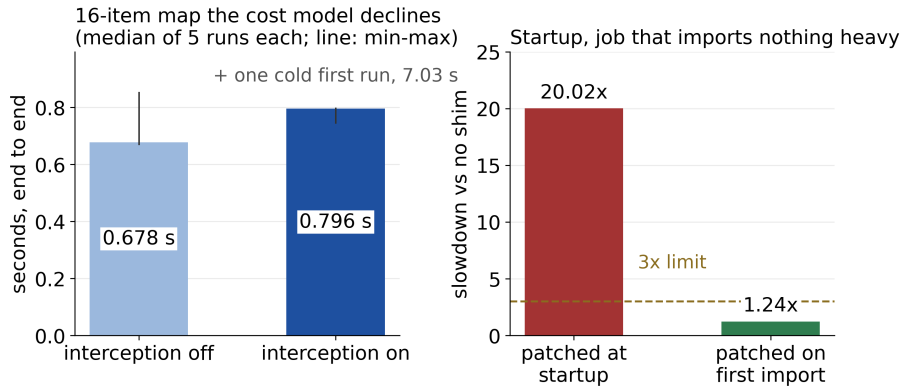


Figure 5.2: Left: the declined 16-item parallel map, median and range; the enabled side's cold first run is left out of its range. Right: interpreter startup with libraries patched at startup and on first import, best of five runs.

Sandbox start. The OCI runtime `crun` costs 15 to 21 ms more per job than the lighter Bubblewrap (`bwrap`) [60] across three tasks (means of 20 runs), which is small beside a warm job of under a second, and its device model is what makes GPU passthrough possible (Figure 5.3).

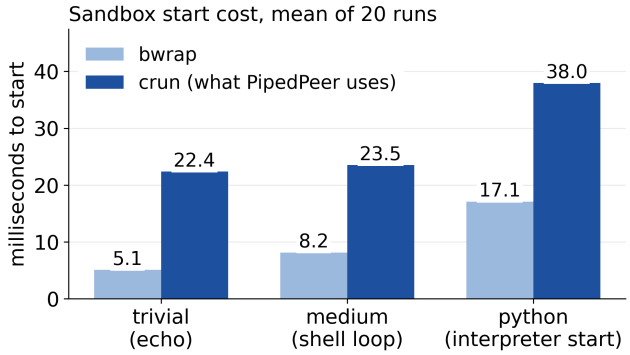


Figure 5.3: Sandbox start cost, mean of 20 runs after five warm-up runs.

5.5 Distribution Across Machines

Work crosses nodes. With distribution forced, the node running a 48-item parallel map sent 18 items to three other daemons of the plain lab, one of them the submitting machine's own, with results identical to a local run. The NumPy workload moved its 34 MB singular value decomposition to one worker. Because the plain lab's containers share the host's processor, distribution there can only add overhead. A separate, unforced run of the pool benchmark shows how much: plain Python took 0.17 s, a hand-tuned pool 0.17 s, and the untouched script under PipedPeer 0.24 s, with 12 of its 48 items on the cluster.

turnitin Page 64 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 65 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Sharing by measured speed. On a lab cluster limited to 8, 2 and 1 CPUs, dividing a map by headcount took 3.6 s (median of five), 1.6 times slower than not distributing at all. Dividing by measured throughput declined the one-CPU worker and took 2.9 s, faster than the headcount split. Derived from those two figures, it was still about 1.3 times slower than a local run, so at this size the map is better kept on one machine. With one peer held to a tenth of a processor in a cluster of otherwise equal peers, the slowdown against an equal cluster fell from 1.6 times on the first run to 1.08 by the fourth, as the fit learned the slow peer (Table A.2).

Scaling. With each container held to a fixed quota of two processors, a scaling map sweeps one variable at a time with the rest fixed — payload from 1 KB to 64 MB, 8 to 2048 items, per-item cost from 10^3 to 3×10^6 operations, two to four nodes, and a speed spread of up to ten times — and fits each step's growth on a log-log scale from the run records. No CPU step grew faster than its expected order. Four equal nodes ran a map 2.9 times faster than one (0.81 s against 2.37 s, medians of three on a host that was also running other work, so the wall times are inflated unevenly; the growth fits use processor time): quotas that together stay within the host's processor let this map measure how the cost grows with the node count, which the shared plain lab cannot; it is not a speedup between physical machines.

5.6 Training

One machine or a split. The decision between a ring and one device matters in both directions. In the lab, a small model with heavy steps on a LAN trained in 9.1 s split across two containers of two processors against 11.8 s on one such container, while a 9 MB model with light steps on Wi-Fi took 80.7 s split against 8.0 s on one container. A GPU widens the gap: the training job of Table 5.6, measured in one run on one machine, took 1.5 s on an RTX 3060 against 55.0 s on its processors.

Fast synchronisation. At the default interval for two ranks, 32 steps, in-process runs kept every model within the 1% bar: MLP-G +0.06%, MLP-C +0.64% and the transformer +0.73% over seeds 0–2, and MLP-C +0.35% and the transformer −1.02% over seeds 0–5 (seeds 3–5 were run for MLP-C and the transformer only). Table 5.2 gives one lab run of a two-rank ring at that interval: each rank sent 7.6 to 9.2 times fewer bytes than under exact synchronisation, and the ring finished 1.2–1.4 times faster than exact on the LAN and 1.6–3.1 times on Wi-Fi (Figure 5.4). Exact synchronisation sends one 8-bit gradient of about 0.55 MiB per step for either perceptron, so MLP-C sends more than MLP-G only because it runs 180 steps against 147; under fast synchronisation the number of synchronisations, not of steps, sets the bytes. A separate lab run at 64 steps, three seeds per cell, also stayed within

turnitin Page 65 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 66 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

the bar on both profiles: MLP-G +0.64%/+0.61%, MLP-C −2.14%/−2.09% and the transformer +0.18%/+0.50% (LAN/Wi-Fi), each within the spread of exact synchronisation's own gap; MLP-C's negative gap reflects that periodic averaging can generalise slightly better than exact synchronisation [18]. The default is 32 rather than 64 because in-process the transformer failed at 64 on seeds 0–2 (+2.13%).

Table 5.2: Two-rank ring in the lab at the default interval of 32 steps: bytes sent per rank and wall time against one container (one seed)

Model	One device, seconds	MiB per rank, exact / fast	Seconds, exact LAN / Wi-Fi	Seconds, fast LAN / Wi-Fi
MLP-G	27.9	81.1 / 10.7	20.0 / 41.8	15.2 / 18.9
MLP-C	16.9	98.9 / 10.7	14.6 / 43.7	10.4 / 14.1
Transformer	26.7	21.7 / 2.4	22.7 / 35.9	19.1 / 22.9

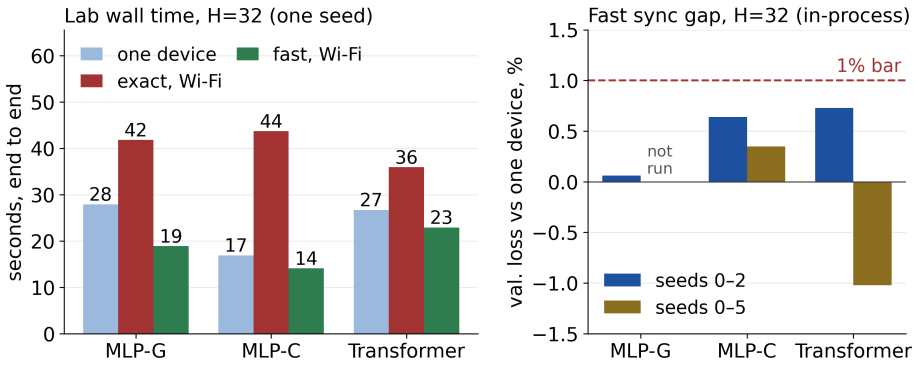


Figure 5.4: Fast synchronisation at the two-rank default of 32 steps. Left: lab wall time of one device and of a two-rank ring under exact and fast synchronisation on Wi-Fi, one seed, from the run of Table 5.2. Right: in-process validation-loss gap to one device, mean of seeds 0–2 and of seeds 0–5 where run; the dashed line is the 1% bar.

The outer step and the ring size. DiLoCo's outer step (Nesterov momentum 0.9 at an outer learning rate of 0.7) failed the bar at every interval tried, leaving the transformer 21.7% above one device even with one synchronisation per epoch (156 local steps), the longest interval these runs allow. In-process runs on the same three models, on up to six seeds, set the interval $H(n)$ as the largest that passed on every model: 32 steps at two ranks, 16 at three and 4 at four; at eight ranks the transformer failed at every interval down to 2, so no interval is used for five or more ranks. Of ten methods tested at 4, 8 and 11 ranks, only exact synchronisation with rank-16 PowerSGD [20] compression and error feedback kept every model within 1% (worst mean +0.18%), at 3.2× fewer bytes than 8-bit exact synchronisation on the perceptrons but 1.7× more on the transformer (Table A.2). Fast synchronisation therefore serves the two to four machines of a small group.

turnitin Page 66 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 67 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Adapting the ring. Offered ranks of 16, 8 and 2 CPUs, containers with those CPU quotas sharing one host, admission took the 16 and the 8, shared the work 66:34, and ran in 23.6 s against 25.4 s with equal batches. That compares two rings, not a ring with one machine: in the same session a three-rank ring of those containers took 36.4 s against 6.9 s for the single machine the admission rule picks. Throttling one rank's container from 8 CPUs to 1 and back moved the shares from 64:36 to 84:16, as the step-time window saw the throttled rank slow down, and then to 70:30 after it recovered.

5.7 Fault Tolerance and Recovery

Table 5.3 lists the failure drills run in the LAN lab and its two-container GPU variant, and the cut link on the two-site testbed. They exercise rescheduling (Section 4.11), re-sharding at an epoch boundary (Section 4.9.2), the cancel frame and the logged output stream. The tests add that a parallel map whose every remote chunk fails still returns the correct result (Section 5.2).

5.8 End-to-End Runs in the LAN Lab

The whole system was run end to end in the LAN lab for the processor steps and its two-container GPU variant for the GPU steps. The containers share one laptop, so Table 5.4 shows what each step costs and that it works, not speedup. A cold run is the first ever on fresh containers; a cached run follows it. The GPU job's first run is not given, because that run measured a closure broadcast to nodes without a GPU rather than the step itself. The last row ran eight jobs at once on containers with 6.0 GB of memory in total.

Cold times are dominated by building and fetching environments; the GPU steps download CUDA torch.

5.9 Measurements Between Real Machines

Two laptops in different homes. Table 5.5 gives runs between two laptops connected over a direct Tailscale path with a 6–8 ms round trip. Times are the script's own unless marked from submission.

The mixed CPU script ran faster across the two laptops than on one. The small training model did not: one GPU finished first. The rings were fixed with `--ddp 2`, so the automatic choice could pick only the sync mode, not release a rank; without `--ddp` N the lead releases a ring that one rank alone outruns. The first five rows

turnitin Page 67 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 68 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Table 5.3: Failure drills

Drill	Result
A node's link cut during a parallel map, two-site testbed	its **53** items run again on the submitting node once it overran its predicted 18 s; checksum unchanged
A worker killed with map chunks in flight (plain lab, 80 items)§	**33** items had run on peers; no chunk lost; result correct
A worker killed during a remote job	node reported gone **16** s after the kill
A training rank killed during a run	remaining rank finished all 80 epochs, **90.5** s
A training rank's machine back during a run	rejoined at the next epoch, **4** s after its daemon started
Interrupt during a parallel map	peers stopped within **2** s
Terminal closed during a run	stopped everywhere, as an interrupt
Detach, then attach while running and after it finished	followed live; replayed in **1.0** s once finished
Submitter's network removed during a remote job	**200** s outage: job ran once, results back **15** s after reconnect
Introducer's address changed, no commands run	links held or re-formed with no command; read at 12.1–12.6 s, the harness's 12 s floor‡

‡When the path survives the move outright, the harness counts a recovery no earlier than 12 s after it, so this reading does not measure a recovery time.
§Recorded in commit `a9c715d` (3 November 2026), after an October run of the same harness had distributed nothing; its raw output is not stored in the repository.

Table 5.4: End-to-end steps, first run and cached

Step	Cold	Cached
Parallel map	43.5 s	17.0 s
Map over a lambda	20.5 s	4.8 s
GPU job submitted from a GPU-less node	—	7.6 s
Two-rank GPU ring on one shared GPU	630.3 s	9.5 s
Combined script	664.6 s	26.7 s
Five student-style scripts*	35–126 s each	20–70 s each
Concurrent workloads	412.0 s, all 8 jobs completed	

*First run after the common packages were built ahead of time.

turnitin Page 68 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 69 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Table 5.5: Two laptops over the internet (RTX 3060 and RTX 3050)

Run	**Result**
CPU script (pool, joblib, NumPy, pandas), three runs each	13.3–14.6 s split, about half the items on the peer, against 17.4–18.1 s on one laptop
Whole job sent to the peer	9.1 s; 11.7 s from submission
Small training model, one GPU	4.2 s, validation loss 0.0794
Same, `--ddp 2`, exact synchronisation	37.1 s, loss 0.0797
Same, `--ddp 2`, fast synchronisation	7.4 s, loss 0.0796
Same, `--ddp 2`, automatic choice (first build)	32.9 s; that build could not switch a fixed ring to fast mode
Second session: `--ddp 2`, fast synchronisation	8.5 s, loss 0.0797
Second session: `--ddp 2`, automatic choice	14.6 s, fast after a short exact warm-up; loss 0.0796
Combined script, from submission: first run and repeat	506 s (487 s environment build, CUDA torch download); 17.7 s, of which the script 15.6 s

come from one session, in which fast synchronisation ran 5.0 times faster than exact (7.4 against 37.1 s) at about the same loss. The last two come from a second session on the build whose automatic choice can switch a fixed ring to fast mode; exact synchronisation was not repeated in it. There the automatic choice took 14.6 s against 8.5 s for fast synchronisation. The automatic choice starts exact and is first evaluated at the twentieth synchronisation, so it synchronised exactly for 19 steps before switching, 25 times in all, whereas the fast run's exact warm-up is a tenth of its 147 steps, 15 steps.

Across two NATs. On the two-site testbed of Section 5.1, scripts, parallel maps, remote runs and both training sync modes ran across the sites, and when a node's link was cut mid-run its items re-ran on the submitting node with the result unchanged. Two machines meet directly when one introducer is reachable; otherwise a public address or an overlay such as Tailscale is required. The two laptops above ran over Tailscale for that reason: neither home offered a reachable introducer (one router refuses port mapping, the other machine sits behind two NATs). No relay is involved in either case.

A phone. On a Samsung Galaxy S20 FE (Android 13, Termux), a laptop's CPU script spread over that laptop, a second laptop over the internet and the phone gave the phone 8 of 192 parallel items with an unchanged result, after the phone had built the job's environment from the binary cache in 27 s. A torch script training

turnitin Page 69 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 70 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

160 small models gave the phone 6 of them, all converged; with 32, it took none. Run on the phone alone, the CPU script without its pandas step took 62.4–66.0 s with Nix's Python under `proot` and 72.8–80.8 s with Termux's own Python. Whether adding the phone shortened a run was not measured.

Further measurements. Table 5.6 collects the second set of physical-machine measurements of Section 5.1, each taken a few times.

Table 5.6: Further measurements between real machines

Measurement	Result
Parallel map, Core i9 machine and Ryzen 7 laptop over Tailscale, plain Python against PipedPeer	5.8–6.4 s against 4.9–5.4 s; 116 of 256 items on the peer
Training over a home link of about 54 Mbit/s: one machine, two ranks with 16-bit gradients, two ranks with 8-bit gradients	54.9 / 69.4 / 56.1 s; loss 0.0875 / 0.0875 / 0.0877
Introducer traffic during a cross-network run, public cloud host as introducer	0.2 MB, against about 30 MB between the peers
Introducer suspended during a run	live peer still reached in 0.03 s
Signed closure on a host that requires signatures	imported when the sender's key was trusted; refused when it was removed
Daemon memory ceiling, 3 GiB allocation under a 1 GiB ceiling	child killed in seconds, out-of-memory recorded

A parallel map ran faster across two machines than on one, though short of what the core counts allow, since a job of about 5 s is dominated by setup and serialisation; exact training over a home link was not faster than one machine; the introducer carried a negligible share of the traffic.

5.10 Comparative Analysis

Table 5.7 sets PipedPeer against Spark, Ray, Dask, BOINC and plain `ssh`. The upper block lists the criteria PipedPeer was designed to meet; the lower block is the more informative half (Section 4.3). The others are far more capable at scale; PipedPeer trades maturity and scale for removing setup, code change and network configuration. The entries come from published designs, not benchmarks.

turnitin Page 70 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

turnitin Page 71 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Table 5.7: PipedPeer against existing systems. The lower block is where PipedPeer is partial or the weaker system.

Property	**PipedPeer**	**Spark**	**Ray**	**Dask**	**BOINC**	**ssh**
What it does differently						
Runs unmodified Python	yes	no	partial	partial	no	yes
No cluster to configure	yes	no	no	no	no	partial
No head or master node	yes	no	no	no	no	yes
Reproduces the environment	yes	partial	partial	partial	partial	no
Joins NATed machines, no relay†	yes	no	no	no	no	no
Where it is partial or behind						
Survives losing a node*	partial	yes	yes	yes	yes	no
Authenticated, encrypted	partial	yes	partial	partial	yes	yes
Sandboxes each job	partial	no	no	no	partial	no
Runtimes beyond Python	no	yes	partial	no	yes	yes
Proven in production	no	yes	yes	yes	yes	yes

†When one introducer is reachable; otherwise a public address or an overlay such as Tailscale is needed.
*Any worker; not the submitter of a parallel script or the machine of a training ring's rank 0.

turnitin Page 71 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Chapter 6

Conclusion

6.1 Conclusion

PipedPeer runs an unmodified Python script on other machines with no cluster to configure, reproduces its environment exactly, distributes the parallel work inside it without the user touching the source, and joins machines on different networks with a single command and no relay. It ships environments as signed Nix closures, sending a peer only the store paths it lacks. It substitutes the parallel primitives a script already uses and divides their work by measured speed, under a cost model that keeps work local when moving it would be slower. It joins machines on different networks through an introducer that every daemon serves and that carries no job data. It places each job from the submitting client, under a three-phase lease, with no scheduler process. It keeps the result of every distributed path by falling back to a local one. It trains PyTorch models data-parallel through the daemons, weighting batches by measured speed and choosing exact or fast synchronisation by ring size. In the evaluation, a worker that held an environment started a job in 0.83 s against 23.4 s cold, one that held part of it received 86% fewer bytes, and at 32 steps on two ranks fast synchronisation held accuracy while each rank sent 7.6 to 9.2 times fewer bytes. It was also slower than one machine where the work was small: short parallel maps, small models on a GPU, and exact training over a home link.

The principle that runs through the design is that the cluster is used only when a measurement says it will help: work is divided by measured speed rather than by headcount, dense matrix products stay local on a CPU cluster, a training ring whose size the user did not fix is released when one GPU is faster, and fast synchronisation is chosen only for ring sizes where it kept accuracy.

6.2 Limitations

- **No relay.** Two machines between which no direct path exists — for example two carrier networks that both allocate a new port per destination — cannot work together; such a peer is reported and routed around.
- **Python and Linux only**, with NVIDIA GPUs in practice; phones take parallel

turnitin Page 73 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

chunks only.

- **Submitter and lead.** A parallel script runs on its submitter, which must survive the job, and a training ring needs rank 0's machine.
- **Fast synchronisation for small rings.** No interval kept accuracy at eight ranks, so automatic mode keeps rings of five or more exact.
- **Interception gaps.** Only `map` of a process-pool executor is intercepted, the `@` operator is not, and numerical work under 32 MiB never leaves the node, by design.
- **A partial sandbox.** The job runs as user 0 inside the container with the host's network and no seccomp filter, and isolation is skipped with a warning on a node lacking `crun` or user namespaces.
- **Measurement.** Speedup comes from containers with fixed processor quotas and a few real machines; the success rate of hole punching across many networks, two GPUs in one machine and fast synchronisation at five to seven ranks are not measured. NAT traversal is evaluated on the two-site testbed on one host; the runs between real homes used an overlay and measure distribution, not traversal. No wall-time comparison against Ray, Dask or `torchrun` was run: the comparison of Table 5.7 is qualitative.
- **Fixed cost constants.** The cost model prices each operation with fixed throughputs and intensities, and a single GPU peer raises the assumed remote throughput of every node (Section 4.10).
- **Seed spread.** The 1% accuracy bar applies to the mean over seeds; single seeds spread wider, from -3.9% (the lab run at 64 steps) to $+2.2\%$ (in-process at 32 steps) against one device, so one run can miss the bar while the mean meets it.
- **Trust.** Every holder of the cluster secret can run code on every node (Section 4.3).

turnitin Page 73 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Chapter 7

Future Scope

The most pressing work is **closing the security gaps**: binding trusted signing keys to the identities that authenticated a link, requiring TLS rather than preferring it, checking signatures on every import path, and authorising users more finely than by one shared secret. Next to it, **a relay of last resort** would join the peer pairs that no direct path can reach, without making it the default data path.

Placement would gain from **locality and topology**: accounting for which node already holds the input data, as iDDS [25] does, and for network distance through a graph-structured view of the cluster [31]. **Fault tolerance for the submitter and the lead** would let a parallel script outlive its submitter and a training ring outlive rank 0's machine, and **a cluster-wide view** would merge every machine's events in one place.

The system can reach more hardware and more programs. **More accelerators** means AMD GPUs through ROCm and phones that run whole jobs; **memory escalation** on out-of-memory would try gradient accumulation, checkpointing and lower precision before failing; and **additional runtimes** would extend interception beyond Python.

For training, **fast synchronisation for larger rings** could build on compressed exact synchronisation with PowerSGD, which kept accuracy at 4 to 11 ranks in this work, and on synchronising the model in staggered fragments (Streaming DiLoCo [49]). Finally, **a controlled multi-machine evaluation** across separate machines and networks, including a machine with two GPUs, would measure speedup where the container lab cannot.

Chapter 8

Research Publication

8.1 PipedPeer: Running Unmodified Python Across a Small Group's Machines Without a Configured Cluster

A journal article drawn from this work, "PipedPeer: Running Unmodified Python Across a Small Group's Machines Without a Configured Cluster", by Yateen Vaviya, Vinayak Yadav, Sahil Gupta and Dr. Rupali Sawant of the Department of Computer Engineering, Sardar Patel Institute of Technology, was submitted to the *Journal of Parallel and Distributed Computing* (Elsevier) as a regular research paper. Status: submitted on 3 November 2026 as manuscript JPDC-D-26-02273, under review.

The article presents PipedPeer for a systems readership and is organised as follows.

- **Introduction** states the three obstacles to using nearby idle machines — the environment, the code and the network — and the article's contributions.
- **Background and related work** places PipedPeer against cluster frameworks for Python, volunteer computing, environment reproduction, NAT traversal, and communication-efficient data-parallel training.
- **Design overview** sets out the design goals and the architecture of Chapter 3: one daemon per machine, coordination by the submitting machine, and an introducer in every daemon.
- **Mechanisms** and **Implementation** describe the parts of Chapter 4: content-addressed environments and path-level transfer, transparent interception with measured work sharing and the cost model, training synchronised through the daemon, and joining across networks.
- **Evaluation** states its questions and answers them with the measurements of Chapter 5, in the order of setup, microbenchmarks, end-to-end runs and training.
- **Discussion**, **Threats to validity and limitations** and **Conclusion and future work** close the article.

A shorter version in the IEEE conference format, "PipedPeer: Zero-Configuration

turnitin Page 76 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Distributed Computing via Recursive, Decentralised Coordination", six pages, accompanies this report for its evaluation.

turnitin Page 76 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Bibliography

[1] M. Zaharia, M. Chowdhury, M. J. Franklin, S. Shenker, and I. Stoica, "Spark: Cluster computing with working sets," in *Proc. 2nd USENIX Workshop on Hot Topics in Cloud Computing (HotCloud)*, 2010.

[2] P. Moritz et al., "Ray: A distributed framework for emerging AI applications," in *Proc. 13th USENIX OSDI*, 2018, pp. 561–577.

[3] M. Rocklin, "Dask: Parallel computation with blocked algorithms and task scheduling," in *Proc. 14th Python in Science Conference (SciPy)*, 2015, pp. 126–132.

[4] J. Dean and S. Ghemawat, "MapReduce: Simplified data processing on large clusters," in *Proc. 6th USENIX OSDI*, 2004, pp. 137–150.

[5] D. Petersohn et al., "Towards scalable dataframe systems," *Proc. VLDB Endowment*, vol. 13, no. 12, pp. 2033–2046, 2020.

[6] D. P. Anderson, "BOINC: A system for public-resource computing and storage," in *Proc. 5th IEEE/ACM Workshop on Grid Computing*, 2004, pp. 4–10.

[7] E. Dolstra, M. de Jonge, and E. Visser, "Nix: A safe and policy-free system for software deployment," in *Proc. 18th LISA*, 2004, pp. 79–92.

[8] Open Container Initiative, "OCI Runtime Specification, v1.0.2," 2020. [Online]. Available: https://github.com/opencontainers/runtime-spec

[9] crun, "A fast and lightweight fully featured OCI runtime and C library for running containers," 2017. [Online]. Available: https://github.com/containers/crun. Accessed: Oct. 16, 2026.

[10] S. Sekigawa, C. Sasaki, and A. Tagami, "Web application-based WebAssembly container platform for extreme edge computing," in *Proc. IEEE GLOBECOM*, 2023, pp. 3609–3614.

[11] M. N. Hoque and K. A. Harras, "WebAssembly for edge computing: Potential and challenges," *IEEE Commun. Standards Mag.*, vol. 6, no. 4, pp. 68–73, Dec. 2022.

[12] S. Kakati and M. Brorsson, "A cross-architecture evaluation of WebAssembly in the cloud-edge continuum," in *Proc. IEEE/ACM CCGrid*, 2024, pp. 337–346.

[13] J. Bachmeier, V. Yussupov, J. Henß, and H. Koziolek, "WebAssembly with wasi-nn for edge machine learning inference: Experiences and lessons learned," in *Proc. ECSA*, 2025, pp. 343–359.

[14] S. E. Khelifa, M. Bagaa, A. O. Messaoud, and A. Ksentini, "Case study of WebAssembly runtimes for AI applications on the edge," in *Proc. Global Information Infrastructure and Networking Symp. (GIIS)*, 2024, pp. 1–6.

[15] S. Li et al., "PyTorch distributed: Experiences on accelerating data parallel training," *Proc. VLDB Endowment*, vol. 13, no. 12, pp. 3005–3018, 2020.

[16] T. Dettmers, "8-bit approximations for parallelism in deep learning," in *Proc. 4th Int. Conf. Learning Representations (ICLR)*, 2016; arXiv:1511.04561.

[17] F. Seide, H. Fu, J. Droppo, G. Li, and D. Yu, "1-bit stochastic gradient descent and its application to data-parallel distributed training of speech DNNs," in *Proc. Interspeech*, 2014, pp. 1058–1062.

[18] T. Lin, S. U. Stich, K. K. Patel, and M. Jaggi, "Don't use large mini-batches, use local SGD," in *Proc. 8th Int. Conf. Learning Representations (ICLR)*, 2020; arXiv:1808.07217.

[19] A. Douillard et al., "DiLoCo: Distributed low-communication training of language models," arXiv:2311.08105, 2023.

[20] T. Vogels, S. P. Karimireddy, and M. Jaggi, "PowerSGD: Practical low-rank gradient compression for distributed optimization," in *Proc. Adv. Neural Inf. Process. Syst.*

(NeurIPS), vol. 32, 2019.

[21] Y. Li and S. Fujita, "Design of Elixir-based edge server for responsive IoT applications," in *Proc. 10th Int. Symp. Computing and Networking Workshops (CANDARW)*, 2022, pp. 185–191.

[22] Y. Li and S. Fujita, "A synergistic Elixir-EDA-MQTT framework for advanced smart transportation systems," *Future Internet*, vol. 16, no. 3, Art. no. 81, 2024.

[23] J. Spenger, "Programming models for failure-transparent distributed systems," Ph.D. dissertation, KTH Royal Institute of Technology, Stockholm, Sweden, 2025.

[24] A. Meurer et al., "Python array API standard: Toward array interoperability in the scientific Python ecosystem," in *Proc. 22nd Python in Science Conf. (SciPy)*, 2023, pp. 8–17.

[25] W. Guan et al., "iDDS: Intelligent distributed dispatch and scheduling for workflow orchestration," arXiv:2510.02930, 2025.

[26] Y. Deng, Z. Chen, X. Chen, and Y. Fang, "Task offloading in multi-hop relay-aided multi-access edge computing," *IEEE Trans. Veh. Technol.*, vol. 72, no. 1, pp. 1372–1376, Jan. 2023.

[27] H. He, X. Yang, X. Mi, H. Shen, and X. Liao, "Multi-agent deep reinforcement learning based dynamic task offloading in a device-to-device mobile-edge computing network to minimize average task delay with deadline constraints," *Sensors*, vol. 24, no. 16, Art. no. 5141, 2024.

[28] D. Yong, R. Liu, X. Jia, and Y. Gu, "Joint optimization of multi-user partial offloading strategy and resource allocation strategy in D2D-enabled MEC," *Sensors*, vol. 23, no. 5, Art. no. 2565, 2023.

[29] S. Wang et al., "Energy-efficient collaborative task offloading in multi-access edge computing based on deep reinforcement learning," *Ad Hoc Networks*, vol. 169, Art. no. 103743, Mar. 2025.

[30] C. Li et al., "Blockchain enabled task offloading based on edge cooperation in the digital twin vehicular edge network," *J. Cloud Comput.*, vol. 12, Art. no. 120, 2023.

[31] Z. Zhao, J. Perazzone, G. Verma, and S. Segarra, "Congestion-aware distributed task offloading in wireless multi-hop networks using graph neural networks," in *Proc. IEEE ICASSP*, 2024, pp. 8951–8955.

[32] M. Petit-Huguenin, G. Salgueiro, J. Rosenberg, D. Wing, R. Mahy, and P. Matthews, "Session Traversal Utilities for NAT (STUN)," RFC 8489, Internet Engineering Task Force, Feb. 2020.

[33] D. MacDonald and B. Lowekamp, "NAT behavior discovery using Session Traversal Utilities for NAT (STUN)," RFC 5780, Internet Engineering Task Force, May 2010.

[34] S. Cheshire and M. Krochmal, "NAT Port Mapping Protocol (NAT-PMP)," RFC 6886, Internet Engineering Task Force, Apr. 2013.

[35] D. Wing, S. Cheshire, M. Boucadair, R. Penno, and P. Selkirk, "Port Control Protocol (PCP)," RFC 6887, Internet Engineering Task Force, Apr. 2013.

[36] UPnP Forum, "Internet Gateway Device (IGD) V2.0," Standardized DCP, 2010.

[37] B. Ford, P. Srisuresh, and D. Kegel, "Peer-to-peer communication across network address translators," in *Proc. USENIX Annual Technical Conf.*, 2005, pp. 179–192.

[38] J. Iyengar and M. Thomson, "QUIC: A UDP-based multiplexed and secure transport," RFC 9000, Internet Engineering Task Force, May 2021.

[39] E. Rescorla, "The Transport Layer Security (TLS) protocol version 1.3," RFC 8446, Internet Engineering Task Force, Aug. 2018.

[40] D. J. Bernstein, N. Duif, T. Lange, P. Schwabe, and B.-Y. Yang, "High-speed high-security signatures," *J. Cryptographic Engineering*, vol. 2, no. 2, pp. 77–89, 2012.

[41] Y. Collet and M. Kucherawy, "Zstandard compression and the 'application/zstd' media type," RFC 8878, Internet Engineering Task Force, Feb. 2021.

[42] D. Anderson, "How NAT traversal works," Tailscale blog, Aug. 2020. [Online]. Available: https://tailscale.com/blog/how-nat-traversal-works. Accessed: Oct. 16, 2026.

[43] E. Rescorla, "Keying material exporters for Transport Layer Security (TLS)," RFC 5705, Internet Engineering Task Force, Mar. 2010.

[44] H. Krawczyk, M. Bellare, and R. Canetti, "HMAC: Keyed-hashing for message authentication," RFC 2104, Internet Engineering Task Force, Feb. 1997.

[45] cloudpickle, "Extended pickling support for Python objects," 2015. [Online]. Available: https://github.com/cloudpipe/cloudpickle. Accessed: Oct. 16, 2026.

[46] Termux, "Termux: Android terminal emulator and Linux environment," 2015. [Online]. Available: https://termux.dev. Accessed: Oct. 16, 2026.

[47] PRoot, "`chroot`, `mount --bind`, and `binfmt_misc` without privilege/setup for Linux," 2010. [Online]. Available: https://proot-me.github.io. Accessed: Oct. 16, 2026.

[48] D. G. Thaler and C. V. Ravishankar, "Using name-based mappings to increase hit rates," *IEEE/ACM Trans. Networking*, vol. 6, no. 1, pp. 1–14, Feb. 1998.

[49] A. Douillard et al., "Streaming DiLoCo with overlapping communication: Towards a distributed free lunch," arXiv:2501.18512, 2025.

[50] P. Goyal et al., "Accurate, large minibatch SGD: Training ImageNet in 1 hour," arXiv:1706.02677, 2017.

[51] E. Hoffer, I. Hubara, and D. Soudry, "Train longer, generalize better: Closing the generalization gap in large batch training of neural networks," in *Proc. Adv. Neural Inf. Process. Syst. (NeurIPS)*, vol. 30, 2017, pp. 1729–1739.

[52] T. B. Johnson, P. Agrawal, H. Gu, and C. Guestrin, "AdaScale SGD: A user-friendly algorithm for distributed training," in *Proc. 37th Int. Conf. Machine Learning (ICML)*, PMLR vol. 119, 2020, pp. 4911–4920.

[53] A. Sarfi, B. Thérien, J. Lidin, and E. Belilovsky, "Overcoming the communication-performance tradeoff in LLM pretraining," arXiv:2508.15706, 2025.

[54] A. F. Aji and K. Heafield, "Sparse communication for distributed gradient descent," in *Proc. Conf. Empirical Methods in Natural Language Processing (EMNLP)*, 2017, pp. 440–445.

[55] T. Li, A. K. Sahu, M. Zaheer, M. Sanjabi, A. Talwalkar, and V. Smith, "Federated optimization in heterogeneous networks," in *Proc. Machine Learning and Systems (MLSys)*, vol. 2, 2020, pp. 429–450.

[56] M. J. Litzkow, M. Livny, and M. W. Mutka, "Condor—A hunter of idle workstations," in *Proc. 8th Int. Conf. Distributed Computing Systems (ICDCS)*, 1988, pp. 104–111.

[57] D. Thain, T. Tannenbaum, and M. Livny, "Distributed computing in practice: The Condor experience," *Concurrency and Computation: Practice and Experience*, vol. 17, no. 2–4, pp. 323–356, 2005.

[58] A. Sergeev and M. Del Balso, "Horovod: Fast and easy distributed deep learning in TensorFlow," arXiv:1802.05799, 2018.

[59] J. A. Donenfeld, "WireGuard: Next generation kernel network tunnel," in *Proc. Network and Distributed System Security Symp. (NDSS)*, 2017.

[60] Bubblewrap, "Low-level unprivileged sandboxing tool used by Flatpak and similar projects," 2016. [Online]. Available: https://github.com/containers/bubblewrap. Accessed: Oct. 16, 2026.

[61] Y. Vaviya, V. Yadav, and S. Gupta, "PipedPeer," source code and measurements. [Online]. Available: https://github.com/vinayakyadav2709/Pipedpeer. Accessed: Oct. 16, 2026.

Appendix A

Implementation Size and Further Measurements

A.1 Scale of the Implementation

Table A.1 gives the size of the implementation and of its test suite.

Table A.1: Implementation size

Measure	Value
Go source, excluding tests*	49,576 lines across 191 files
Go tests*	38,114 lines across 216 files
Python interception shim, embedded	7,251 lines
Go packages	47: the binary's 46 (45 internal and `main`) and the separate benchmark module's one
Mutations in the test audit	95, all caught

*Every `.go` file in the source tree at the final revision, split only by the `_test.go` suffix; lines counted with `wc -l`, blank and comment lines included.

A.2 Further Measurements

Table A.2 lists measurements that support individual mechanisms of Chapter 4 but are not needed for the questions of Chapter 5. All are from the container labs of Section 5.1 unless stated.

Table A.2: Further measurements

Measurement	Result
Parallel-map request body for a 100 MB payload	built in 0.06 s, for 100 items of 1 MB and for 1000 items
Workspace re-upload after editing one file (40 files of 200 KB, two-rank run on two nodes, LAN)	8.0 MB stored on the second node on the first run, 200 KB after the edit
Empty script, environment already on the node	0.23 s total overhead

turnitin Page 81 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417

Measurement	**Result**
Many-rank remedies for fast synchronisation, in-process, at 4, 8 and 11 ranks	rank-16 PowerSGD with error feedback on exact synchronisation within 1% on every model (worst mean +0.18%), sending 3.2× fewer bytes than 8-bit exact synchronisation on the perceptrons and 1.7× more on the transformer; keeping each rank's batch, with or without learning-rate scaling [50–52] or doubled epochs, SparseLoCo [53], top-k [54], FedProx [55], rank-4 PowerSGD and outer learning rates of 1.25 or more all failed
One peer at a tenth of a processor among equal peers (lab), slowdown against an equal cluster on four consecutive runs	1.60, 1.25, 1.09 and 1.08 times; equal clusters unchanged
Skipping a stalled rank's remaining batches, by a factor of 2 instead of 4 times the median step, in a simulation of the ring	28–30% less time for 0.3–1.2% more loss, so the default only guards against a stalled rank
Phone (S20 FE): the CPU script without its pandas step, three runs each	62.4, 62.8 and 66.0 s with Nix's Python under `proot`; 73.1, 80.8 and 72.8 s with Termux's own Python
Phone runtime closure (Python with NumPy, pandas, torch, scikit-learn and joblib, ARM)	67 paths, about 1.5 GiB unpacked and 395 MiB to download, all from the public binary cache
Two daemons on one machine, a host daemon and a container worker	memory promised in total 6.74 GiB and 1.97 GiB, each daemon subtracting the other's reservations
A joining machine on the two-site testbed, time to connect	0.2–0.4 s

turnitin Page 81 of 81 - Integrity Submission Submission ID trn:oid:::3618:157031417