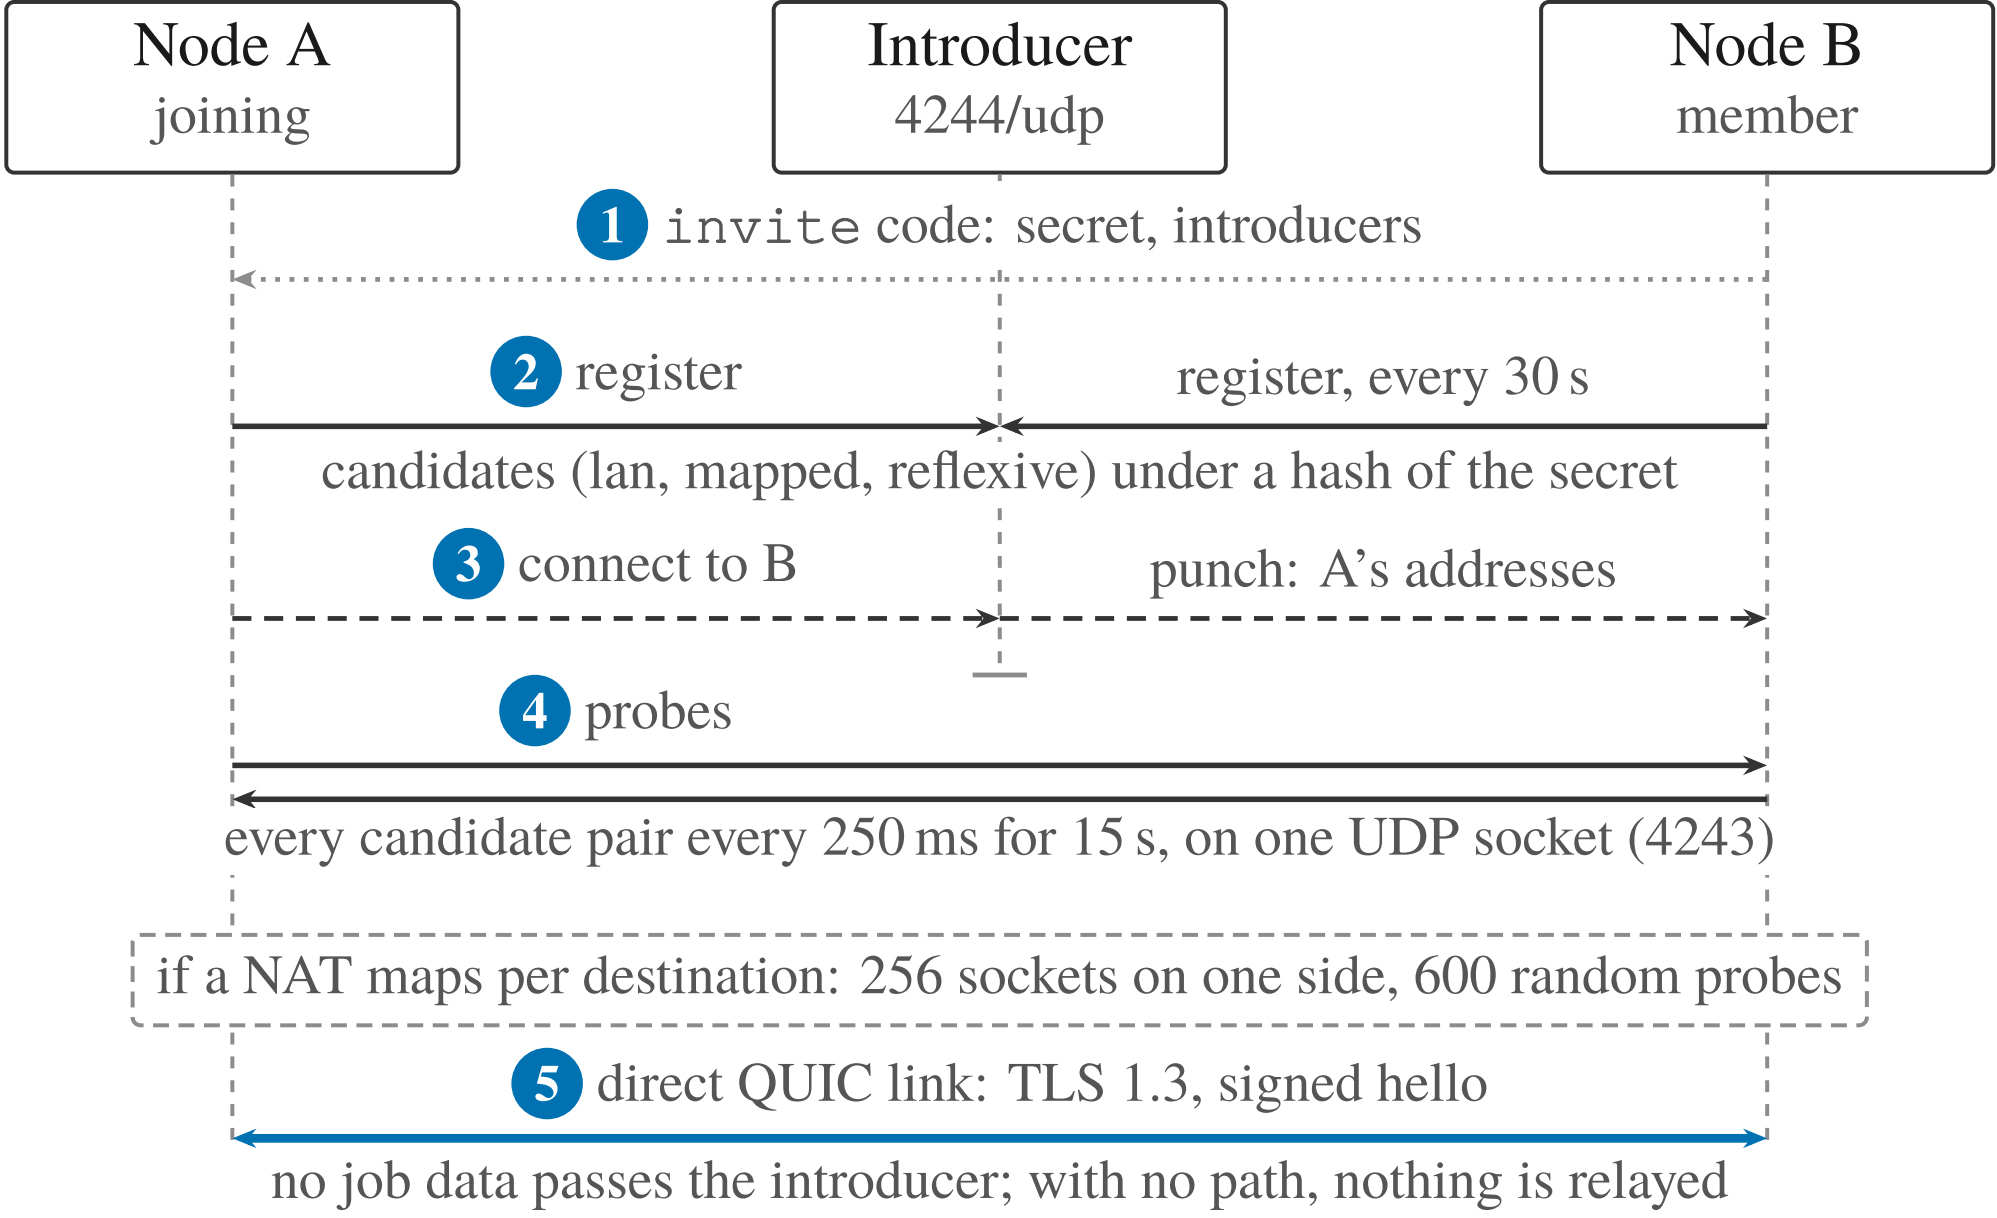
Node A
joining
Introducer
4244/udp
Node B
member
1 invite code: secret, introducers
2 register
register, every 30 s
candidates (lan, mapped, reflexive) under a hash of the secret
3 connect to B
punch: A's addresses
4 probes
every candidate pair every 250 ms for 15 s, on one UDP socket (4243)
if a NAT maps per destination: 256 sockets on one side, 600 random probes
5 direct QUIC link: TLS 1.3, signed hello
no job data passes the introducer; with no path, nothing is relayed