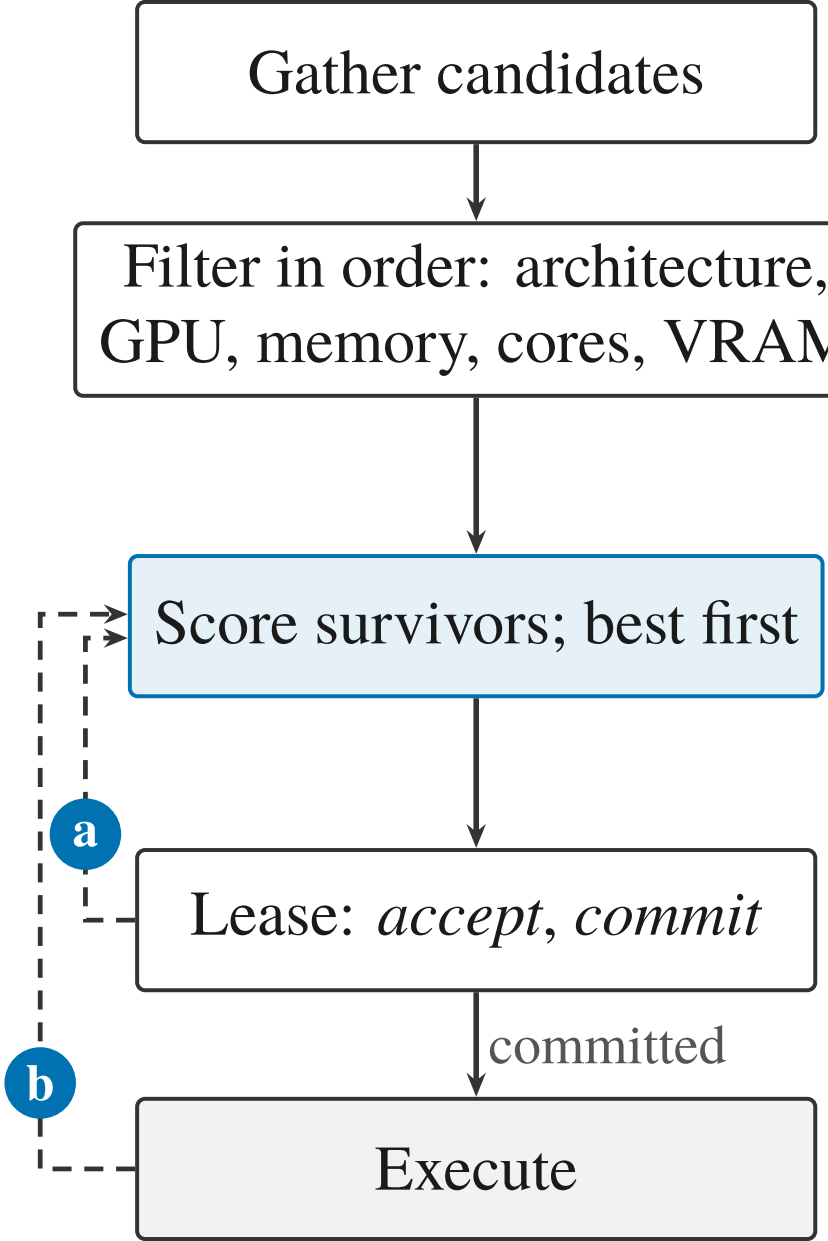

node store, LAN discovery, linked peers and self, one entry per node id

a rejected node keeps its reason;
none left: retry every 30 s, for 10 min

$$S = h\,(1 - \frac{u_{\text{cpu}} + u_{\text{mem}}}{200} - 0.05\,n_{\text{jobs}} + \Delta)$$

load terms: up to -1.0
Δ: cores, MHz, free GiB, free cores, ± 0.18
h: health, halved on a failure (floor 0.1)
a GPU request adds up to $+0.8$

a refused: lease the next node

b failed: place again, at most 3 runs, untried nodes first