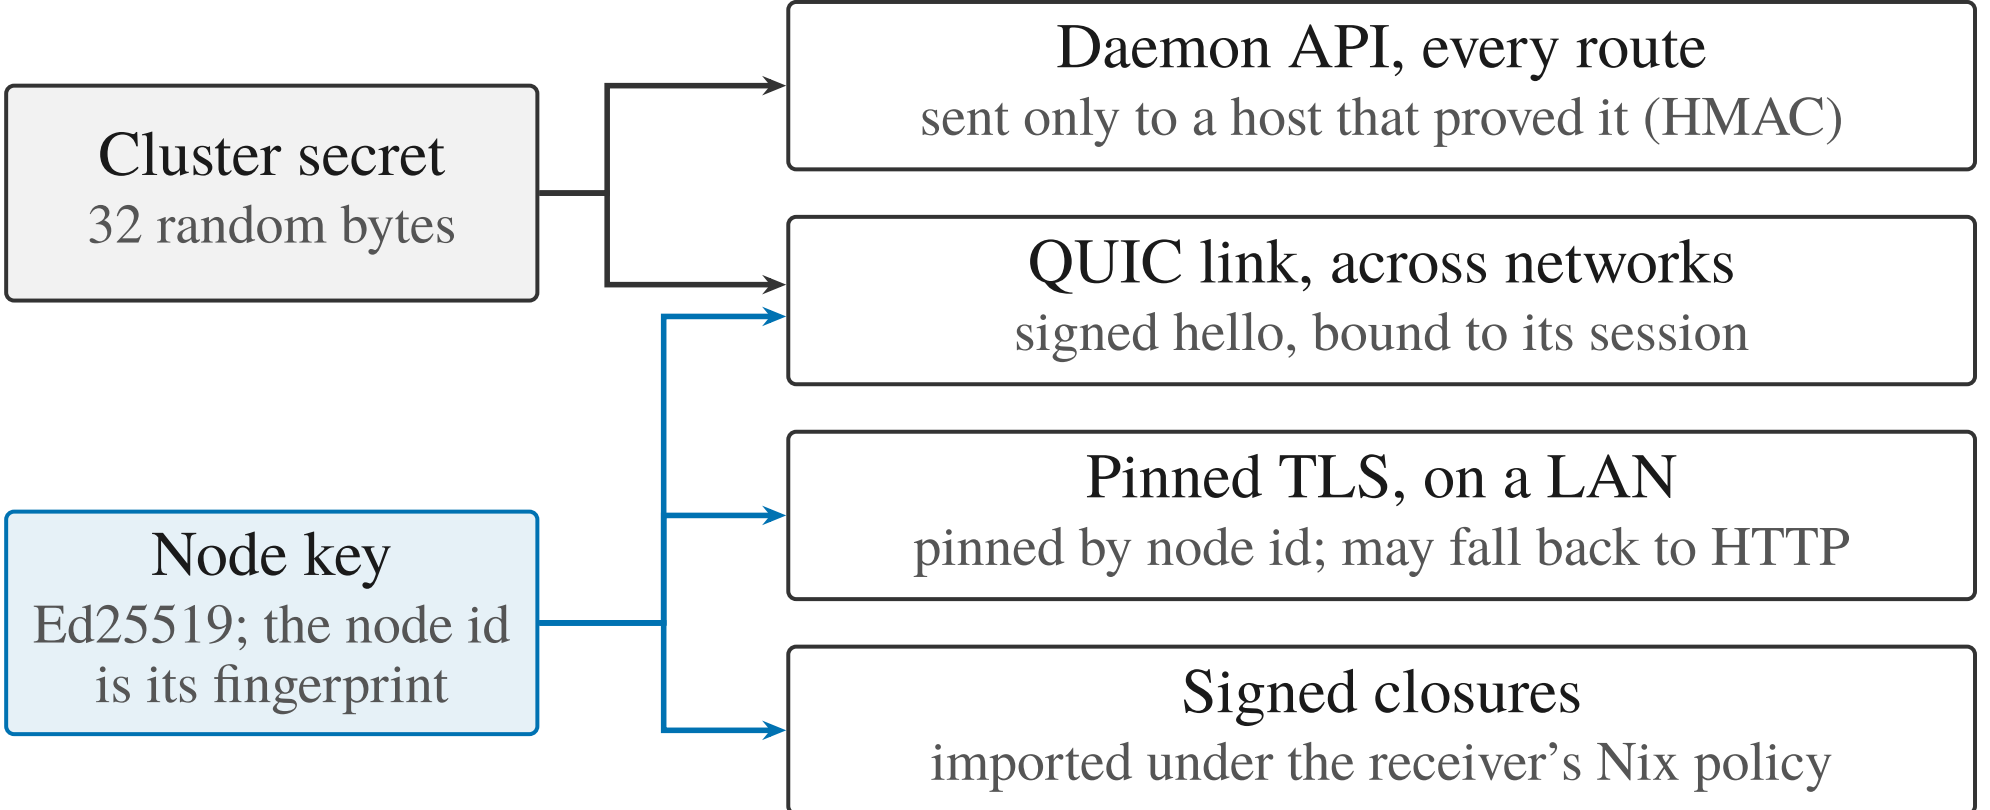
Cluster secret
32 random bytes
Node key
Ed25519; the node id
is its fingerprint
Daemon API, every route
sent only to a host that proved it (HMAC)
QUIC link, across networks
signed hello, bound to its session
Pinned TLS, on a LAN
pinned by node id; may fall back to HTTP
Signed closures
imported under the receiver's Nix policy